



Mailing address:
"STANDA"
P.O.Box. 377
03012 Vilnius
Lithuania
Registras – Lietuvos Respublikos Juridinių asmenų registras

Office:
Švitrigailos 4-39
03222 Vilnius
Lithuania
VAT code LT203728219

Telephone:
+370-5-2651474
Fax:
+370-5-2651483

E-mail:
sales@standa.LT
Internet:
http://www.standa.LT

8SMC4-USB-B8-B9

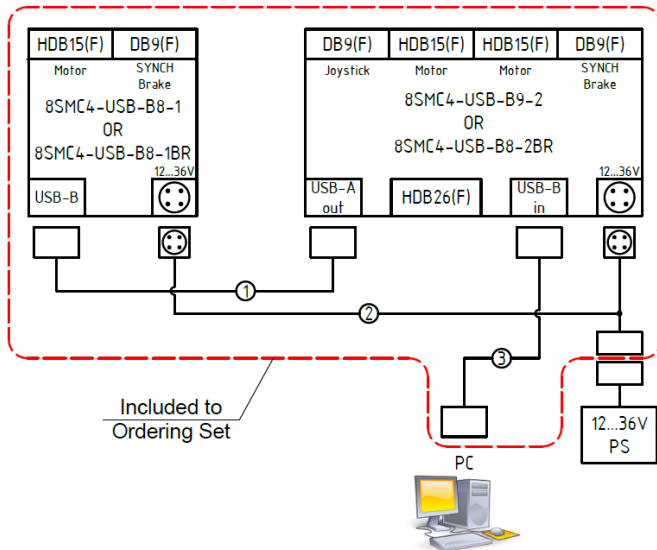


Figure 1.
3-axis controller 8SMC4-USB-B8-B9

SPECIFICATIONS

Electrical

- Targeted for bipolar, two phase stepper motors with current ratings of 0.25 A - 3 A and for DC motors with the winding current of up to 6 A. The current limit value is set programmatically.
- Power supply voltage ranges from 12 V to 36 V.
- Current overload protection, voltage overload protection, short circuit protection, motor hot plug / unplug protection, ESD protection.
- Encoder Inputs for stall detection and for closed loop mode feedback (option).
- Revolutions counter input.

Motion

- Left / right move, move to point, shift on delta, continuous speed, acceleration and deceleration ramps, backlash compensation mode and automatic home position calibration mode.

Peripherals

- Joystick, left / right buttons, limit switches, magnetic brake TTL output, limits LEDs, status LEDs.
- Analog input, external driver output, Synchronization input and output.
- Step modes full-step, 1/2, 1/4, 1/8, 1/16, 1/32, 1/64, 1/128, 1/256.
- Rotation speed up to 35 000 full steps per second.
- Feedback quadrature encoder, bandwidth 200 kHz.

No.	Code	Description
Included to Ordering Set		
	8SMC4-USB-B9-2	Motor Controller
	8SMC4-USB-B8-1	Motor Controller
1	USB/A-B	USB cable between controllers 0.2 m
2	8A-KPPX-KPJX	Power distribution cable
3	USB/A-USB/B	USB cable to PC, 1.8 m
Not Included to Ordering Set		
	8CA15F-15MR	Cable from controller to motor
	8CA-SYNCH	Synchronization cable

Table 1.
Ordering information

Control

- PC controls via USB interface.
- Optional handheld remote offers manual two button directional control.
- Additional features include two programmable limit switches, an emergency limit switch, encoder and revolution sensor for stall detection and input / output for synchronization, **serial port 3.3 V logic, common in/out.**

Programming

- Graphical user interface XiLab - compatible with Windows XP, Vista, 7, 8, Linux, Mac OS X, including 64-bit versions. Inside XiLab interface user can enter Javascript language based movement sequences and run to execute.
- Cross platform library with code examples on C, Visual Basic, Matlab, Labview, C#.
- Set of virtual instruments for National Instruments LabView.
- The controller compatibility with custom software made for 8SMC1-USBhF – possible after updating the MicroSMC driver.

Mechanical

- RoHS compliant.
- Operating temperature range: 0 to 70°C.



Mailing address:
"STANDA"
P.O.Box. 377
03012 Vilnius
Lithuania
Registras – Lietuvos Respublikos Juridinių asmenų registras

Office:
Švitrigailos 4-39
03222 Vilnius
Lithuania
VAT code LT203728219

Telephone:
+370-5-2651474
Fax:
+370-5-2651483

E-mail:
sales@standa.LT
Internet:
http://www.standa.LT

All available models:

8SMC4-USB	8SMC4-USB-B8-1	8SMC4-USB-B9-1	8SMC4-USB-B9-2
Control Buttons	Control Buttons	Control Buttons	Control Buttons
Synchronization I/O	Synchronization I/O	Synchronization I/O	Synchronization I/O
Magnetic Brake TTL out		Magnetic Brake TTL out	Magnetic Brake TTL out
Analog Input		Analog Input	Analog Input
Ext. Driver Output		Ext. Driver Output	Ext. Driver Output
Serial Port, 3.3V logic I/O		Serial Port, 3.3V logic I/O	Serial Port, 3.3V logic I/O
Joystick Input		Joystick Input	Joystick Input

8SMC4-USB-B8-1BR	8SMC4-USB-B9-1BR	8SMC4-USB-B9-2BR
Control Buttons	Control Buttons	Control Buttons
Synchronization I/O	Synchronization I/O	Synchronization I/O
Magnetic Brake Electronics	Magnetic Brake Electronics	Magnetic Brake Electronics
	Analog Input	Analog Input
	Ext. Driver Output	Ext. Driver Output
	Serial Port, 3.3V logic I/O	Serial Port, 3.3V logic I/O
	Joystick Input	Joystick Input

Table 2.
All available models



8SMC4-USB
1-axis CCA



8SMC4-USB-B8-1
1-axis controller



8SMC4-USB-B9-2
2-axis controller



8SMC4-USB-B8-B9
3-axis controller



8SMC4-USB-B9-B9
4-axis controller

Figure 2.
8SMC4-USB controller models lineup

If you have additional needs of the same system please contact us via e-mail: sales@standa.lt