ETSI TS 129 518 V19.8.0 (2026-10)



TECHNICAL SPECIFICATION

5G;
5G System;
Access and Mobility Management Services;
Stage 3
(3GPP TS 29.518 version 19.8.0 Release 19)

Reference
RTS/TSGC-0429518vj80

Keywords
5G

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the
ETSI Search & Browse Standards application.

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on ETSI deliver repository.

Users should be aware that the present document may be revised or have its status changed, this information is available in the Milestones listing.

If you find errors in the present document, please send your comments to the relevant service listed under Committee Support Staff.

If you find a security vulnerability in the present document, please report it through our Coordinated Vulnerability Disclosure (CVD) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.
No recommendation as to products and services or vendors is made or should be implied.
No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.
In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part of this document may be reproduced in any form, by any means and in any media, without the prior written authorization of ETSI and except as expressly permitted below.
By way of exception and when the document is a normative deliverable (European Standard (EN), Technical Specification (TS), Group Specification (GS) or ETSI Standard (ES)), ETSI authorizes to reproduce and incorporate into products, services and technical documentation only those extracts (e.g. templates) that are strictly necessary for the technical implementation of the normative deliverable, to ensure compliance with the latter.
Nothing in this notice shall be construed as limiting any mandatory exceptions to copyright provided by applicable law.

© ETSI 2026.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables (European Standard (EN), Technical Specification (TS), Group Specification (GS) or ETSI Standard (ES)) may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI IPR online database.

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM**® and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found at 3GPP to ETSI numbering cross-referencing.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the ETSI Drafting Rules (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights 2
Legal Notice 2
Modal verbs terminology 2
Foreword 17
1 Scope 19
2 References 19
3 Definitions and abbreviations 21
3.1 Definitions 21
3.2 Abbreviations 21
4 Overview 22
4.1 Introduction 22
5 Services offered by the AMF 23
5.1 Introduction 23
5.2 Namf_Communication Service 25
5.2.1 Service Description 25
5.2.2 Service Operations 25
5.2.2.1 Introduction 25
5.2.2.2 UE Context Operations 26
5.2.2.2.1 UEContextTransfer 26
5.2.2.2.1.1 General 26
5.2.2.2.1.2 Retrieve UE Context after successful UE authentication 29
5.2.2.2.2 RegistrationStatusUpdate 29
5.2.2.2.2.1 General 29
5.2.2.2.3 CreateUEContext 30
5.2.2.2.3.1 General 30
5.2.2.2.3.2 Create UE Context with AMF Relocation 33
5.2.2.2.4 ReleaseUEContext 34
5.2.2.2.4.1 General 34
5.2.2.2.5 RelocateUEContext 34
5.2.2.2.5.1 General 34
5.2.2.2.6 CancelRelocateUEContext 35
5.2.2.2.6.1 General 35
5.2.2.3 UE Specific N1N2 Message Operations 36
5.2.2.3.1 N1N2MessageTransfer 36
5.2.2.3.1.1 General 36
5.2.2.3.1.2 Detailed behaviour of the AMF 39
5.2.2.3.2 N1N2Transfer Failure Notification 41
5.2.2.3.3 N1N2MessageSubscribe 42
5.2.2.3.3.1 General 42
5.2.2.3.4 N1N2MessageUnSubscribe 43
5.2.2.3.4.1 General 43
5.2.2.3.5 N1MessageNotify 44
5.2.2.3.5.1 General 44
5.2.2.3.5.2 Using N1MessageNotify in the Registration with AMF Re-allocation Procedure 45
5.2.2.3.5.3 Using N1MessageNotify in the UE Assisted and UE Based Positioning Procedure 45
5.2.2.3.5.4 Using N1MessageNotify in the UE Configuration Update for transparent UE Policy delivery 45
5.2.2.3.5.5 Using N1MessageNotify in the LCS Event Report, Event Reporting in RRC INACTIVE state procedures, LCS Cancel Location and LCS Periodic-Triggered Invoke Procedures 46
5.2.2.3.5.6 Using N1MessageNotify in the UE triggered policy provisioning procedure to request UE policies 46
5.2.2.3.5.7 Using N1MessageNotify in the procedures applicable to a PRU 46
5.2.2.3.6 N2InfoNotify 47

5.2.2.3.6.1 General 47
5.2.2.3.6.2 Using N2InfoNotify during Inter NG-RAN node N2 based handover procedure 48
5.2.2.3.6.3 Using N2InfoNotify during Location Services procedures 49
5.2.2.3.6.4 Using N2InfoNotify during AMF planned removal procedure with UDSF deployed procedure 49
5.2.2.4 Non-UE N2 Message Operations 50
5.2.2.4.1 NonUeN2MessageTransfer 50
5.2.2.4.1.1 General 50
5.2.2.4.1.2 Obtaining Non UE Associated Network Assistance Data Procedure 50
5.2.2.4.1.3 Warning Request Transfer Procedure 51
5.2.2.4.1.4 Configuration Transfer Procedure 51
5.2.2.4.1.5 RIM Information Transfer Procedures 52
5.2.2.4.1.6 Broadcast of Assistance Data by an LMF 52
5.2.2.4.1.7 Management of network timing synchronization status monitoring procedures 52
5.2.2.4.2 NonUeN2InfoSubscribe 53
5.2.2.4.2.1 General 53
5.2.2.4.2.2 NonUeN2InfoSubscribe for N2 PWS Information 53
5.2.2.4.3 NonUeN2InfoUnSubscribe 54
5.2.2.4.3.1 General 54
5.2.2.4.4 NonUeN2InfoNotify 54
5.2.2.4.4.1 General 54
5.2.2.4.4.2 Using NonUeN2InfoNotify during Location Services procedures 55
5.2.2.4.4.3 Use of NonUeN2InfoNotify for PWS related events 55
5.2.2.4.4.4 Using NonUeN2InfoNotify during network timing synchronization status monitoring procedure 56
5.2.2.5 AMF Status Change Operations 56
5.2.2.5.1 AMFStatusChangeSubscribe 56
5.2.2.5.1.1 General 56
5.2.2.5.1.2 Creation of a subscription 56
5.2.2.5.1.3 Modification of a subscription 57
5.2.2.5.2 AMFStatusChangeUnSubscribe 57
5.2.2.5.2.1 General 57
5.2.2.5.3 AMFStatusChangeNotify 58
5.2.2.5.3.1 General 58
5.2.2.6 EBIAssignment 59
5.2.2.6.1 General 59
5.3 Namf_EventExposure Service 60
5.3.1 Service Description 60
5.3.1.1 General 60
5.3.1.2 Event types supported by the service 60
5.3.1.3 Subscriptions targeting a specific UE 68
5.3.1.4 Bulk Subscriptions targeting a Group of UEs or Any UE 68
5.3.1.4.1 General 68
5.3.1.4.2 AMF Set level Bulk Subscription 69
5.3.2 Service Operations 70
5.3.2.1 Introduction 70
5.3.2.2 Subscribe 70
5.3.2.2.1 General 70
5.3.2.2.2 Creation of a subscription 70
5.3.2.2.3 Modification of a subscription 73
5.3.2.2.4 Remove or add group member UE(s) for a group subscription 75
5.3.2.3 Unsubscribe 76
5.3.2.3.1 General 76
5.3.2.4 Notify 76
5.3.2.4.1 General 76
5.3.2.4.2 Event Subscription Synchronization for specific UE 77
5.4 Namf_MT Service 78
5.4.1 Service Description 78
5.4.2 Service Operations 78
5.4.2.1 Introduction 78
5.4.2.2 EnableUEReachability 78
5.4.2.2.1 General 78

5.4.2.3 ProvideDomainSelectionInfo 80
5.4.2.3.1 General 80
5.4.2.4 EnableGroupReachability 81
5.4.2.4.1 General 81
5.4.2.5 UEReachabilityInfoNotify 82
5.4.2.5.1 General 82
5.5 Namf_Location Service 82
5.5.1 Service Description 82
5.5.2 Service Operations 83
5.5.2.1 Introduction 83
5.5.2.2 ProvidePositioningInfo 83
5.5.2.2.1 General 83
5.5.2.3 EventNotify 85
5.5.2.3.1 General 85
5.5.2.4 ProvideLocationInfo 86
5.5.2.4.1 General 86
5.5.2.5 CancelLocation 86
5.5.2.5.1 General 86
5.6 Namf_MBSBroadcast Service 87
5.6.1 Service Description 87
5.6.2 Service Operations 87
5.6.2.1 Introduction 87
5.6.2.2 ContextCreate 87
5.6.2.3 ContextUpdate 89
5.6.2.4 ContextRelease 90
5.6.2.5 ContextStatusNotify 91
5.7 Namf_MBSCommunication Service 93
5.7.1 Service Description 93
5.7.2 Service Operations 93
5.7.2.1 Introduction 93
5.7.2.2 N2MessageTransfer 93
5.7.2.3 Notify 94
5.8 Namf_AIoT Service 95
5.8.1 Service Description 95
5.8.2 Service Operations 95
5.8.2.1 Introduction 95
5.8.2.2 Namf_AIoT_MessageDelivery 96
5.8.2.3 Namf_AIoT_Notify 96
6 API Definitions 97
6.1 Namf_Communication Service API 97
6.1.1 API URI 97
6.1.2 Usage of HTTP 97
6.1.2.1 General 97
6.1.2.2 HTTP standard headers 98
6.1.2.2.1 General 98
6.1.2.2.2 Content type 98
6.1.2.3 HTTP custom headers 98
6.1.2.3.1 General 98
6.1.2.4 HTTP multipart messages 98
6.1.3 Resources 100
6.1.3.1 Overview 100
6.1.3.2 Resource: Individual ueContext 101
6.1.3.2.1 Description 101
6.1.3.2.2 Resource Definition 102
6.1.3.2.3 Resource Standard Methods 102
6.1.3.2.3.1 PUT 102
6.1.3.2.4 Resource Custom Operations 104
6.1.3.2.4.1 Overview 104
6.1.3.2.4.2 Operation: release (POST) 104
6.1.3.2.4.2.1 Description 104
6.1.3.2.4.2.2 Operation Definition 104

6.1.3.2.4.3 Operation: assign-ebi (POST) 105
6.1.3.2.4.3.1 Description 105
6.1.3.2.4.3.2 Operation Definition 105
6.1.3.2.4.4 Operation: transfer (POST) 108
6.1.3.2.4.4.1 Description 108
6.1.3.2.4.4.2 Operation Definition 108
6.1.3.2.4.5 Operation: transfer-update (POST) 109
6.1.3.2.4.5.1 Description 109
6.1.3.2.4.5.2 Operation Definition 110
6.1.3.2.4.6 Operation: relocate (POST) 111
6.1.3.2.4.6.1 Description 111
6.1.3.2.4.6.2 Operation Definition 111
6.1.3.2.4.7 Operation: cancel-relocate (POST) 112
6.1.3.2.4.7.1 Description 112
6.1.3.2.4.7.2 Operation Definition 112
6.1.3.3 Resource: N1N2 Subscriptions Collection for Individual UE Contexts 113
6.1.3.3.1 Description 113
6.1.3.3.2 Resource Definition 113
6.1.3.3.3 Resource Standard Methods 113
6.1.3.3.3.1 POST 113
6.1.3.3.4 Resource Custom Operations 115
6.1.3.4 Resource: N1N2 Individual Subscription 115
6.1.3.4.1 Description 115
6.1.3.4.2 Resource Definition 115
6.1.3.4.3 Resource Standard Methods 115
6.1.3.4.3.1 DELETE 115
6.1.3.4.4 Resource Custom Operations 116
6.1.3.5 Resource: N1N2 Messages Collection 116
6.1.3.5.1 Description 116
6.1.3.5.2 Resource Definition 117
6.1.3.5.3 Resource Standard Methods 117
6.1.3.5.3.1 POST 117
6.1.3.6 Resource: subscriptions collection 121
6.1.3.6.1 Description 121
6.1.3.6.2 Resource Definition 121
6.1.3.6.3 Resource Standard Methods 122
6.1.3.6.3.1 POST 122
6.1.3.7 Resource: individual subscription 123
6.1.3.7.1 Description 123
6.1.3.7.2 Resource Definition 123
6.1.3.7.3 Resource Standard Methods 123
6.1.3.7.3.1 DELETE 123
6.1.3.7.3.2 PUT 124
6.1.3.8 Resource: Non UE N2 Messages Collection 126
6.1.3.8.1 Description 126
6.1.3.8.2 Resource Definition 126
6.1.3.8.3 Resource Standard Methods 126
6.1.3.8.4 Resource Custom Operations 126
6.1.3.8.4.1 Overview 126
6.1.3.8.4.2 Operation: transfer 126
6.1.3.8.4.2.1 Description 126
6.1.3.8.4.2.2 Operation Definition 126
6.1.3.9 Resource: Non UE N2 Messages Subscriptions Collection 128
6.1.3.9.1 Description 128
6.1.3.9.2 Resource Definition 128
6.1.3.9.3 Resource Standard Methods 128
6.1.3.9.3.1 POST 128
6.1.3.9.4 Resource Custom Operations 129
6.1.3.10 Resource: Non UE N2 Message Notification Individual Subscription 129
6.1.3.10.1 Description 129
6.1.3.10.2 Resource Definition 129
6.1.3.10.3 Resource Standard Methods 130

6.1.3.10.3.1 DELETE 130
6.1.3.10.4 Resource Custom Operations 131
6.1.4 Custom Operations without associated resources 131
6.1.5 Notifications 131
6.1.5.1 General 131
6.1.5.2 AMF Status Change Notification 131
6.1.5.2.1 Description 131
6.1.5.2.2 Notification Definition 131
6.1.5.2.3 Notification Standard Methods 131
6.1.5.2.3.1 POST 131
6.1.5.3 Non UE N2 Information Notification 132
6.1.5.3.1 Description 132
6.1.5.3.2 Notification Definition 132
6.1.5.3.3 Notification Standard Methods 133
6.1.5.3.3.1 POST 133
6.1.5.4 N1 Message Notification 133
6.1.5.4.1 Description 133
6.1.5.4.2 Notification Definition 134
6.1.5.4.3 Notification Standard Methods 134
6.1.5.4.3.1 POST 134
6.1.5.5 UE Specific N2 Information Notification 135
6.1.5.5.1 Description 135
6.1.5.5.2 Notification Definition 135
6.1.5.5.3 Notification Standard Methods 135
6.1.5.5.3.1 POST 135
6.1.5.6 N1N2 Transfer Failure Notification 136
6.1.5.6.1 Description 136
6.1.5.6.2 Notification Definition 136
6.1.5.6.3 Notification Standard Methods 137
6.1.5.6.3.1 POST 137
6.1.5.7 Void 138
6.1.6 Data Model 138
6.1.6.1 General 138
6.1.6.2 Structured data types 147
6.1.6.2.1 Introduction 147
6.1.6.2.2 Type: SubscriptionData 147
6.1.6.2.3 Type: AmfStatusChangeNotification 147
6.1.6.2.4 Type: AmfStatusInfo 147
6.1.6.2.5 Type: AssignEbiData 148
6.1.6.2.6 Type: AssignedEbiData 148
6.1.6.2.7 Type: AssignEbiFailed 149
6.1.6.2.8 Type: UEContextRelease 149
6.1.6.2.9 Type: N2InformationTransferReqData 149
6.1.6.2.10 Type: NonUeN2InfoSubscriptionCreateData 150
6.1.6.2.11 Type: NonUeN2InfoSubscriptionCreatedData 151
6.1.6.2.12 Type: UeN1N2InfoSubscriptionCreateData 151
6.1.6.2.13 Type: UeN1N2InfoSubscriptionCreatedData 151
6.1.6.2.14 Type: N2InformationNotification 152
6.1.6.2.15 Type: N2InfoContainer 155
6.1.6.2.16 Type: N1MessageNotification 156
6.1.6.2.17 Type: N1MessageContainer 158
6.1.6.2.18 Type: N1N2MessageTransferReqData 159
6.1.6.2.19 Type: N1N2MessageTransferRspData 163
6.1.6.2.20 Type: RegistrationContextContainer 164
6.1.6.2.21 Type: AreaOfValidity 166
6.1.6.2.22 Void 166
6.1.6.2.23 Type: UeContextTransferReqData 166
6.1.6.2.24 Type: UeContextTransferRspData 167
6.1.6.2.25 Type: UeContext 168
6.1.6.2.26 Type: N2SmInformation 179
6.1.6.2.27 Type: N2InfoContent 180
6.1.6.2.28 Type: NrppaInformation 180

6.1.6.2.29 Type: PwsInformation 181
6.1.6.2.30 Type: N1N2MsgTxfrFailureNotification 183
6.1.6.2.31 Type: N1N2MessageTransferError 184
6.1.6.2.32 Type: N1N2MsgTxfrErrDetail 184
6.1.6.2.33 Type: N2InformationTransferRspData 185
6.1.6.2.34 Type: MmContext 186
6.1.6.2.35 Type: SeafData 190
6.1.6.2.36 Type: NasSecurityMode 190
6.1.6.2.37 Type: PduSessionContext 191
6.1.6.2.38 Type: NssaiMapping 197
6.1.6.2.39 Type: UeRegStatusUpdateReqData 197
6.1.6.2.40 Type: AssignEbiError 198
6.1.6.2.41 Type: UeContextCreateData 198
6.1.6.2.42 Type: UeContextCreatedData 199
6.1.6.2.43 Type: UeContextCreateError 199
6.1.6.2.44 Type: NgRanTargetId 200
6.1.6.2.45 Type: N2InformationTransferError 200
6.1.6.2.46 Type: PWSResponseData 200
6.1.6.2.47 Type: PWSErrorData 201
6.1.6.2.48 Void 201
6.1.6.2.49 Type: NgKsi 201
6.1.6.2.50 Type: KeyAmf 201
6.1.6.2.51 Type: ExpectedUeBehavior 201
6.1.6.2.52 Type: UeRegStatusUpdateRspData 202
6.1.6.2.53 Type: N2RanInformation 202
6.1.6.2.54 Type: N2InfoNotificationRspData 202
6.1.6.2.55 Type: SmallDataRateStatusInfo 202
6.1.6.2.56 Type: SmfChangeInfo 203
6.1.6.2.57 Type: V2xContext 203
6.1.6.2.58 Type: ImmediateMdtConf 204
6.1.6.2.59 Type: V2xInformation 206
6.1.6.2.60 Type: EpsNasSecurityMode 206
6.1.6.2.61 Type: UeContextRelocateData 207
6.1.6.2.62 Type: UeContextRelocatedData 207
6.1.6.2.63 Void 208
6.1.6.2.64 Type: EcRestrictionDataWb 208
6.1.6.2.65 Type: ExtAmfEventSubscription 208
6.1.6.2.66 Type: AmfEventSubscriptionAddInfo 209
6.1.6.2.67 Type: UeContextCancelRelocateData 211
6.1.6.2.68 Type: UeDifferentiationInfo 211
6.1.6.2.69 Type: CeModeBInd 212
6.1.6.2.70 Type: LteMInd 212
6.1.6.2.71 Type: NpnAccessInfo 212
6.1.6.2.72 Type: ProseContext 213
6.1.6.2.73 Type: AnalyticsSubscription 214
6.1.6.2.74 Type: NwdafSubscription 214
6.1.6.2.75 Type: UpdpSubscriptionData 214
6.1.6.2.76 Type: ProSeInformation 214
6.1.6.2.77 Type: ReleaseSessionInfo 215
6.1.6.2.78 Type: AreaOfInterestEventState 215
6.1.6.2.79 Type: TssInformation 215
6.1.6.2.80 Type: AmPolicyInfoContainer 216
6.1.6.2.81 Type: RslpInformation 216
6.1.6.2.82 Type: A2xContext 216
6.1.6.2.83 Type: A2xInformation 217
6.1.6.2.84 Type: LcsUpContext 217
6.1.6.2.85 Type: DeregInactTimerInfo 217
6.1.6.2.86 Type: TssRspPerNgran 217
6.1.6.2.87 Type: SliceReplacementMapping 218
6.1.6.2.88 Type: SliceDeregInactConfig 218
6.1.6.2.89 Type: NrppaRspPerNgran 218
6.1.6.3 Simple data types and enumerations 218

6.1.6.3.1 Introduction 218
6.1.6.3.2 Simple data types 218
6.1.6.3.3 Enumeration: StatusChange 219
6.1.6.3.4 Enumeration: N2InformationClass 220
6.1.6.3.5 Enumeration: N1MessageClass 220
6.1.6.3.6 Enumeration: N1N2MessageTransferCause 221
6.1.6.3.7 Enumeration: UeContextTransferStatus 222
6.1.6.3.8 Enumeration: N2InformationTransferResult 222
6.1.6.3.9 Enumeration: CipheringAlgorithm 222
6.1.6.3.10 Enumeration: IntegrityAlgorithm 222
6.1.6.3.11 Void 222
6.1.6.3.12 Enumeration: ScType 222
6.1.6.3.13 Enumeration: KeyAmfType 223
6.1.6.3.14 Enumeration: TransferReason 223
6.1.6.3.15 Enumeration: PolicyReqTrigger 223
6.1.6.3.16 Enumeration: RatSelector 223
6.1.6.3.17 Enumeration: NgapIeType 224
6.1.6.3.18 Enumeration: N2InfoNotifyReason 224
6.1.6.3.19 Enumeration: SmfChangeIndication 224
6.1.6.3.20 Enumeration: SbiBindingLevel 225
6.1.6.3.21 Enumeration: EpsNasCipheringAlgorithm 225
6.1.6.3.22 Enumeration: EpsNasIntegrityAlgorithm 225
6.1.6.3.23 Enumeration: PeriodicCommunicationIndicator 225
6.1.6.3.24 Enumeration: UuaaMmStatus 225
6.1.6.3.25 Enumeration: ReleaseCause 226
6.1.6.3.26 Enumeration: NgranFailureInfo 226
6.1.6.3.27 Enumeration: XrDeviceWith2Rx 226
6.1.6.3.28 Enumeration: NrppaTransFailure 226
6.1.6.4 Binary data 226
6.1.6.4.1 Introduction 226
6.1.6.4.2 N1 Message 227
6.1.6.4.3 N2 Information 228
6.1.6.4.3.1 Introduction 228
6.1.6.4.3.2 NGAP IEs 228
6.1.6.4.3.3 NGAP Messages 230
6.1.6.4.4 Mobile Terminated Data 231
6.1.6.4.5 GTP-C Message 231
6.1.7 Error Handling 232
6.1.7.1 General 232
6.1.7.2 Protocol Errors 232
6.1.7.3 Application Errors 232
6.1.8 Feature Negotiation 235
6.1.9 Security 239
6.1.10 HTTP redirection 239
6.2 Namf_EventExposure Service API 240
6.2.1 API URI 240
6.2.2 Usage of HTTP 240
6.2.2.1 General 240
6.2.2.2 HTTP standard headers 240
6.2.2.2.1 General 240
6.2.2.2.2 Content type 240
6.2.2.3 HTTP custom headers 241
6.2.2.3.1 General 241
6.2.3 Resources 241
6.2.3.1 Overview 241
6.2.3.2 Resource: Subscriptions collection 242
6.2.3.2.1 Description 242
6.2.3.2.2 Resource Definition 242
6.2.3.2.3 Resource Standard Methods 242
6.2.3.2.3.1 POST 242
6.2.3.2.4 Resource Custom Operations 244
6.2.3.3 Resource: Individual subscription 244

6.2.3.3.1 Description 244
6.2.3.3.2 Resource Definition 244
6.2.3.3.3 Resource Standard Methods 244
6.2.3.3.3.1 PATCH 244
6.2.3.3.3.2 DELETE 245
6.2.3.3.4 Resource Custom Operations 246
6.2.3.4 Resource: AMF set level bulk subscriptions collection 247
6.2.3.4.1 Description 247
6.2.3.4.2 Resource Definition 247
6.2.3.4.3 Resource Standard Methods 247
6.2.3.4.3.1 POST 247
6.2.3.4.4 Resource Custom Operations 249
6.2.3.5 Resource: Individual AMF set level bulk subscription 249
6.2.3.5.1 Description 249
6.2.3.5.2 Resource Definition 249
6.2.3.5.3 Resource Standard Methods 249
6.2.3.5.3.1 PATCH 249
6.2.3.5.3.2 DELETE 250
6.2.3.5.4 Resource Custom Operations 251
6.2.4 Custom Operations without associated resources 252
6.2.5 Notifications 252
6.2.5.1 Introduction 252
6.2.5.2 AMF Event Notification 252
6.2.5.2.1 Notification Definition 252
6.2.5.2.3 Notification Standard Methods 252
6.2.5.2.3.1 POST 252
6.2.6 Data Model 253
6.2.6.1 General 253
6.2.6.2 Structured data types 257
6.2.6.2.1 Introduction 257
6.2.6.2.2 Type: AmfEventSubscription 258
6.2.6.2.3 Type: AmfEvent 261
6.2.6.2.4 Type: AmfEventNotification 268
6.2.6.2.5 Type: AmfEventReport 269
6.2.6.2.6 Type: AmfEventMode 275
6.2.6.2.7 Type: AmfEventState 277
6.2.6.2.8 Type: RmInfo 278
6.2.6.2.9 Type: CmInfo 278
6.2.6.2.10 Void 278
6.2.6.2.11 Type: CommunicationFailure 278
6.2.6.2.12 Type: AmfCreateEventSubscription 279
6.2.6.2.13 Type: AmfCreatedEventSubscription 279
6.2.6.2.14 Type: AmfUpdateEventSubscriptionItem 280
6.2.6.2.15 Type: AmfUpdatedEventSubscription 283
6.2.6.2.16 Type: AmfEventArea 284
6.2.6.2.17 Type: LadnInfo 284
6.2.6.2.18 Type: AmfUpdateEventOptionItem 285
6.2.6.2.19 Type: 5GsUserStateInfo 285
6.2.6.2.20 Type: TrafficDescriptor 286
6.2.6.2.21 Type: UEIdExt 286
6.2.6.2.22 Type: AmfEventSubsSyncInfo 286
6.2.6.2.23 Type: AmfEventSubscriptionInfo 287
6.2.6.2.24 Type: TargetArea 287
6.2.6.2.25 Type: SnssaiTaiMapping 287
6.2.6.2.26 Type: SupportedSnssai 288
6.2.6.2.27 Type: UeInAreaFilter 288
6.2.6.2.28 Type: IdleStatusIndication 289
6.2.6.2.29 Type: UeAccessBehaviorReportItem 290
6.2.6.2.30 Type: UeLocationTrendsReportItem 291
6.2.6.2.31 Type: DispersionArea 292
6.2.6.2.32 Type: MmTransactionLocationReportItem 292
6.2.6.2.33 Type: MmTransactionSliceReportItem 293

6.2.6.2.34 Type: SliceAreaRestrictionInfo 293
6.2.6.2.35 Type: ScheduledArea 294
6.2.6.2.36 Type: TrajectorySegment 294
6.2.6.2.37 Type: Trajectory 294
6.2.6.2.38 Type: SmCommFailureFilter 295
6.2.6.2.39 Type: SignallingMeasurementInfo 295
6.2.6.2.41 Type: SignallingMeasurementUeRelatedInfo 295
6.2.6.2.42 Type: UeRelatedInfo 296
6.2.6.2.43 Type: UeSignallingInfo 297
6.2.6.2.44 Type: UeStateInfo 297
6.2.6.2.45 Type: AmfTimerInfo 298
6.2.6.3 Simple data types and enumerations 298
6.2.6.3.1 Introduction 298
6.2.6.3.2 Simple data types 298
6.2.6.3.3 Enumeration: AmfEventType 299
6.2.6.3.4 Enumeration: AmfEventTrigger 302
6.2.6.3.5 Enumeration: LocationFilter 302
6.2.6.3.6 Void 302
6.2.6.3.7 Enumeration: UeReachability 303
6.2.6.3.8 Void 303
6.2.6.3.9 Enumeration: RmState 303
6.2.6.3.10 Enumeration: CmState 303
6.2.6.3.11 Enumeration: 5GsUserState 303
6.2.6.3.12 Enumeration: LossOfConnectivityReason 303
6.2.6.3.13 Enumeration: ReachabilityFilter 304
6.2.6.3.14 Enumeration: UeType 304
6.2.6.3.15 Enumeration: AccessStateTransitionType 304
6.2.6.3.16 Enumeration: SubTerminationReason 304
6.2.6.3.17 Enumeration: TrajectoryReportReason 305
6.2.6.3.19 Enumeration: UavAltRptFailureCause 305
6.2.6.3.20 Enumeration: FailureReason 305
6.2.6.3.21 Enumeration: UeSignallingType 306
6.2.6.3.22 Enumeration: StateChangeType 306
6.2.6.4 Binary data 306
6.2.7 Error Handling 306
6.2.7.1 General 306
6.2.7.2 Protocol Errors 306
6.2.7.3 Application Errors 306
6.2.8 Feature Negotiation 307
6.2.9 Security 310
6.2.10 HTTP redirection 311
6.3 Namf_MT Service API 311
6.3.1 API URI 311
6.3.2 Usage of HTTP 311
6.3.2.1 General 311
6.3.2.2 HTTP standard headers 312
6.3.2.2.1 General 312
6.3.2.2.2 Content type 312
6.3.2.3 HTTP custom headers 312
6.3.2.3.1 General 312
6.3.3 Resources 312
6.3.3.1 Overview 312
6.3.3.2 Resource: ueReachInd 313
6.3.3.2.1 Description 313
6.3.3.2.2 Resource Definition 313
6.3.3.2.3 Resource Standard Methods 313
6.3.3.2.3.1 PUT 313
6.3.3.2.4 Resource Custom Operations 315
6.3.3.3 Resource: ueContext 315
6.3.3.3.1 Description 315
6.3.3.3.2 Resource Definition 315
6.3.3.3.3 Resource Standard Methods 315

6.3.3.3.3.1 GET 315
6.3.3.3.4 Resource Custom Operations 317
6.3.3.4 Resource: ueContexts collection 317
6.3.3.4.1 Description 317
6.3.3.4.2 Resource Definition 317
6.3.3.4.3 Resource Standard Methods 317
6.3.3.4.4 Resource Custom Operations 317
6.3.3.4.4.1 Overview 317
6.3.3.4.4.2 Operation: enable-group-reachability 317
6.3.3.4.4.2.1 Description 317
6.3.3.4.4.2.2 Operation Definition 317
6.3.4 Custom Operations without associated resources 319
6.3.5 Notifications 319
6.3.5.1 General 319
6.3.5.2 UE Reachability Info Notify 319
6.3.5.2.1 Notification Definition 319
6.3.5.2.3 Notification Standard Methods 319
6.3.5.2.3.1 POST 319
6.3.6 Data Model 320
6.3.6.1 General 320
6.3.6.2 Structured data types 321
6.3.6.2.1 Introduction 321
6.3.6.2.2 Type: EnableUeReachabilityReqData 322
6.3.6.2.3 Type: EnableUeReachabilityRspData 322
6.3.6.2.4 Type: UeContextInfo 323
6.3.6.2.5 Type: ProblemDetailsEnableUeReachability 323
6.3.6.2.6 Type: AdditionInfoEnableUeReachability 323
6.3.6.2.7 Type: EnableGroupReachabilityReqData 324
6.3.6.2.8 Type: EnableGroupReachabilityRspData 324
6.3.6.2.9 Type: UeInfo 324
6.3.6.2.10 Type: ReachabilityNotificationData 324
6.3.6.2.11 Type: ReachableUeInfo 325
6.3.6.2.12 Type: QosFlowInfo 325
6.3.6.3 Simple data types and enumerations 325
6.3.6.3.1 Introduction 325
6.3.6.3.2 Simple data types 325
6.3.6.3.3 Enumeration: UeContextInfoClass 325
6.3.6.4 Binary data 326
6.3.7 Error Handling 326
6.3.7.1 General 326
6.3.7.2 Protocol Errors 326
6.3.7.3 Application Errors 326
6.3.8 Feature Negotiation 326
6.3.9 Security 327
6.3.10 HTTP redirection 328
6.4 Namf_Location Service API 328
6.4.1 API URI 328
6.4.2 Usage of HTTP 328
6.4.2.1 General 328
6.4.2.2 HTTP standard headers 329
6.4.2.2.1 General 329
6.4.2.2.2 Content type 329
6.4.2.3 HTTP custom headers 329
6.4.2.3.1 General 329
6.4.3 Resources 329
6.4.3.1 Overview 329
6.4.3.2 Resource: Individual UE Context 330
6.4.3.2.1 Description 330
6.4.3.2.2 Resource Definition 330
6.4.3.2.3 Resource Standard Methods 330
6.4.3.2.4 Resource Custom Operations 331
6.4.3.2.4.1 Overview 331

6.4.3.2.4.2 Operation: provide-pos-info (POST) 331
6.4.3.2.4.2.1 Description 331
6.4.3.2.4.2.2 Operation Definition 331
6.4.3.2.4.3 Operation: provide-loc-info (POST) 333
6.4.3.2.4.3.1 Description 333
6.4.3.2.4.3.2 Operation Definition 333
6.4.3.2.4.4 Operation: cancel-pos-info (POST) 334
6.4.3.2.4.4.1 Description 334
6.4.3.2.4.4.2 Operation Definition 334
6.4.4 Custom Operations without associated resources 335
6.4.5 Notifications 336
6.4.5.1 General 336
6.4.5.2 Event Notify 336
6.4.5.2.1 Description 336
6.4.5.2.2 Notification Definition 336
6.4.5.2.3 Notification Standard Methods 336
6.4.5.2.3.1 POST 336
6.4.6 Data Model 337
6.4.6.1 General 337
6.4.6.2 Structured data types 341
6.4.6.2.1 Introduction 341
6.4.6.2.2 Type: RequestPosInfo 342
6.4.6.2.3 Type: ProvidePosInfo 347
6.4.6.2.4 Type: NotifiedPosInfo 351
6.4.6.2.5 Type: RequestLocInfo 355
6.4.6.2.6 Type: ProvideLocInfo 356
6.4.6.2.7 Type: CancelPosInfo 357
6.4.6.2.11 Type: ProvidePosInfoExt 358
6.4.6.2.12 Type: NotifiedPosInfoExt 358
6.4.6.3 Simple data types and enumerations 358
6.4.6.3.1 Introduction 358
6.4.6.3.2 Simple data types 358
6.4.6.3.3 Enumeration: LocationType 358
6.4.6.3.4 Enumeration: LocationEvent 359
6.4.6.3.5 Enumeration: LocationPrivacyVerResult 359
6.4.6.3.6 Enumeration: LpHapType 359
6.4.7 Error Handling 360
6.4.7.1 General 360
6.4.7.2 Protocol Errors 360
6.4.7.3 Application Errors 360
6.4.8 Feature Negotiation 360
6.4.9 Security 361
6.4.10 HTTP redirection 361
6.5 Namf_MBSBroadcast Service API 362
6.5.1 API URI 362
6.5.2 Usage of HTTP 362
6.5.2.1 General 362
6.5.2.2 HTTP standard headers 362
6.5.2.2.1 General 362
6.5.2.2.2 Content type 362
6.5.2.3 HTTP custom headers 363
6.5.2.3.1 General 363
6.5.2.4 HTTP multipart messages 363
6.5.3 Resources 364
6.5.3.1 Overview 364
6.5.3.2 Resource: Broadcast MBS session contexts collection 364
6.5.3.2.1 Description 364
6.5.3.2.2 Resource Definition 364
6.5.3.2.3 Resource Standard Methods 365
6.5.3.2.3.1 POST 365
6.5.3.2.4 Resource Custom Operations 366
6.5.3.3 Resource: Individual broadcast MBS session context 366

6.5.3.3.1 Description 366
6.5.3.3.2 Resource Definition 366
6.5.3.3.3 Resource Standard Methods 366
6.5.3.3.3.1 DELETE 366
6.5.3.3.4 Resource Custom Operations 367
6.5.3.3.4.2 Operation: update (POST) 367
6.5.3.3.4.2.1 Description 367
6.5.3.3.4.2.2 Operation Definition 367
6.5.4 Custom Operations without associated resources 368
6.5.5 Notifications 368
6.5.5.1 General 368
6.5.5.2 Broadcast MBS Session Context Status Notification 369
6.5.5.2.1 Description 369
6.5.5.2.2 Target URI 369
6.5.5.2.3 Notification Standard Methods 369
6.5.5.2.3.1 POST 369
6.5.6 Data Model 370
6.5.6.1 General 370
6.5.6.2 Structured data types 371
6.5.6.2.1 Introduction 371
6.5.6.2.2 Type: ContextCreateReqData 371
6.5.6.2.3 Type: ContextCreateRspData 371
6.5.6.2.4 Type: ContextStatusNotification 372
6.5.6.2.5 Type: ContextUpdateReqData 373
6.5.6.2.6 Type: ContextUpdateRspData 373
6.5.6.2.7 Type: N2MbsSmInfo 374
6.5.6.2.8 Type: OperationEvent 374
6.5.6.2.9 Type: NgranFailureEvent 374
6.5.6.2.10 Type: ContextStatusNotificationResponse 375
6.5.6.3 Simple data types and enumerations 375
6.5.6.3.1 Introduction 375
6.5.6.3.2 Simple data types 375
6.5.6.3.3 Enumeration: OperationStatus 375
6.5.6.3.4 Enumeration: NgapIeType 376
6.5.6.3.5 Enumeration: OpEventType 376
6.5.6.3.6 Enumeration: NgranFailureIndication 376
6.5.6.4 Binary data 376
6.5.6.4.1 Introduction 376
6.5.6.4.2 N2 Information 377
6.5.6.4.2.1 Introduction 377
6.5.6.4.2.2 NGAP IEs 377
6.5.7 Error Handling 377
6.5.7.1 General 377
6.5.7.2 Protocol Errors 377
6.5.7.3 Application Errors 377
6.5.8 Feature Negotiation 378
6.5.9 Security 378
6.5.10 HTTP redirection 378
6.6 Namf_MBSCommunication Service API 378
6.6.1 API URI 378
6.6.2 Usage of HTTP 379
6.6.2.1 General 379
6.6.2.2 HTTP standard headers 379
6.6.2.2.1 General 379
6.6.2.2.2 Content type 379
6.6.2.3 HTTP custom headers 379
6.6.2.3.1 General 379
6.6.2.4 HTTP multipart messages 380
6.6.3 Resources 380
6.6.3.1 Overview 380
6.6.3.1 Resource: N2 Message Handler (Custom Operation) 381
6.6.3.1.1 Description 381

6.6.3.1.2 Resource Definition 381
6.6.3.1.3 Resource Standard Methods 381
6.6.3.1.4 Resource Custom Operations 381
6.6.3.1.4.1 Overview 381
6.6.3.1.4.2 Operation: transfer 381
6.6.3.1.4.2.1 Description 381
6.6.3.1.4.2.2 Operation Definition 381
6.6.4 Custom Operations without associated resources 382
6.6.5 Notifications 382
6.6.5.1 General 382
6.6.5.2 Notification 383
6.6.5.2.1 Description 383
6.6.5.2.2 Notification Definitionn 383
6.6.5.2.3 Notification Standard Methods 383
6.6.5.2.3.1 POST 383
6.6.6 Data Model 384
6.6.6.1 General 384
6.6.6.2 Structured data types 385
6.6.6.2.1 Introduction 385
6.6.6.2.2 Type: MbsN2MessageTransferReqData 385
6.6.6.2.3 Type: MbsN2MessageTransferRspData 385
6.6.6.2.4 Type: N2MbsSmInfo 386
6.6.6.2.5 Type: Notification 386
6.6.6.2.6 Type: RanFailure 386
6.6.6.3 Simple data types and enumerations 386
6.6.6.3.1 Introduction 386
6.6.6.3.2 Simple data types 386
6.6.6.3.3 Enumeration: MbsNgapIeType 387
6.6.6.3.4 Enumeration: RanFailureIndication 387
6.6.6.4 Binary data 387
6.6.6.4.1 Introduction 387
6.6.6.4.2 N2 Information 387
6.6.6.4.2.1 Introduction 387
6.6.6.4.2.2 NGAP IEs 387
6.6.7 Error Handling 388
6.6.7.1 General 388
6.6.7.2 Protocol Errors 388
6.6.7.3 Application Errors 388
6.6.8 Feature Negotiation 388
6.6.9 Security 389
6.6.10 HTTP redirection 389

Annex A (normative): OpenAPI specification 400

A.1 General 400

A.2 Namf_Communication API 400

A.3 Namf_EventExposure API 461

A.4 Namf_MT 483

A.5 Namf_Location 489

A.6 Namf_MBSBroadcast API 498

A.7 Namf_MBSCommunication API 509

A.8 Namf_AIoT API 513

Annex B (Informative): HTTP Multipart Messages 517

B.1 Example of HTTP multipart message 517
B.1.1 General 517
B.1.2 Example HTTP multipart message with N2 Information binary data 517

Annex C (informative): Change history 518
History 533

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

shall indicates a mandatory requirement to do something

shall not indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

should indicates a recommendation to do something

should not indicates a recommendation not to do something

may indicates permission to do something

need not indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

can indicates that something is possible

cannot indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

will indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document

will not indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document

might indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

might not indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

is (or any other verb in the indicative mood) indicates a statement of fact

is not (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

1 Scope

The present document specifies the stage 3 protocol and data model for the Namf Service Based Interface. It provides stage 3 protocol definitions and message flows, and specifies the API for each service offered by the AMF.

The 5G System stage 2 architecture and procedures are specified in TS 23.501 [2], TS 23.502 [3] and TS 23.247 [55].

The Technical Realization of the Service Based Architecture and the Principles and Guidelines for Services Definition are specified in TS 29.500 [4] and TS 29.501 [5].

2 References

[1] TR 21.905: "Vocabulary for 3GPP Specifications".

[2] 3GPP TS 23.501: "System Architecture for the 5G System; Stage 2".

[3] 3GPP TS 23.502: "Procedures for the 5G System; Stage 2".

[4] 3GPP TS 29.500: "5G System; Technical Realization of Service Based Architecture; Stage 3".

[5] 3GPP TS 29.501: "5G System; Principles and Guidelines for Services Definition; Stage 3".

[6] 3GPP TS 29.571: "5G System; Common Data Types for Service Based Interfaces; Stage 3".

[7] 3GPP TS 23.503: "Policy and Charging Control Framework for the 5G System; Stage 2".

[8] IETF RFC 8259: "The JavaScript Object Notation (JSON) Data Interchange Format".

[9] IETF RFC 2387: "The MIME Multipart/Related Content-type".

[10] IETF RFC 2045: "Multipurpose Internet Mail Extensions (MIME) Part One: Format of Internet Message Bodies".

[11] 3GPP TS 24.501: "Non-Access-Stratum (NAS) Protocol for 5G System (5GS); Stage 3".

[12] 3GPP TS 38.413: "NG Radio Access Network (NG-RAN); NG Application Protocol (NGAP)".

[13] 3GPP TS 36.355: "Evolved Universal Terrestrial Radio Access (E-UTRA); LTE Positioning Protocol (LPP)".

[14] IETF RFC 6902: "JavaScript Object Notation (JSON) Patch".

[15] 3GPP TS 24.007: "Mobile radio interface signalling layer 3; General Aspects".

[16] 3GPP TS 29.502: "5G System, Session Management Services; Stage 3".

[17] 3GPP TS 38.455: "NR Positioning Protocol A (NRPPa)".

[18] 3GPP TS 29.531: "Network Slice Selection Services; Stage 3".

[19] IETF RFC 9113: "Hypertext Transfer Protocol Version 2 (HTTP/2)".

[20] 3GPP TS 23.041: "Technical realization of Cell Broadcast Service (CBS)".

[21] Void.

[22] 3GPP TS 24.008: "Mobile radio interface Layer 3 specification; Core network protocols; Stage 3".

[23] OpenAPI Initiative, "OpenAPI Specification Version 3.0.0".

[24] 3GPP TS 36.413: "Evolved Universal Terrestrial Radio Access Network (E-UTRAN); S1 Application Protocol (S1AP)".

[25] 3GPP TS 29.572: "5G System, Location Management Services; Stage 3".

[26] Void.

[27] 3GPP TS 33.501: "Security architecture and procedures for 5G system".

[28] IETF RFC 6749: "The OAuth 2.0 Authorization Framework".

[29] 3GPP TS 29.510: "Network Function Repository Services; Stage 3".

[30] 3GPP TS 32.422: "Telecommunication management; Subscriber and equipment trace; Trace control and configuration management".

[31] Void.

[32] 3GPP TS 29.507: "5G System; Access and Mobility Policy Control Service; Stage 3".

[33] 3GPP TS 23.527: "5G System; Restoration Procedures".

[34] 3GPP TS 29.525: "5G System; UE Policy Control Service; Stage 3".

[35] 3GPP TS 29.503: "5G System; Unified Data Management Services; Stage 3".

[36] IETF RFC 9457: "Problem Details for HTTP APIs".

[37] 3GPP TR 21.900: "Technical Specification Group working methods".

[38] 3GPP TS 23.288: "Architecture enhancements for 5G System (5GS) to support network data analytics services".

[39] 3GPP TS 23.216: "Single Radio Voice Call Continuity (SRVCC); Stage 2".

[40] IETF RFC 6901: "JavaScript Object Notation (JSON) Pointer".

[41] 3GPP TS 29.274: "3GPP Evolved Packet System (EPS); Evolved General Packet Radio Service (GPRS) Tunnelling Protocol for Control plane (GTPv2-C); Stage 3".

[42] 3GPP TS 23.273: "5G System (5GS) Location Services (LCS); Stage 2".

[43] 3GPP TS 24.080: "Mobile radio interface layer 3 supplementary services specification; Formats and coding".

[44] 3GPP TS 23.040: "Technical realization of the Short Message Service (SMS)".

[45] 3GPP TS 24.011: "Point-to-Point (PP) Short Message Service (SMS) support on mobile radio interface".

[46] 3GPP TS 29.515: "5G System; Gateway Mobile Location Services Stage 3".

[47] 3GPP TS 23.287: "Architecture enhancements for 5G System (5GS) to support Vehicle-to-Everything (V2X) services".

[48] 3GPP TS 23.316: "Wireless and wireline convergence access support for the 5G System (5GS)".

[49] 3GPP TS 33.401: "3GPP System Architecture Evolution (SAE); Security architecture".

[50] 3GPP TS 29.010: "Information element mapping between Mobile Station - Base Station System (MS - BSS) and Base Station System - Mobile-services Switching Centre (BSS - MSC); Signalling Procedures and the Mobile Application Part (MAP)".

[51] 3GPP TS 23.304: "Proximity based Services (ProSe) in the 5G System (5GS)".

[52] 3GPP TS 29.520: "5G System; Network Data Analytics Services; Stage 3".

[53] 3GPP TS 24.587: "Vehicle-to-Everything (V2X) services in 5G System (5GS); Stage 3".

[54] 3GPP TS 24.554: "Proximity-services (ProSe) in 5G System (5GS) protocol aspects; Stage 3".

[55] 3GPP TS 23.247: "Architectural enhancements for 5G multicast-broadcast services".

[56] 3GPP TS 23.256: "Support of Uncrewed Aerial Systems (UAS) connectivity, identification and tracking; Stage 2".

[57] 3GPP TS 33.256: "Security aspects of Uncrewed Aerial Systems (UAS)".

[58] 3GPP TS 23.548: "5G System Enhancements for Edge Computing; Stage 2".

[59] 3GPP TS 23.586: "Architectural Enhancements to support Ranging based services and Sidelink Positioning".

[60] 3GPP TS 24.577: "Aircraft-to-Everything (A2X) services in 5G system (5GS); Protocol aspects; Stage 3".

[61] 3GPP TS 24.572: "User Plane Location Services (LCS) Protocols And Procedures; Stage 3".

[62] 3GPP TS 29.122: "T8 reference point for Northbound APIs".

[63] 3GPP TS 23.369: "Architecture support for Ambient power-enabled Internet of Things".

[64] 3GPP TS 23.003: "Numbering, addressing and identification".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TR 21.905 [1].

example: text used to clarify abstract rules by applying them literally.

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [1] and TS 23.501 [2] and the following apply. An abbreviation defined in the present document or in TS 23.501 [2] takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [1]. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TS 23.501 [2].

5GC	5G Core Network
5GS	5G System
5G-AN	5G Access Network
5G-GUTI	5G Globally Unique Temporary Identifier
5QI	5G QoS Identifier
AIoT	Ambient IoT
AIOTF	Ambient IoT Function
AMF	Access and Mobility Management Function
ASTI	Access Stratum TIme
DAPS	Dual Active Protocol Stacks
DCCF	Data Collection Coordination Function
EBI	EPS Bearer Identity
GAD	Universal Geographical Area Description
GPSI	Generic Public Subscription Identifier

GUAMI	Globally Unique AMF Identifier
JSON	JavaScript Object Notation
LADN	Local Area Data Network
LDR	Location Deferred Request
LIR	Location Immediate Request
LMF	Location Management Function
LPHAP	Low Power and High Accuracy Positioning
MA	Multi-Access
MBS	Multicast/Broadcast Service
MB-SMF	Multicast/Broadcast Session Management Function
MM	Mobility Management
N3IWF	Non-3GPP InterWorking Function
NEF	Network Exposure Function
NR	New Radio
NRPPa	NR Positioning Protocol A
NSI ID	Network Slice Instance Identifier
NSSAI	Network Slice Selection Assistance Information
NSSAA	Network Slice-Specific Authentication and Authorization
NWDAF	Network Data Analytics Function
PCF	Policy Control Function
PEI	Permanent Equipment Identifier
PRU	Positioning Reference Unit
RAT	Radio Access Type
RFSP	RAT/Frequency Selection Priority
SARI	Service Area Restriction Information
SBI	Service Based Interface
SM	Session Management
SMF	Session Management Function
SMSF	Short Message Service Function
S-NSSAI	Single Network Slice Selection Assistance Information
SUCI	Subscription Concealed Identifier
SUPI	Subscription Permanent Identifier
TA	Tracking Area
TAI	Tracking Area Identity
TNAP	Trusted Non-3GPP Access Point
TSCTSF	Time Sensitive Communication and Time Synchronization Function
TWAP	Trusted WLAN Access Point
UCMF	UE radio Capability Management Function
UDM	Unified Data Management
UDSF	Unstructured Data Storage Function
UPP-CM	User Plane Positioning Connection Management

4 Overview

4.1 Introduction

Within the 5GC, the AMF offers services to the SMF, other AMF, PCF, SMSF, LMF, GMLC, CBCF, PWS-IWF, NWDAF, DCCF, NEF, TSCTSF, AIOTF and MB-SMF via the Namf service based interface (see TS 23.501 [2], TS 23.502 [3], TS 23.041 [20], TS 23.288 [38] and TS 23.247 [55]).

Figure 4.1-1 provides the reference model (in service based interface representation and in reference point representation), with focus on the AMF and the scope of the present specification.

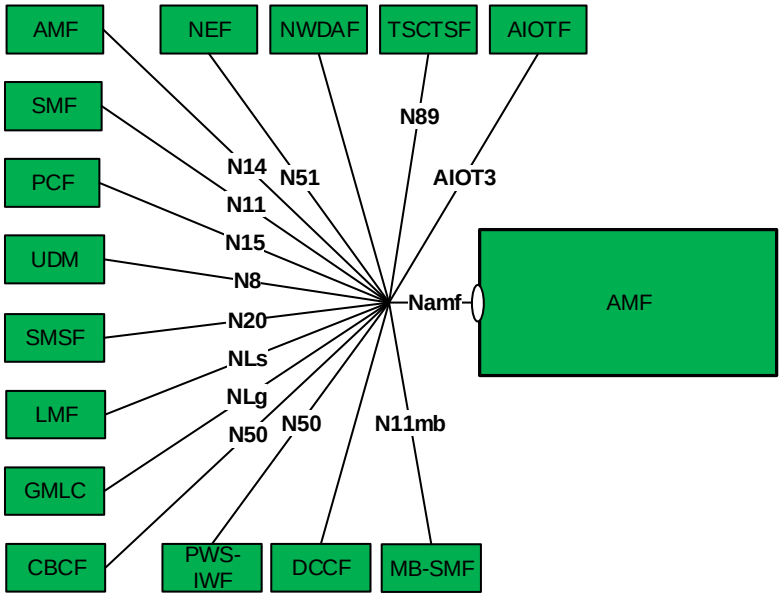


Figure 4.1-1: Reference model – AMF

The functionalities supported by the AMF are listed in clause 6.2.1 of TS 23.501 [2].

5 Services offered by the AMF

5.1 Introduction

The table 5.1-1 shows the AMF Services and AMF Service Operations:

Table 5.1-1 List of AMF Services

Service Name	Service Operations	Operation Semantics	Example Consumer(s)
Namf_Communication	UEContextTransfer	Request/Response	Peer AMF
	RegistrationStatusUpdate	Request/Response	Peer AMF
	CreateUEContext	Request/Response	Peer AMF
	ReleaseUEContext	Request/Response	Peer AMF
	RelocateUEContext	Request/Response	Peer AMF
	CancelRelocateUEContext	Request/Response	Peer AMF
	N1MessageNotify	Subscribe/Notify	Peer AMF, LMF, PCF
	N2InfoNotify		LMF, AMF
	N1N2MessageSubscribe		PCF
	N1N2MessageUnSubscribe		PCF
	N1N2MessageTransfer	Request/Response	Peer AMF, SMF, SMSF, LMF, PCF
	N1N2TransferFailureNotification	Subscribe/Notify	SMF, SMSF, LMF, PCF
	NonUeN2MessageTransfer	Request/Response	Peer AMF, LMF, CBCF, PWS-IWF, TSCTSF
	NonUeN2InfoSubscribe	Subscribe/Notify	CBCF, PWS-IWF, TSCTSF
	NonUeN2InfoUnSubscribe		CBCF, PWS-IWF, TSCTSF
	NonUeN2InfoNotify		LMF, CBCF, PWS-IWF, TSCTSF
	EBIAssignment	Request/Response	SMF
	AMFStatusChangeSubscribe	Subscribe / Notify	SMF, PCF, NEF, SMSF, UDM
	AMFStatusChangeUnSubscribe	Subscribe / Notify	SMF, PCF, NEF, SMSF, UDM
	AMFStatusChangeNotify	Subscribe / Notify	SMF, PCF, NEF, SMSF, UDM
Namf_EventExposure	Subscribe (see NOTE)	Subscribe/Notify	NEF, SMF, UDM, NWDAF, LMF, GMLC, DCCF, TSCTSF
	Unsubscribe (see NOTE)	Subscribe/Notify	NEF, SMF, UDM, NWDAF, LMF, GMLC, DCCF, TSCTSF
	Notify	Subscribe/Notify	NEF, SMF, UDM, NWDAF, LMF, GMLC, DCCF, TSCTSF
Namf_MT	EnableUEReachability	Request/Response	SMSF, SMF
	ProvideDomainSelectionInfo	Request/Response	UDM
	EnableGroupReachability	Request/Response	SMF
	UEReachabilityInfoNotify	Subscribe/Notify	SMF
Namf_Location	ProvidePositioningInfo	Request/Response	GMLC
	EventNotify	Subscribe / Notify	GMLC
	ProvideLocationInfo	Request/Response	UDM
	CancelLocation	Request/Response	GMLC
Namf_MBSBroadcast	ContextCreate	Request/Response	MB-SMF
	ContextUpdate	Request/Response	MB-SMF
	ContextRelease	Request/Response	MB-SMF
	ContextStatusNotify	Subscribe / Notify	MB-SMF
Namf_MBSCommunication	N2MessageTransfer	Request/Response	MB-SMF
	Notify	Subscribe/Notify	MB-SMF
Namf_AIoT	MessageDelivery	Request/Response	AIOTF
	Notify	Subscribe/Notify	AIOTF
NOTE: A subscription applies for one UE, group of UE(s) or any UE.			

Table 5.1-2 summarizes the corresponding APIs defined for this specification.

Table 5.1-2: API Descriptions

Service Name	Clause	Description	OpenAPI Specification File	apiName	Annex
Namf_Communication	6.1	AMF Communication Service	TS29518_Namf_Communication.yaml	namf-comm	A.2
Namf_EventExposure	6.2	AMF Event Exposure Service	TS29518_Namf_EventExposure.yaml	namf-evts	A.3
Namf_MT	6.3	AMF Mobile Terminated Service	TS29518_Namf_MT.yaml	namf-mt	A.4
Namf_Location	6.4	AMF Location Service	TS29518_Namf_Location.yaml	namf-loc	A.5
Namf_MBSBroadcast	6.5	AMF MBS Broadcast Service	TS29518_Namf_MBSBroadcast.yaml	namf-mbs-bc	A.6
Namf_MBSCommunication	6.6	AMF MBS Communication Service	TS29518_Namf_MBSCommunication.yaml	namf-mbs-com	A.7
Namf_AIoT	6.7	AMF AIoT Service	TS29518_Namf_AIoT.yaml	namf-aiot	A.8

5.2 Namf_Communication Service

5.2.1 Service Description

This service enables an NF to communicate with the UE through N1 NAS messages or with the AN (both UE and non UE specific). The service operations defined below allow the NF to communicate with the UE and the AN. The following are the key functionalities of this NF service.

- Provide service operations for transporting N1 messages to the UE;
- Allow NFs to subscribe and unsubscribe for notifications of specific N1 messages from the UE;
- Allow NFs to subscribe and unsubscribe for notifications about specific information from AN;
- Provide service operations for initiating N2 messages towards the AN;
- Security Context Management; and
- UE information management and transfer (including its security context).

5.2.2 Service Operations

5.2.2.1 Introduction

The Namf_Communication service supports following service operations:

- UEContextTransfer
- RegistrationStatusUpdate
- N1N2MessageTransfer (UE Specific)
- N1N2TransferFailureNotification (UE Specific)

- N1N2MessageSubscribe (UE Specific)
- N1N2MessageUnsubscribe (UE Specific)
- N1MessageNotify (UE Specific)
- N2InfoNotify (UE Specific)
- NonUeN2MessageTransfer
- NonUeN2InfoSubscribe
- NonUeN2InfoUnsubscribe
- NonUeN2InfoNotify
- EBIAssignment
- CreateUEContext
- ReleaseUEContext
- RelocateUEContext
- CancelRelocateUEContext
- AMFStatusChangeSubscribe
- AMFStatusChangeUnsubscribe
- AMFStatusChangeNotify

5.2.2.2 UE Context Operations

5.2.2.2.1 UEContextTransfer

5.2.2.2.1.1 General

The UEContextTransfer service operation is used during the following procedure:

- General Registration procedure (see TS 23.502 [3], clause 4.2.2.2.2)
- Registration with Onboarding SNPN (see TS 23.502 [3], clause 4.2.2.2.4)

The UEContextTransfer service operation is invoked by a NF Service Consumer, e.g. a target AMF, towards the AMF (acting as source AMF), when the target AMF receives a Registration Request with the UE's 5G-GUTI included and the serving AMF has changed since last registration, to retrieve the UE Context, e.g. the UE's SUPI and MM Context, in the source AMF.

The NF Service Consumer (e.g. the target AMF) shall retrieve the UE Context by invoking the "transfer" custom method on the URI of an "Individual ueContext" resource identified by UE's 5G-GUTI, see clause 6.1.3.2.4. See also Figure 5.2.2.2.1.1-1.

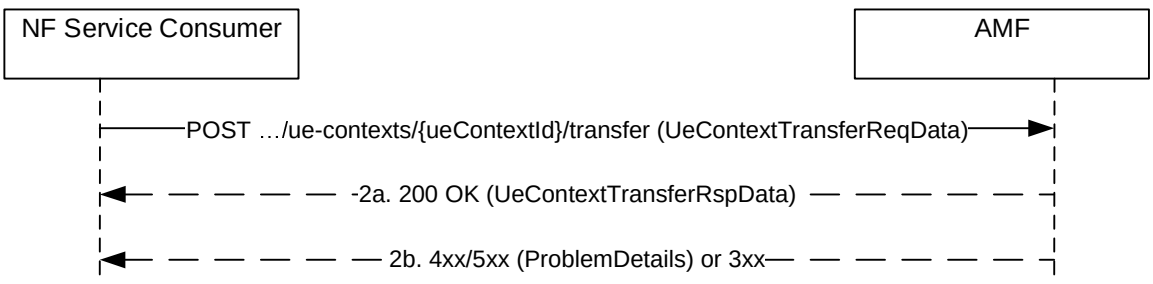


Figure 5.2.2.2.1.1-1 UE Context Transfer

1. The NF Service Consumer, e.g. target AMF, shall send a HTTP POST request to invoke "transfer" custom method on an "Individual ueContext" resource URI. The content of the request shall be an object of "UeContextTransferReqData" data type.

   If UE Context Transfer is triggered by UE initial registration, mobility registration, disaster roaming initial registration or disaster roaming mobility registration, the NF Service Consumer, e.g. target AMF, shall set the reason attribute to "INIT_REG" or "MOBI_REG" and include the integrity protected registration request message which triggers the UE context transfer in the content.

2a. On success:

- if the reason attribute is "INIT_REG" and integrity check is successful, the (source) AMF shall respond with the status code "200 OK". The content of the response shall be an object of "UeContextTransferRspData" data type, containing:

  case a) the representation of the requested UE Context as follows:

  - without PDU Session Contexts associated to the access type indicated in the request by the NF Service Consumer (e.g. target AMF); and
  - with PDU Session Contexts associated to the other access type, if the UE is registered for the other access type in the (source) AMF, unless the source AMF determines based on the PLMN ID or SNPN ID of the (target) AMF that there is no possibility for relocating the N2 interface for non-3GPP access to the (target) AMF;

  or

  case b) the representation of the requested UE Context only containing the "supi" attribute, if the UE is registered in a different access type in the (source) AMF and the source AMF determines based on the PLMN ID of the (target) AMF that there is no possibility for relocating the N2 interface to the (target) AMF.

- If the reason attribute is "MOBI_REG" and integrity check is successful, the (source) AMF shall respond with the status code "200 OK". The content of the response shall be an object of "UeContextTransferRspData" data type, containing:

  a) the representation of the complete UE Context including available MM and PDU Session Contexts. The source AMF shall transfer the complete UE context including both access types if the UE is registered for both 3GPP and non-3GPP accesses and if the target PLMN is the same as the source PLMN; or

  b) the representation of the requested UE Context including the available MM and PDU Session Contexts for the 3GPP access type, if the UE is registered for both 3GPP and non-3GPP accesses in the (source) AMF and the source AMF determines based on the PLMN ID or SNPN ID of the (target) AMF that there is no possibility for relocating the N2 interface for non-3GPP access to the (target) AMF.

NOTE: The source AMF can determine that it is not possible to relocate the N2 interface to the target AMF when both AMFs pertain to different PLMNs or SNPNs.

The UE context shall contain trace control and configuration parameters, if signalling based trace has been activated (see TS 32.422 [30]).

The NF Service Consumer, e.g. target AMF, starts tracing according to the received trace control and configuration parameters, if trace data is received in the UE context indicating that signalling based trace has been activated. Once the NF Service Consumer receives subscription data, trace requirements received from the UDM supersedes the trace requirements received from the AMF.

The UE context shall contain analytics subscription parameters, if the (source) AMF has created analytics subscription(s) towards NWDAF related to the UE (see clause 5.2.2.2.2 of TS 23.502 [3]) and both the source and the target AMFs support the "ASUC" feature. The NF Service Consumer, e.g. target AMF, may take over the analytics subscription(s).

The UE context shall contain event subscriptions information in the following cases:

a) Any NF Service Consumer has subscribed for UE specific event; and/or

b) Any NF Service Consumer has subscribed for UE group specific events to which the UE belongs. In this case the event subscriptions provided in the UE context shall contain the event details applicable to this specific UE in the group (e.g maxReports in options IE).

The NF Service Consumer, e.g. target AMF, shall:

- in case a) create event subscriptions for the UE specific events;

- in case b) create event subscriptions for the group Id if there are no existing event subscriptions for that group Id, subscription change notification URI (subsChangeNotifyUri) and the subscription change notification correlation Id (subsChangeNotifyCorrelationId). If there is already an existing event subscription for the group Id, and for the given subscription change notification URI (subsChangeNotifyUri) and subscription change notification correlation Id (subsChangeNotifyCorrelationId), then an event subscription shall not be created at the NF Service Consumer. The individual UE specific event details (e.g maxReports in options IE) within that group shall be taken into account. See also clause 5.3.1.4.2 if the subscription to the group of UEs is an AMF Set level bulk subscription.

- for both the cases, for each created event subscription, allocate a new subscription Id, if necessary (see clause 6.5.2 of TS 29.500 [4]), and if allocated, send the new subscription Id to the notification endpoint for informing the subscription Id creation, along with the notification correlation Id for the subscription Id change. If the UEContextTransfer service operation is performed towards the old AMF as part of the EPS to 5GS mobility registration procedure using N26 interface (see clause 4.11.1.3.3 of TS 23.502 [3]), the target AMF may also initiate event subscription synchronization procedure with UDM, as specified in clause 5.3.2.4.2, when both the target AMF and the UDM support the "ESSYNC" feature.

NOTE: Subscription Id can be reused if the mobility is between AMFs of same AMF Set.

If the UE context being transferred from the source AMF is the last UE context that belongs to a UE group Id related subscription, then the source AMF shall not delete the UE group Id related subscription until the expiry of that event subscription (see clause 5.3.2.2.2).

The target AMF may authorize the event subscriptions transferred from the source AMF as specified in clause 13.4.1.4 of TS 33.501 [27]. Based on local policy, the target AMF may consider that transferred subscriptions containing no or an invalid access token are not authorized. Transferred subscriptions that are not authorized by the target AMF shall not be regarded active; if the target AMF supports the STEN (Subscription Termination Event Notification) feature, and if the notification of event subscription termination was requested by the NF service consumer, the target AMF shall send a notification to the NF service consumer to report the termination of the subscription with the subscription termination cause "SUBSCRIPTION_NOT_AUTHORIZED".

The source AMF shall not transfer those PDU sessions which are not supported by the target AMF, e.g. the MA-PDU sessions shall not be transferred if the target AMF does not support ATSSS.

During UE context transfer, the source AMF shall send indications of the received values for the AM policy association and UE policy association to the NF consumer (i.e., target AMF), whenever available. Further during the UE context transfer, information about the UE policy container if received from the UE and stored in the source AMF, shall be sent from the source AMF to the target AMF.

The UE context shall contain SNPN Onboarding indication, if the UE is registered for onboarding in an SNPN as described in clause 4.2.2.2.4 of TS 23.502 [3]. The NF Service Consumer, i.e. target AMF, may start an implementation specific timer to deregister the onboarding registered UE, i.e. if the received UE context contains SNPN Onboarding indication.

The AMF shall store in the UE context the access and mobility management policy information, if it is received from PCF (e.g. during network slice replacement). The source AMF shall transfer the AM policy information within the UE context to target AMF.

If there are ongoing Network Slice Deregistration Inactivity Timer(s) for the UE, the source AMF shall include the information (e.g. the expiry time) of the ongoing Network Slice Deregistration Inactivity Timer(s) in the UE context. The target AMF should resume the ongoing Network Slice Deregistration Inactivity Timer(s) if received for the S-NSSAI(s) that are allowed for the UE in the target AMF. The source AMF shall include the configured deregistration inactivity timer value(s) in the UE context within the "amPolicyInfoContainer" attribute, if received from PCF.

2b. On failure or redirection, one of the HTTP status codes listed in Table 6.1.3.2.4.4.2-2 shall be returned. For a 4xx/5xx response, the message body shall contain a ProblemDetails structure with the "cause" attribute set to one of the application errors listed in Table 6.1.3.2.4.4.2-2.

5.2.2.2.1.2 Retrieve UE Context after successful UE authentication

When a successful UE authentication has been performed after a previous integrity check failure, the NF service consumer (e.g. the target AMF) shall retrieve the UE context by invoking "transfer" service operation on the URI of the "Individual ueContext" resource identified by UE's SUPI. The same requirements in clause 5.2.2.2.1.1 shall be applied with following modifications:

1. Same as step 1 of figure 5.2.2.2.1.1-1, with following differences:
   - The {ueContextId} in the URI shall be composed using UE's SUPI, and
   - The "reason" attribute in request body shall be set to "MOBI_REG_UE_VALIDATED", and
   - The request body shall not include registration request message from UE.
2. Same as step 2a of figure 5.2.2.2.1.1-1, with following differences:
   - The (source) AMF shall skip integrity check and shall respond with the status code "200 OK "with the UE Context excluding SeafData and including available PDU Session Contexts

5.2.2.2.2 RegistrationStatusUpdate

5.2.2.2.2.1 General

The RegistrationStatusUpdate service operation is used during the following procedure:

- General Registration procedure (see TS 23.502 [3], clause 4.2.2.2.2)
- Registration with AMF re-allocation procedure (see TS 23.502 [3], clause 4.2.2.2.3)

The RegistrationStatusUpdate service operation is invoked by a NF Service Consumer, e.g. the target AMF, towards the NF Service Producer, i.e. the source AMF, to update the status of UE registration at the target AMF, thereby indicating the result of previous UE Context transfer for a given UE (see clause 5.2.2.2.1.1).

The target AMF shall update the NF Service Producer (i.e. source AMF) with the status of the UE registration at the target AMF due to a previous UE Context transfer. The NF Service Consumer (e.g. target AMF) shall use the HTTP method POST to invoke the "transfer-update" custom operation on the URI of an "Individual ueContext" resource, see clause 6.1.3.2.4. See also Figure 5.2.2.2.2.1-1.

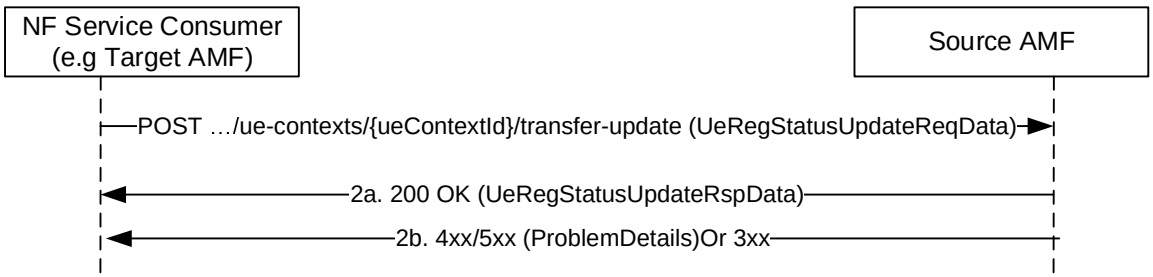


Figure 5.2.2.2.2.1-1 Registration Status Update

1. The NF service consumer (e.g. target AMF), shall send a POST request to invoke the "transfer-update" custom operation on the URI of an "Individual ueContext" resource, to update the source AMF with the status of the UE registration at the target AMF. The UE's 5G-GUTI is included as the UE identity.

   The request content shall include the transferStatus attribute set to "TRANSFERRED" if the UE context transfer

was completed successfully (including the case where only the supi was transferred to the target AMF during the UE context transfer procedure) or to "NOT_TRANSFERRED" otherwise.

If any network slice(s) become no longer available and there are PDU Session(s) associated with them, the target AMF shall include these PDU session(s) in the toReleaseSessionList attribute in the content. If the continuity of the PDU Session(s) cannot be supported between networks (e.g. SNPN-SNPN mobility, inter-PLMN mobility where no HR agreement exists), the target AMF shall include these PDU session(s) with release cause in the toReleaseSessionInfo attribute in the content.

If the target AMF selects a new PCF for AM Policy and/or UE policy other than the one which was included in the UeContext by the old AMF, the target AMF shall set pcfReselectedInd to true.

NOTE: AMF selects the same PCF instance for AM policy and for UE policy, as described in clause 6.3.7.1, TS 23.501 [2].

The NF service consumer shall include the smfChangeInfoList attribute including the UE's PDU Session ID(s) for which the I-SMF or V-SMF has been changed or removed, if any, with for each such PDU session, the related smfChangeIndication attribute set to "CHANGED" or "REMOVED", if the I-SMF or V-SMF is changed or removed respectively.

If the target AMF receives analytics subscription parameters from the source AMF, and one or more analytics subscription(s) are not taken over by the target AMF, the target AMF shall include these analytics subscription(s) in the analyticsNotUsedList IE. The source AMF should unsubscribe the analytics subscriptions included in analyticsNotUsedList IE for the UE.

Once the update is received, the source AMF shall:

- remove the individual ueContext resource and release any PDU session(s) in the toReleaseSessionList attribute, if the transferStatus attribute included in the POST request body is set to "TRANSFERRED" and if the source AMF transferred the complete UE Context including all MM contexts and PDU Session Contexts. The source AMF may choose to start a timer to supervise the release of the UE context resource and may keep the individual ueContext resource until the timer expires. If the pcfReselectedInd is set to true, the source AMF shall terminate the AM Policy Association and/or the UE Policy Association that the source AMF has to the old PCF.

- keep the UE context only including the MM context and PDU session(s) associated to the non-3GPP access, if the transferStatus attribute included in the POST request body is set to "TRANSFERRED" and if the source AMF did not transfer the MM context and PDU Session Contexts for the non-3GPP access type; the AMF shall release any PDU session(s) in the toReleaseSessionList attribute. The source AMF may choose to start a timer and keep the MM context and PDU session(s) associated to the 3GPP access until the timer expires.

- keep the UE Context as if the context transfer procedure had not happened if the transferStatus attribute included in the POST request body is set to "NOT_TRANSFERRED".

2a. On Success: The source AMF shall respond with the status code "200 OK" if the request is accepted. If the smfChangeInfoList attribute was received in the request, the source AMF shall release the SM context at the I-SMF or V-SMF only, for all the PDU sessions listed in the smfChangeInfoList attribute with the smfChangeIndication attribute set to "CHANGED" or "REMOVED".

If some PDU sessions are not supported by the target AMF and thus not transferred to the target AMF, the source AMF shall release these PDU sessions after this step.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.1.3.2.4.5.2-2 shall be returned. For a 4xx/5xx response, the message body shall contain a ProblemDetails structure with the "cause" attribute set to one of the application errors listed in Table 6.1.3.2.4.5.2-2, where applicable.

5.2.2.2.3 CreateUEContext

5.2.2.2.3.1 General

The CreateUEContext service operation is used during the following procedure:

- Inter NG-RAN node N2 based handover (see TS 23.502 [3], clause 4.9.1.3, and clause 4.23.7)

The CreateUEContext service operation is invoked by a NF Service Consumer, e.g. a source AMF, towards the AMF (acting as target AMF), when the source AMF can't serve the UE and selects the target AMF during the handover procedure, to create the UE Context in the target AMF.

The NF Service Consumer (e.g. the source AMF) shall create the UE Context by using the HTTP PUT method with the URI of the "Individual UeContext" resource (See clause 6.1.3.2.3.1). See also Figure 5.2.2.2.3.1-1.

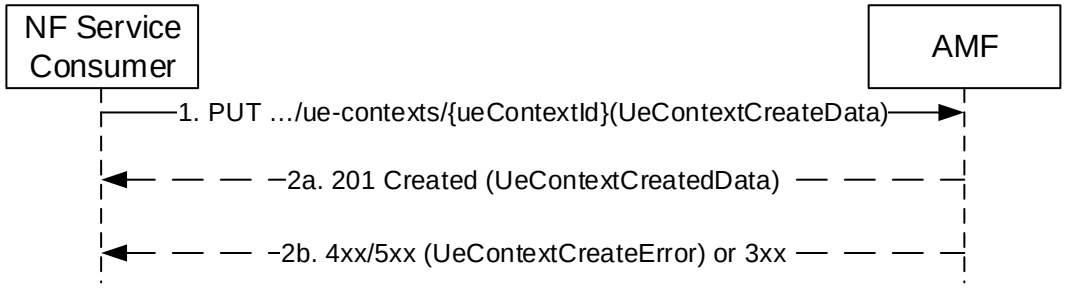


Figure 5.2.2.2.3.1-1 Create UE Context

1. The NF Service Consumer, e.g. source AMF, shall send a PUT request, to create the ueContext in the target AMF. The content of the PUT request shall contain a UeContextCreateData structure, including a N2 Information Notification callback URI.

   The UE context shall contain trace control and configuration parameters, if signalling based trace has been activated (see TS 32.422 [30]).

   The source AMF shall transfer the complete UE context including both access types if the UE is registered for both 3GPP and non-3GPP accesses and if the target PLMN is the same as the source PLMN.

   The source AMF shall transfer only UE context for 3GPP access if the source AMF determines there is no possibility for relocating the N2 interface for non-3GPP access to the (target) AMF, e.g. when the target AMF is in another PLMN.

   The source AMF shall send an indication of the received value for the AM policy association and UE policy association indicators to the NF producer (i.e., target AMF), whenever available. Additionally, the UE policy container, if received from the UE and stored in the source AMF shall be sent to the target AMF.

   For a UE supporting 5G-SRVCC, the NF Service Consumer (i.e. AMF) shall include the Mobile Station Classmark 2, STN-SR, C-MSISDN and Supported Codec List in the request, if available, as specified in TS 23.502 [3].

   The UE context shall contain analytics subscription parameters, if the (source) AMF has created analytics subscription(s) towards NWDAF related to the UE (see clause 5.2.2.2.11 of TS 23.502 [3]) and both the source and the target AMFs support the "ASUC" feature. The NF service producer, e.g. target AMF, may take over the analytics subscription(s).

   The UE context shall contain SNPN Onboarding indication and the target AMF shall support SNPN Onboarding, if the UE is registered for onboarding in an SNPN as described in clause 4.2.2.2.4 of TS 23.502 [3].

   The AMF shall store in the UE context the access and mobility management policy information, if it is received from PCF (e.g. during network slice replacement). The source AMF shall transfer the AM policy information within the UE context to target AMF.

   If there are ongoing Network Slice Deregistration Inactivity Timer(s) for the UE, the source AMF shall include the information (e.g. the expiry time) of the ongoing Network Slice Deregistration Inactivity Timer(s) in the UE context. The source AMF shall also include the configured deregistration inactivity timer value(s) in the UE context within the "amPolicyInfoContainer" attribute, if received from PCF.

2a. On success, the target AMF shall respond with the status code "201 Created" if the request is accepted, together with a HTTP Location header to provide the location of a newly created resource. The content of the PUT response shall contain the representation of the created UE Context. If the target AMF selects a new PCF for AM Policy other than the one which was included in the UeContext by the old AMF, the target AMF shall set

pcfReselectedInd to true. If the pcfReselectedInd is set to true, the source AMF shall terminate the AM Policy Association to the old PCF.

The target AMF starts tracing according to the received trace control and configuration parameters, if trace data is received in the UE context indicating that signalling based trace has been activated. Once the AMF receives subscription data, trace requirements received from the UDM supersedes the trace requirements received from the NF Service Consumer.

If the target AMF receives analytics subscription parameters from the source AMF, and one or more analytics subscription(s) are not taken over by the target AMF, the target AMF shall include these analytics subscription(s) in the analyticsNotUsedList IE. The source AMF may unsubscribe the analytics subscriptions included in analyticsNotUsedList IE for the UE.

The UE context shall contain event subscriptions information in the following cases:

a) Any NF Service Consumer has subscribed for UE specific event; and/or

b) Any NF Service Consumer has subscribed for UE group specific events to which the UE belongs. In this case the event subscriptions provided in the UE context shall contain the event details applicable to this specific UE in the group (e.g maxReports in options IE).

The target AMF shall:

- in case a) create event subscriptions for the UE specific events;

- in case b) create event subscriptions for the group Id if there are no existing event subscriptions for that group Id, subscription change notification URI (subsChangeNotifyUri) and the subscription change notification correlation Id (subsChangeNotifyCorrelationId). If there is already an existing event subscription for the group Id and for the given subscription change notification URI (subsChangeNotifyUri) and subscription Id change notification correlation Id (subsChangeNotifyCorrelationId), then an event subscription shall not be created at the target AMF. The individual UE specific event details (e.g maxReports in options IE) within that group shall be taken into account. See also clause 5.3.1.4.2 if the subscription to the group of UEs is an AMF Set level bulk subscription.

- for both the cases, for each created event subscription, allocate a new subscription Id, if necessary (see clause 6.5.2 of TS 29.500 [4]), and if allocated send the new subscription Id to the notification endpoint for informing the subscription Id creation, along with the notification correlation Id for the subscription Id change.

NOTE: Subscription Id can be reused if the mobility is between AMFs of same AMF Set.

If the UE context being transferred from the NF service consumer (e.g. source AMF) is the last UE context that belongs to a UE group Id related subscription, then the NF service consumer (e.g. source AMF) shall not delete the UE group Id related subscription until the expiry of that event subscription (see clause 5.3.2.2.2).

The target AMF may authorize the event subscriptions transferred from the source AMF as specified in clause 13.4.1.4 of TS 33.501 [27]. Based on local policy, the target AMF may consider that transferred subscriptions containing no or an invalid access token are not authorized. Transferred subscriptions that are not authorized by the target AMF shall not be regarded active; if the target AMF supports the STEN (Subscription Termination Event Notification) feature, and if the notification of event subscription termination was requested by the NF service consumer, the target AMF shall send a notification to the NF service consumer to report the termination of the subscription with the subscription termination cause "SUBSCRIPTION_NOT_AUTHORIZED".

If the target AMF receives SNPN Onboarding indication from the source AMF, the target AMF may start an implementation specific timer to deregister the onboarding registered UE, i.e. if the received UE context contains SNPN Onboarding indication.

The source AMF shall release those PDU sessions not supported by the target AMF and thus not transferred to the target AMF.

If the source AMF includes the information of ongoing Network Slice Deregistration Inactivity Timer(s) in the UE context, the target AMF should resume the ongoing Network Slice Deregistration Inactivity Timer(s) if received for the S-NSSAI(s) that are allowed for the UE in the target AMF.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.1.3.2.3.1-3 shall be returned. For a 4xx/5xx response, the message body shall contain a UeContextCreateError structure, including:

- a ProblemDetails structure with the "cause" attribute set to one of the application errors listed in Table 6.1.3.2.3.1-3. The cause in the error attribute shall be set to HANDOVER_FAILURE, if all of the PDU sessions are failed, e.g. no response from the SMF within a maximum wait timer;
- NgAPCause, if available;
- N2 information carrying the Target to Source Failure Transparent Container, if this information has been received from the target NG-RAN and if the source AMF supports the NPN feature.

5.2.2.2.3.2 Create UE Context with AMF Relocation

During inter-PLMN N2 Handover, the initial AMF may relocate the UE context to a target AMF (e.g. due to slices cannot be served by initial AMF) as specified in clause 4.9.1.3.2 of TS 23.502 [3]. This clause describes the procedure for this scenario.

The NF Service Consumer (e.g. the source AMF) shall create the UE Context by using the HTTP PUT method with the URI of the "Individual UeContext" resource (See clause 6.1.3.2.3.1). See also Figure 5.2.2.2.3.2-1.

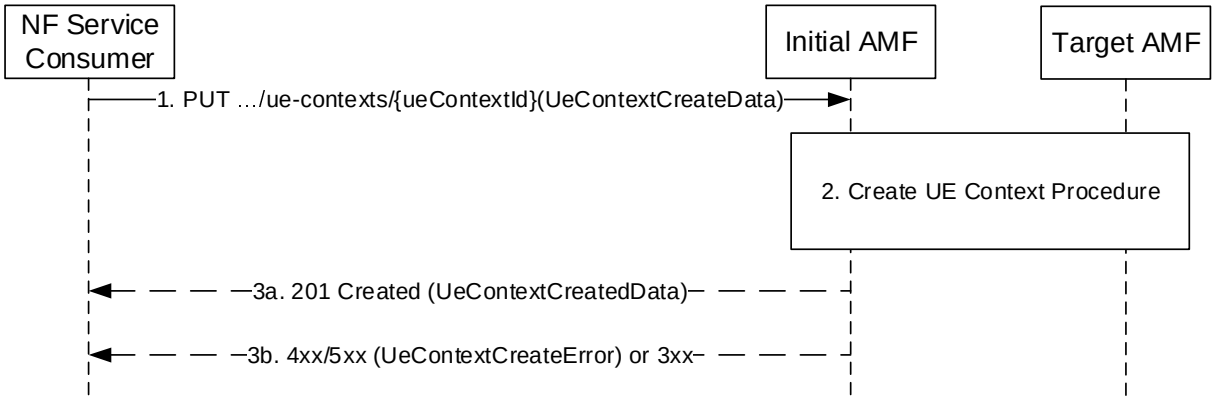


Figure 5.2.2.2.3.2-1 Create UE Context with AMF Relocation

Same requirement of clause 5.2.2.2.3.1 applies, with following modifications:

1. Same as step 1 of clause 5.2.2.2.3.1.
2. The initial AMF selects a target AMF and perform CreateUeContext procedure (see clause 5.2.2.2.3.1).
   - the request body shall include the information received from the source AMF in step 1, including the serving network, the supported features, etc.
   - if the received serving network (from the source AMF) is different from the PLMN of the target AMF, the resource URI in the Location header in 201 Create response shall contain the inter-PLMN API Root.
   - if the serving network is visited PLMN, the initial AMF shall also include the slice mapping information if received from the NSSF, i.e.:
     - the Allowed Nssai in serving PLMN and the Nssai Mapping List in MM Context in UE context; and
     - the S-NSSAI in the serving PLMN mapped from the S-NSSAI in home PLMN per active PDU session in the pduSessionList IE.

3a. Same as step 2a of clause 5.2.2.2.3.1, with following modifications:

- the request body shall contain the UE Context and other information received from the target AMF in step 2.

- the Location header shall contain the resource URI received in the "201 Created" response from target AMF in step 2.
- the initial AMF shall insert a 3gpp-Sbi-Producer-Id header indicating the target AMF.

3b. Same as step 2b of clause 5.2.2.2.3.1.

5.2.2.2.4 ReleaseUEContext

5.2.2.2.4.1 General

The ReleaseUEContext service operation is used during the following procedure:

- Inter NG-RAN node N2 based handover, Cancel procedure (see TS 23.502 [3], clause 4.9.1.4)

The ReleaseUEContext service operation is invoked by a NF Service Consumer, e.g. a source AMF, towards the AMF (acting as target AMF), when the source AMF receives the Handover Cancel from the 5G-AN during the handover procedure, to release the UE Context in the target AMF.

The NF Service Consumer (e.g. the source AMF) shall release the UE Context by using the HTTP "release" custom operation with the URI of the "Individual UeContext" resource (See clause 6.1.3.2.4.2). See also Figure 5.2.2.2.4.1-1.

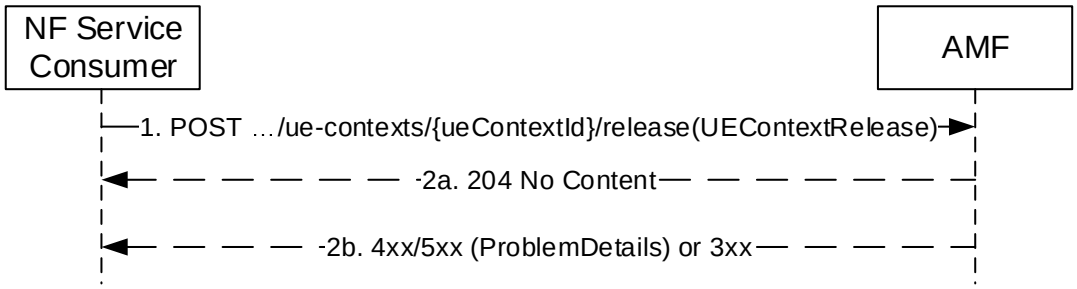


Figure 5.2.2.2.4.1-1 Release UE Context

1. The NF Service Consumer, e.g. source AMF, shall send a POST request, to release the ueContext in the target AMF. The content of the POST request shall contain the UEContextRelease.

2a. On success, the target AMF shall return "204 No Content" with an empty content in the POST response.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.1.3.2.4.2.2-2 shall be returned. For a 4xx/5xx response, the message body shall contain a ProblemDetails structure with the "cause" attribute set to one of the application error listed in Table 6.1.3.2.4.2.2-2.

5.2.2.2.5 RelocateUEContext

5.2.2.2.5.1 General

The RelocateUEContext service operation is used during the following procedure:

- EPS to 5GS handover using N26 interface with AMF re-allocation (see TS 23.502 [3], clause 4.11.1.2.2).

The RelocateUEContext service operation is invoked by a NF Service Consumer, e.g. an initial AMF, towards the AMF (acting as target AMF), during an EPS to 5GS handover with AMF re-allocation, to relocate the UE Context in the target AMF.

The NF Service Consumer (e.g. the initial AMF) shall relocate the UE Context in the target AMF by invoking the "relocate" custom method on the URI of an "Individual ueContext" resource (see clause 6.1.3.2.4). See also Figure 5.2.2.2.5.1-1.

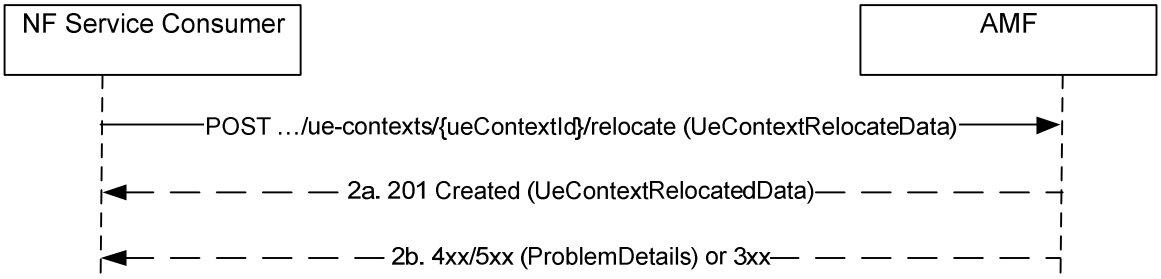


Figure 5.2.2.2.5.1-1 Relocate UE Context

1. The NF Service Consumer, e.g. initial AMF, shall send a POST request to relocate the UE context in the target AMF. The content of the POST request shall contain a UeContextRelocateData structure.

   The UE context shall contain trace control and configuration parameters, if signalling based trace has been activated (see TS 32.422 [30]).

   For an EPS to 5GS handover procedure, the NF Service Consumer shall carry per PDU session the S-NSSAI for serving PLMN, the MME Control Plane Address and the TEID in the request. If S-NSSAI for interworking is configured and used in initial AMF for the PDU session, the initial AMF shall also carry the configured S-NSSAI for interworking to the target AMF, as specified in clause 4.11.1.2.2 of TS 23.502 [3]. In Home Routed roaming case, the S-NSSAI for serving PLMN is derived by the initial AMF based on the S-NSSAI for home PLMN retrieved from SMF+PGW-C, as specified in TS 23.502 [3].

2a. On success, the target AMF shall respond with the status code "201 Created" if the request is accepted, together with a HTTP Location header to provide the location of the newly created resource. The content of the POST response shall contain the representation of the created UE Context.

   The target AMF starts tracing according to the received trace control and configuration parameters, if trace data is received in the UE context indicating that signalling based trace has been activated. Once the AMF receives subscription data, trace requirements received from the UDM supersedes the trace requirements received from the NF Service Consumer.

2b. On failure to relocate the UE context or redirection, one of the HTTP status code listed in Table 6.1.3.2.4.6.2-2 shall be returned. For a 4xx/5xx response, the message body shall contain a ProblemDetails structure with the "cause" attribute set to one of the application errors listed in Table 6.1.3.2.4.6.2-2.

   If the target RAN rejects the Handover Request, the target AMF shall send Forward Relocation Response message directly to the source MME over the N26 interface, carrying the appropriate cause value.

5.2.2.2.6 CancelRelocateUEContext

5.2.2.2.6.1 General

The CancelRelocateUEContext service operation is used during the following procedure:

- EPS to 5GS Handover with AMF re-allocation, Handover Cancel procedure (see TS 23.502 [3], clause 4.11.1.2.3)

The CancelRelocateUEContext service operation is invoked by a NF Service Consumer (i.e. initial AMF), towards the AMF (acting as target AMF), when the initial AMF receives Forward Cancel Request from the source MME during EPS to 5GS Handover with AMF re-allocation procedure, to trigger the target AMF to release the UE Context.

The NF Service Consumer (i.e. the initial AMF) shall cancel the UE Context Relocation by using the HTTP "cancel-relocate" custom operation with the URI of the "Individual UeContext" resource (See clause 6.1.3.2.4.2). See also Figure 5.2.2.2.6.1-1.

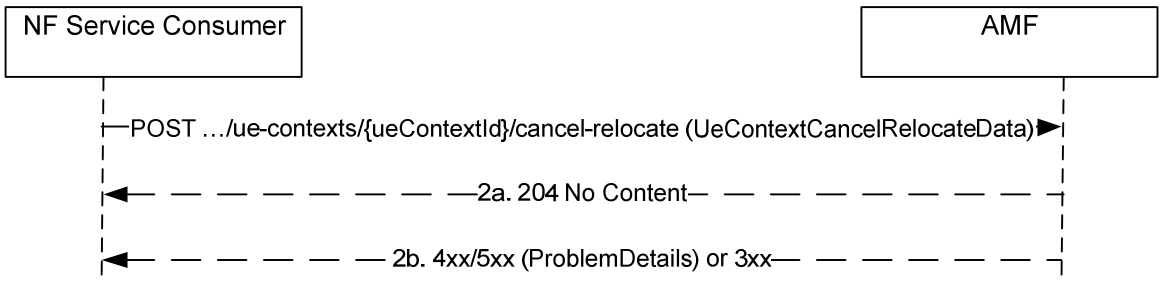


Figure 5.2.2.2.6.1-1 Cancel Relocate UE Context

1. The NF Service Consumer, i.e. initial AMF, shall send a POST request, to release the ueContext in the target AMF. The content of the POST request shall contain the UeContextCancelRelocateData that needs to be passed to the target AMF.

2a. On success, the target AMF shall return "204 No Content" with an empty content in the POST response.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.1.3.2.4.7.2-2 shall be returned. For a 4xx/5xx response, the message body shall contain a ProblemDetails structure with the "cause" attribute set to one of the application error listed in Table 6.1.3.2.4.7.2-2.

5.2.2.3 UE Specific N1N2 Message Operations

5.2.2.3.1 N1N2MessageTransfer

5.2.2.3.1.1 General

The N1N2MessageTransfer service operation is used by a NF Service Consumer to transfer N1 and/or N2 information to the UE and/or 5G-AN through the AMF in the following procedures:

- Network triggered Service Request (see clause 4.2.3.3 of TS 23.502 [3])
- PDU Session establishment (see clause 4.3.2 of TS 23.502 [3])
- PDU Session modification (see clause 4.3.3 of TS 23.502 [3])
- PDU Session release (see clause 4.3.4 of TS 3GPP 23.502 [3])
- Session continuity, service continuity and UP path management (see clause 4.3.5 of TS 23.502 [3])
- Inter NG-RAN node N2 based handover (see clause 4.9.1.3 of TS 23.502 [3])
- SMS over NAS procedures (see clause 4.13.3 of TS 23.502 [3]
- UE assisted and UE based positioning procedure (see clause 6.11.1 of TS 23.273 [42])
- Network assisted positioning procedure (see clause 6.11.2 of TS 23.273 [42])
- LCS Event Report, Event Reporting in RRC INACTIVE state procedures, LCS Cancel Location and LCS Periodic-Triggered Invoke procedures (see clause 6.3, clause 6.7 and clause 6.20.3 of TS 23.273 [42])
- UE configuration update procedure for transparent UE policy delivery (see clause 4.2.4.3 of TS 23.502 [3])
- UPF anchored Mobile Terminated Data Transport in Control Plane CIoT 5GS Optimisation (see clause 4.24.2 of TS 23.502 [3])
- NEF Anchored Mobile Terminated Data Transport (see clause 4.25.5 of TS 23.502 [3])
- System interworking procedures with EPC (see clause 4.3 in TS 23.501 [2] and clause 4.11 in TS 23.502 [3])
- SMF triggered N3 data transfer establishment procedure (see clause 4.2.10.2 of TS 23.502 [3])
- 5G-RG requested PDU Session Establishment via W-5GAN (see clause 7.3.1 of TS 23.316 [48])

- 5G-RG or Network requested PDU Session Modification via W-5GAN (see clause 7.3.2 of TS 23.316 [48])
- 5G-RG or Network requested PDU Session Release via W-5GAN (see clause 7.3.3 of TS 23.316 [48])
- FN-RG related PDU Session Establishment via W-5GAN (see clause 7.3.4 of TS 23.316 [48])
- CN-initiated selective deactivation of UP connection of an existing PDU Session associated with W-5GAN Access (see clause 7.3.5 of TS 23.316 [48])
- FN-RG or Network Requested PDU Session Modification via W-5GAN (see clause 7.3.6 of TS 23.316 [48])
- FN-RG or Network Requested PDU Session Release via W-5GAN (see clause 7.3.7 of TS 23.316 [48])
- Non-5G capable device behind 5G-CRG and FN-CRG requested PDU Session Establishment via W-5GAN (see clause 4.10a of TS 23.316 [48])
- Non-5G capable device behind 5G-CRG and FN-CRG or Network Requested PDU Session Modification via W-5GAN (see clause 4.10a of TS 23.316 [48])
- Non-5G capable device behind 5G-CRG and FN-CRG or Network Requested PDU Session Release via W-5GAN (see clause 4.10a of TS 23.316 [48])
- Handover procedures between 3GPP access / 5GC and W-5GAN access (see clause 7.6.3 of TS 23.316 [48])
- Handover from 3GPP access / EPS to W-5GAN / 5GC (see clause 7.6.4.1 of TS 23.316 [48])
- Transfer UAV specific data via N1 SM (see clause 5.2.3.2 and clause 5.2.4.3 of TS 23.256 [56])
- MBS join and Session establishment procedure (see clause 7.2.1.3 of TS 23.247 [55])
- MBS activation procedure (see clause 7.2.5.2 of TS 23.247 [55])
- Multicast session leave requested by the network or MBS session release (see clause 7.2.2.3 of TS 23.247 [55])
- Procedures applicable to a PRU (see clause 6.17 of TS 23.273 [42])
- Procedures of SL-MT-LR involving LMF (see TS 23.273 [42], clause 6.20.3)
- Procedures of SL-MT-LR for periodic, triggered Location Events (see TS 23.273 [42], clause 6.20.4)
- 5GC-MT-LR Procedure using SL positioning (see TS 23.273 [42], clause 6.20.5)
- Procedures of user plane connection between UE and LMF for location service (see clause 6.18 of TS 23.273 [42] and TS 24.572 [61])
- Procedures of data collection for NG RAN-sided models for AI/ML positioning (see clause 6.23 of TS 23.273 [42])

NOTE: Though in TS 23.502 [3] the procedure is called "UE configuration update procedure for transparent UE policy delivery", as per TS 24.501 [11] clause 5.4.5.3.1, the network initiated NAS transport procedure is used.

The NF Service Consumer shall invoke the service operation by using HTTP method POST, to request the AMF to transfer N1 and/or N2 information for a UE and/or 5G-AN, with the URI of "N1 N2 Messages Collection" resource (see clause 6.1.3.5.3.1).

The NF Service Consumer may include the following information in the HTTP Request message body:

- SUPI
- PDU Session ID or LCS Correlation ID depending on the N1/N2 message class to be transferred
- N2 SM Information (PDU Session ID, QoS profile, CN N3 Tunnel Info, S-NSSAI)
- N1 Message Container, including a N1 SM, LPP message, LCS message, SMS, UPDP message, PRU message, UPP-CM message
- N2 Information Container, including N2 SM, NRPPa message, PWS or RAN related information

- Mobile Terminated Data (i.e. CIoT user data container)
- Allocation and Retention Priority (ARP)
- Paging Policy Indication
- 5QI
- Notification URL (used for receiving Paging Failure Indication)
- Last Message Indication
- NF Instance Identifier and optionally Service Instance Identifier of the NF Service Consumer (e.g. an LMF or SMF)
- N1 SM Skipping Indication
- Area of Validity for N2 SM Information
- A MA PDU Session Accepted indication, if a MA-PDU session is established;
- Extended Buffering Support Indication, if SMF determines that Extended Buffering applies during Network triggered Service Request Procedure (see clause 4.2.3.3 of TS 23.502 [3]), UPF anchored Mobile Terminated Data Transport in Control Plane CIoT 5GS Optimisation procedure (see clause 4.24.2 of TS 23.502 [3]) or NEF Anchored Mobile Terminated Data Transport (see clause 4.25.5 of TS 23.502 [3]);
- Target Access type towards which the SMF requests to send N2 information and optionally N1 information, for a Multi-Access (MA) PDU session, or through which the LMF requests to transfer an LPP message to the UE.

During an intra-AMF handover between 3GPP and non-3GPP accesses, the SMF shall include the targetAccess IE set to the old access type in the HTTP Request message body, when releasing the N2 PDU session resources in the old access (see step 3 of Figure 4.9.2.1-1 and step 3 of Figure 4.9.2.2-1 of TS 23.502 [3]).

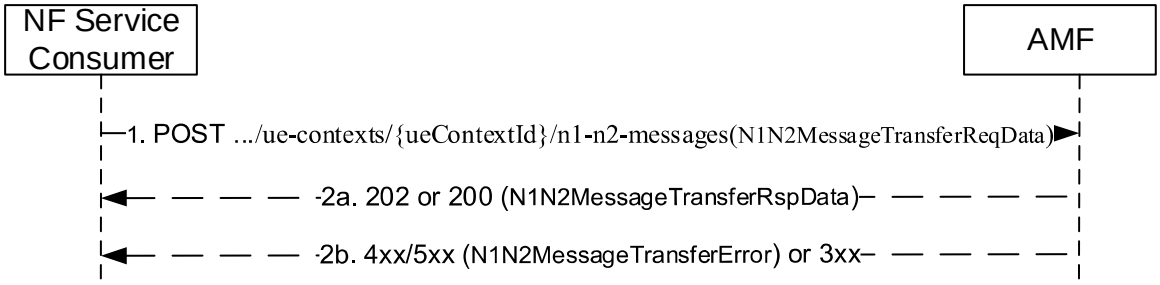


Figure 5.2.2.3.1.1-1 N1N2MessageTransfer for UE related signalling

1. The NF Service Consumer shall send a POST request to transfer N1 and N2 information. The NF Service Consumer may include a N1N2MessageTransfer Notification URI to AMF in the request message.

2a. On success, i.e. if the request is accepted and the AMF is able to transfer the N1/N2 message to the UE and/or the AN, the AMF shall respond with a "200 OK" status code. The AMF shall set the cause IE in the N1N2MessageTransferRspData as "N1_N2_TRANSFER_INITIATED" in this case.

The AMF shall respond with a "200 OK" status code and set the cause IE in the N1N2MessageTransferRspData to "N2_MSG_NOT_TRANSFERRED", if the N1N2MessageTransfer request included an area of validity for the N2 SM Information, the UE is in CM-CONNECTED state and outside of the area of validity.

2b. On failure or redirection, one of the HTTP status codes listed in Table 6.1.3.5.3.1-2 shall be returned. For a 4xx/5xx response, the message body shall contain an N1N2MessageTransferError structure, including:

- a ProblemDetails structure with the "cause" attribute set to one of the application error listed in Table 6.1.3.5.3.1-2.

5.2.2.3.1.2 Detailed behaviour of the AMF

When an NF service consumer is requesting to send N1 and/or N2 information and the UE is in CM-IDLE state for the access type for which the N1 and/or N2 information is related (called "associated access type" hereafter in this clause), the requirements specified in clause 5.2.2.3.1.1 shall apply with the following modifications:

NOTE: N1 and/or N2 Session Management information is related to the access type of the targeted PDU session for a single access PDU session, or to the Target Access received in the request for a MA PDU session; LCS related N2 (NRPPa) information is related to 3GPP access in this release of specification.

4xx and 5xx response cases shall also apply to UEs in CM-CONNECTED state, when applicable.

2xx Response Cases:

Case A: When UE is CM-IDLE in 3GPP access and the associated access type is 3GPP access:

a) Same as step 2a of Figure 5.2.2.3.1.1-1, the AMF should respond with the status code "200 OK", if "skipInd" attribute is set to "true" in the request body, with a response body that carries the cause "N1_MSG_NOT_TRANSFERRED".

b) Same as step 2a of Figure 5.2.2.3.1.1-1, the AMF shall respond with the status code "202 Accepted", if the asynchronous type communication is invoked and hence the UE is not paged, update the UE context and store N1 and/or N2 information and initiate communication with the UE and/or 5G-AN when the UE becomes reachable. In this case the AMF shall provide the URI of the resource in the AMF in the "Location" header of the response. In this release, the URI shall only be used by NF Service consumer to correlate the possible N1/N2 Message Transfer Failure Notification with the related N1/N2 Message Transfer Operation. The NF service consumer shall not send any service requests towards the URI received in the Location header.

   The AMF shall also provide a response body containing the cause, "WAITING_FOR_ASYNCHRONOUS_TRANSFER" that represents the current status of the N1/N2 message transfer;

c) Same as step 2a of Figure 5.2.2.3.1.1-1, the AMF shall respond with the status code "202 Accepted", if paging is issued when the UE is in CM-IDLE and reachable for 3GPP access, with a response body that carries a cause "ATTEMPTING_TO_REACH_UE" as specified in clause 4.2.3.3 and 5.2.2.2.7 of TS 23.502 [3].

Case B: When UE is CM-IDLE in Non-3GPP access but CM-CONNECTED in 3GPP access and the associated access type is Non-3GPP access:

a) Same as step 2a of Figure 5.2.2.3.1.1-1, the AMF shall respond with the status code "200 OK" with cause "N1_N2_TRANSFER_INITIATED" and initiate N1 NAS SM message transfer via 3GPP access, if the NF service consumer (i.e. SMF) requests to send only N1 NAS SM message without any associated N2 SM information, and the current access type related to the PDU session is Non-3GPP access and the UE is CM-CONNECTED in 3GPP access.

b) Same as step 2a of Figure 5.2.2.3.1.1-1, the AMF shall respond with the status code "202 Accepted", if NAS Notification procedure is issued when the UE is in CM-CONNECTED in 3GPP access, with a response body that carries a cause "ATTEMPTING_TO_REACH_UE" as specified in step 4c of clause 4.2.3.3 and 5.2.2.2.7 of TS 23.502 [3].

Case C: When UE is CM-IDLE in both Non-3GPP access and 3GPP access and the associated access type is Non-3GPP access:

All the bullets specified in Case A are applicable.

The NF Service Consumer shall not send any further signalling for the UE if it receives a POST response body with a cause "ATTEMPTING_TO_REACH_UE" unless it has higher priority signalling. In such a case the response shall include the "Location" header containing the URI of the resource created in the AMF, e.g. ".../n1-n2-messages/{n1N2MessageId}". In this release, the URI shall only be used by NF Service consumer to correlate the possible N1/N2 Message Transfer Failure Notification with the related N1/N2 Message Transfer Operation. The NF service consumer shall not send any service requests towards the URI received in the Location header. The AMF shall:

- store the N1 and/or N2 information related to 3GPP access and, when the UE responds with a Service Request, shall initiate communication with the UE and/or 5G-AN using the stored N1 and/or N2 information;

- store the N1 NAS SM information related to Non-3GPP access if no N2 information was received and the AMF initiated paging towards the UE. Later when the UE responds with a Service Request, the AMF shall initiate communication with the UE using the stored N1 information via 3GPP access;

- inform the SMF which invoked the service operation, that the access type of the PDU Session can be changed from Non-3GPP access to 3GPP access as specified in clause 5.2.2.3.2.1 of TS 29.502 [16], when the UE responds with a "List Of Allowed PDU Sessions" and the indicated non-3GPP PDU session of the N2 (and N1 if received) information is included in the list; or

- notify the NF which invoked the service operation, as specified in clause 5.2.2.3.2, if the Notification URI is provided, when the AMF determines that the paging or NAS Notification has failed or when the UE responds with a "List Of Allowed PDU Sessions" and the indicated Non-3GPP PDU session of the N2 (and N1 if received) information is not included in the list.

4xx Response Cases:

- Same as step 2b of Figure 5.2.2.3.1.1-1, the AMF shall respond with status code "409 Conflict" in the following cases:

  - if the UE is in 3GPP access and there is already an ongoing paging procedure with higher or same priority, the AMF shall set the application error as "HIGHER_PRIORITY_REQUEST_ONGOING" in the "cause" attribute of the ProblemDetails structure of the POST response body. The AMF may provide a retryAfter IE to the NF Service Consumer in order for the NF Service Consumer to retry the request after the expiry of the timer. When the retryAfter IE is provided, the NF Service Consumer shall not initiate the downlink messaging until the timer expires. The AMF may also provide the ARP value of the QoS flow that has triggered the currently ongoing highest priority paging, so that the NF Service Consumer (e.g. SMF) knows that if any subsequent trigger initiating downlink messaging for a QoS flow with the same or lower priority happens.

  - if there is an ongoing registration procedure (see clause 4.2.3.3 of TS 23.502 [3]) the AMF shall set the application error as "TEMPORARY_REJECT_REGISTRATION_ONGOING" in the "cause" attribute of the ProblemDetails structure in the POST response body; The AMF may provide a retryAfter IE to the NF Service Consumer in order for the NF Service Consumer to retry the request after a short period. When the retryAfter IE is provided, the NF Service Consumer should not initiate new N1/N2 Message Transfer request until the timer expires.

  - if this is a request to transfer a N2 PDU Session Resource Modify Request or a N2 PDU Session Resource Release Command to a 5G-AN and if the UE is in CM-IDLE state at the AMF for the Access Network Type associated to the PDU session (see clauses 4.3.3 and 4.3.4 of TS 23.502 [3] and clause 5.3.2.1 of TS 23.527 [33]), the AMF shall set the application error "UE_IN_CM_IDLE_STATE" in the "cause" attribute of the ProblemDetails structure in the POST response body.

  - if there is an ongoing Xn, N2 or 5GS to EPS handover procedure (see clauses 4.9.1.2.1, 4.9.1.3.1 and 4.11.1.2.1 of TS 23.502 [3]) the AMF shall set the application error as "TEMPORARY_REJECT_HANDOVER_ONGOING" in the "cause" attribute of the ProblemDetails structure in the POST response body, if the AMF rejects the request due to the on-going handover.

  - if there is an ongoing Service Request procedure (see clause 4.2.3.2 of TS 23.502 [3]), the AMF may reject a N1/N2 Message Transfer Request including a PDU Session Resource Setup Request Transfer IE due to the on-going Service Request procedure for the same PDU session, and if it does so, the AMF shall set the application error as "TEMPORARY_REJECT_SR_ONGOING" in the "cause" attribute of the ProblemDetails structure in the POST response body.

NOTE: In the scenario above, the AMF sends to the NG-RAN the PDU Session Resource Setup Request Transfer IE that is received in the Update SM Context Response (200 OK) for the on-going (UE triggered) Service Request.

  - if the RAT Type is NB-IoT, and the UE already has 2 PDU Sessions with active user plane resources, the AMF shall set the application error as "MAX_ACTIVE_SESSIONS_EXCEEDED" in POST response body.

  - if Paging Restrictions information restricts the N1N2MessageTransfer request from causing paging (see clause 4.2.3.3 of TS 23.502 [3]) the AMF shall set the application error as "REJECTION_DUE_TO_PAGING_RESTRICTION" in the "cause" attribute of the ProblemDetails structure in the POST response body.

- if the AMF determines that the UE is not supporting multiple LCS-UPP connections capability and LCS-UPP connection already exists between the UE and one LMF, the AMF shall reject the request to transfer "UPP-CM" N1 message to the UE from another LMF (other than the target LMF during Modification of User Plane Connection between UE and LMF procedure, see clause 6.18 of TS 23.273 [42]) and set the application error as "MAX_LCS_UPP_CONN_REACHED" in POST response body.

- Same as step 2b of Figure 5.2.2.3.1.1-1, the AMF shall respond with the status code "403 Forbidden", if the UE is in a Non-Allowed Area and the service request is not for regulatory prioritized service. The AMF shall set the application error as "UE_IN_NON_ALLOWED_AREA" in POST response body.

  - The NF service consumer (i.e. the SMF) that receives this application error may supress subsequent message (e.g. N1N2MessageTransfer) to the AMF for non regulatory prioritized service. In this case, the NF service consumer (i.e. the SMF) should subscribe the Reachability-Report event for "UE Reachability Status Change" from the AMF, so as to get notified by the AMF when the UE becomes reachable again.

- Same as step 2b of Figure 5.2.2.3.1.1-1, the AMF shall respond with the status code "403 Forbidden ", if the NF service consumer (e.g. an LMF) is requesting to send N1 LPP message to the UE and the UE has indicated that it does not support LPP in N1 mode during registration procedure (see clause 5.5.1.2.2 and 5.5.1.3.2 of TS 24.501 [11]). The AMF shall set the application error to "UE_WITHOUT_N1_LPP_SUPPORT" in POST response body.

- Same as step 2b of Figure 5.2.2.3.1.1-1, the AMF shall respond with the status code "403 Forbidden", if the request body includes an nfId IE indicating an SMF instance which is different from the stored SMF instance hosting the SM Context of the PDU session. The AMF shall set the application error to "INVALID_SM_CONTEXT" in POST response body. During procedures with SM Context relocation, e.g. UE mobility procedures with I-SMF insertion/change/removal, the AMF shall allow N1N2MessageTransfer from both SMF instances holding the old and new SM Contexts.

  The NF service consumer (i.e. the SMF) that receives this application error shall remove the SM Context for the PDU session and release the PDU session resource in (H-)SMF if available. The SMF shall not send a SMContextStatusNotification to the AMF for the PDU session release.

- Same as step 2b of Figure 5.2.2.3.1.1-1, the AMF shall respond with the status code "403 Forbidden ", if the NF service consumer (e.g. an LMF) is requesting to initiate a positioning procedure towards a PRU (see clause 6.11.2 of TS 23.273 [42]), i.e. the pruInd IE with the value true was included in the request, but the UE is not a valid PRU. The AMF shall set the application error to "INVALID_PRU" in POST response body.

5xx Response Cases:

- Same as step 2b of Figure 5.2.2.3.1.1-1, the AMF shall respond with the status code "504 Gateway Timeout", if the UE is currently unreachable (e.g., due to the UE in MICO mode, the UE using extended idle mode DRX or the UE is only registered over Non-3GPP access and its state is CM-IDLE). The AMF shall set the application error as "UE_NOT_REACHABLE" in POST response body. If Extended Buffering Support Indication is received in the request, the AMF shall include the Estimated Maximum Waiting time in the response body when the message is rejected due to the UE in MICO mode or the UE using extended idle mode DRX. If the UE is using extended idle mode DRX, after the AMF responded with the status code "504 Gateway Timeout", when the AMF determines that the UE is reachable, then the AMF shall page the UE.

- step 2b of Figure 5.2.2.3.1.1-1, the AMF may respond with the status code "504 Gateway Timeout", if the UE is temporarily not responding (e.g., not responding to the paging). The AMF shall set the application error as "UE_NOT_RESPONDING" in POST response body. The AMF may provide a retryAfter IE to the NF Service Consumer in order for the NF Service Consumer to throttle sending further N1/N2 Message Transfer request for a short period. When the retryAfter IE is provided, the NF Service Consumer should not initiate new N1/N2 Message Transfer request until the timer expires.

5.2.2.3.2 N1N2Transfer Failure Notification

The AMF uses this notification to inform the NF service consumer that initiated an earlier

Namf_Communication_N1N2MessageTransfer, that the AMF failed to deliver the N1 and/or N2 message. The HTTP POST method shall be used on the notification callback URI provided by the NF service consumer as specified in clause 5.2.2.3.1.2.

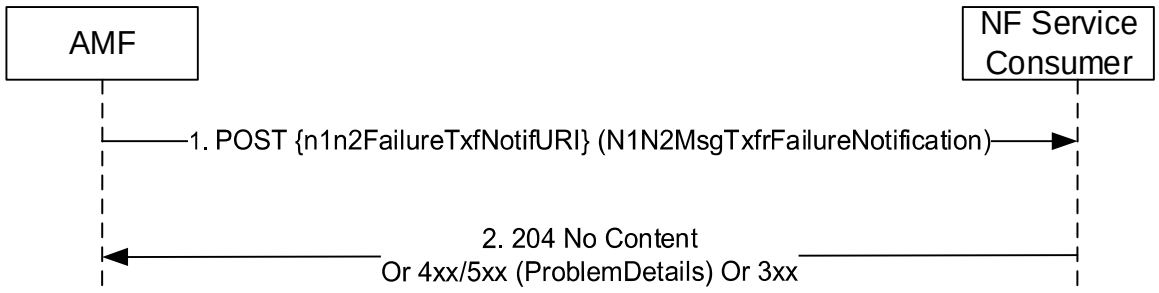


Figure 5.2.2.3.2-1 N1N2Transfer Failure Notification for UE related signalling

1. If the NF service consumer had provided a notification URI (see clause 5.2.2.3.1.2), the AMF shall send a POST request to the NF Service Consumer on that Notification URI when the AMF determines that:

   - the paging or NAS Notification has failed;
   - the indicated non-3GPP PDU session is not allowed to move to 3GPP access;
   - the UE has rejected the page as defined in TS 23.501 [2] clause 5.38.4;
   - the delivery of the N1 message fails, e.g. in case the UE is in RRC Inactive and NG-RAN paging was not successful or in case an Xn or N2 handover is being triggered at the NG-RAN

   The AMF shall include the N1N2MessageTransfer request resource URI returned earlier in the N1N2MessageTransfer response if any (see clause 5.2.2.3.1.2), otherwise a dummy URI (see clause 6.1.6.2.30), in the POST request body. The AMF shall also include a N1/N2 message transfer cause information in the POST request body and set the value as specified in clause 6.1.5.6.3.1.

   The NF Service Consumer shall delete any stored representation of the N1N2MessageTransfer request resource URI upon receiving this notification.

   The AMF may also include a "retryAfter" IE in the POST request body in order for the NF consumer to throttle sending further N1/N2 Message Transfer request for a short period, e.g. to reduce unnecessary paging to an unresponding UE for a period of time to save the RAN resources.

   The AMF may also include the maxWaitingTime attribute if the AMF has attempted to page the UE, e.g. for a UE using extended idle mode DRX but it was in Paging Time Window upon receiving the N1N2Message Transfer request, but the paging has failed, and if the extBufSupport attribute was set to "true" in the N1N2MessageTransfer request.

2. The NF Service Consumer shall send a response with "204 No Content" status code.

   On failure or redirection, one of the HTTP status codes together with the response body listed Table 6.1.5.6.3.1-2 shall be returned.

5.2.2.3.3 N1N2MessageSubscribe

5.2.2.3.3.1 General

The N1N2MessageSubscribe service operation is used by a NF Service Consumer (e.g. PCF) to subscribe to the AMF for notifying N1 messages of a specific type (e.g. UPDP) or N2 information of a specific type. For the N1 message class UPDP, a PCF shall subscribe for the N1 message notification with the AMF to receive the N1 messages from UE that are related to UE Policy.

NOTE: Step 0 of clause 4.2.4.3 of TS 23.502 [3] specifies that the PCF can split the UPDP transfer towards UE into multiple units. One UE specific callback URI is registered with the AMF by the PCF for the AMF to notify all UPDP message responses from the UE to the same callback URI. As a result, an explicit subscription per UE policy association is defined in stage 3 for this purpose.

An NF Service Consumer (e.g. PCF) may subscribe to notifications of specific N1 message type (e.g. LPP or UPDP) or N2 information type. In this case the NF Service Consumer shall subscribe by using the HTTP POST method with the

URI of the "N1N2 Subscriptions Collection for Individual UE Contexts" resource (See clause 6.1.3.3). See also Figure 5.2.2.3.3.1-1.

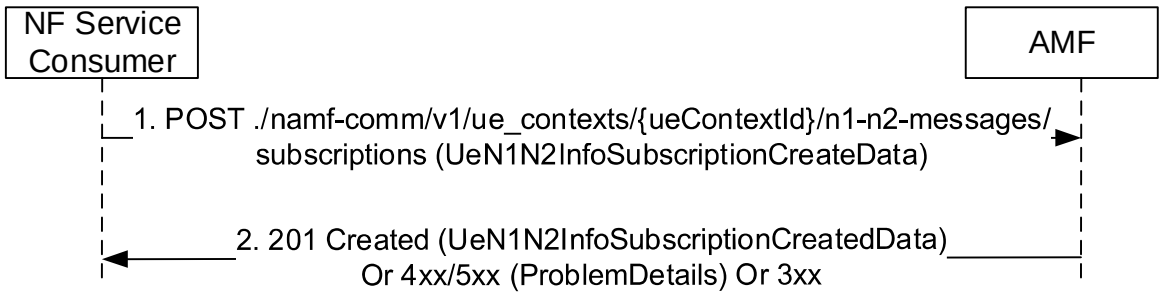


Figure 5.2.2.3.3.1-1 N1N2 Message Subscribe

1. The NF Service Consumer shall send a POST request to create a subscription resource in the AMF for a UE specific N1/N2 message notification. The content of the POST request shall contain:

   - N1 and/or N2 Message Type, identifying the type of N1 and/or N2 message to be notified
   - A callback URI for the notification

2. If the request is accepted, the AMF shall include a HTTP Location header to provide the location of a newly created resource (subscription) together with the status code 201 indicating the requested resource is created in the response message.

   On failure or redirection, one of the HTTP status codes together with the response body listed Table 6.1.3.3.3.1-3 shall be returned.

5.2.2.3.4 N1N2MessageUnSubscribe

5.2.2.3.4.1 General

The N1N2MessageUnSubscribe service operation is used by a NF Service Consumer (e.g. PCF) to unsubscribe to the AMF to stop notifying N1 messages of a specific type (e.g. LPP or UPDP).

The NF Service Consumer shall use the HTTP method DELETE with the URI of the "N1N2 Individual Subscription" resource (See clause 6.1.3.7.3.1), to request the deletion of the subscription for the N1 / N2 message towards the AMF. See also Figure 5.2.2.3.4.1-1.

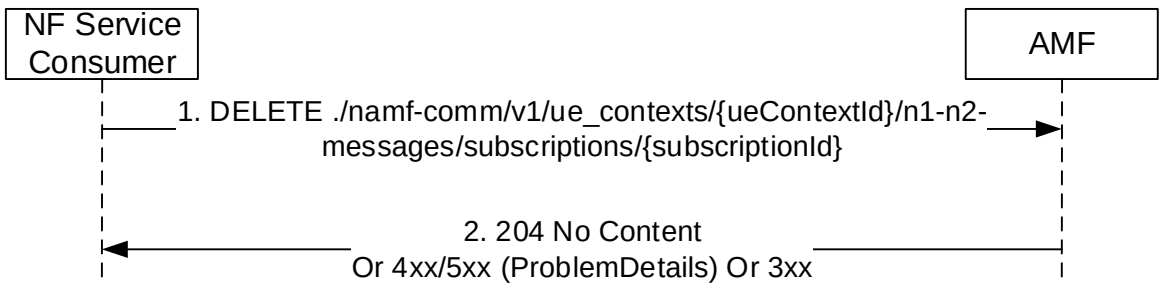


Figure 5.2.2.3.4.1-1 N1N2 Message UnSubscribe

1. The NF Service Consumer shall send a DELETE request to delete an existing subscription resource in the AMF.

2. If the request is accepted, the AMF shall reply with the status code 204 indicating the resource identified by subscription ID is successfully deleted, in the response message.

On failure or redirection, one of the HTTP status codes together with the response body listed Table 6.1.3.4.3.1-3 shall be returned.

5.2.2.3.5 N1MessageNotify

5.2.2.3.5.1 General

The N1MessageNotify service operation is used by an AMF notifying the N1 message received from the UE to a destination CN NF, and it is used in the following procedures:

- Registration with AMF re-allocation (see clause 4.2.2.2.3 of TS 23.502 [3])
- UE assisted and UE based positioning procedure (see clause 6.11.1 of TS 23.273 [42])
- LCS Event Report, Event Reporting in RRC INACTIVE state procedures, LCS Cancel Location and LCS Periodic-Triggered Invoke procedures (see clause 6.3, clause 6.7 and clause 6.20.3 of TS 23.273 [42])
- UE configuration update procedure for transparent UE policy delivery (See clause 4.2.4.3 in TS 23.502 [3])

NOTE: Though in TS 23.502 [3] the procedure is called "UE configuration update procedure for transparent UE policy delivery", as per TS 24.501 [11] clause 5.4.5.2.1, the UE initiated NAS transport procedure is used.

- UE triggered policy provisioning procedure to request UE policies. (See clause 6.2.4 in TS 23.287 [47] and clause 6.2.4 in TS 23.304 [51])
- Procedures applicable to a PRU (see clause 6.17 of TS 23.273 [42])
- Procedures of SL-MT-LR involving LMF (see TS 23.273 [42], clause 6.20.3)
- Procedures of SL-MT-LR for periodic, triggered Location Events (see TS 23.273 [42], clause 6.20.4)
- 5GC-MT-LR Procedure using SL positioning (see TS 23.273 [42], clause 6.20.5)
- Procedures of user plane connection between UE and LMF for location service (see clause 6.18 of TS 23.273 [42] and clause 6.2 of TS 24.572 [61])

The AMF shall use HTTP POST method to the N1 Notification URI provided by the NF Service Consumer via N1N2MessageSubscribe service operation (See clause 5.2.2.3.3). See also figure 5.2.2.3.5.1-1.

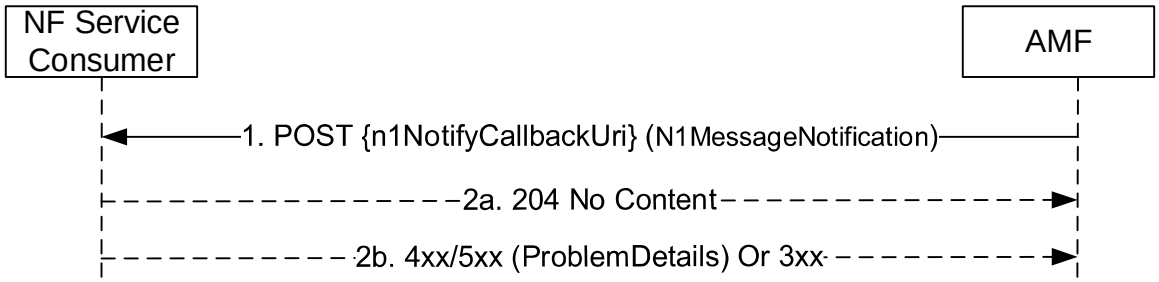


Figure 5.2.2.3.5.1-1 N1 Message Notify

1. The AMF shall send a HTTP POST request to the N1 Notification URI, and the content of the POST request shall contain an N1MessageNotification data structure with the subscribed N1 message.

2a. On success, "204 No Content" shall be returned and the content of the POST response shall be empty.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.1.5.4.3.1-3 shall be returned. The message body shall contain a ProblemDetails object with "cause" set to one of the corresponding application errors listed in Table 6.1.5.4.3.1-3.

5.2.2.3.5.2 Using N1MessageNotify in the Registration with AMF Re-allocation Procedure

In the Registration with AMF re-allocation procedure, the N1MessageNotify service operation is invoked by a NF Service Producer, i.e. an Initial AMF, towards a NF Service Consumer, e.g. the target AMF, which is selected to serve the UE, by the initial AMF.

The requirements specified in clause 5.2.2.3.5.1 shall apply with the following modifications:

1. The initial AMF discovers the NF Service Consumer (e.g. the target AMF) from the NRF, and fetch N1 Notification URI from the default notification subscription registered with "N1_MESSAGE" notification type and "5GMM" N1 message class (See Table 6.2.6.2.3-1 and Table 6.2.6.2.4-1 of TS 29.510 [29].

NOTE: The alternate AMF is expected to have registered a callback URI with the NRF.

2. Same as step 1 of Figure 5.2.2.3.5.1-1, the request content shall include the following information in the HTTP POST Request message body:

   - RAN NGAP ID and initial AMF name (the information enabling (R)AN to identify the N2 terminating point);
   - RAN identity, e.g. RAN Node Id, RAN N2 IPv4/v6 address;
   - Information from RAN, e.g. User Location, RRC Establishment Cause and UE Context Request;
   - the N1 message, which shall be the complete Registration Request message in clear text if the UE has a valid NAS security context, or as the one contained in the NAS message container IE in the Security Mode Complete message as specified in clause 4.2.2.2.3 of TS 23.502 [2];
   - the UE's SUPI and MM Context;
   - the Allowed NSSAI and if available the partially Allowed NSSAI, together with the corresponding NSI IDs (if network slicing is used and the initial AMF has obtained).

5.2.2.3.5.3 Using N1MessageNotify in the UE Assisted and UE Based Positioning Procedure

In the UE assisted and UE based positioning procedure, the N1MessageNotify service operation is invoked by the AMF, towards the LMF, to notify the N1 UE positioning messages received from the UE.

The requirements specified in clause 5.2.2.3.5.1 shall apply with the following modifications:

1. If the corresponding N1 notification URI is not available, the AMF shall retrieve the NF profile of the NF Service Consumer (e.g. the LMF) from the NRF using the NF Instance Identifier received during corresponding N1N2MessageTransfer service operation (see clause 5.2.2.3.1), and further identify the corresponding service instance if Service Instance Identifier was also received, and fetch N1 Notification URI from the default notification subscription registered with "N1_MESSAGE" notification type and "LPP" N1 message class (See Table 6.2.6.2.3-1 and Table 6.2.6.2.4-1 of TS 29.510 [29]).

2. Same as step 1 of Figure 5.2.2.3.5.1-1, the request content shall include the following information:

   - the N1 Uplink Positioning Message;
   - LCS correlation identifier.

5.2.2.3.5.4 Using N1MessageNotify in the UE Configuration Update for transparent UE Policy delivery

In the UE Configuration Update for transparent UE Policy delivery procedure, the N1MessageNotify service operation is invoked by the AMF, towards the PCF which subscribed to be notified with UPDP messages received from the UE.

The requirements specified in clause 5.2.2.3.5.1 shall apply with the following modifications:

1. Same as step 1 of Figure 5.2.2.3.5.1-1. The request content shall include the following information:

- the UPDP message.

5.2.2.3.5.5 Using N1MessageNotify in the LCS Event Report, Event Reporting in RRC INACTIVE state procedures, LCS Cancel Location and LCS Periodic-Triggered Invoke Procedures

In the LCS Event Report, Event Reporting in RRC INACTIVE state procedures, LCS Cancel Location and LCS Periodic-Triggered Invoke procedure, the N1MessageNotify service operation is invoked by the AMF, towards the LMF, to notify the N1 UE LCS messages received from the UE.

The requirements specified in clause 5.2.2.3.5.1 shall apply with the following modifications:

1. If the corresponding N1 notification URI is not available, the AMF shall retrieve the NF profile of the NF Service Consumer (e.g. the LMF) from the NRF using the NF Instance Identifier received during corresponding N1N2MessageTransfer service operation (see clause 5.2.2.3.1), and further identify the corresponding service instance if Service Instance Identifier was also received, and fetch N1 Notification URI from the default notification subscription registered with "N1_MESSAGE" notification type and "LCS" N1 message class (See Table 6.2.6.2.3-1 and Table 6.2.6.2.4-1 of TS 29.510 [29]).

2. Same as step 1 of Figure 5.2.2.3.5.1-1, the request content shall include the following information:

   - the N1 Uplink LCS Message;

   - LCS correlation identifier;

   - indication of Control Plane CIoT 5GS Optimisation if Control Plane CIoT 5GS Optimisation is being used.

   and may include serving cell ID if it is available;

NOTE: For the EventReport message and UE initiated CancelDeferredLocation message, the AMF includes the deferred routing identifier received from UE in N1 UL NAS TRANSPORT message as LCS correlation identifier. The LCS correlation identifier can assist a serving LMF in identifying the periodic or triggered location session if the same LMF had assigned the deferred routing identifier or can indicate to the LMF that it is acting as a default LMF.

5.2.2.3.5.6 Using N1MessageNotify in the UE triggered policy provisioning procedure to request UE policies

In the UE triggered policy provisioning procedure, the N1MessageNotify service operation is invoked by the AMF, towards the PCF which subscribed to be notified with UPDP messages received from the UE.

The requirements specified in clause 5.2.2.3.5.1 shall apply with the following modifications:

1. Same as step 1 of Figure 5.2.2.3.5.1-1. The request content shall include the following information:

   - the UPDP message.

5.2.2.3.5.7 Using N1MessageNotify in the procedures applicable to a PRU

In the PRU Association Procedure, LMF Initiated PRU Disassociation Procedure or PRU Initiated PRU Disassociation Procedure, the N1MessageNotify service operation is invoked by the AMF, towards the LMF, to notify the N1 PRU messages received from the PRU.

The requirements specified in clause 5.2.2.3.5.1 shall apply with the following modifications:

1. If the corresponding N1 notification URI is not available, the AMF shall select the LMF and retrieve the NF profile of the LMF from the NRF (see clause 6.17 of TS 23.273 [42]), and fetch N1 Notification URI from the default notification subscription registered with "N1_MESSAGE" notification type and "LCS" N1 message class (See Table 6.2.6.2.3-1 and Table 6.2.6.2.4-1 of TS 29.510 [29]).

2. Same as step 1 of Figure 5.2.2.3.5.1-1, the request content shall include the following information if available:

   - the N1 PRU messages;

   - PRU subscription Indication;

   - the TAI and cell Id of the PRU;

- Correlation identifier;
- SUPI of the PRU.

5.2.2.3.5.8 Using N1MessageNotify in the LCS-UPP connection procedure between UE and LMF

In the LCS-UPP connection procedure between UE and LMF, the N1MessageNotify service operation is invoked by the AMF, towards the LMF to notify the "UPP-CM" N1 message received from the UE.

The requirements specified in clause 5.2.2.3.5.1 shall apply with the following modifications:

1. Same as step 2a of Figure 5.2.2.3.5.1-1. The AMF invokes N1MessageNotify service operation to transfer received "UPP-CM" N1 message (see clause 6.2.1.1.1 of TS 24.252 [61]) to the LMF.

   The AMF checks the notification of LCS-UPP connection status from the LMF, and:

   - if receiving Nlmf_Location_UPNotify message from the LMF indicating the successful establishment of LCS-UPP connection (see clause 6.18.1 of TS 23.273 [42]), the AMF creates the LCS-UP context in the UE context and stores the LMF Instance ID into the LCS-UP context; or
   - if receiving Nlmf_UPNotify message from the LMF indicating the successful release of LCS-UPP connection (see clause 6.18.1 of TS 23.273 [42]), the AMF releases the LCS-UP context corresponding to the LMF from the UE context.

NOTE: To enable receiving the LCS-UPP connection status notification from the LMF, the AMF needs to explicitly subscribe from the LMF the corresponding notification.

5.2.2.3.6 N2InfoNotify

5.2.2.3.6.1 General

The N2InfoNotify service operation is used during the following procedure:

- Inter NG-RAN node N2 based handover procedure (see TS 23.502 [3], clauses 4.9.1.3.3, 4.9.1.3.3a and 4.23.7.3);
- Network assisted positioning procedure (see clause 6.11.2 of TS 23.273 [42])
- AMF planned removal procedure with UDSF deployed (see clause 5.21.2.2.1 of TS 23.501 [2]), to forward uplink N2 signalling to a different AMF.

The N2InfoNotify service operation is invoked by AMF, to notify a NF Service Consumer that subscribed N2 information has been received from access network.

The AMF shall use HTTP POST method to the N2Info Notification URI provided by the NF Service Consumer via N1N2MessageSubscribe service operation (See clause 5.2.2.3.3). See also figure 5.2.2.3.6.1-1.

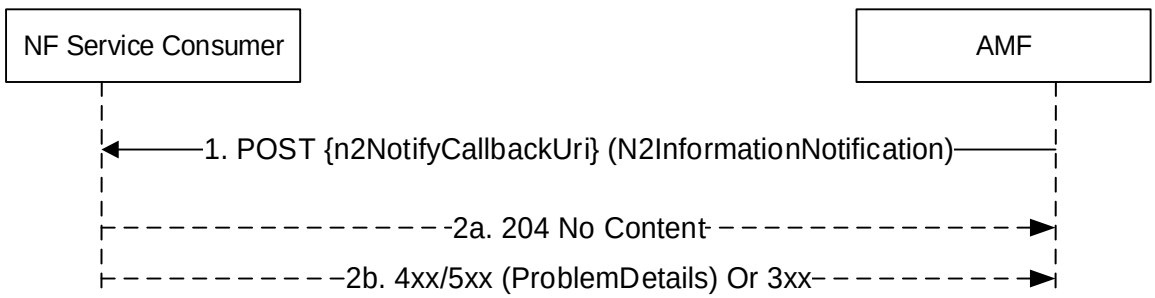


Figure 5.2.2.3.6.1-1 N2 Information Notify

1. The AMF shall send a HTTP POST request to the n2NotifyCallbackUri, and the content of the POST request shall contain a N2InformationNotification data structure, containing the N2 information that was subscribed by the NF Service Consumer.

2a. On success, "204 No Content" shall be returned and the content of the POST response shall be empty.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.1.5.5.3.1-3 shall be returned. The message body shall contain a ProblemDetails object with "cause" set to one of the corresponding application errors listed in Table 6.1.5.5.3.1-3.

5.2.2.3.6.2 Using N2InfoNotify during Inter NG-RAN node N2 based handover procedure

The N2InfoNotify service operation is invoked by a NF Service Producer, e.g. the target AMF, towards the NF Service Consumer, i.e. the source AMF, to notify that the handover procedure has been successful in the target side, for a given UE.

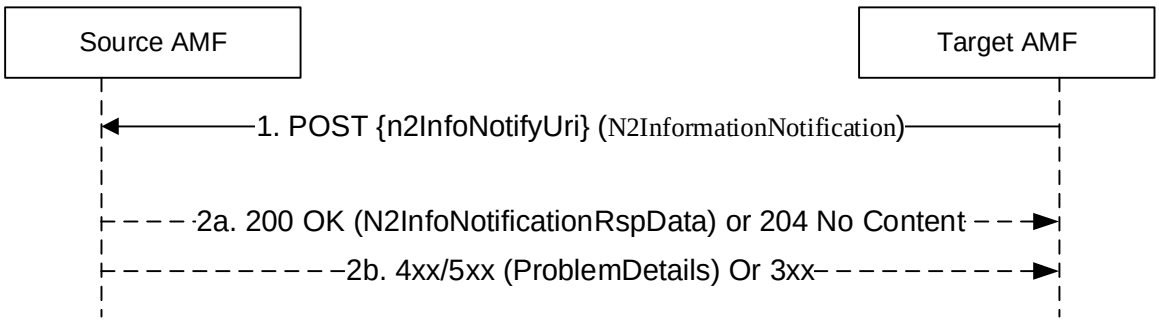


Figure 5.2.2.3.6.2-1 N2 Information Notify during N2 Handover execution

The requirements specified in clause 5.2.2.3.6.1 shall apply with the following modifications:

0. During an inter AMF handover procedure, the source AMF, acting as a NF Service Consumer, when invoking the CreateUEContext service operation (see clause 5.2.2.2.3), shall include a N2Info Notification URI to the target AMF in the HTTP request message.

1. Same as step 1 of Figure 5.2.2.3.6.1-1, the request content shall contain the following information:

   - notification content (see clause 6.1.5.5) without the "n2InfoContainer" attribute;
   - the "notifyReason" attribute set to "HANDOVER_COMPLETED";
   - the "smfChangeInfoList" attribute including the UE's PDU Session ID(s) for which the I-SMF or V-SMF has been changed or removed, if any, with for each such PDU session, the related "smfChangeIndication" attribute set to "CHANGED" or "REMOVED", if the I-SMF or the V-SMF is changed or removed respectively.
   - the "notifySourceNgRan" attribute set to "true" during an Inter NG-RAN node N2 based DAPS handover procedure, if the target AMF receives this indication in the Handover Notify from the target NG-RAN node (see clause 4.9.1.3.3a of TS 23.502 [3]).

   If any network slice(s) become no longer available and there are PDU Session(s) associated with them, the target AMF shall include these PDU session(s) in the toReleaseSessionList attribute in the content. If the continuity of the PDU Session(s) cannot be supported between networks (e.g. SNPN-SNPN mobility, inter-PLMN mobility where no HR agreement exists), the target AMF shall include these PDU session(s) with release cause in the toReleaseSessionInfo attribute in the content.

   The n2NotifySubscriptionId included in the notification content shall be the UE context Id.

2. Same as Step 2a of Figure 5.2.2.3.6.1-1, with the following additions/modifications:

   - the source AMF shall release the PDU Session(s) listed in the toReleaseSessionList attribute and the toReleaseSessionInfo attribute in the content;

- if the smfChangeInfoList attribute was received in the request, the source AMF shall release the SM Context at the I-SMF or V-SMF only, for all the PDU sessions listed in the smfChangeInfoList attribute with the smfChangeIndication attribute set to "CHANGED" or "REMOVED";

- the source AMF shall remove the individual ueContext resource. The source AMF may choose to start a timer to supervise the release of the UE context resource and may keep the individual ueContext resource until the timer expires;

- if Secondary RAT usage data have been received from the source NG-RAN and buffered at the source AMF for one or more PDU sessions as specified in step 2a0 of clause 4.9.1.3.3 of TS 23.502 [3], the source AMF shall send a 200 OK response with the Secondary RAT usage data included in the response content for one or more PDU sessions.

- if the "notifySourceNgRan" attribute was set to "true" in the request, the source AMF shall send a HANDOVER SUCCESS to the source NG-RAN (see clause 4.9.1.3.3a of TS 23.502 [3]).

NOTE: This notification is due to an implicit subscription and hence no explicit subscription Id is created. UE context Id is included as the notification subscription Id for the NF Service Consumer (e.g. Source AMF) to co-relate the notification to an earlier initiated UE context creation during a handover procedure.

5.2.2.3.6.3 Using N2InfoNotify during Location Services procedures

The N2InfoNotify service operation is invoked by a NF Service Producer, i.e. the AMF, towards the NF Service Consumer, e.g. the LMF, to notify the positioning parameters received from the 5G-AN in the NRPPa message.

The requirements specified in clause 5.2.2.3.6.1 shall apply with the following modifications:

1. If the corresponding N2 notification URI is not available, the AMF shall retrieve the NF profile of the NF Service Consumer (e.g. the LMF) from the NRF using the NF Instance Identifier received during corresponding N1N2MessageTransfer service operation (see clause 5.2.2.3.1), and further identify the corresponding service instance if Service Instance Identifier was also received, and fetch N2 Notification URI from the default subscription registered with "N2_INFORMATION" notification type and "NRPPa" N2 information class (See Table 6.2.6.2.3-1 and Table 6.2.6.2.4-1 of TS 29.510 [29]).

2. Same as step 1 of Figure 5.2.2.3.6.1-1, the request content shall contain N2 information of type NRPPa and LCS correlation identifier.

5.2.2.3.6.4 Using N2InfoNotify during AMF planned removal procedure with UDSF deployed procedure

In the AMF planned removal procedure with UDSF deployed (see clause 5.21.2.2.1 of TS 23.501 [2]), the N2InfoNotify service operation is invoked by a NF Service Producer, i.e. an initial AMF, towards the NF Service Consumer, i.e. the target AMF, to forward uplink N2 signalling to the target AMF.

The requirements specified in clause 5.2.2.3.6.1 shall apply with the following modifications:

1. If the N2 notification URI is not available, the initial AMF shall discover the NF Service Consumer (i.e. the target AMF) from the NRF, and fetch the N2 Notification URI from the default notification subscription registered with "N2_INFORMATION" notification type and "RAN" N2 message class (See Table 6.2.6.2.3-1 and Table 6.2.6.2.4-1 of TS 29.510 [29].

NOTE: The target AMF is expected to have registered a callback URI with the NRF.

2. Same as step 1 of Figure 5.2.2.3.6.1-1, the request content shall contain the following information in the HTTP POST Request message body:

   - N2 information of type "RAN";

   - N2 message;

   - initial AMF name;

   - RAN identity, e.g. RAN Node Id, RAN N2 IPv4/v6 address.

5.2.2.4 Non-UE N2 Message Operations

5.2.2.4.1 NonUeN2MessageTransfer

5.2.2.4.1.1 General

The NonUeN2MessageTransfer service operation is used by a NF Service Consumer to transfer N2 information to the 5G-AN through the AMF in the following procedures:

- Obtaining non-UE associated network assistance data (See clause 6.11.3 in TS 23.273 [42]);
- Warning Request Transfer procedures (See clause 9A in TS 23.041 [20]);
- Configuration Transfer procedure (see clause 5.26 of TS 23.501 [2])
- RIM Information Transfer procedures (see clause 8.16 of TS 38.413 [12]).
- Broadcast of Assistance Data by an LMF (see clause 6.14.1 of TS 23.273 [42]).
- Management of network timing synchronization status monitoring procedures (see clause 4.15.9.5 of TS 23.502 [3]).

The NF Service Consumer shall invoke the service operation by sending POST to the URI of the "transfer" customer operation on the "Non UE N2Messages Collection" resource (See clause 6.1.3.8.4.2) on the AMF. See also figure 5.2.2.4.1.1-1.

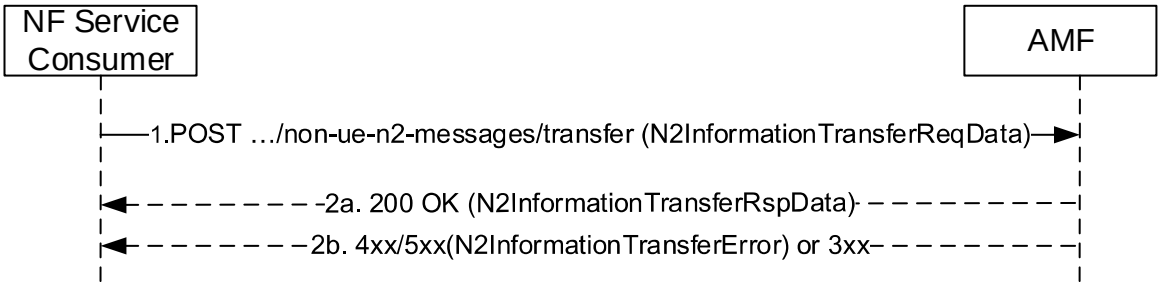


Figure 5.2.2.4.1.1-1 Non-UE N2 Message Transfer

1. The NF Service Consumer shall invoke the custom operation for non UE associated N2 message transfer by sending a HTTP POST request, and the request body shall carry the N2 information to be transferred.

2a. On success, AMF shall respond a "200 OK" status code with N2InformationTransferRspData data structure.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.1.3.8.4.2.2-2shall be returned with the message body containing a N2InformationTransferError structure, including a ProblemDetails attribute with the "cause" attribute set to one of the application errors listed in Table 6.1.3.8.4.2.2-2.

5.2.2.4.1.2 Obtaining Non UE Associated Network Assistance Data Procedure

The NonUeN2MessageTransfer service operation shall be invoked by a NF Service Consumer, e.g. LMF to transfer non UE associated N2 information of N2 information class NRPPa to NG-RAN for obtaining the network assistance data or providing positioning information for data collection.

The requirements specified in clause 5.2.2.4.1.1 shall apply with the following modifications:

1. Same as step 1 of Figure 5.2.2.4.1.1-1, the POST request body shall carry the N2 information to be transferred together with the NG RAN node identifier(s) to which the transfer needs to be initiated. The POST request body shall also include the NF Instance Identifier of the NF Service Consumer (e.g. LMF) in "nfId" attribute.

2a. Same as step 2a of Figure 5.2.2.4.1.1-1, AMF shall respond with "200 OK" status code with N2InformationTransferRspData data structure. If the AMF has successfully initiated NRPPa message transfer to all the RAN Node(s) in the request, then "result" attribute shall be set to "N2_INFO_TRANSFER_INITIATED". Otherwise, if the message transfer of NRPPA has failed for part of the

RAN Node(s), then the "result" attribute shall be set to "PARTIAL_N2_INFO_TRANSFER" and a failure cause per RAN node shall be sent in the "nrppaRspPerNgranList" attribute.

2b. Same as step 2b of Figure 5.2.2.4.1.1-1, and the POST response body shall contain following additional information:

- NRPPa error information per RAN node, if any.

5.2.2.4.1.3 Warning Request Transfer Procedure

The NonUeN2MessageTransfer service operation shall be invoked by the NF Service Consumer, e.g. CBCF/PWS-IWF, to send non-UE specific messages of N2 information class PWS to the NG-RAN.

The requirements specified in clause 5.2.2.4.1.1 shall apply with the following modifications:

1. Same as step 1 of Figure 5.2.2.4.1.1-1, the request body shall include the N2 Message Container and:

   - the globalRanNodeList IE, or;

   - the taiList IE and the ratSelector IE, or;

   - the ratSelector IE.

   The AMF shall forward the N2 Message Container to ng-eNBs or to gNBs indicated in the globalRanNodeList IE if present. If the globalRanNodeList IE if not present, the AMF shall forward the N2 Message Container to ng-eNBs or to gNBs, subject to the value of the *ratSelector* IE, that serve Tracking Areas as listed in the *taiList* IE if present. If the *taiList* IE and the *globalRanNodeList* IE are not present, the AMF shall forward the N2 Message Container to all attached ng-eNBs or all attached gNBs, subject to the value of the *ratSelector* IE.

NOTE: The *globalRanNodeList* IE can be present when transferring WRITE-REPLACE WARNING REQUEST. When present, the *globalRanNodeList* IE only contains RAN nodes of the same type, i.e. only ng-eNBs or only gNBs.

   The request body may additionally include the *omcId* IE and/or the *sendRanResponse* IE.

2a. Same as step 2a of Figure 5.2.2.4.1.1-1, and the POST response body shall contain the mandatory elements from the Write-Replace-Warning Confirm response (see clause 9.2.17 in TS 23.041 [20]) or the mandatory elements and optionally the *unknown TAI List* IE from the Stop-Warning Confirm response (see clause 9.2.19 in TS 23.041 [20]).

   If the *sendRanResponse* IE with the value "true" was received in the request, but the corresponding N2 information subscription for PWS information from the NF service consumer is not available in the AMF, the AMF should include the *n2PwsSubMissInd* IE with the value "true" in the response.

2b. Same as step 2b of Figure 5.2.2.4.1.1-1, and the POST response body shall contain following additional information:

- PWS specific information, if any, e.g. PWS Cause information.

5.2.2.4.1.4 Configuration Transfer Procedure

The NonUeN2MessageTransfer service operation shall be invoked by the NF Service Consumer (i.e. source AMF) towards the NF Service Producer (i.e. target AMF) to transfer the RAN configuration information received from the source NG-RAN towards the target NG-RAN.

The requirements specified in clause 5.2.2.4.1.1 shall apply with the following modifications:

1. Same as step 1 of Figure 5.2.2.4.1.1-1. The POST request body shall contain the SON Configuration Transfer IE received from the source NG-RAN, the NG RAN node identifier of the destination of this configuration information, and the N2 information class "RAN".

   The target AMF shall forward the SON Configuration Transfer IE in a NGAP Downlink RAN Configuration Transfer message to the target NG-RAN.

5.2.2.4.1.5 RIM Information Transfer Procedures

The NonUeN2MessageTransfer service operation shall be invoked by the NF Service Consumer (i.e. source AMF) towards the NF Service Producer (i.e. target AMF) to transfer the RIM information received from the source NG-RAN towards the target NG-RAN.

The requirements specified in clause 5.2.2.4.1.1 shall apply with the following modifications:

1. Same as step 1 of Figure 5.2.2.4.1.1-1. The POST request body shall contain the RIM Information Transfer IE received from the source NG-RAN, the NG RAN node identifier of the destination of this configuration information, and the N2 information class "RAN".

   The target AMF shall forward the RIM Information Transfer IE in a NGAP Downlink RIM Information Transfer message to the target NG-RAN.

5.2.2.4.1.6 Broadcast of Assistance Data by an LMF

The NonUeN2MessageTransfer service operation shall be invoked by a NF Service Consumer, e.g. LMF to transfer non UE associated N2 information of N2 information class NRPPa to NG-RAN for sending assistance information broadcasting.

The requirements specified in clause 5.2.2.4.1.1 shall apply with the following modifications:

1. Same as step 1 of Figure 5.2.2.4.1.1-1, the POST request body shall contain NRPPa-PDU IE carrying Network Assistance Data generated by LMF to be transferred together with the target NG RAN node identifier(s) to which the transfer needs to be initiated. The POST request body shall also include the NF Instance Identifier of the NF Service Consumer (e.g. LMF) in "nfId" attribute.

2a. Same as step 2a of Figure 5.2.2.4.1.1-1, AMF shall respond with "200 OK" status code with N2InformationTransferRspData data structure. If the AMF has successfully initiated NRPPa message transfer to all the RAN Node(s) in the request, then "result" attribute shall be set to "N2_INFO_TRANSFER_INITIATED". Otherwise, if the message transfer of NRPPA has failed for part of the RAN Node(s), then the "result" attribute shall be set to "PARTIAL_N2_INFO_TRANSFER" and a failure cause per RAN node shall be sent in the "nrppaRspPerNgranList" attribute.

2b. Same as step 2b of Figure 5.2.2.4.1.1-1, and the POST response body shall contain following additional information:

   - NRPPa error information per RAN node, if any.

5.2.2.4.1.7 Management of network timing synchronization status monitoring procedures

The NonUeN2MessageTransfer service operation shall be invoked by a NF Service Consumer, e.g. TSCTSF, to transfer clock quality reporting control information to NG-RAN.

The requirements specified in clause 5.2.2.4.1.1 shall apply with the following modifications:

1. Same as step 1 of Figure 5.2.2.4.1.1-1, the POST request body shall contain a NGAP Timing Synchronization Status Request message, a list of TAIs or a list of NG-RAN IDs identifying target NG RAN node(s) towards which the NGAP message is requested to be transferred, the N2 information class set to "TSS", and the "nfId" attribute set to the NF Instance Identifier of the NF Service Consumer (e.g. TSCTSF).

2. Same as step 2a of Figure 5.2.2.4.1.1-1. The N2InformationTransferRspData data structure may contain a list of TssRspPerNgran if the AMF receives Timing Synchronization Status Failure message(s), or Timing Synchronization Status Response message(s) with the Criticality Diagnostics IE being present, from one or more NG-RAN nodes, or if the AMF is unable to reach some NG-RAN node(s).

   Upon receipt of subsequent responses from other NG-RANs after sending the 200 OK response, assuming that the TSCTSF has subscribed to the AMF for TSS information reporting (see clause 5.2.2.4.2), if additional information (e.g., Timing Synchronization Status Failure or Timing Synchronization Status Response message with the Criticality Diagnostics IE being present, as specified in TS 38.413 [12]) needs to be transferred to the TSCTSF, the AMF shall transfer such information in the TssRspPerNgran by sending one or more Namf_NonUeN2InfoNotify requests to the TSCTSF.

NOTE: The TSCTSF sends the Namf_NonUeN2InfoSubscribe request message to the AMF to subscribe for receiving TSS related information, i.e., Timing Synchronization Status Report/Failure/Response messages, before it sends the Namf_NonUeN2MessageTransfer message containing the Timing Synchronization Status Request to start the TSS reporting in the NG-RAN.

5.2.2.4.2 NonUeN2InfoSubscribe

5.2.2.4.2.1 General

The NonUeN2InfoSubscribe service operation is used by a NF Service Consumer (e.g. CBCF, PWS-IWF, TSCTSF) to subscribe to the AMF for notifying non UE specific N2 information of a specific type (e.g. PWS Indications, TSS).

An NF Service Consumer (e.g. CBCF, PWS-IWF, TSCTSF) may subscribe to notifications of specific N2 information type (e,g PWS Indications, TSS) that are not associated with any UE. In this case, the NF Service Consumer shall subscribe by using the HTTP POST method with the URI of the "Non UE N2Messages Subscriptions Collection" resource (See clause 6.1.3.9.3.1). See also Figure 5.2.2.4.2.1-1.

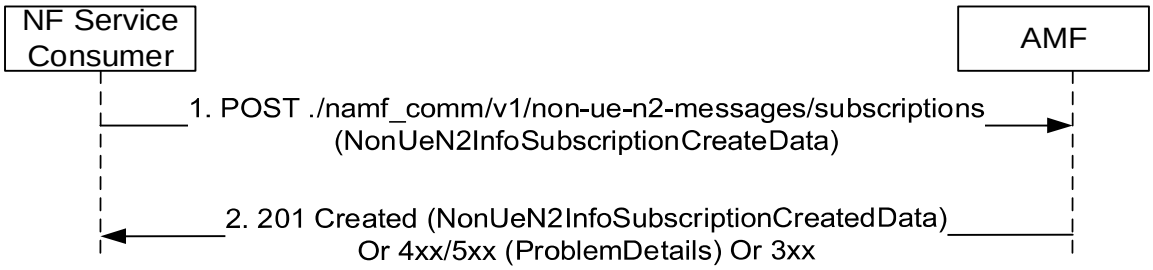


Figure 5.2.2.4.2.1-1 N2 Information Subscription for Non UE Information

1. The NF Service Consumer shall send a POST request to create a subscription resource in the AMF for a non UE specific N2 information notification. The content of the POST request shall contain:

   - N2 Information Type, identifying the type of N2 information to be notified
   - A callback URI for the notification

2. If the request is accepted, the AMF shall include a HTTP Location header to provide the location of a newly created resource (subscription) together with the status code 201 indicating the requested resource is created in the response message.

   On failure or redirection, one of the HTTP status codes together with the response body listed Table 6.1.3.9.3.1-3 shall be returned.

5.2.2.4.2.2 NonUeN2InfoSubscribe for N2 PWS Information

The NonUeN2InfoSubscribe service operation shall be invoked by the NF Service Consumer (i.e. CBCF, PWS-IWF) towards the NF Service Producer (i.e. target AMF) to subscribe for notifications of N2 PWS information classes ("PWS", "PWS-BCAL" or "PWS-RF").

The requirements specified in clause 5.2.2.4.2.1 shall apply with the following additions:

1. Same as step 1 of Figure 5.2.2.4.2.1-1. The POST request body may contain the NF instance ID of the NF consumer when more than one CBCF/PWS-IWF instances are deployed in the network. The AMF may store the NF instance ID in the subscription and use it to identify whether the same CBCF/PWS-IWF instance has subscribed for corresponding N2 PWS information when handling N2 PWS information transfer request from a CBCF/PWS-IWF.

2. Same as step 1 of Figure 5.2.2.4.2.1-1. If the request is accepted, the AMF may remove any duplicated subscription, i.e. an existing subscription from the same NF consumer (identified by the NF instance ID) for notification of the same N2 PWS information class.

5.2.2.4.3 NonUeN2InfoUnSubscribe

5.2.2.4.3.1 General

The NonUeN2InfoUnSubscribe service operation is used by a NF Service Consumer (e.g. CBCF, PWS-IWF, TSCTSF) to unsubscribe to the AMF to stop notifying N2 information of a specific type (e.g. PWS Indications, TSS).

The NF Service Consumer shall use the HTTP method DELETE with the URI of the "Non UE N2 Message Notification Individual Subscription" resource (See clause 6.1.3.10.3.1), to request the deletion of the subscription for non UE specific N2 information notification, towards the AMF. See also Figure 5.2.2.4.3.1-1.

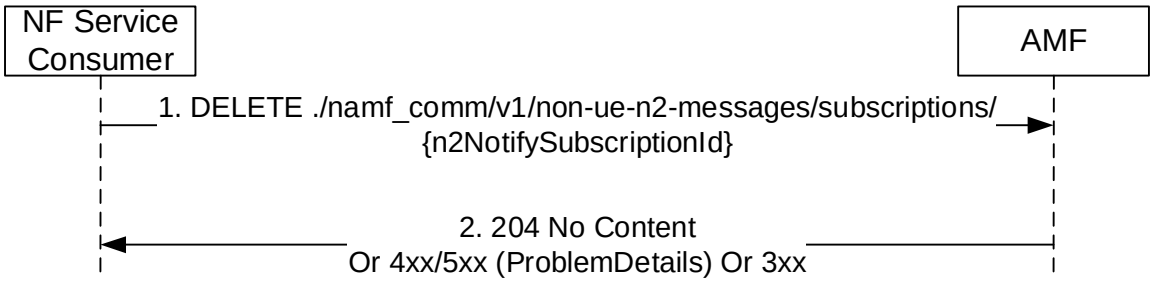


Figure 5.2.2.4.3.1-1 NonUeN2InfoUnSubscribe for Non UE Specific Information

1. The NF Service Consumer shall send a DELETE request to delete an existing subscription resource in the AMF.
2. If the request is accepted, the AMF shall reply with the status code 204 indicating the resource identified by subscription ID is successfully deleted, in the response message.

   On failure or redirection, one of the HTTP status codes together with the response body listed Table 6.1.3.10.3.1-3 shall be returned.

5.2.2.4.4 NonUeN2InfoNotify

5.2.2.4.4.1 General

The NonUeN2InfoNotify service operation is used during the following procedures:

- Obtaining non-UE associated network assistance data (See clause 4.13.5.6 in TS 23.502 [3])
- Receiving PWS related events from the NG-RAN
- Broadcast of Assistance Data by an LMF (see clause 6.14.1 of TS 23.273 [42]).
- Monitoring of Timing synchronization status information (see clause 4.15.9.5 of TS 23.502 [3]).

The NonUeN2InfoNotify service operation is invoked by the AMF to notify a NF Service Consumer that subscribed Non-UE N2 information has been received from the 5G-AN.

The AMF shall use HTTP POST method to the N2Info Notification URI provided by the NF Service Consumer via NonUeN2InfoSubscribe service operation (See clause 5.2.2.4.2). See also Figure 5.2.2.4.4.1-1.

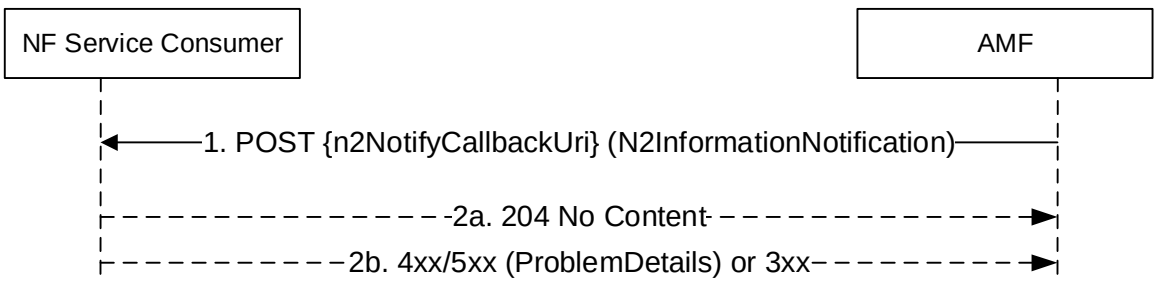


Figure 5.2.2.4.4.1-1 Non-UE N2 Information Notify

1. The AMF shall send a HTTP POST request to the N2Info Notification URI, and the content of the POST request shall contain a N2InformationNotification data structure, with the N2 information that was subscribed by the NF Service Consumer.

2a. On success, "204 No Content" shall be returned and the content of the POST response shall be empty.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.1.5.3.3.1-3 shall be returned. The message body shall contain a ProblemDetails object with "cause" set to one of the corresponding application errors listed in Table 6.1.5.3.3.1-3.

5.2.2.4.4.2 Using NonUeN2InfoNotify during Location Services procedures

The NonUeN2InfoNotify service operation is invoked by a NF Service Producer, i.e. the AMF, towards the NF Service Consumer, e.g. the LMF, to notify the assistance data received from the 5G-AN.

The requirements specified in clause 5.2.2.4.4.1 shall apply with the following modifications:

1. If the corresponding N2 notification URI is not available, the AMF shall retrieve the NF profile of the NF Service Consumer (e.g. the LMF) from the NRF using the NF Instance Identifier received during "Obtaining Non UE Associated Network Assistance Data Procedure" or "Broadcast of Assistance Data by an LMF Procedure" (see clause 5.2.2.4.1.2), and further identify the corresponding service instance if Service Instance Identifier was also received, and fetch N2 Notification URI from the default subscription registered with "N2_INFORMATION" notification type and "NRPPa" information class (See Table 6.2.6.2.3-1 and Table 6.2.6.2.4-1 of TS 29.510 [29]).

2. Same as step 1 of Figure 5.2.2.4.4.1-1, the content shall contain network assistance data.

5.2.2.4.4.3 Use of NonUeN2InfoNotify for PWS related events

The NonUeN2InfoNotify service operation shall be used during the following PWS related events:

1) The AMF has received a Write-Replace-Warning-Response or a PWS-Cancel-Response from the NG-RAN over N2.

   Upon receiving the N2 Message Content the RAN Nodes return a response which may include the *Broadcast Completed Area List* IE or the *Broadcast Cancelled Area List* IE, depending on the *Message Type* IE. The AMF may aggregate the lists it receives from the RAN Nodes for the same request.

   If the *Send-Write-Replace-Warning Indication* IE was present in the Write-Replace-Warning Request message, then the AMF may forward the *Broadcast Completed Area List* IE(s) to the NF Service Consumer. If the NG-RAN node(s) have responded without the *Broadcast Completed Area List* IE then the AMF shall include the NG-RAN node ID(s) in "bcEmptyAreaList" attribute in the request body.

   If the *Send-Stop-Warning Indication* IE was present in the Stop-Warning-Request message, then the AMF may forward the *Broadcast Cancelled Area List* IE(s) to the NF Service Consumer. If the NG-RAN node(s) have responded without the *Broadcast Cancelled Area List* IE then the AMF shall include the NG-RAN node ID(s) in "bcEmptyAreaList" attribute in the request body.

   If none of the NG-RAN nodes have responded with the Broadcast Completed Area List IE (in the Write-Replace Warning Response messages) or with the Broadcast Cancelled Area List IE (in the PWS Cancel Response messages), the AMF shall send one (or more) NonUEN2InfoNotify request(s) including a Write-Replace Warning Response or a PWS Cancel Response to the CBCF/PWS-IWF, and including all the NG-RAN node(s) in the "bcEmptyAreaList" attribute.

   NOTE: TS 23.041 [20] specifies that the AMF sends a NonUEN2InfoNotify including a Write-Replace Warning Indication or a Stop Warning Indication to the CBCF/PWS-IWF. This is supported at stage 3 level by the AMF sending a NonUEN2InfoNotify including a Write-Replace Warning Response or a PWS Cancel Response to the CBCF/PWS-IWF.

2) The AMF has received a Restart Indication or a Failure Indication from a NG-RAN Node. The AMF shall forward the Restart Indication or Failure Indication to the NF Service Consumer.

   The requirements specified in clause 5.2.2.4.4.1 shall apply with the following modifications:

- Same as step 1 of Figure 5.2.2.4.4.1-1, the request body shall include the PWS related N2 information.

5.2.2.4.4.4 Using NonUeN2InfoNotify during network timing synchronization status monitoring procedure

The NonUeN2InfoNotify service operation is invoked by the AMF towards the NF Service Consumer indicated by the Routing ID IE received within the NGAP Timing Synchronization Status Report/Failure/Response messages, e.g. the TSCTSF, to notify the RAN timing synchronization status information and/or the result of the Namf_NonUeN2MessageTransfer request message which contains Timing Synchronization Status Request to start or stop the reporting of RAN timing synchronization status in the NG-RAN, as specified in clause 5.2.2.4.1.7, from the 5G-AN.

The requirements specified in clause 5.2.2.4.4.1 shall apply with the following modifications:

- Same as step 1 of Figure 5.2.2.4.4.1-1. The request body shall include:
  - the RAN Timing Synchronization Status Report message for TSS related N2 information, the Timing Synchronization Status Failure message(s), and/or the Timing Synchronization Status Response message(s) with the Criticality Diagnostics IE being present, from one or more NG-RAN nodes; and/or
  - one or more TssRspPerNgran(s) containing only the NG-RAN node ID and the ngranFailureInfo IE to report a failure related to an NG-RAN, e.g. when the AMF has detected that the NG-RAN has failed with or without restart, or the NG-RAN is not reachable, as specified in clause 8.3 of TS 23.527 [33].

NOTE: The AMF can aggregate up to 10 N2 Information containers encapsulating Timing Synchronization Status Report, Failure and/or Response messages received from NG-RANs in an NonUeN2InfoNotify request message where each N2 Information container encapsulates a Timing Synchronization Status Report, Failure or Response message.

5.2.2.5 AMF Status Change Operations

5.2.2.5.1 AMFStatusChangeSubscribe

5.2.2.5.1.1 General

This service operation is used by a NF Service Consumer to subscribe the status change of the AMF.

The AMFStatusChangeSubscribe service operation is used during the following procedure:

- AMF planned removal procedure (see TS 23.501 [2], clause 5.21.2.2)

5.2.2.5.1.2 Creation of a subscription

This service operation creates a subscription so a NF Service Consumer can request to be notified when the status of the AMF is changed.

It is executed by creating a new individual resource under the collection resource "subscriptions". The operation shall be invoked by issuing a POST request on the URI of the "subscriptions collection" resource (See clause 6.1.3.6.3.1).

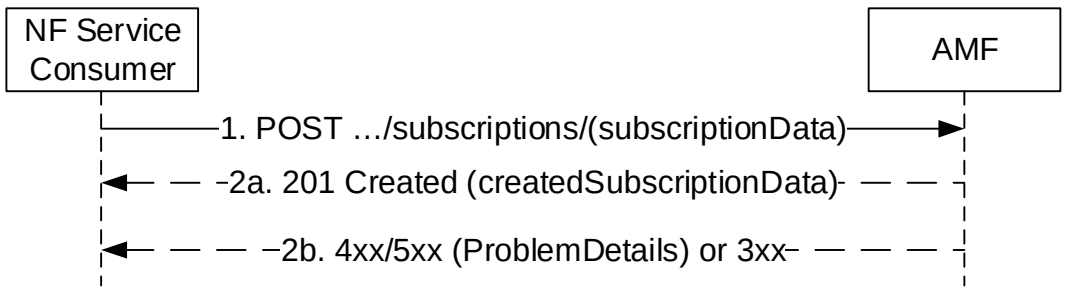


Figure 5.2.2.5.1.1-1 NF Service Consumer Subscription to Notifications

1. The NF Service Consumer shall send a POST request to the resource URI representing the "subscriptions" collection resource. The request body shall include the data indicating the GUAMI(s) supported by the AMF that the NF Service Consumer is interested in receiving the related status change notification. The request body also contains a callback URI, where the NF Service Consumer shall be prepared to receive the actual notification from the AMF (see AMFStatusChangeNotify operation in clause 5.2.2.5.3).

2a. On success, the AMF shall include a HTTP Location header to provide the location of a newly created resource (subscription) together with the status code 201 indicating the requested resource is created in the response message.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.1.3.6.3.1-3 shall be returned. For a 4xx/5xx response, the message body containing a ProblemDetails structure with the "cause" attribute set to one of the application error listed in Table 6.1.3.6.3.1-3.

5.2.2.5.1.3 Modification of a subscription

This service operation updates the subscription data of an NF Service Consumer previously subscribed in the AMF by providing the updated subscription data to the AMF. The update operation shall apply to the whole subscription data (complete replacement of the existing subscription data by a new subscription data).

The NF Service Consumer shall issue an HTTP PUT request, towards the URI of the "individual subscription" resource (See clause 6.1.3.7.3.2), as shown in Figure 5.2.2.5.1.3-1:

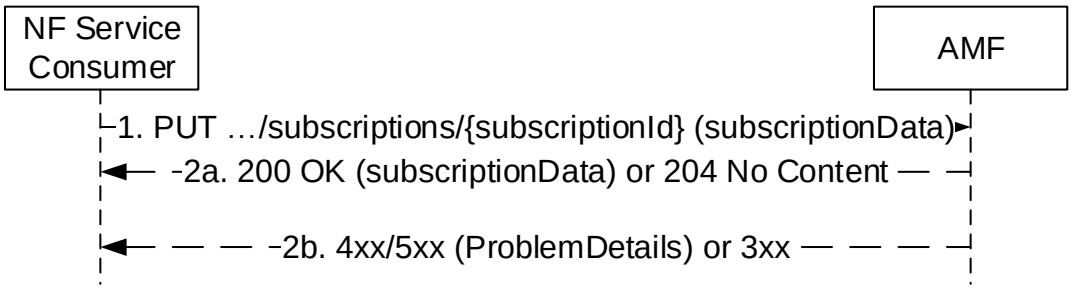


Figure 5.2.2.5.1.3-1 Subscription Data Complete Replacement

1. The NF Service Consumer shall send a PUT request to the resource URI representing the individual subscription. The request body shall include a representation of subscription data to replace the previous subscription data in the AMF.

2a. On success, "200 OK" shall be returned, the content of the PUT response shall contain the representation of the replaced resource. "204 No Content" may be returned, if the NF Service Producer accepts entirely the resource representation provided by the NF Service Consumer in the request.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.1.3.7.3.2-3 shall be returned. For a 4xx/5xx response, the message body shall contain a ProblemDetails structure with the "cause" attribute set to one of the application error listed in Table 6.1.3.7.3.2-3.

5.2.2.5.2 AMFStatusChangeUnSubscribe

5.2.2.5.2.1 General

This service operation removes an existing subscription to notifications.

The AMFStatusChangeUnSubscribe service operation is used during the following procedure:

- AMF planned removal procedure (see TS 23.501 [2], clause 5.21.2.2)

It is executed by deleting a given resource identified by a "subscriptionId". The operation is invoked by issuing a DELETE request on the URI of the specific " individual subscription" resource (See clause 6.1.3.7.3.1).

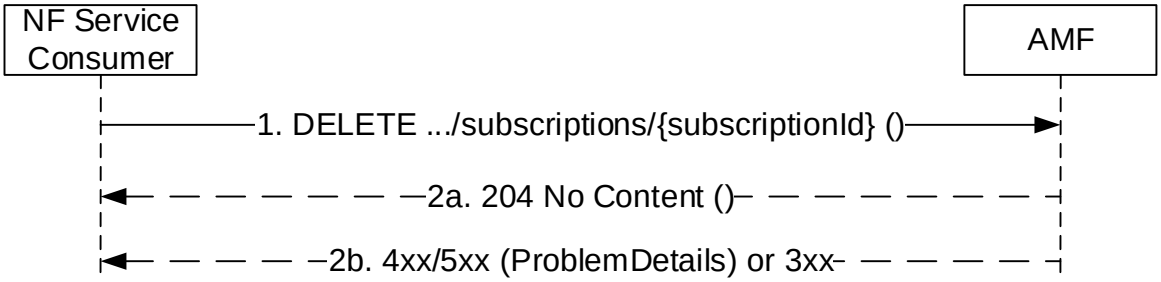


Figure 5.2.2.5.2.1-1: NF Service Consumer Unsubscription to Notifications

1. The NF Service Consumer shall send a DELETE request to the resource URI representing the individual subscription. The request body shall be empty.

2a. On success, "204 No Content" shall be returned. The response body shall be empty.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.1.3.7.3.1-3 shall be returned. For a 4xx/5xx response, the message body shall contain a ProblemDetails structure with the "cause" attribute set to one of the application error listed in Table 6.1.3.7.3.1-3.

5.2.2.5.3 AMFStatusChangeNotify

5.2.2.5.3.1 General

This service operation notifies each NF Service Consumer that was previously subscribed to receiving notifications of the status change of the AMF (e.g. AMF unavailable). The notification is sent to a callback URI that each NF Service Consumer provided during the subscription (see AMFStatusChangeSubscribe operation in 5.2.2.5.1).

The AMFStatusChangeNotify service operation is used during the following procedure:

- AMF planned removal procedure (see TS 23.501 [2], clause 5.21.2.2)

The operation is invoked by issuing a POST request to each callback URI of the different NF Service Consumer.

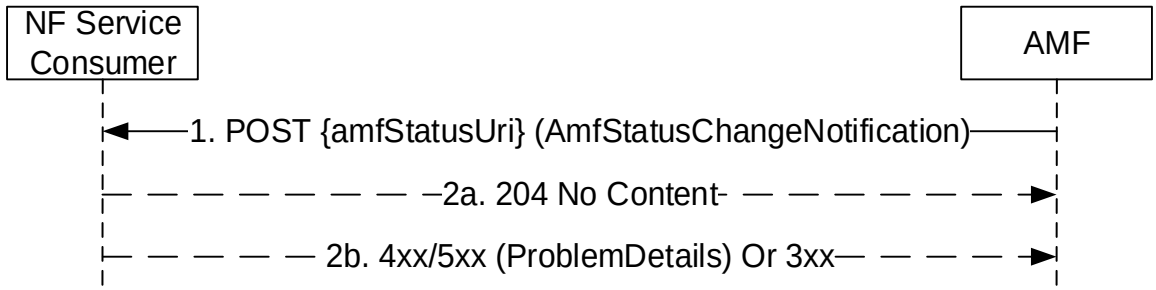


Figure 5.2.2.5.3.1-1: AMF Notifications

1. The AMF shall send a POST request to the callback URI. The request body shall include the GUAMI(s) and the related status change, GUAMI(s) is indicated by the NF Service Consumer during the subscription operation. For network deployment without UDSF case, the target AMF Name which is to serve the user of the indicated GUAMI(s) is also included.

2a. On success, "204 No content" shall be returned by the NF Service Consumer.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.1.5.2.3.1-2 shall be returned. For a 4xx/5xx response, the message body shall contain a ProblemDetails structure with the "cause" attribute set to one of the application error listed in Table 6.1.5.2.3.1-2.

5.2.2.6 EBIAssignment

5.2.2.6.1 General

The EBIAssignment service operation is used during the following procedures (see TS 23.502 [3], clause 4.11.1.4):

- UE requested PDU Session Establishment including Request Types "Initial Request", "Existing PDU Session", "Initial emergency request" and "Existing emergency PDU session" (Non-roaming and Roaming with Local Breakout (see TS 23.502 [3], clause 4.3.2.2.1).
- UE requested PDU Session Establishment including Request Types "Initial Request" and "Existing PDU Session" (Home-routed Roaming (see TS 23.502 [3], clause 4.3.2.2.2).
- UE or network requested PDU Session Modification (non-roaming and roaming with local breakout) (see TS 23.502 [3], clause 4.3.3.2).
- UE or network requested PDU Session Modification (home-routed roaming) (see TS 23.502 [3], clause 4.3.3.3).
- UE Triggered Service Request (see TS 23.502 [3], clause 4.2.3.2) to move PDU Session(s) from untrusted non-3GPP access to 3GPP access.
- Network requested PDU Session Modification, when the SMF needs to release the assigned EBI from a QoS flow (see TS 23.502 [3], clause 4.11.1.4.3).

The EBIAssignment service operation is invoked by a NF Service Consumer, e.g. a SMF, towards the NF Service Producer, i.e. the AMF, to request the AMF to allocate EPS bearer ID(s) towards EPS bearer(s) mapped from QoS flow(s) for an existing PDU Session for a given UE.

EBI allocation shall apply only to:

- QoS flows of Single Access PDU Session(s) via 3GPP access using SSC mode 1 and supporting EPS interworking with N26;
- Qos flows of Multi-Access PDU Session(s) using SSC mode 1 and supporting EPS interworking with N26, that are not only allowed over non-3GPP access.

EBI allocation shall not apply to:

- PDU Session(s) via 3GPP access supporting EPS interworking without N26;
- PDU Session(s) via non-3GPP access supporting EPS interworking;
- GBR QoS flow(s) that are only allowed over non-3GPP access in Multi-Access PDU Session(s) supporting EPS interworking; and
- PDU sessions using SSC mode 2 or SSC mode 3.

The EBIAssignment service operation is also invoked by an NF Service Consumer, e.g. an SMF, towards the NF Service Producer supporting the EAEA feature, i.e. the AMF, to request the AMF to update the mapping of EBI and ARP, if the ARP for a QoS flow that has already been allocated an EBI is changed during the network requested PDU Session Modification.

The NF Service Consumer (e.g. the SMF) shall perform EBIAssignment service operation by invoking "assign-ebi" custom operation on the "individual ueContext" resource (See clause 6.1.3.2.4.3). See also Figure 5.2.2.6.1-1.

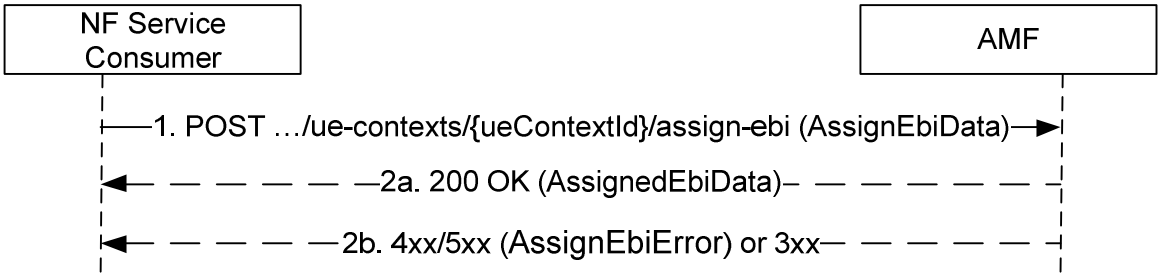


Figure 5.2.2.6.1-1 EBI Assignment

1. The NF Service Consumer, e.g. the SMF, shall invoke "assign-ebi" custom method on individual ueContext resource, which is identified by the UE's SUPI or PEI in the AMF. The NF Service consumer shall provide PDU Session ID and ARP list as input for the service operation. If the NF Service Consumer invokes this service operation to update the mapping of EBI and ARP for a QoS flow to which an EBI is already allocated in the AMF, the NF Service Consumer shall provide the PDU Session ID and modifiedEbiList.

2a. On success, the AMF shall assign EBI for each ARP in received ARP list, if enough EBI(s) are available. If there is not enough EBI(s) available, the AMF may revoke already assigned EBI(s) based on the ARP(s) and the S-NSSAI of the PDU session for which the request was received, EBIs information in the UE context and local policies. The AMF may only assign a subset of the requested EPS Bearer ID(s), e.g. when other PDU Sessions with higher ARP have occupied other available EPS Bearer IDs. If AMF has successfully assigned all or part of the requested EBI(s), the AMF shall respond with the status code 200 OK, together with the assigned EBI to ARP mapping(s), the list of ARPs for which the AMF failed to allocate an EBI (if any) and the list of EBI(s) released for this PDU session due to revocation based on ARP(s) and the S-NSSAI (if any).

   If the request contains "releasedEbiList", the AMF shall release the requested EBI(s). The AMF shall respond with the status code 200 OK and shall include the EBI(s) released in the "releasedEbiList" IE of the POST response body. The "releasedEbiList" in the request shall be handled before the EBI assignment in AMF.

   If the same EBI(s) are both in the "releasedEbiList"and "assignedEbiList", the NF sevice consumer considers that EBI(s) have been released and reassigned.

   If the request contains "modifiedEbiList", the AMF shall store the association of the assigned EBI and ARP pair to the corresponding PDU Session ID. The AMF shall respond with the status code 200 OK and shall include the EBI(s) with ARP updated in the "modifiedEbiList" IE of the POST response body.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.1.3.2.4.3.2-2 shall be returned. For a 4xx/5xx response, the message body shall contain an AssignEbiError structure, including:

   - a ProblemDetails structure with the "cause" attribute set to one of the application error listed in Table 6.1.3.2.4.3.2-2;

   - a failureDetails which describes the details of the failure including the list of ARPs for which the EBI assignment failed.

5.3 Namf_EventExposure Service

5.3.1 Service Description

5.3.1.1 General

The AMF may offer this service as a Service Producer to enable an NF to subscribe to event notifications on its own or on behalf of another NF and get notified about an event. The known Service Consumers are NEF, SMF, UDM, NWDAF, DCCF, LMF, TSCTSF and GMLC. See also clause 5.34.7 of TS 23.501 [2], clauses 4.15.1, 4.15.3.2, 4.15.4.2 and 5.2.2.3.1 of TS 23.502 [3] and clause 6.2.2 in TS 23.288 [38].

5.3.1.2 Event types supported by the service

The following event types are supported by the Namf_EventExposure Service:

NOTE 0: The immediateFlag parameter does only apply to the events listed below including the immediateFlag within the list of input parameters. If the immediateFlag is received in a subscription for an event for which the immediateFlag does not apply, it is ignored by the AMF.

Event: Location-Report

A NF subscribes to this event to receive the Last Known Location (if the immediateFlag is set) or the Current Location (if the immediateFlag is not set) of a UE or a group of UEs or any UE, and Updated Location of any of these UEs when AMF becomes aware of a location change of any of these UEs with the granularity as requested.

This event implements the "Location Reporting" event in table 4.15.3.1-1 of TS 23.502 [3].

UE Type: One UE, Group of UEs, any UE

Report Type: One-Time Report, Continuous Report (See NOTE 1), Periodic Report (See NOTE 1 and 2)

Input: UE-ID(s), "ANY_UE", optional filters (TAI, Cell-ID, N3IWF, UE-IP, UDP-PORT, TNAP ID, TWAP ID, Global Line Id), immediateFlag

Notification: UE-ID, filtered updated location (TAI, Cell-ID for 3GPP access, most recent N3IWF node, UE local IP address and UDP source port number for non-3GPP access, TNAP ID, TWAP ID, Global Line Id).

NOTE 1: Support of Continuous Report or Periodic Report should be controlled by operator policy.

NOTE 2: For Periodic Report, UE Last Known Location is reported if the UE is in CM-IDLE state when the report is being generated.

Event: Presence-In-AOI-Report

A NF subscribes to this event to receive the current presence state of a UE or a group of UEs or any UE in a specific Area of Interest (AOI), and notification when a specified UE enters or leaves the specified area. The area could be identified by a TA list, a NG-RAN node ID list, a cell ID list, an area ID or specific interested area name like "LADN", or a specific interested area name like "S-NSSAI"(related with an S-NSSAI that is part of a Partially Allowed NSSAI or whose support is restricted to an NS-AoS). If the subscription includes the uePosCapRequestedInd, the AMF shall also report the UE Positioning Capabilities and the UE User Plane positioning capabilities, if available, of each UE located in the AOI.

If the AoI includes an S-NSSAI, the AMF shall report the UE presence IN or OUT of an area that support the S-NSSAI, i.e. whether the UE is IN or OUT of TAIs of the Registration Area which support the S-NSSAI (for a partially allowed S-NSSAI) or IN or OUT of the NS-AoS, or the UE presence in the reporting area is UNKNOWN.

For one-time reporting or for the first notification of Continuously reporting, the AMF shall generate the notification as following:

- when the event subscription is targeting a UE or a group of UEs, the AMF shall report the current presence status of the target UE(s);

- when the event subscription is targeting any UE, the AMF shall only report the UEs that are "IN" the Area of Interest (AOI); if no UE is currently "IN" the Area of Interest (AOI), the AMF shall generate a report only including the AnyUe indication (without any UE ID) and the subscribed AOI with the presence status set to "IN". The NF consumer should consider other UEs served by the AMF are "OUT" of the AOI or with "UNKNOWN" state.

In subsequent notifications, the AMF shall only report the UE(s) whose presence status has changed compared to the previous notification sent by the AMF.

The S-NSSAI or the combination of S-NSSAI and the NSI may be used as event filtering information, e.g. by the NWDAF to subscribe to the Total number of UE registered to a S-NSSAI or to a combination of S-NSSAI and NSI ID (see clause 6.3.2A of TS 23.288 [38]).

For an AMF supporting the AOIEF feature (AOI Event Filters, see clause 6.2.8):

- If the event subscription indicates that the AoI may be adjusted based on the UE's Registration Area, the AMF shall report that the UE is IN the AoI if the UE is inside a Registration Area which contains at least

one Tracking Area that is contained within the Area of Interest (see clause 5.3.4.4 of TS 23.501 [2] and clauses 4.15.9.3.2, 4.15.9.4, 5.2.2.3.1 and Annex D.1 of TS 23.502 [3]).

- If the subscription to the Presence-In-AOI-Report event includes the "RAN timing synchronization status change event" indication and the UE indicated support for network reconnection due to RAN timing synchronization status change, the AMF shall report the UE presence in AoI based on the most recent N2 connection as described in clause 5.3.4.4 of TS 23.501 [2] and Annex D.1 of TS 23.502 [3].

- If the subscription to the Presence-In-AOI-Report event includes:

  - the notifyForSupiList IE and/or the notifyForGroupList IE, the AMF shall notify the NF service consumer about AOI events only if the event is for a UE belonging to the provided list of SUPIs or for a UE belonging to at least one Internal Group of the provided list of Internal Groups; and/or

  - the notifyForSnssaiDnnList IE, the AMF shall notify the NF service consumer about AOI events only if the event is for a UE having a PDU session established for the provided DNN(s)/S-NSSAI(s).

  The notifyForSupiList IE and the notifyForGroupList IE may only be included in a subscription request targeting Any UE.

  If a subscription to the Presence-In-AOI-Report event targeting Any UE includes the notifyForSnssaiDnnList IE in addition to the notifyForSupiList IE and/or notifyForGroupList IE, the AMF shall notify the NF service consumer about AOI events only if the event is for a UE fulfilling all the related conditions specified above.

UE Type: One UE, Group of UEs, any UE

Report Type: One-Time Report, Continuously Report

Continuous Report should be requested when subscribing to the Presence-In-AOI-Report event, unless the NF service consumer only needs to receive the current presence state.

Input: UE ID(s), "ANY_UE", Area identifier (a TA list, a NG-RAN node ID list, a cell ID list, an area Id, "LADN" or "S-NSSAI"), Adjust AoI based on RA indication, RAN timing synchronization status change indication, optional filters (Notify the NF service consumer only for UEs in the notifyForSupiList, Notify the NF service consumer only for UEs having a PDU session established with a DNN/S-NSSAI in the notifyForSnssaiDnnList IE), S-NSSAI, NSI ID, immediateFlag, uePosCapRequestedInd.

Notification: UE-ID(s), Area identifier, Presence Status (IN/OUT/UNKNOWN), UE Positioning Capability, UE User Plane Positioning Capability

NOTE 3: If the immediateFlag is set and the AMF can determine the current UE presence state (IN/OUT/UNKNOWN) in the AoI at the time of the subscription (e.g. when the AoI comprises TAIs and the AMF can determine that the UE is IN or OUT of the AoI based on the UE Registration Area), the AMF sends an immediate report including the current UE presence in the AoI. Otherwise, if the immediateFlag is not set or if the AMF cannot determine the current UE presence state in the AoI at the time of the subscription, the AMF sends a subsequent notification with the requested information as soon as the AMF can determine the current UE presence state in the AoI.

Event: Time-Zone-Report

A NF subscribes to this event to receive the current time zone of a UE or a group of UEs, and updated time zone of the UE or any UE in the group when AMF becomes aware of a time zone change of the UE.

UE Type: One UE, Group of UEs

Report Type: One-Time Report, Continuous Report

Input: UE ID(s), immediateFlag

Notification: UE-ID, most recent time-zone

Event: Access-Type-Report

A NF subscribes to this event to receive the current access type(s) of a UE or a group of UEs or any UE, and updated access type(s) of any of the UEs when AMF becomes aware of the access type change of any of

these UEs. The area could be identified by a TA list, an area ID or specific interested area name like "LADN".

UE Type: One UE, Group of UEs, any UE

Report Type: One-Time Report, Continuous Report

Input: UE ID(s), "ANY_UE", optionally filters: Area identifier (a TA list, an area Id or "LADN"), immediateFlag

Notification: UE ID, most recent access-types (3GPP, Non-3GPP)

Event: Registration-State-Report

A NF subscribes to this event to receive the current registration state of a UE or a group of UEs or any UE, and report for updated registration state of any of these UEs when AMF becomes aware of a registration state change of any of these UEs. The area could be identified by a TA list, an area ID or specific interested area name like "LADN".

UE Type: One UE, Group of UEs, any UE

Report Type: One-Time Report, Continuous Report

Input: UE ID(s), "ANY_UE", optionally filters: Area identifier (a TA list, an area Id or "LADN"), immediateFlag

Notification: UE ID, most recent registration state (REGISTERED/DEREGISTERED) with access type

Event: Connectivity-State-Report

A NF subscribes to this event to receive the current connection management state of a UE or a group of UEs, and report for updated connection management state of a UE or any UE in the group when AMF becomes aware of a connection management state change of the UE.

UE Type: One UE, Group of UEs

Report Type: One-Time Report, Continuous Report

Input: UE ID(s), immediateFlag

Notification: UE ID, most recent connection management state (IDLE/CONNECTED) with access type

Event: Reachability-Report

A NF subscribes to this event for "UE Reachability Status Change" to receive the current reachability state of a UE or a group of UEs in the AMF, and report for updated reachability state of a UE or any UE in the group when AMF becomes aware of a reachability state change of the UEs between REACHABLE, UNREACHABLE, REGULATORY_ONLY. In this case, the AMF shall report the current reachability state of the UE in a first notification (regardless of whether the immediateFlag is set or not) and then send event reports when the UE reachability state changes as described below:

- the AMF shall send a Reachability Report ("UNREACHABLE") if the Mobile Reachable Timer expires (see clause 5.4.1.1 of TS 23.501 [2]) or the UE enters CM-IDLE when it is only registered over the Non-3GPP access (see clause 5.5.3 of TS 23.501 [2]);
- the AMF shall send a Reachability Report ("REGULATORY_ONLY") if the UE becomes reachable only for regulatory prioritized service (see clause 4.15.4.2 of TS 23.502 [3]);
- the AMF shall send a Reachability Report ("REACHABLE") when the UE reachability state changes from any of the two above states to REACHABLE.

NOTE 4: The AMF does not send a Reachability Report ("UNREACHABLE") in particular when the UE enters extended DRX cycle (see clause 5.31.7.2.2.3 of TS 23.501 [2]), the UE enters power saving state (see clause 5.31.8 of TS 23.501 [2]), the UE enters CM IDLE in MICO mode (see clause 5.4.1.3 of TS 23.501 [2]), or when the UE does not respond to a paging request.

An NF subscribes to this event for "UE Reachable for DL Traffic" to receive reports of a UE or a group of UEs when the UE becomes reachable for sending downlink data. In this case, if the UE is not reachable at the time of the subscription to the event, the event is detected when the UE transitions to CM-CONNECTED mode or when the UE will become reachable for paging, as specified in table 4.15.3.1-1in clause 4.15.3.1, clauses 4.2.5 and 4.3.3 of TS 23.502 [3]. For the UE in CM-CONNECTED mode with RRC-Inactive, the event is detected when the UE is reachable for paging as specified in step 4 of clause 4.2.5.2 of TS 23.502 [3]. If the UE is reachable at the time of the subscription to the event, the AMF shall send an event report immediately (regardless of whether the immediateFlag is set or not) in a notification request or in the subscription response (depending on whether the immediateFlag is set to true in the request, the subscription is done on behalf of another NF, and the support of the IERSR feature) as specified in clause 5.3.2.2.2. When reporting the "UE Reachable for DL Traffic", the AMF shall also indicate the access types through which the UE is reachable.

NOTE 5: The AMF does not send an event report for "UE Reachable for DL Traffic" immediately after an UECM Registration in UDM, if the AMF has previously been indicated that reachability event will be detected at UDM. The UDM will detect the UE reachability from the UECM Registration and send a notification to the NF consumer (unless the UDM is indicated that the UE is currently not reachable, as specified in clause 5.3.2.2.2 of TS 29.503 [35]), thus the notification report from AMF is omitted.

UE Type: One UE, Group of UEs

Report Type: One-Time Report, Continuous Report

Continuous Report should be requested when subscribing to "UE Reachability Status Change", unless the NF service consumer only needs to receive the current reachability state.

Continuous Report may be requested when subscribing to "UE Reachability for DL Traffic" with direct reporting.

NOTE 6: AMFs not supporting continuous reporting can set in the event subscription response the maximum number of reports to 1.

One-Time Report shall be requested when subscribing to "UE Reachable for DL Traffic" with indirect reporting via the UDM.

Input: UE ID(s), (optional) Reachability Filter, immediateFlag

Notification: UE ID, AMF Id, most recent reachability state (i.e. the REACHABLE, UNRACHABLE or REGULATORY_ONLY state for the "UE Reachability Status Change" event, and the "REACHABLE" state for the "UE Reachable for DL Traffic" event), access type(s) through which the UE is reachable.

Event: Communication-Failure-Report

A NF subscribes to this event to receive the Communication failure report of a UE or group of UEs or any UE, when the AMF becomes aware of a RAN or NAS failure event.

This event implements the "Communication failure" event in table 4.15.3.1-1 of TS 23.502 [3], which is an unexpected termination of the communication.

UE Type: One UE, Group of UEs, any UE

Report Type: One-Time Report, Continuous Report

Input: UE ID(s), "ANY_UE", optionally filters: Area identifier (a TA list, an area Id or "LADN")

Notification: UE ID, RAN/NAS release code.

Event: UEs-In-Area-Report

A NF subscribes to this event to receive the number of UEs in a specific area. A NF may ask AMF for the UEs within the area based on Last Known Location (if the immediateFlag is set) or it may request AMF to actively look for the UEs within the area based on Current Location (if the immediateFlag is not set).

For an AMF supporting the OBGAD feature (On-demand broadcast of GNSS assistance data, see clause 6.2.8):

- If the event subscription indicates that the number of UEs in a specific area may be reported considering UEs which are subscribed to receive ciphering keys to decipher corresponding LCS assistance data, the AMF shall report the number of UEs in a specific area which are subscribed to receive ciphering keys to decipher corresponding LCS assistance data. If the reporting threshold is provided together, the AMF actively check the UE numbers and report in case the UE number matches, or exceeds than the reporting threshold, or lower than the reporting threshold. (see clause 6.14.1 of TS 23.273 [42] and clause 5.2.2.3.1 of TS 23.502 [3]).

NOTE 7: If the reporting threshold is provided, both the Periodic Report and immediateFlag is not applicable.

This event implements the "Number of UEs present in a geographical area" event in table 4.15.3.1-1 of TS 23.502 [3].

UE Type: any UE

Input: "ANY_UE", Area identified in a TA List or cell ID list, optionally Ue in Area filters: UE Aerial Indication, Indication of PDU session established for DNN(s) subject to aerial service, indication to omit UE IDs in the event reports, immediateFlag, indication of subscription to receive ciphering keys to decipher broadcast assistance data, reporting threshold.

Report Type: One-Time Report (See NOTE 7), Continuous Report (See NOTE 8), Periodic Report (See NOTE 8)

Notification: Number of UEs in the area, and if eNA is supported also the UE IDs

NOTE 8: For an Immediate Report, UE Last Known Location is used to count the UEs within the area.

NOTE 9: Support of Continuous Report or Periodic Report should be controlled by operator.

Event: Loss-of-Connectivity

An NF subscribes to this event to receive the event report of a UE or group of UEs when AMF detects that a target UE is no longer reachable for either signalling or user plane communication. Such condition is identified when Mobile Reachable timer expires in the AMF (see TS 23.501 [2]), when the UE detaches, when AMF deregisters from UDM for an active UE and when UE indicates Unavailability Period by including Unavailability Period Duration during Mobility Registration or Deregistration procedure. If the UE is already not reachable for either signalling or user plane communication when the event is subscribed, the AMF shall report the event immediately (regardless of whether the immediateFlag is set or not) in a notification request or in the subscription response (depending on whether the immediateFlag is set to true in the request, the subscription is done on behalf of another NF, and the support of IERSR feature) as specified in clause 5.3.2.2.2, and shall include, when applicable, the remaining value of Unavailability Period Duration to determine the foreseen Loss of Connectivity time. If the UE included Start of Unavailability Period, the event is reported when unavailability period starts, else the event is reported immediately, if subscribed.

When the AMF receives two different Unavailability Period Duration valuess, i.e. one reported by the UE and another one known to the AMF as specified in clause 5.4.13.3 of TS 23.501 [2], the AMF decides on the Unavailability Period as specified in clause 5.4.1.4 of TS 23.501 [2].

This event implements the "Loss of Connectivity" event in table 4.15.3.1-1 of TS 23.502 [3].

UE Type: One UE, Group of UEs.

Report Type: One-Time Report, Continuous Report

Input: UE ID(s), immediateFlag

Notification: UE ID, optionally Unavailability Period Duration.

Event: 5GS-User-State-Report

A NF subscribes to this event to receive the 5GS User State of a UE.

UE Type: One UE

Report Type: One-Time Report

Input: UE ID(s)

Notification: UE ID, 5GS User State

Event: Availability-after-DDN-failure

A NF subscribes to this event to be notified about the Availability of a UE after a DDN failure.

UE Type: One UE, Group of UEs

Report Type: One-Time Report, Continuous Report

Input: UE ID(s)

Notification: UE ID(s)

Event: Type-Allocation-Code-Report

A NF subscribes to this event to receive the TAC of a UE or a group of UEs or any UE.

UE Type: One UE, Group of UEs, any UE

Report Type: One-Time Report, Continuous Report

Input: UE ID(s),"ANY_UE", optionally filters: TAI, Area identifier (a TA list, an area Id or "LADN")

Notification: UE ID(s), TAC(s)

Event: Frequent-Mobility-Registration-Report

A NF subscribes to this event to receive the number of mobility registration during a period for a UE or a group of UEs or any UE.

UE Type: One UE, Group of UEs, any UE

Report Type: One-Time Report, Continuous Report

Input: UE ID(s), expiry time, "ANY_UE", optionally filters: Area identifier (a TA list, an area Id or "LADN")

Notification: UE ID(s), Frequent Registration

Event: Snssai-TA-Mapping-Report

A NF subscribes to this event to receive the related access type and the list of supported S-NSSAIs.

UE Type: any UE

Report Type: One-Time Report, Continuous Report

Input: Target Area: TA list or "ANY_TAI", optionally filters: S-NSSAI(s)

Notification: Access type, list of supported S-NSSAIs with an indication of restriction at the AMF

Event: UE-Access-Behavior-Trends

A NF subscribes to this event to receive the UE access behavior trends (e.g. access type change, handover, etc.) within a period for a UE or a group of UEs, as specified in clause 4.15.4.2 of TS 23.502 [3].

UE Type: One UE, Group of UEs

Report Type: Periodic Report

Input: UE ID(s), expiry time

Notification: UE ID(s), UE access behavior trends report.

Event: UE-Location-Trends

A NF subscribes to this event to receive the UE Location Trends within a period for a UE or a group of UEs, as specified in clause 4.15.4.2 of TS 23.502 [3].

UE Type: One UE, Group of UEs

Report Type: Periodic Report

Input: UE ID(s), expiry time, Dispersion Area (e.g. a TAI list).

Notification: UE ID(s), UE Location Trends report.

Event: UE-MM-Transaction-Report

A NF subscribes to this event to receive the Total Number of Mobility Management transactions during a period for a UE or a group of UEs, as specified in clause 5.2.2.3.1 of TS 23.502 [3]. The Total number of transactions is incremented when the NAS signalling transactions from Authentication, Registration, De-Registration, Service Request and UE Configuration Update procedures is completed

UE Type: One UE, Group of UEs

Report Type: Periodic Report

Input: UE ID(s), expiry time, filters: Dispersion Area (e.g. a TA list) or Slice filter (i.e. a list of S-NSSAIs)

Notification: UE ID(s), List of UE transaction numbers per location or List of UE transaction numbers per slice.

Event: Trajectory-Tracking-Report

A NF subscribes to this event to track the UE movement of an assigned trajectory. An event report is triggered when the UE deviates from the assigned trajectory, i.e. moves outside the assigned TA(s), moves in the assigned TA(s) but not following the scheduled time, and/or moves outside the assigned altitude range, as specified in clause 5.13.2 of TS 23.256 [56] and clause 5.2.2.3.1 of TS 23.502 [3]. When the assigned trajectory consists multiple segments, an event report is also triggered when the UE moves across different segments.

UE Type: One UE

Report Type: One-Time Report, Continuous Report

Input: UE ID, a list of TAIs, optionally filters: the scheduled Time per TA(s), the altitude range, trajectory segments.

Notification: UE ID, Reason for report (Deviating report, Segment Change Report), TAI, Altitude

Event: Signalling-Measurement-Report

A NF subscribes to this event to receive the service signalling characteristics information of the AMF. For details about the information collected and analytics performed analytics, see signalling storm analytics specified in clause 6.22.2 of TS 23.288 [38].

UE Type: any UE

Report Type: One-Time, Periodic

Input: UE ID or group ID, Reporting Duration / Measurement time window(s)

Notification: UE ID(s), NF signalling measurement information of AMF.

Event: Signalling-Measurement-UE-Related-Report

A NF subscribes to this event to receive the service signalling characteristics information to collect the request type and number of requests corresponding to the request type from UE/RAN, request type and number from the NF, state transition information, timer information etc. For details about the full set of signalling measurements, see signalling storm analytics specified in clause 6.22.2 of TS 23.288 [38].

UE Type: One UE, Group of UEs

Report Type: One-Time, Periodic

Input: Reporting Duration / Measurement time window(s)

Notification: Signalling statistics per request type from UE/RAN, UE Related State Transition Information, UE related timer information, DNN(s) for which the UE has established PDU session, allowed NSSAI.

Event: Altitude-Report

A NF subscribes to this event to configure the aerial UE to perform altitude reporting. An event report is triggered when the UE meets the altitude reporting condition as specified in clause 5.16.2 or clause 5.16.4 of TS 23.256 [56].

UE Type: One UE

Report Type: Continuous Report

Input: UE ID, the altitude thresholds, optionally reporting periodicity, reporting event triggers (e.g, TA change, RAN Node Change)

Notification: UE ID, Altitude or Failure Indication

5.3.1.3 Subscriptions targeting a specific UE

For each subscription targeting a specific UE, a specific AMF instance within the AMF set (typically the AMF instance that serves the target UE) owns the subscription and provides event reports for the target UE.

If the AMF instance gets out of service, another AMF instance of the AMF set (typically the AMF instance to which the UE is reassigned) takes over the subscription targeting the UE and the reporting of events towards the NF service consumer, seamlessly for the NF service consumer.

Likewise, for deployments supporting backup AMFs, a specific AMF instance owns the subscription and provides event reports for the target UE, and a backup AMF takes over the subscription targeting the UE and the reporting of events towards the NF service consumer, seamlessly for the NF service consumer, upon planned maintenance or failure of the original AMF instance (see clause 5.21.2 of TS 23.501 [2]).

5.3.1.4 Bulk Subscriptions targeting a Group of UEs or Any UE

5.3.1.4.1 General

For subscriptions targeting a group of UEs or Any UE (also known as bulk subscriptions), different AMF instances of the AMF set may typically serve the targets UEs.

A bulk subscription may apply either to:

a) the group of UEs or Any UEs that are served by the specific AMF instance at which the subscription is created (default behavior).

   In this case, the NF service consumer should discover and create a bulk subscription at each AMF instance of the AMF set to be notified about events of the target UEs.

NOTE 1: The NF Service Consumer also possibly needs to create a bulk subscription at any new AMF instance that is later on added to the AMF set (e.g. scale-out operation) and to any AMF instance that fails with restart, since a new AMF instance or a restarted AMF instance is not aware of the bulk subscription otherwise. The subscription is lost when the AMF instance, at which the subscription was created, fails or restarts.

NOTE 2: The NF service consumer cannot update or delete a bulk subscription created at a specific AMF instance (with the same Subscription ID) via another AMF instance of the AMF set.

or

b) the group of UEs or Any UE that are served by all the AMF instances of the AMF set, if the NF service consumer and the AMF support the "AMF Set level Bulk Subscription" feature (see clause 5.3.1.4.2) and the NF service consumer creates an AMF Set level bulk subscription resource.

In this case, the NF service consumer creates the bulk subscription at only one AMF instance of the AMF set and the AMF set applies the subscription and reports events for all the target UEs, even when these UEs are served by different AMF instances of the AMF set.

NOTE 3: The AMF set implementation takes care of applying the bulk subscription to any new AMF instance that is later on added to the AMF set (e.g. scale-out operation) and to any AMF instance that fails with restart, transparently for the NF service consumer.

5.3.1.4.2 AMF Set level Bulk Subscription

If the NF service consumer and the AMF support the AMF Set level Bulk Subscription feature, the NF service consumer may request the AMF to create an AMF Set level bulk subscription that applies to the whole AMF set.

If the AMF accepts the request, the subscription shall apply to the whole AMF set (if no service set is configured) or to the whole AMF service set of the AMF service instance at which the subscription is created and to all the equivalent service sets in the AMF set.

NOTE 1: It is implementation specific how the AMF instances of the AMF set are made aware of the AMF Set level bulk subscription.

NOTE 2: Only the AMF at which the subscription is created returns a subscription creation response. The other AMFs within the AMF set send notifications only.

For an AMF Set level bulk subscription, the NF service consumer shall consider that:

- the bulk subscription applies throughout the AMF set and the NF service consumer may update or delete the subscription (using the same Subscription ID) via any AMF instance of the AMF set (e.g. when the AMF instance towards which the subscription was created is no longer available);

- the bulk subscription remains available at the AMF set even when the AMF instance via which the subscription was created fails or restarts; and

- the AMF instance sending an event report may be different from the AMF instance via which the bulk subscription was created.

For an AMF Set level bulk subscription, each AMF instance of the AMF set shall send its own reports to the NF service consumer including the status of all the target UEs that the AMF instance supports. Each AMF event notification shall include the NF instance ID of the AMF instance sending the notification. The NF service consumer shall derive the overall report for the whole AMF set by aggregating the reports received from all the AMF instances of the AMF set.

NOTE 3: For an AMF Set level bulk subscription done by an intermediate NF on behalf of another NF, immediate reports are sent directly to the other NF, i.e. AMF Set level bulk subscriptions cannot be used together with the IERSR feature.

AMF Set level bulk subscriptions targeting a group of UEs shall be handled as follows during the mobility of group members across two different AMF sets:

- if the source AMF support the AMF Set level bulk subscription feature, the source AMF shall set the amfSetLevelBulkSubs IE to true when transferring an AMF Set level bulk subscription targeting a group of UEs to the target AMF;

- if both the source AMF and target AMF support the AMF Set level bulk subscription feature, the target AMF shall create a new AMF Set level bulk subscription (if none exists yet for the corresponding subscription), i.e. the subscription shall apply to the whole target AMF set (or to all the equivalent service sets in the target AMF set);

- if the source AMF does not support the AMF Set level bulk subscription feature while the target AMF does, the target AMF shall create a new subscription applicable only to the target AMF instance (if none exists yet for the corresponding subscription);

- if the source AMF supports the AMF Set level bulk subscription feature while the target AMF does not, the target AMF shall create a new subscription applicable only to the target AMF instance (if none exists yet for the corresponding subscription).

See also clauses 5.2.2.2.1.1 and 5.2.2.2.3.1.

5.3.2 Service Operations

5.3.2.1 Introduction

For the Namf_EventExposure service the following service operations are defined:

- Subscribe;
- Unsubscribe;
- Notify.

5.3.2.2 Subscribe

5.3.2.2.1 General

The Service Operation is used by a NF Service Consumer (e.g. NEF) to subscribe to an event(s) for one UE, group of UE(s) or any UE.

5.3.2.2.2 Creation of a subscription

The Subscribe service operation is invoked by a NF Service Consumer, e.g. NEF, towards the AMF, when it needs to create a subscription to monitor at least one event relevant to the AMF. The NF Service Consumer may subscribe to multiple events in a subscription. A subscription may be associated with one UE, a group of UEs or any UE.

The NF Service Consumer shall request to create a new subscription by using HTTP method POST with the URI of the subscriptions collection or the URI of the AMF Set level bulk subscription collection, see clauses 6.2.3.2 and 6.2.3.4.

The NF Service Consumer shall include the following information in the HTTP message body:

- NF ID, indicates the identity of the network function instance initiating the subscription;
- Subscription Target, indicates the target(s) to be monitored, as one of the following types:
  - A specific UE, identified with a SUPI, a PEI or a GPSI;
  - A group of UEs, identified with a group identity;
  - Any UE, identified by the "anyUE" flag.
- Notification URI, indicates the address to deliver the event notifications generated by the subscription;
- Notification Correlation ID, indicates the correlation identity to be carried in the event notifications generated by the subscription;
- List of events to be subscribed;
- Event Types per event, as specified in clause 5.3.1.

The NF Service Consumer may include the following information in the HTTP message body:

- Immediate Report Flag per event, indicates an immediate report to be generated with current event status;
- Event Trigger, indicates how the events shall be reported (One-time Reporting or Continuously Reporting).
- Maximum Number of Reports, defines the maximum number of reports after which the event subscription ceases to exist;

- Expiry, defines maximum duration after which the event subscription ceases to exist;
- Sampling ratio, defines the random subset of UEs among target UEs, and AMF only report the event(s) related to the selected subset of UEs;
- partitioning criteria, that defines Criteria for partitioning UEs before applying sampling ratio;
- Periodic Report Flag per event, indicates the report to be generated periodically;
- Repetition Period, defines the period for periodic reporting;
- Variable reporting periodicity information, defines the list of conditions related to Reporting periodicity and the period per condition.
- Event Filters per applicable event, defines further options on when/how the event shall be reported;
- Reference Id per event, indicates the value of the Reference Id associated with the event to be monitored. If provided, the Reference Id shall be included in the reports triggered by the event;
- a notification flag as "notifFlag" attribute if the EneNA feature is supported;
- Muting Exception Instructions, which specify instructions to apply to the subscription and the stored events when an exception occurs at the AMF while the event is muted (e.g., the buffer of stored event reports is full, or the number of stored event reports exceeds a certain number), if the ENAPH3 feature is supported (see clause 6.2.8); and/or
- UE positioning capabilities requested indication.
- UDR Restart Indication, informing the subscription is due to a UDR data restoration, and the requested Event Exposure subscription may already exist in the AMF.

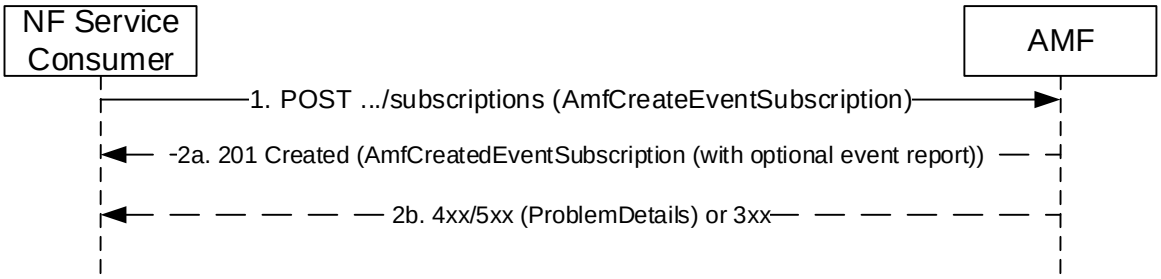


Figure 5.3.2.2.2-1 Subscribe service operation

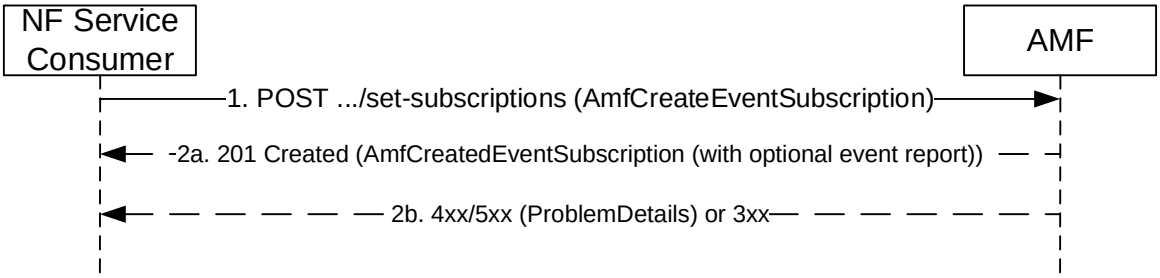


Figure 5.3.2.2.2-2 Subscribe service operation for an AMF Set level Bulk Subscription

NOTE: Apart from the aspects specified in clause 5.3.1.4, the functional behavior and contents of messages exchanged for an AMF Set level Bulk Subscription are the same as for bulk subscriptions applying only to a specific AMF instance.

1. The NF Service Consumer shall send a POST request to create a subscription resource in the AMF. The content of the POST request shall contain a representation of the individual subscription resource to be created. The request may contain an expiry time, suggested by the NF Service Consumer as a hint, representing the time upto which the subscription is desired to be kept active and the time after which the subscribed event(s) shall stop generating report. If the UDR Restart Indication is included indicating that the request is due to a UDR re-

synchronization event, it also indicates that the request may not be for creation of a new subscription as the subscription resource may already exist in the AMF.

2a. On success, the request is accepted, the AMF shall include a HTTP Location header to provide the location of a newly created resource (subscription) together with the status code 201 indicating the requested resource is created in the response message. If the NF Service Consumer has included more than one events in the event subscription and some of the events are failed to be subscribed, the AMF shall accept the message and provide the successfully subscribed event(s) in AmfEventSubscription.

If the NF Service Consumer has included the immediateFlag with value as "true" in the event subscription, the AMF shall include the current status of the events subscribed, if available (e.g. last known location information is included if the subscribed event is LOCATION_REPORT).

If the events with immediateFlag set to "true" are subscribed by an NF service consumer on behalf of a third NF (i.e. if the subsChangeNotifyUri is included in the event subscription), and if the NF service consumer has not indicated supporting of IERSR feature (see clause 6.2.8), the current status of the events subscribed shall not be included in the response message. In this case, the AMF shall subsequently send a notification directly to the third NF including the current status of the events subscribed.

If the NF Service Consumer has set the event reporting option as ONE_TIME and if the AMF has included the current status of the events subscribed in the response, then the AMF shall not do any subsequent event notification for the events given in the AmfCreateEventSubscription parameter. If the NF Service Consumer has set the event reporting option as ONE_TIME, the subscribed event as LOCATION_REPORT and the immediateFlag is set to false or absent, the AMF shall send an event notification to notify the current location of the UE after the subscription; if the UE is in RM-REGISTERED and CM-IDLE state over 3GPP access and the UE does not respond to the paging, or if the UE is in RM-REGISTERED over non-3GPP access, the event notification shall include the last known location and the ageOfLocationInformation IE set to a value other than "0", which indicates to the NF service consumer that the AMF returned the last known location.

If the NF Service Consumer has set the CONTINUOUS or PERIODIC event reporting option, the subscribed event as LOCATION_REPORT and the immediateFlag is set to false or absent, the AMF shall send a first event notification to notify the current location of the UE after the subscription is created and then subsequent event notifications when the user location changes or according to the requested period respectively; if at the time of the subscription creation the UE is in RM-REGISTERED and CM-IDLE state over 3GPP access and the UE does not respond to the paging, or if the UE is in RM-REGISTERED over non-3GPP access, the AMF shall send the first event notification including the last known location and the ageOfLocationInformation IE set to a value other than "0", which indicates to the NF service consumer that the AMF returned the last known location.

The response, based on operator policy and taking into account the expiry time included in the request, may contain the expiry time, as determined by the AMF, after which the subscription becomes invalid. Once the subscription expires, if the NF Service Consumer wants to keep receiving notifications, it shall create a new subscription in the AMF. The AMF shall not provide the same expiry time for many subscriptions in order to avoid all of them expiring and recreating the subscription at the same time. If the expiry time is not included in the response, the NF Service Consumer shall consider the subscription to be valid without an expiry time.

If the sampling ratio ("sampRatio") attribute is included in the subscription without a partitioningCriteria, the AMF shall select a random subset of UEs among target UEs according to the sampling ratio and only report the event(s) related to the selected subset of UEs. If the partitioningCriteria attribute is also included along with sampling ratio, the AMF shall apply the sampling ratio on the group of UEs determined according to the partitioning criteria.

If the AMF supports the EneNA feature and the "notifFlag" attribute is included and set to "DEACTIVATE" in the request (by e.g. the NWDAF or DCCF), the AMF shall mute the event notification and store the available events. Additionally, if the AMF also supports the ENAPH3 feature (see clause 6.2.8) and the NF service consumer also included event muting instructions in the request, the AMF should evaluate the received event muting instructions against to local actions (if configured) and, if the subscription creation request is accepted, the AMF may indicate the following information to the NF service consumer in the response:

- the maximum number of notifications that the AMF expects to be able to store for the subscription;
- an estimate of the duration for which notifications can be buffered.

If the NF service consumer is a UDM, the AMF and the UDM both support the "ESSYNC" feature and the subscription is targeting a specific UE with Reference Id(s) included in the subscription, the AMF shall locally

store the information that the event subscription is subject to the Event Subscription Synchronization with UDM during EPS to 5GS mobility as specified in clause 5.3.2.4.2. During inter-AMF mobility procedures, the source AMF shall include the "eventSyncInd" IE (in AmfEventSubscriptionAddInfo data type) with the value "true" in the UE Context for the event subscriptions that are subject to Event Subscription Synchronization with UDM.

If the subscription creation request targets a group of UE or any UE, the AMF shall accept the request and create a subscription even if the AMF does not currently serve any UE of the group or any UE respectively, unless other reasons exist to reject the request.

For "Trajectory-Tracking-Report" event and "Altitude-Reporting" event, if the AMF determines that the event configuration in the created subscription conflicts with an existing subscription (e.g. configuring different altitude thresholds for a UAV in the same area) the AMF shall terminate the existing subscription. In this case, the AMF supporting the 'STEN" feature shall send an event subscription termination notification to the NF service consumer of the existing subscription with the termination cause "CONFLICT_SUBSCRIPTION", if notification of event subscription termination is requested by the NF service consumer.

2b. On failure or redirection, one of the HTTP status codes listed in Table 6.2.3.2.3.1-3 shall be returned. For a 4xx/5xx response, the message body shall contain a ProblemDetails structure with the "cause" attribute set to one of the application errors listed in Table 6.2.3.2.3.1-3.

If the subscription creation request targets a specific UE and this UE is not served by the AMF (i.e. it is not known to the AMF), the AMF shall reject the request with a 403 Forbidden response and the application error "UE_NOT_SERVED_BY_AMF", unless the request can be redirected to another AMF known to serve the UE (e.g. another AMF of the same AMF set).

If the AMF supports the EneNA and ENAPH3 features (see clause 6.2.8), the NF service consumer sets the "notifFlag" attribute to "DEACTIVATE" and event muting instructions in the request, but the AMF cannot accept the received instructions, the AMF may reject the request with a 403 Forbidden response and the application error "MUTING_EXC_INSTR_NOT_ACCEPTED".

5.3.2.2.3 Modification of a subscription

The Subscribe service operation is invoked by a NF Service Consumer, e.g. NEF, towards the AMF, when it needs to modify an existing subscription previously created by itself at the AMF.

The NF Service Consumer shall modify the subscription by using HTTP method PATCH with the URI of the individual subscription resource (see clauses 6.2.3.3 and 6.2.3.5) to be modified.

See also Figure 5.3.2.2.3-1 and Figure 5.3.2.2.3-2 below.

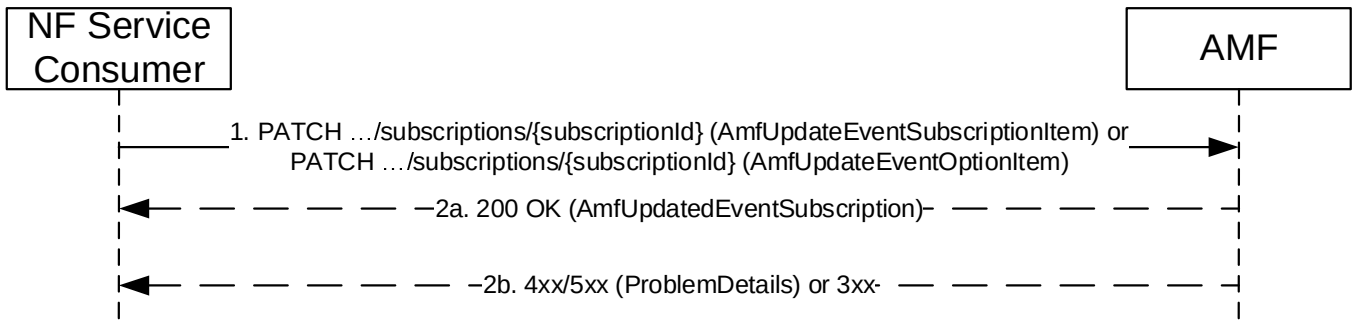


Figure 5.3.2.2.3-1 Modification of a Subscription

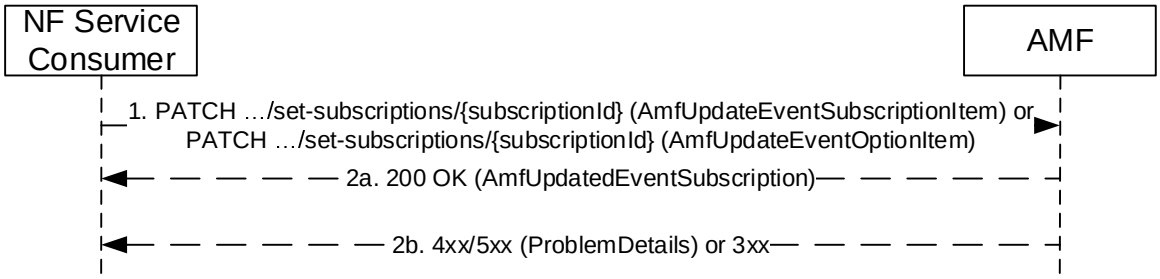


Figure 5.3.2.2.3-2 Modification of an AMF Set level Bulk Subscription

NOTE: Apart from the aspects specified in clause 5.3.1.4, the functional behavior and contents of messages exchanged for an AMF Set level Bulk Subscription are the same as for bulk subscriptions applying only to a specific AMF instance.

1. The NF Service Consumer shall send a PATCH request to modify a subscription resource in the AMF. The modification may be for the events subscribed or for updating the event options.

2a. On success, the request is accepted, the AMF shall return the representation of the modified subscription resource or its sub-resource together with the status code 200 OK. When the PATCH request is for modifying the expiry attribute of the options IE of the subscription, then the AMF based on operator policies and taking into account the expiry time included in the request, shall include an expiry time, after which the subscription becomes invalid. Once the subscription expires, if the NF Service Consumer wants to keep receiving notifications, it shall create a new subscription in the AMF, as specified in clause 5.3.2.2.2. The AMF shall not provide the same expiry time for many subscriptions in order to avoid all of them expiring and recreating the subscription at the same time.

When the immediateFlag with the value "true" is received for newly subscribed event(s), the AMF shall include the current status of the newly subscribed event(s) in the response, if available and if the NF service consumer had directly subscribed to the AMF. Otherwise, if the NF service consumer had subscribed to the AMF on behalf of a third NF (e.g. UDM had subscribed to the AMF on behalf of NEF), the current status of the newly subscribed event(s) shall not be included in the response but shall be included in a notification sent directly to the third NF.

The PATCH request may be used to modify the "notifFlag" attribute of the options IE of the subscription, when both the AMF and NF Service Consumer support the EneNA feature as defined in clause 6.2.8:

- if the "notifFlag" attribute is set to "DEACTIVATE" in the request and the event notification is currently not muted, the AMF shall mute the event notification and store the available events, or
- if the "notifFlag" is set to "RETRIEVAL" in the request and the event notification is currently muted, the AMF shall send the stored events to the NF service consumer, mute the event notification again and store available events; or
- if the "notifFlag" is set to "ACTIVATE" in the request and the event notification is currently muted, the AMF shall send the stored events to the NF service consumer and stop muting the event notification.

In addition, if both the AMF and the NF service consumer (e.g. NWDAF or DCCF) also support the ENAPH3 feature (see clause 6.2.8), the PATCH request modifies the "notifFlag" attribute to "DEACTIVATE" and contains muting exception instructions, the AMF should evaluate the received event muting instructions against to local actions (if configured) and, if the subscription modification request is accepted, the AMF may indicate the following information to the NF service consumer in the response:

- the maximum number of notifications that the AMF expects to be able to store;
- an estimate of the duration for which notifications can be buffered.

If the subscription requested to be modified targets a group of UE or any UE, the AMF shall accept the request and modify the subscription even if the AMF does not currently serve any UE of the group or any UE respectively, unless other reasons exist to reject the request.

2b. On failure or redirection, one of the HTTP status codes listed in Table 6.2.3.3.3.1-3 shall be returned. For a 4xx/5xx response, the message body shall contain a ProblemDetails structure with the "cause" attribute set to one of the application errors listed in Table 6.2.3.3.3.1-3.

If the AMF cannot accept the received muting exception instructions, the AMF may reject the request with a 403 Forbidden response and the application error "MUTING_EXC_INSTR_NOT_ACCEPTED".

5.3.2.2.4 Remove or add group member UE(s) for a group subscription

The Subscribe service operation is invoked by a NF Service Consumer, e.g. UDM, towards the AMF, to remove or add group member UE(s) for an existing group subscription.

The NF Service Consumer shall modify the subscription by using HTTP method PATCH with the URI of the individual subscription resource (see clauses 6.2.3.3 and 6.2.3.5) to be modified.

See also Figure 5.3.2.2.4-1 and Figure 5.3.2.2.4-2 below.

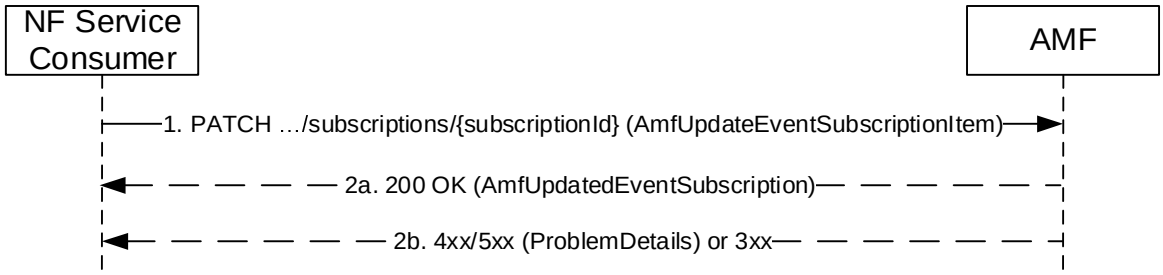


Figure 5.3.2.2.4-1 Remove or add group member UE(s) for a group subscription

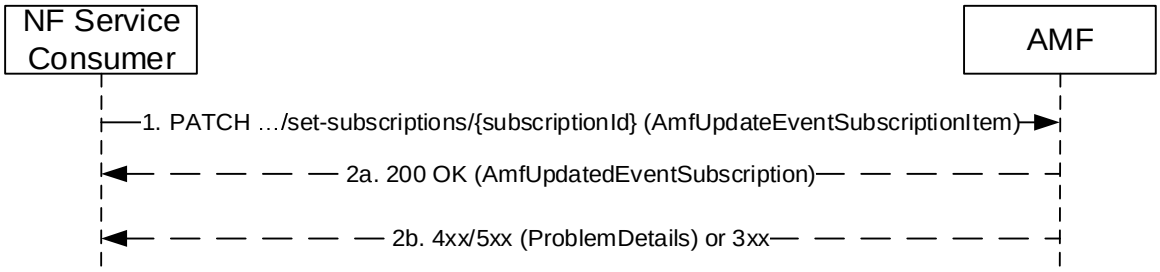


Figure 5.3.2.2.2-2 Remove or add group member UE(s) for a group subscription for an AMF Set level Bulk Subscription

NOTE: Apart from the aspects specified in clause 5.3.1.4, the functional behavior and contents of messages exchanged for an AMF Set level Bulk Subscription are the same as for bulk subscriptions applying only to a specific AMF instance.

1. The NF Service Consumer shall send a PATCH request to modify a subscription resource targeting a group of UEs in the AMF. The modification shall indicate the group member UE(s) to be excluded or added for the group subscription.

2a. On success, the request is accepted, the AMF shall return the representation of the modified subscription resource with the status code 200 OK.

The AMF shall stop monitoring events for excluded member UE(s). If Maximum number of Reports is applied, the AMF shall set the number of reports of the indicated UE(s) to Maximum Number of Reports.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.2.3.3.3.1-3 shall be returned. For a 4xx/5xx response, the message body shall contain a ProblemDetails structure with the "cause" attribute set to one of the application error listed in Table 6.2.3.3.3.1-3.

5.3.2.3 Unsubscribe

5.3.2.3.1 General

The Unsubscribe service operation is invoked by a NF Service Consumer, e.g. NEF, towards the AMF, to remove an existing subscription previously created by itself at the AMF.

The NF Service Consumer shall unsubscribe to the subscription by using HTTP method DELETE with the URI of the individual subscription resource (see clauses 6.2.3.3 and 6.2.3.4) to be deleted.

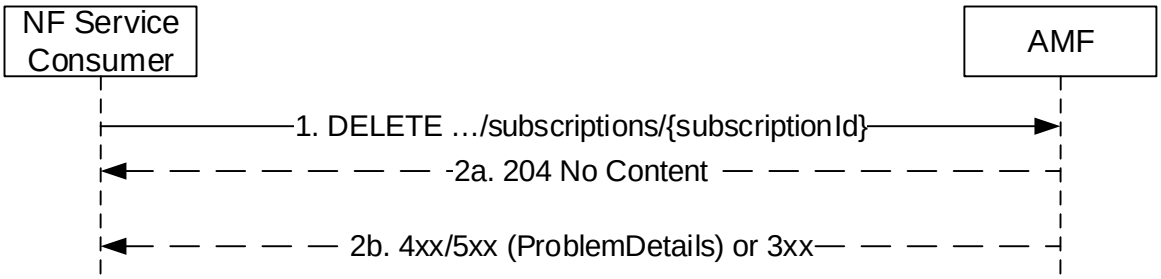


Figure 5.3.2.3.1-1 Unsubscribe a subscription

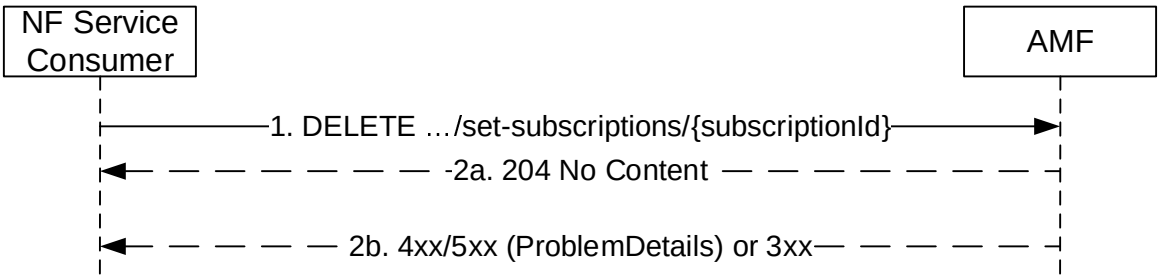


Figure 5.3.2.2.2-2 Unsubscribe for an AMF Set level Bulk Subscription

NOTE: Apart from the aspects specified in clause 5.3.1.4, the functional behavior and contents of messages exchanged for an AMF Set level Bulk Subscription are the same as for bulk subscriptions applying only to a specific AMF instance.

1. The NF Service Consumer shall send a DELETE request to delete an existing subscription resource in the AMF.

2a. On success, the request is accepted, the AMF shall reply with the status code 204 indicating the resource identified by subscription ID is successfully deleted in the response message.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.2.3.3.3.2-3 shall be returned. For a 4xx/5xx response, the message body shall contain a ProblemDetails structure with the "cause" attribute set to one of the application error listed in Table 6.2.3.3.3.2-3.

5.3.2.4 Notify

5.3.2.4.1 General

The Notify service operation is invoked by the AMF, to send a notification, towards the notification URI, when certain event included in the subscription has taken place.

The AMF shall use the HTTP method POST, using the notification URI received in the subscription creation as specified in clause 5.3.2.2.2, including e.g. the subscription ID, Event ID(s) for which event has happened, notification correlation ID provided by the NF service consumer at the time of event subscription, to send a notification. See Figure 5.3.2.4.1-1.

Additionally, the Notify service operation shall also be invoked by the AMF, when:

- there is a change of AMF during UE mobility procedures, if the subscription Id changes for a subscription to a single UE or a new subscription Id is additionally created for a group subscription (i.e. Registration procedures and Handover procedures), or
- the subscription is terminated by the AMF, if event subscription termination notification is requested by the NF consumer.

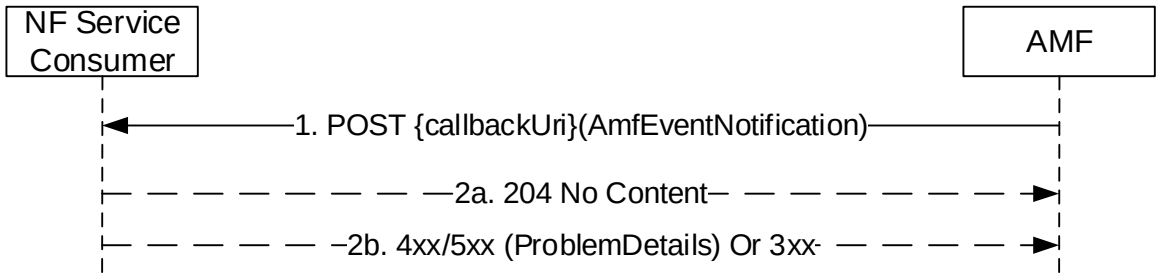


Figure 5.3.2.4.1-1 Notify

1. The AMF shall send a POST request to send a notification. When the notification is sent to inform a new subscription Id is additionally created for a group subscription, the notification shall include the expiry time of the created subscription.

2a. On success, "204 No content" shall be returned by the NF Service Consumer.

2b. On failure or redirection, the appropriate HTTP status code (e.g. "403 Forbidden") indicating the error shall be returned and appropriate additional error information should be returned.

When the AMF received the following response code (and application error), the AMF should consider the subscription is no longer valid and terminate the subscription:

- "400 Bad Request" with application error "RESOURCE_CONTEXT_NOT_FOUND"
- "404 Not Found"

When AMF terminates the subscription in above scenarios, if the subscription is created by the NF consumer on behalf of another NF (e.g. the UDM subscribes to the AMF on behalf of the NEF) and notification of event subscription termination is requested by the NF consumer, the AMF supporting the 'STEN" feature shall send a notification to the NF consumer (e.g. the UDM) to report the termination of the subscription.

5.3.2.4.2 Event Subscription Synchronization for specific UE

When the AMF and the UDM both support the "ESSYNC" feature, the AMF may initiate synchronization for event subscriptions with the UDM for the specific UE during EPS to 5GS mobility registration procedure (see clause 4.11.5.2 of TS 23.502 [3]), if UE specific event subscriptions from the UDM are available in UE Context.

To initiate event subscription synchronization, when sending notification for subscription change to the UDM, the AMF shall include the event subscription information in the notification request. If subscription change notification is not needed, e.g. when UE registers to the same AMF after moving from EPS, the AMF may send a notification to the subscription change notification URI. The notification request in this case only includes the event subscription information but no event report list.

The AMF shall only include active event subscriptions that are subject to Event Subscription Synchronization with UDM (determined as defined in clause 5.3.2.2.2) in the event subscription information.

For each active subscription, the following information shall include:

- URI of the subscription resource in the AMF; and
- Notification Correlation Id of the subscription; and
- list of Reference Ids, one per event in the subscription; and

- optionally, the URI of old subscription resource on the source AMF, if the subscription Id is changed during the mobility procedure.

When the UDM receives event subscription information from AMF, the UDM shall compare the active event subscriptions in AMF with the active UDM Event Exposure subscriptions using Reference Id(s) and Notification Correlation Id, and perform the following:

- if an event is to be detected by AMF but not existing in the AMF, the UDM shall subscribe the event in AMF by creating a new AMF event subscription or updating an existing AMF event subscription;

- if an event exists in AMF but does not exist in UDM, the UDM shall unsubscribe the event from AMF by removing or update an AMF event subscription.

When the AMF identified that event synchronization with UDM is required, but either the UDM or the AMF or both do not support the "ESSYNC" feature, the AMF may require the UDM to re-subscribe the stored event exposure subscriptions to the AMF, see clause 5.3.2.2.2 and 5.3.2.2.3 of TS 29.503 [35].

5.4 Namf_MT Service

5.4.1 Service Description

Namf_MT service allows a NF to request information related to capabilities to send MT signalling or data to a target UE. The following are the key functionalities of this NF service:

- enabling UE reachability by:

  - paging the UE if the UE is in CM-IDLE state and responding to the requester NF after the UE enters CM-CONNECTED state, or

  - responding to the requester NF if UE is in CM-CONNECTED state.

- providing the terminating domain selection information for IMS voice to the consumer NF.

- enabling reachability of a list of UEs by:

  - paging UEs for an MBS session if the UEs are in CM-IDLE state, and

  - responding to the requester NF, including the list of UEs that are already in CM-CONNECTED state if any, and

  - sending notification with the UE reachability information and user location information to NF consumers.

5.4.2 Service Operations

5.4.2.1 Introduction

For the Namf_MT Service the following service operations are defined:

- EnableUEReachability

- ProvideDomainSelectionInfo

- EnableGroupReachability

- UEReachabilityInfoNotify

5.4.2.2 EnableUEReachability

5.4.2.2.1 General

The EnableUEReachability service operation is used in the following procedure:

- MT SMS over NAS in CM-IDLE state (see TS 23.502 [3], clause 4.13.3.6), or in CM-CONNECTED state (see TS 23.502 [3], clause 4.13.3.7).
- UPF anchored Mobile Terminated Data Transport in Control Plane CIoT 5GS Optimisation (see clause 4.24.2 of TS 23.502 [3]).
- Network Triggered Connection Resume in RRC Inactive with CN based MT communication handling (see clause 4.8.2.2b of TS 23.502 [3]).

The EnableUEReachability service operation shall be invoked by the NF Service Consumer (e.g. SMSF, SMF) to enable the reachability of the UE.

The NF Service Consumer shall invoke the service by using the HTTP method PUT, towards the URI of a "ueReachInd" resource as specified in clause 6.3.3.2. See also figure 5.4.2.2.1-1.

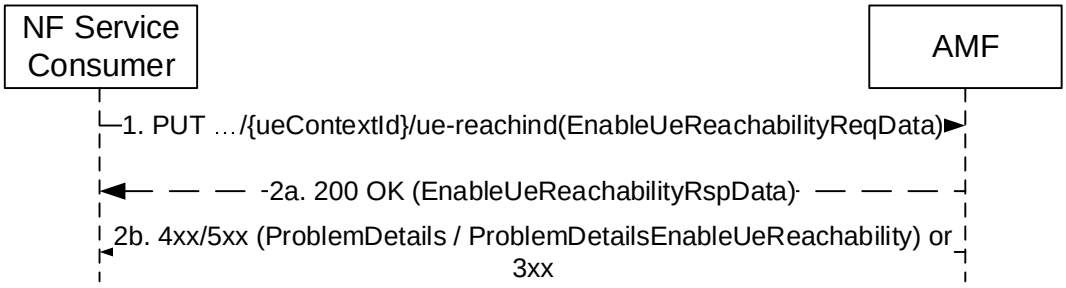


Figure 5.4.2.2.1-1: NF Service Consumer enables the reachability of the UE

1. The NF Service Consumer sends a PUT request to the resource representing the ueReachInd resource of the AMF. The content of the PUT request shall contain an "EnableUeReachabilityReqData" object.

   During the Network Triggered Connection Resume in RRC Inactive with CN based MT communication handling (see clause 4.8.2.2.b of TS 23.502 [3]), the SMF may include the ppi, the arp, the qfi, the 5qi and the DL data size of the received DL packets per QoS flow of the PDU session for which DL packets are received, together with the PDU session identifier, to enable NG-RAN to take this information into account when paging the UE.

   The SMF shall send a new Namf_MT_EnableUEReachability request with a higher priority or a different Paging Policy Indicator to the AMF if, while the SMF is waiting for the response for UE connection resume from the AMF as specified in clause 4.8.2.2b of TS 23.502 [3] or the SMF has received a reject response with Estimated Maximum Wait time from the AMF:

   - the SMF receives any additional Data Notification from the UPF for data packets pertaining to another QoS Flow associated with a higher priority (i.e. ARP priority level) than the priority indicated to the AMF in the previous Namf_MT_EnableUEReachability request (for the case of DL data buffering in UPF);
   - the SMF receives any additional DL data packets pertaining to another QoS Flow associated with a higher priority (i.e. ARP priority level) than the priority indicated to the AMF in the previous Namf_MT_EnableUEReachability request (for the case of DL data buffering in SMF); or
   - the SMF derives a different Paging Policy Indicator according to the additional Data Notification or the additional DL data packets.

   Based on local configuration, the SMF may send a new Namf_MT_EnableUEReachability message to AMF if:

   - the SMF receives any additional Data Notification messages for data packets pertaining to another QoS Flow associated with same or lower priority than the priority indicated to the AMF in the previous Namf_MT_EnableUEReachability (for the case of DL data buffering in UPF); or
   - the SMF receives any additional DL data packets pertaining to another QoS Flow associated with same or lower priority than the priority indicated to the AMF in the previous Namf_MT_EnableUEReachability(for the case of DL data buffering in SMF).

   Before the UE becomes reachable, the AMF may receive several Namf_MT_EnableUEReachability requests which are triggered by DL data reports for different QoS flows, the AMF shall store or update the ppi, the arp,

the qfi, the 5qi and the DL data size per QoS flow if included and may provide the received ppi(s), arp(s), qfi(s), 5qi(s) and DL data size(s) for each QoS flow to the NG-RAN when paging the UE based on the local configuration.

2a. On success:

- if the UE is in CM-CONNECTED state, the AMF shall immediately respond using "200 OK" status code, with content containing an "EnableUeReachabilityRspData" object.
- if the UE is in CM-IDLE state and the NAS message is to be sent over via 3GPP access and paging is not restricted as defined in TS 23.501 [2] clause 5.38.5, the AMF shall page the UE. When UE becomes CM-CONNECTED and the UE has not rejected the page as specified in TS 23.501 [2] clause 5.38.4, "200 OK" shall be returned with content containing an "EnableUeReachabilityRspData" object.
- if the UE is in Extended DRX for RRC-INACTIVE state and with CN based MT communication handling, and the AMF determines that the UE is reachable, then the AMF shall send a N2 RAN paging request message to NG-RAN with the request for the UE's RRC connection to be resumed as specified in clause 4.8.2.2b of TS 23.502 [3]). When an N2 Notification is received by the AMF indicating that the UE is in RRC-CONNECTED state or indicating in a MT Communication Handling request that the UE is reachable for downlink data and/or signalling as specified in clause 4.8.2.2 of TS 23.502 [3], "200 OK" shall be returned with the content containing an "EnableUeReachabilityRspData" object.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.3.3.2.3.1-3 shall be returned. For a 4xx/5xx response, the message body shall contain a ProblemDetails or ProblemDetailsEnableUeReachability structure with the "cause" attribute set to one of the application error listed in Table 6.3.3.2.3.1-3.

The AMF shall respond with the status code "403 Forbidden", if the UE is in a Non-Allowed Area and the service request is not for regulatory prioritized service. The AMF shall set the application error as "UE_IN_NON_ALLOWED_AREA" in POST response body.

The AMF shall respond with the status code "409 Conflict", if Paging Restriction Information restrict the EnableUEReachability request from causing paging as defined in TS 23.501 [2] clause 5.38.5 or if the UE rejects the paging as defined in TS 23.501 [2] clause 5.38.4. The AMF shall set the application error as "REJECTION_DUE_TO_PAGING_RESTRICTION" in POST response body.

The AMF shall respond with the status code "504 Gateway Timeout" and set the application error as "UE_NOT_REACHABLE" and include an Estimated Maximum Wait time in POST response body when the AMF determines the UE is unreachable (e.g. if the UE is in MICO mode or the UE has entered Extended DRX in CM-IDLE or Extended DRX for RRC-INACTIVE state) as specified in clauses 4.24.2 and 4.8.2.2b of TS 23.502 [3]), and:

- if the UE is in Extended DRX for RRC-INACTIVE state and with CN based MT communication handling,when the AMF determines that the UE is reachable, the AMF shall send a N2 RAN paging request message to NG-RAN with the request for the UE's RRC connection to be resumed as specified in clause 4.8.2.2b of TS 23.502 [3]) using the information received in the EnableUeReachabilityReqData (i.e. the ppi, the arp, the qfi, the 5qi and the DL data size of the received DL packets per QoS flow of the PDU session for which DL packets are received, together with the PDU session identifier); or
- if the UE is in Extended DRX in CM-IDLE state, and the AMF determines that the UE is reachable, the AMF shall page the UE (i.e. using CN paging).

5.4.2.3 ProvideDomainSelectionInfo

5.4.2.3.1 General

The ProvideDomainSelectionInfo service operation shall be invoked by the NF Service Consumer (e.g. UDM) to get the UE information for terminating domain selection of IMS voice, including following information:

- Indication of supporting IMS voice over PS Session;
- Time stamp of the last radio contact with the UE;
- Current Access type and RAT type

The NF Service Consumer shall invoke the service by using the HTTP GET towards the URI of the "UeContext" resource (See clause 6.3.3.3.3.1). See also figure 5.4.2.3.1-1.

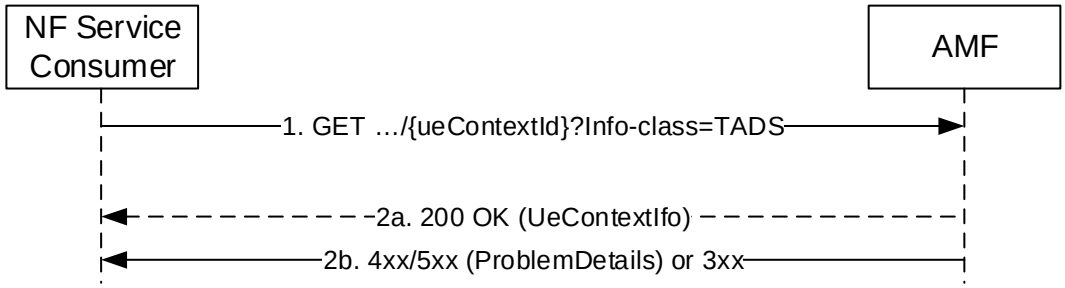


Figure 5.4.2.3.1-1: Provide UE Information for Terminating Domain Selection

1. The NF Service Consumer shall send a GET request to the URI of the "UeContext" resource on the AMF, with query parameter "info-class" set to value "TADS".

2a. On success, the AMF shall return "200 OK" status code with content containing an "UeContextInfo" data structure including UE information for terminating domain selection for IMS voice.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.3.3.3.3.1-3 shall be returned. The message body shall contain a ProblemDetails object with "detail" set to one of the corresponding application errors listed in Table 6.3.3.3.3.1-3.

If the request cannot be completed due to a Registration procedure going-on for the target UE, the AMF shall reject the request with a 409 Conflict response and with the TEMPORARY_REJECT_REGISTRATION_ONGOING application error. The NF Service Consumer should repeat the request after a suitable delay.

If the request cannot be completed due to the target UE being in RM-DEREGISTERED state, the AMF shall reject the request with a 403 Forbidden response and with the UE_DEREGISTERED application error.

5.4.2.4 EnableGroupReachability

5.4.2.4.1 General

The EnableGroupReachability service operation is used in the following procedure:

- MBS session activation procedure (see TS 23.247 [55], clause 7.2.5.2).

The EnableGroupReachability service operation shall be invoked by the NF Service Consumer (e.g. SMF) to enable the reachability of the list of UEs involved in the MBS Session.

The NF Service Consumer shall invoke the service by using the HTTP method POST (enable-group-reachability custom operation) as shown in figure 5.4.2.4.1-1.

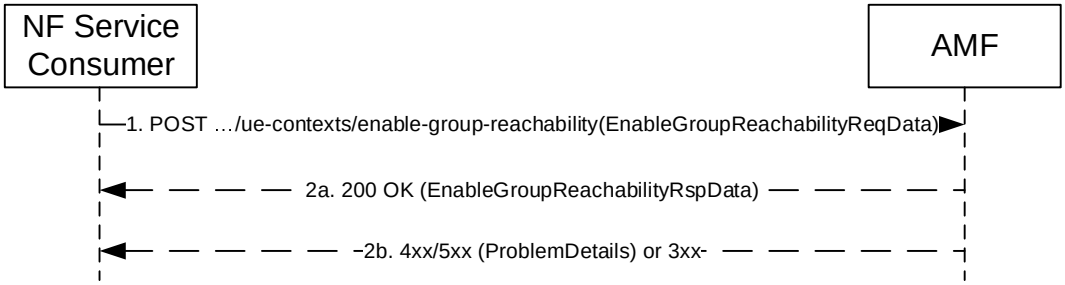


Figure 5.4.2.4.1-1: NF Service Consumer enabling the reachability of a list of UEs

1. The NF Service Consumer shall send a POST request to the resource representing the UeContexts resource of the AMF. The content of the POST request shall contain an "EnableGroupReachabilityReqData" object.

2a. On success:

If at least one UE in the list of UEs included in EnableGroupReachabilityReqData is in CM-CONNECTED state, the AMF shall respond using "200 OK" status code, with the content containing the list of UEs in CM-CONNECTED state in "EnableGroupReachabilityRspData" object; or

If all the UEs in the list of UEs included in EnableGroupReachabilityReqData are in CM-IDLE state, the AMF shall respond with "200 OK" status code.

The AMF shall page UEs in CM-IDLE state as specified in clause 7.2.5.2 of TS 23.247 [55].

2b. On failure or redirection, one of the HTTP status code listed in Table 6.3.3.4.4.2.2-2 shall be returned. For a 4xx/5xx response, the message body shall contain a ProblemDetails structure with the "cause" attribute set to one of the application error listed in Table 6.3.3.4.4.2.2-2.

5.4.2.5 UEReachabilityInfoNotify

5.4.2.5.1 General

The UEReachabilityInfoNotify service operation is used in the following procedure:

- MBS session activation procedure (see TS 23.247 [55], clause 7.2.5.2).

The UEReachabilityInfoNotify service operation shall be invoked by the AMF to send a notification towards the notification URI for the UE(s) which are reachable or do not respond to paging.

The AMF shall use the HTTP method POST, using the notification URI received in the EnableGroupReachability request as specified in clause 5.4.2.4.1, to send a notification. See Figure 5.4.2.5.1-1.

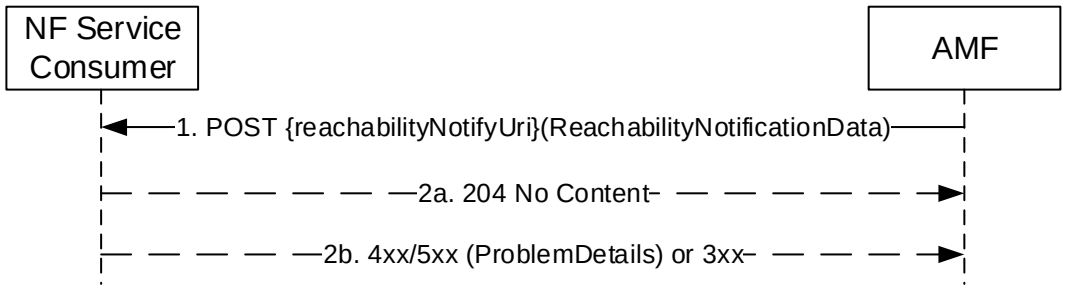


Figure 5.4.2.5.1-1: UE Reachability Info Notify

1. The AMF shall send a POST request to send a notification.

2a. On success, "204 No content" shall be returned by the NF Service Consumer.

2b. On failure or redirection, the appropriate HTTP status code (e.g. "403 Forbidden") indicating the error shall be returned and appropriate additional error information should be returned.

5.5 Namf_Location Service

5.5.1 Service Description

The Namf_Location service is used by NF service consumers to request the AMF for initiating positioning requests and provide the location information. It is also used to subsequently notify the location change events towards the NF service consumers. The following are the key functionalities of this NF service:

- Allow NFs to request the current geodetic and optionally local and/or civic location of a target UE.
- Allow NFs to be notified of event information related to emergency sessions.

- Allow NFs to request Network Provided Location Information (NPLI) and/or local time zone corresponding to the location of a target UE.
- Allow NFs to request the ranging and sidelink positioning location results for a group of n UEs (n≥2), the ranging and sidelink positioning location results may include absolute locations, relative locations or distance and directions related to the UEs.
- Allow NFs to enable the location reporting over user plane.

5.5.2 Service Operations

5.5.2.1 Introduction

For the Namf_Location Service the following service operations are defined:

- ProvidePositioningInfo;
- EventNotify; and
- ProvideLocationInfo.
- CancelLocation

5.5.2.2 ProvidePositioningInfo

5.5.2.2.1 General

The ProvidePositioningInfo service operation is used in the following procedure:

- 5GC-MT-LR Procedure without UDM Query (see TS 23.273 [42], clause 6.10.2)
- 5GC-MT-LR Procedure (see TS 23.273 [42], clause 6.1)
- Initiation and Reporting of Location Events (see TS 23.273 [42], clause 6.3.1)
- Location Continuity for Handover of an Emergency session from NG-RAN (see TS 23.273 [42], clause 6.10.3)
- 5GC-MT-LR multiple location procedure without UDM Query (see TS 23.273 [42], clause 6.10.4)
- Procedures of SL-MT-LR involving LMF (see TS 23.273 [42], clause 6.20.3)
- Procedures of SL-MT-LR for periodic, triggered Location Events (see TS 23.273 [42], clause 6.20.4)
- 5GC-MT-LR Procedure using SL positioning (see TS 23.273 [42], clause 6.20.5)

The ProvidePositioningInfo service operation shall be invoked by the NF Service Consumer (e.g. GMLC) to request the current or deferred geodetic and optionally local and/or civic location of the UE. The service operation triggers the AMF to invoke the service towards the LMF.

The NF Service Consumer shall invoke the service operation by sending POST to the URI of the "provide-pos-info" custom operation on the "Individual UE Context" resource (See clause 6.4.3.2.4.2). See also figure 5.5.2.2.1-1.

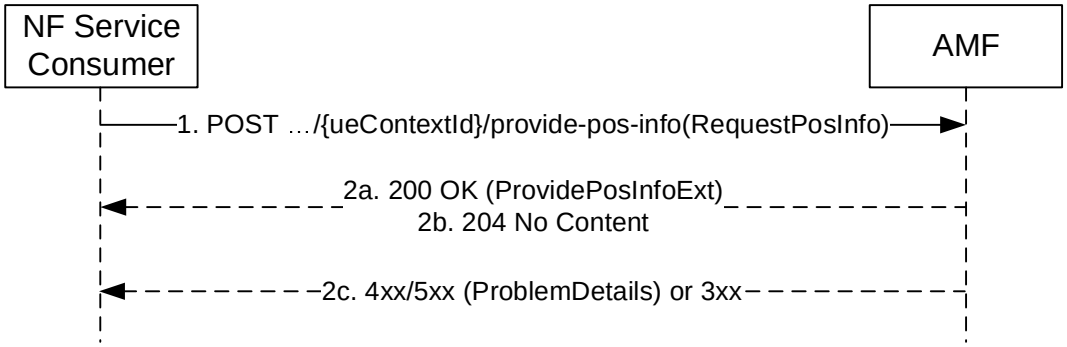


Figure 5.5.2.2.1-1: NF Service Consumer requests the positioning information of the UE

1. The NF Service Consumer shall send a POST request to the resource URI of "provide-pos-info" custom operation of the "Individual UE context" resource of the AMF. The content of the POST request may contain:

   - an indication of a positioning request from emergency services or commercial services client,
   - the required location QoS, and additionally the mapped location QoS applicable to EPS if multiple location QoS is required,
   - Supported GAD shapes,
   - scheduled location time,
   - reliable UE Location Request,
   - UE unaware indication,
   - the LMF ID that should be used for selecting the LMF,
   - the reporting indication,
   - the integrity requirements
   - the requested ranging_SL location results, including absolute locations, relative locations or distances and directions related to the UEs for ranging and sidelink positioning, and/or
   - the information of the related UEs, including application layer ID(s) and the related UE type for each related UE for ranging and sidelink positioning.

   If the NF service consumer wants the location change information or deferred location information to be notified (e.g. during a handover procedure or for activation or completion of deferred location), it also provides a callback URI on which the EventNotify service operation is executed (see clause 5.5.2.3).

   During 5GC-MT-LR multiple location procedure for regulatory location service, the request body may also include the indication of acceptance for intermediate response and the maximum response time, the GMLC callback address and the LIR reference number.

2a. On success, "200 OK" shall be returned. The content may contain the LCS correlation identifier, the location estimate, its age and accuracy, the information about the positioning method. If the request is invoked during a handover the response body shall also include the target AMF node identifier as specified in clause 6.10.3 of TS 23.273 [42].

   If the location determination will be sent by LMF to GMLC directly, the content shall include the directReportInd and supportedFeatures attributes.

2b. On accept, "204 No Content" shall be returned to acknowledge that AMF supports a deferred location request and a deferred location is accepted as specified in step 6 of clause 6.3.1 of TS 23.273 [42];

2c. On failure or redirection, one of the HTTP status code listed in Table 6.4.3.2.4.2.2-2 shall be returned. For a 4xx/5xx response, the message body shall contain a ProblemDetails structure with the "cause" attribute set to one of the application error listed in Table 6.4.3.2.4.2.2-2.

If the AMF received the LMF ID from the NF service consumer and the AMF does not find an LMF with the LMF ID received from GMLC, the AMF should return a 403 Forbidden response with the cause attribute set to "REQUESTED_LMF_NOT_AVAILABLE" to the NF service consumer, if no other LMF is configured as backup selection. Otherwise, the ProblemDetails structure with the "cause" attribute set to one of the application errors listed in Table 6.4.3.2.4.2.2-2 shall be applied.

5.5.2.3 EventNotify

5.5.2.3.1 General

The EventNotify service operation is used in the following procedure:

- 5GC-NI-LR Procedure (see TS 23.273 [42], clause 6.10.1)
- Location Continuity for Handover of an Emergency session from NG-RAN (see TS 23.273 [42], clause 6.10.3)
- Completion of a deferred location for the UE available event or activation of deferred location for periodic location, area event triggered location or motion event triggered location (see TS 23.273 [42], clause 6.3.1)

The EventNotify service operation notifies the NF Service Consumer (i.e. GMLC) about the UE location related event information related to regulatory services e.g. the initiation, handover or termination of an emergency session. The notification is delivered to:

- the callback URI registered in the NRF, if the GMLC registered to the NRF with notification endpoints for location notifications (see clauses 6.1.6.2.4 and 6.1.6.3.4 of TS 29.510 [29]); or
- GMLC URI locally provisioned in the AMF.

The EventNotify service operation notifies the NF Service Consumer (i.e. GMLC) about the UE location related event information related to deferred location request, i.e. the activation of deferred location request or the delivery of event reports. The notification is delivered to:

- the callback URI received from the GMLC during an earlier ProvidePositioningInfo service operation;

NOTE: During a handover procedure, both the source AMF and the target AMF can invoke the EventNotify service operation, based on the local configuration.

The operation is invoked by issuing a POST request to the callback URI of the NF Service Consumer (See clause 6.4.5.2.2). See also figure 5.5.2.3.1-1.

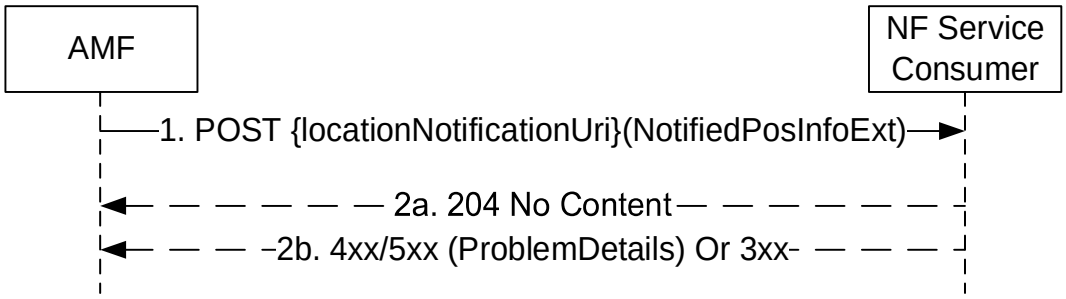


Figure 5.5.2.3.1-1: UE Location Notification

1. The AMF shall send a POST request to the callback URI provided by the NF service consumer determined as described above. The request body shall include the type of location related event and UE Identification (SUPI or PEI), and may include the GPSI, Geodetic Location, Local Location, Civic Location, MSC server identity, the Position methods used or a serving LMF identification for activation of periodic or triggered location. During deferred periodic location procedure, the nrppaPeriodicInd with the value true shall also be included if the LMF has indicated that the Periodic Location Estimates are generated based on NRPPa Periodic Measurement.

2a. On success, "204 No content" shall be returned by the NF Service Consumer.

2b. On failure or redirection, the appropriate HTTP status code (e.g. "403 Forbidden") indicating the error shall be returned and appropriate additional error information should be returned.

5.5.2.4 ProvideLocationInfo

5.5.2.4.1 General

The ProvideLocationInfo service operation allows an NF Service Consumer (e.g. UDM) to request the Network Provided Location Information (NPLI) of a target UE.

The NF Service Consumer shall invoke the service operation by sending POST request to the URI of the "provide-loc-info" custom operation on the "Individual UE Context" resource (see clause 6.4.3.2.4.3), as shown in figure 5.5.2.4.1-1.

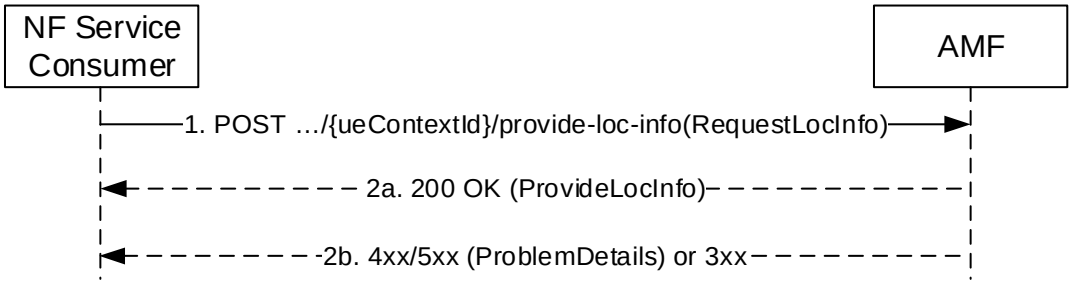


Figure 5.5.2.4.1-1: NF Service Consumer requests the Location Information of the UE

1. The NF Service Consumer shall send a POST request to the resource URI of "provide-loc-info" custom operation of the "Individual UE context" resource on the AMF. The content of the POST request shall contain a "requestLocInfo" data structure indicating the desired type of location information.

   If the NF Service Consumer desires the current location information of the target UE, it shall set "reqCurrentLoc" attribute to "true".

2a. On success, "200 OK" response shall be returned. The content of the response shall contain a "ProvideLocInfo" data structure including the Network Provide Location Information (NPLI) of the target UE.

   If "reqCurrentLoc" attribute is set to "true" and the UE is in RM-REGISTERED and CM-IDLE state over 3GPP access, the AMF shall initiate a paging procedure to the UE. If the paging procedure is successful, the AMF shall return the current location information and set "currentLoc" attribute to "true" in the response; if the UE does not respond to the paging, the AMF shall provide the last known location and set "currentLoc" attribute to "false" in the response.

   If "reqCurrentLoc" attribute is set to "true" and the UE is in RM-REGISTERED and CM-CONNECTED state over 3GPP access, the AMF shall follow NG-RAN Location reporting procedure, as specified in clause 4.10 of TS 23.502 [3], to trigger a single standalone report by setting "direct" event type in Location Reporting Control message. If NG-RAN reports current location of the UE, the AMF shall set "currentLoc" attribute to "true" in the response; if NG-RAN reports last known location of the UE with timestamp, the AMF shall set "currentLoc" attribute to "false" in the response.

   If the UE is in RM-REGISTERED over non-3GPP access, the AMF shall include the latest non-3GPP access location information.

2b. On failure or redirection, one of the HTTP status code listed in table 6.4.3.2.4.3.2-2 shall be returned. For a 4xx/5xx response, the message body shall contain a ProblemDetails structure with the "cause" attribute set to one of the application error listed in table 6.4.3.2.4.3.2-2.

5.5.2.5 CancelLocation

5.5.2.5.1 General

This service operation is used in the following procedure:

- Cancellation of Reporting of Location Events by an AF or External LCS Client (see TS 23.273 [42], clause 6.3.3)

The CancelLocation service operation shall be invoked by the NF Service Consumer (e.g. GMLC) to cancel reporting periodic or events triggered location.

The NF Service Consumer shall invoke the service operation by sending a POST request to the URI of the "cancel-pos-info" custom operation on the "Individual UE Context" resource (See clause 6.4.3.2.4.4). See also figure 5.5.2.5.1-1.

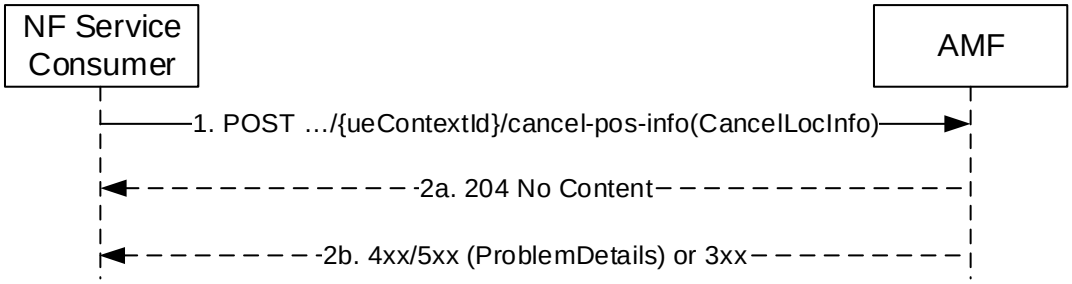


Figure 5.5.2.5.1-1: Cancellation of reporting periodic or events triggered location of the UE

1. The NF Service Consumer shall send a POST request to the resource URI of "cancel-pos-info" custom operation of the "Individual UE context" resource of the AMF. The content of the POST request shall contain a "CancelLocInfo" data structure indicating the desired cancellation of reporting periodic or events triggered location of the UE.

2a. On success, AMF responds with "204 No Content". If the nrppaPeriodicInd IE with the value true is received, the AMF shall skip the cancel location procedures towards the UE.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.4.3.2.4.4-2 shall be returned. For a 4xx/5xx response, the message body shall contain a ProblemDetails structure with the "cause" attribute set to one of the application errors.

5.6 Namf_MBSBroadcast Service

5.6.1 Service Description

This service enables the NF Service Consumer (e.g. MB-SMF) to create, update or release a broadcast MBS session context in the AMF and to be notified about status change of the MBS broadcast context.

5.6.2 Service Operations

5.6.2.1 Introduction

The Namf_MBSBroadcast service supports following service operations:

- ContextCreate
- ContextUpdate
- ContextRelease
- ContextStatusNotify

5.6.2.2 ContextCreate

The ContextCreate service operation shall be used by the NF Service Consumer (e.g. MB-SMF) to request the AMF to create a broadcast MBS session context.

NOTE: For a location dependent MBS service, one single ContextCreate service operation is performed per MBS session (for a given AMF).

It is used in the following procedures:

- MBS Session Start for Broadcast (see clause 7.3.1 and clause 7.3.1a of TS 23.247 [55]);
- MBS Session Update for Broadcast (see clause 7.3.3 of TS 23.247 [55]);
- Support for Local Broadcast Service (see clause 7.3.4 of TS 23.247 [55]).

There shall be only one broadcast MBS session context per MBS session, or per MBS session and Area Session ID for an MBS session with Location dependent Broadcast service.

The NF Service Consumer (e.g. MB-SMF) shall create a broadcast MBS session context by using the HTTP POST method as shown in Figure 5.6.2.2-1.

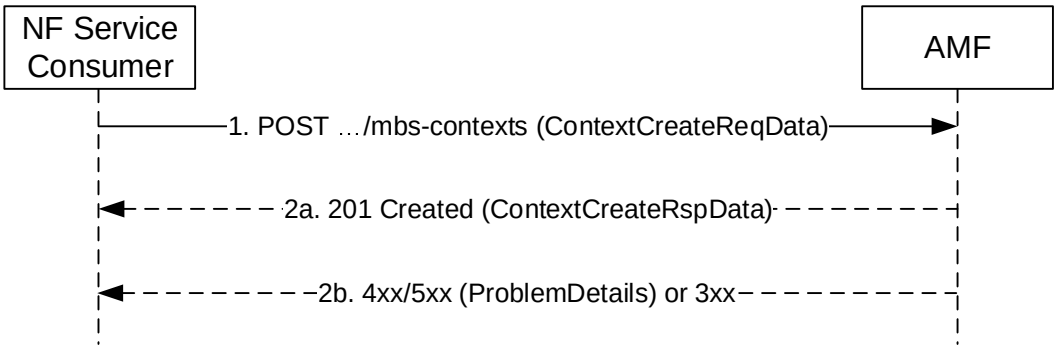


Figure 5.6.2.2-1: Broadcast MBS session context creation

1. The NF Service Consumer shall send a POST request targeting the Broadcast MBS session contexts collection resource of the AMF. The content of the POST request shall contain the following information:

   - MBS Session ID (i.e. TMGI, or TMGI and NID for an MBS session in an SNPN);
   - list of Area Session ID and related MBS service area, for a Location dependent broadcast MBS service;
   - MBS service area, for a Local broadcast MBS session;
   - N2 MBS Session Management container (see MBS Session Setup or Modification Request Transfer IE in TS 38.413 [12]);
   - Notification URI where to be notified about the status change of the broadcast MBS session context; and
   - SNSSAI.

   The NF Service Consumer may also include the maxResponseTime IE in the request to indicate the maximum response time to receive information about the completion of the Broadcast MBS session establishment.

   The NF Service Consumer may also include the MB-SMF instance ID and MB-SMF service instance ID to enable the AMF subscribing to the MB-SMF status notifications.

   The NF Service Consumer may also include the MBS associated session ID to enable NG-RAN to identify the multiple MBS sessions delivering the same content when AF creates multiple broadcast MBS Sessions via different Core Networks to deliver the same content.

2a. On success, "201 Created" shall be returned. The AMF should respond success when it receives the first successful response from the NG-RAN(s). The 201 Created response shall contain MBS session identifier and may contain one or more N2 MBS Session Management containers, if additional information (e.g. MBS Session Setup or Modification Response Transfer IE or MBS Session Setup or Modification Failure Transfer IE in TS 38.413 [12]) needs to be transferred to the MB-SMF. If the AMF received the NG-RAN responses from all involved NG-RAN(s), e.g. if the broadcast MBS session involves only one NG-RAN, the AMF shall include an indication of completion of the operation in all NG-RANs in the 201 Created response.

   Upon receipt of subsequent responses from other NG-RANs after sending the 201 Created response, if additional information (e.g. MBS Session Setup or Modification Response Transfer IE or MBS Session Setup or Modification Failure Transfer IE in TS 38.413 [12]) needs to be transferred to the MB-SMF, the AMF shall

transfer such information by sending one or more Namf_MBSBroadcast_ContextStatusNotify requests to the MB-SMF. A Namf_MBSBroadcast_ContextStatusNotify request may include a list of N2 MBS Session Management containers received from different NG-RANs. When the AMF receives the response from all NG-RANs, the AMF shall include an indication of the completion of the operation in the Namf_MBSBroadcast_ContextStatusNotify request.

If the AMF does not receive responses from all NG-RAN nodes before the maximum response time elapses since the reception of the Namf_MBSBroadcast_ContextCreate Request, then the AMF should send one Namf_MBSBroadcast_ContextStatusNotify request indicating the incompletion of the Broadcast MBS session establishment.

For each N2 MBS Session Management container sent towards the MB-SMF, the AMF shall insert the identifier of the NG-RAN node that generated it in the corresponding entry of the n2MbsSmInfoList attribute.

The AMF may send one or more Namf_MBSBroadcast_ContextStatusNotify request including an operationEvents attribute to report the MB-SMF about failure to reach one or more NG-RANs.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.5.3.2.3.1-3 shall be returned. For a 4xx/5xx response, the message body may contain a ProblemDetails structure with the "cause" attribute set to one of the application errors listed in Table 6.5.3.2.3.1-3.

5.6.2.3 ContextUpdate

The ContextUpdate service operation shall be used by the NF Service Consumer (e.g. MB-SMF) to request the AMF to update a broadcast MBS session context.

It is used in the following procedures:

- MBS Session Update for Broadcast (see clause 7.3.3 of TS 23.247 [55]).
- Broadcast MBS session restoration by MB-SMF (see clause 8.3.2.3 of TS 23.527 [33].
- Selecting an alternative AMF for a Broadcast MBS Session at AMF failure (see clause 8.3.2.4 of TS 23.527 [33]).

The NF Service Consumer (e.g. MB-SMF) shall update a broadcast MBS session context by using the HTTP POST method as shown in Figure 5.6.2.3-1.

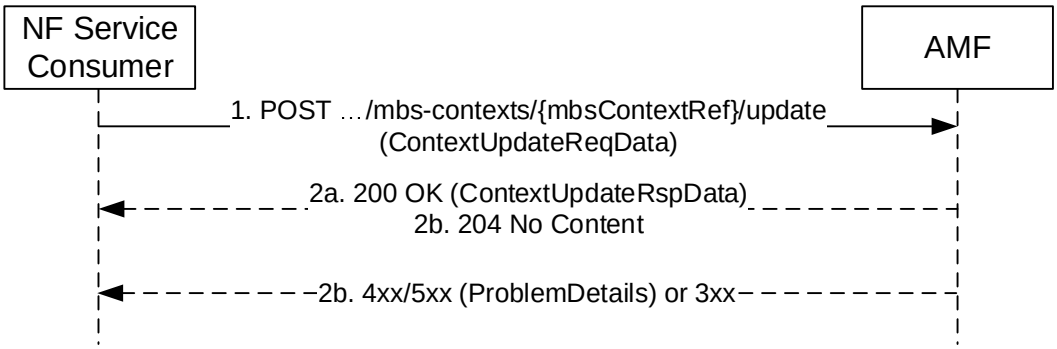


Figure 5.6.2.3-1: Broadcast MBS session context update

1. The NF Service Consumer shall send a POST request targeting the individual Broadcast MBS session context resource to be updated in the AMF. The content of the POST request may contain the following information:
   - N2 MBS Session Management container (see MBS Session Setup or Modification Request Transfer IE in TS 38.413 [12]);
   - Notification URI, if the NF Service Consumer wishes to modify the notification URI where to be notified about the status change of the broadcast MBS session context;
   - updated MBS service area, for a Local broadcast MBS session;

- updated list of Area Session ID and related MBS service area, for a Location dependent broadcast MBS session.

- the n2MbsInfoChangeInd IE set to "true" or "false" to indicate to the AMF whether the information within the N2 MBS Session Management container has changed or not for the MBS session

The NF Service Consumer may also include the maxResponseTime IE in the request to indicate the maximum response time to receive information about the completion of the Broadcast MBS session update.

During a broadcast MBS session restoration procedure for an NG-RAN failure with restart, the MB-SMF may include one or more ranIds attibutes to request the AMF to setup the Broadcast MBS session in a list of NG-RANs as identified by the NG-RAN ID(s), as specified in clause 8.3.2.3 of TS 23.527 [33].

During a restoration procedure upon an AMF failure without restart, for an AMF deployed in an AMF set, the MB-SMF may set the noNgapSignallingInd IE to "true" when the MB-SMF detects the original AMF has failed and then selects an alternative AMF to take over the MBS session but without a need to trigger any NGAP signalling towards NG-RANs, as specified in clause 8.3.2.4 of TS 23.527 [33].

2a. On success, "200 OK" shall be returned if additional information needs to be returned in the response. The 200 OK response may contain one or more N2 MBS Session Management containers, if such information (e.g. MBS Session Setup or Modification Response Transfer IE, MBS Session Setup or Modification Failure Transfer IE or MBS Session Release Response Transfer IE in TS 38.413 [12]) needs to be transferred to the MB-SMF. If the AMF received the NG-RAN responses from all involved NG-RAN(s), the AMF shall include an indication of completion of the operation in all NG-RANs.

2b. On success, "204 No Content" shall be returned if no additional information needs to be returned in the response.

In both 2a and 2b cases, upon receipt of subsequent responses from other NG-RANs after sending the 200 OK response or the 204 No Content response, if additional information (e.g. MBS Session Setup or Modification Response Transfer IE MBS Session Setup or Modification Failure Transfer IE or MBS Session Release Response Transfer IE in TS 38.413 [12]) needs to be transferred to the MB-SMF, the AMF shall transfer such information by sending one or more Namf_MBSBroadcast_ContextStatusNotify requests to the MB-SMF. A Namf_MBSBroadcast_ContextStatusNotify request may include a list of N2 MBS Session Management containers received from different NG-RANs. When the AMF receives the response from all NG-RANs, the AMF shall include an indication of the completion of the operation in the Namf_MBSBroadcast_ContextStatusNotify request.

If the AMF does not receive responses from all NG-RAN nodes before the maximum response time elapses since the reception of the Namf_MBSBroadcast_ContextUpdate Request, then the AMF should send one Namf_MBSBroadcast_ContextStatusNotify request indicating the incompletion of the Broadcast MBS session update.

If the n2MbsInfoChangeInd IE is present in the request and set to "false", the AMF does not need to contact NG-RAN nodes unaffected by the MBS service area change.

For each N2 MBS Session Management container sent towards the MB-SMF, the AMF shall insert the identifier of the NG-RAN node that generated it in the corresponding entry of the n2MbsSmInfoList attribute.

The AMF may send one or more Namf_MBSBroadcast_ContextStatusNotify request including an operationEvents attribute to report the MB-SMF about failure to reach one or more NG-RANs.

2c. On failure or redirection, one of the HTTP status code listed in Table 6.5.3.2.4.2.2-2 shall be returned. For a 4xx/5xx response, the message body may contain a ProblemDetails structure with the "cause" attribute set to one of the application errors listed in Table 6.5.3.3.4.2.2-2.

5.6.2.4 ContextRelease

The ContextRelease service operation shall be used by the NF Service Consumer (e.g. MB-SMF) to request the AMF to release a broadcast MBS session context.

It is used in the following procedures:

- MBS Session Release for Broadcast (see clause 7.3.2 and clause 7.3.2a of TS 23.247 [55]);

- MBS Session Update for Broadcast (see clause 7.3.3 of TS 23.247 [55]).

The NF Service Consumer (e.g. MB-SMF) shall release a broadcast MBS session context by using the HTTP DELETE method as shown in Figure 5.6.2.4-1.

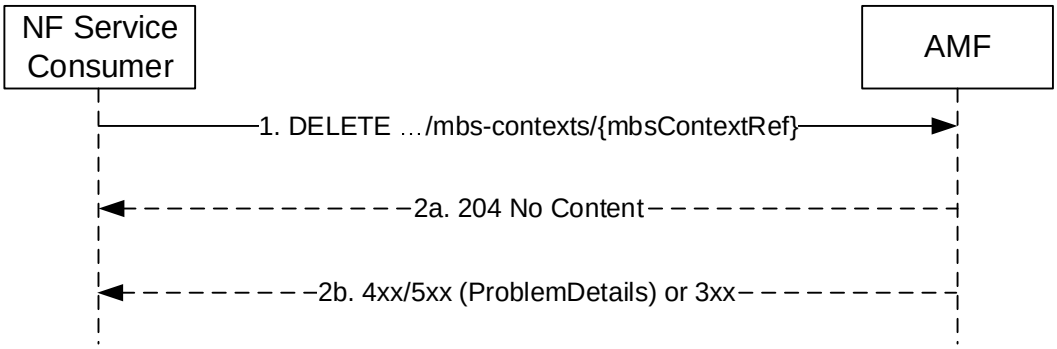


Figure 5.6.2.4-1: Broadcast MBS session context release

1. The NF Service Consumer shall send a DELETE request targeting the individual Broadcast MBS session context resource to be released in the AMF.

2a. On success, "204 No Content" shall be returned.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.5.3.3.3.1-3 shall be returned. For a 4xx/5xx response, the message body may contain a ProblemDetails structure with the "cause" attribute set to one of the application errors listed in Table 6.5.3.3.3.1-3.

The AMF may send one or more Namf_MBSBroadcast_ContextStatusNotify request including an operationEvents attribute to report the MB-SMF about failure to reach one or more NG-RANs.

5.6.2.5 ContextStatusNotify

The ContextStatusNotify service operation shall be used by the AMF to notify status change of a broadcast MBS session context to the NF Service Consumer (e.g. MB-SMF).

It is used in the following procedures:

- MBS Session Start for Broadcast (see clause 7.3.1 of TS 23.247 [55]);
- MBS Session Update for Broadcast (see clause 7.3.3 of TS 23.247 [55]);
- Broadcast MBS Session Release Require (see clause 7.3.6 of TS 23.247 [55]).
- Broadcast MBS session restoration by MB-SMF (see clause 8.3.2.3 of TS 23.527 [33]).
- Selecting an alternative AMF for a Broadcast MBS Session at AMF failure (see clause 8.3.2.4 of TS 23.527 [33]).
- Transport change for resource sharing across broadcast MBS Sessions in network sharing (see clause 7.3.7 of TS 23.247 [55]).

The AMF shall notify status change of a broadcast MBS session context to the NF Service Consumer (e.g. MB-SMF) by using the HTTP POST method as shown in Figure 5.6.2.5-1.

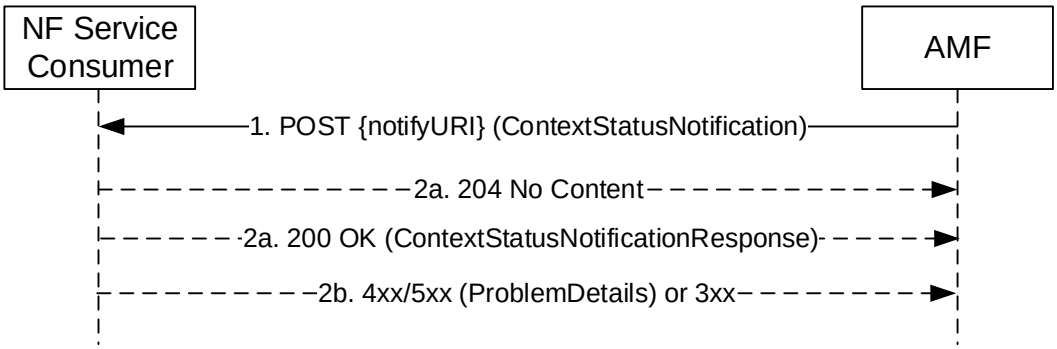


Figure 5.6.2.5-1: Broadcast MBS session context status change notification

1. The AMF shall send a POST request targeting the notification URI received from the NF Service Consumer. The content of the POST request shall contain the following information:

   - MBS Session ID (i.e. TMGI, or TMGI and NID for an MBS session in an SNPN);
   - Area Session ID, if this is a Location dependent broadcast MBS service;
   - one or more N2 MBS Session Management containers, if N2 MBS Session Management information (e.g. MBS Session Setup or Modification Response Transfer IE, MBS Session Setup or Modification Failure Transfer IE or MBS Session Release Response Transfer IE or Broadcast Session Transport Request Transfer IE in TS 38.413 [12]) has been received from one or more NG-RANs that needs to be transferred to the NF Service Consumer; for each N2 MBS Session Management container sent towards the MB-SMF, the AMF shall insert the identifier of the NG-RAN node that generated it in the corresponding entry of the n2MbsSmInfoList attribute.
   - the operationStatus IE indicating the completion of the Broadcast MBS session establishment or update, if the NF Service Consumer has requested to establish or update the Broadcast MBS session context and a response has been received from all NG-RANs; and
   - the operationStatus IE indicating the incompletion of the Broadcast MBS session establishment or update, if the NF Service Consumer has requested to establish or update the Broadcast MBS session context including a maximum response time and the AMF has not received responses from all NG-RANs before the maximum response time elapses.

   During a Broadcast MBS Session Release Require procedure (see clause 7.3.6 of TS 23.247 [55]), one or more NG-RANs may request the AMF to release the Broadcast MBS session. In this case, based on operator's policy, the AMF may:

   - report the Broadcast MBS Session release to the MB-SMF by including the operationEvent attribute in the MBS Context Status Notification request with the opEventType set to "NG_RAN_EVENT" together with a list of "ngranFailureEvent" for each NG-RAN that requested to release the Broadcast MBS Session. Upon receiving such a notification, per local policies, the MB-SMF may attempt to re-establish the MBS session after some operator configurable time in these NG-RANs by performing the Broadcast MBS session restoration by MB-SMF procedure specified in clause 8.3.2.3 of TS 23.527 [33]; or
   - attempt to re-establish the MBS session after some operator configurable time in these NG-RANs by performing the Broadcast MBS session restoration by AMF procedure specified in clause 8.3.2.2 of TS 23.527 [33].

   If all the NG-RANs serving the Broadcast MBS session requested the AMF to release the Broadcast MBS session, the AMF shall release the Broadcast MBS session context and send a notification with the releaseInd attribute set to true to report to the MB-SMF that the Broadcast MBS session (context) is released at the AMF and NG-RANs.

   The AMF may include an operationEvents attribute in the MBS Context Status Notification request to report the MB-SMF:

- a NG-RAN failure event, e.g. the NG-RAN failure with or without restart, as specified in clause 8.3.2.3 of TS 23.527 [33]);
- that a new AMF has taken over the control of the broadcast MBS session upon an AMF failure as specified in clause 8.3.2.4 of TS 23.527 [33]).

2a. On success, if the ContextStatusNotification does not contain a N2 MBS Session Management container with a Broadcast Session Transport Request Transfer IE, the NF Service Consumer shall return a "204 No Content" response.

If the ContextStatusNotification contains one or more N2 MBS Session Management containers encapsulating a Broadcast Session Transport Request Transfer IE, the MB-SMF shall return a "200 OK" with the ContextStatusNotificationResponse containing one or more N2 MBS Session Management containers encapsulating a Broadcast Session Transport Response Transfer IE or a Broadcast Session Transport Failure Transfer IE. For each N2 MBS Session Management container sent towards the AMF, the MB-SMF shall insert the identifier of the NG-RAN node to which the information in the container relates in the corresponding entry of the n2MbsSmInfoList attribute.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.5.5.2.3.1-3 shall be returned. For a 4xx/5xx response, the message body may contain a ProblemDetails attribute with the "cause" attribute set to one of the application errors listed in Table 6.5.5.2.3.1-3.

5.7 Namf_MBSCommunication Service

5.7.1 Service Description

This service enables an NF Service Consumer (e.g. MB-SMF) to request the AMF to transfer MBS multicast related N2 message towards NG-RAN(s) serving a multicast MBS session, during a multicast MBS session activation, deactivation or update.

5.7.2 Service Operations

5.7.2.1 Introduction

The Namf_MBSCommunication service supports the following service operations:

- N2MessageTransfer
- Notify

5.7.2.2 N2MessageTransfer

The N2MessageTransfer service operation shall be used by the NF Service Consumer (e.g. MB-SMF) to request the AMF to transfer an MBS related N2 message to the NG-RAN nodes serving the multicast MBS session. It is used during the following procedures:

- MBS session activation procedure (see clause 7.2.5.2 of TS 23.247 [55]);
- MBS session deactivation procedure (see clause 7.2.5.3 of TS 23.247 [55]); and
- Multicast session update procedure (see clause 7.2.6 of TS 23.247 [55]).

The NF Service Consumer shall invoke the service operation by sending a POST request to the URI of the "transfer" custom operation (see clause 6.6.3.1) of the AMF. See Figure 5.7.2.2-1.

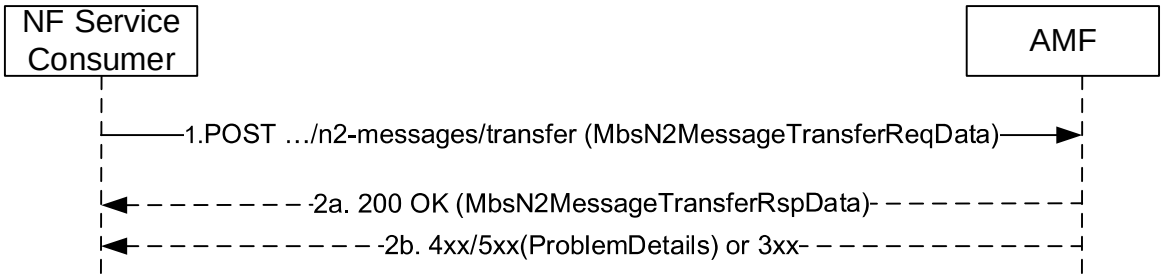


Figure 5.7.2.2-1 N2 Message Transfer for a multicast MBS session

1. The NF Service Consumer shall invoke the custom operation for N2 message transfer by sending a HTTP POST request and the request body shall carry the MbsN2MessageTransferReqData data structure which contains the N2 MBS Session Management information to be transferred. The MbsN2MessageTransferReqData shall contain:

   - MBS Session ID (i.e. TMGI, or TMGI and NID for an MBS session in an SNPN);

   and may also contain:

   - the Area Session ID, if this is a location dependent multicast MBS session; and/or
   - if the NF service consumer and the AMF support the RAN-ID-LIST feature (see clause 6.6.8):
     - the list of NG RAN node IDs towards which the MBS related N2 message is requested to be distributed;
     - a notification URI where to be notified about any failure of the MBS related N2 procedure for an NG RAN node in this list; and
     - an optional notification correlation ID to be sent within notifications.

   If the AMF supports the RAN-ID-LIST feature, the AMF shall distribute the MBS related N2 message to the list of NG-RAN nodes indicated by the MB-SMF, if any, otherwise to the list of NG-RAN nodes having established shared delivery that the AMF stores locally, if any.

NOTE: An AMF which does not support the the RAN-ID-LIST feature distributes the MBS related N2 message to the list of NG-RAN nodes having established shared delivery that the AMF stores locally.

2a. On success, the AMF shall respond with a "200 OK" status code with MbsN2MessageTransferRspData data structure. The AMF should respond success when it receives the first successful response from the NG-RAN(s).

   If the AMF supports the RAN-ID-LIST feature (see clause 6.6.8), and if the request included a list of NG RAN node IDs and a notification URI where to be notified about failures, the AMF shall report failure(s) of the N2 MBS related N2 procedure with an NG RAN node in this list by including the failureList IE in the "200 OK" response or in a subsequent Notify request towards the notification URI received in the request. See clause 8.4.1.2 of TS 23.527 [33].

2b. On failure or redirection, one of the HTTP status code listed in Table 6.6.3.1.4.2.2-2 shall be returned. For a 4xx/5xx response, the message body may contain a ProblemDetails attribute with the "cause" attribute set to one of the application errors listed in Table 6.6.3.1.4.2.2-2 if any.

5.7.2.3 Notify

The Notify service operation shall be used by the AMF to notify the NF Service Consumer about a failure of an MBS related N2 procedure with an NG RAN node (see clause 5.7.2.2).

It is used in the following procedure:

- N2 MBS session request distribution with list of NG RAN Node IDs provided by MB-SMF to AMF (see clause 8.4.1.2 of TS 23.527 [33]).

The AMF shall notify a failure of an MBS related N2 procedure with an NG RAN node to the NF Service Consumer (e.g. MB-SMF) by using the HTTP POST method as shown in Figure 5.7.2.3-1.

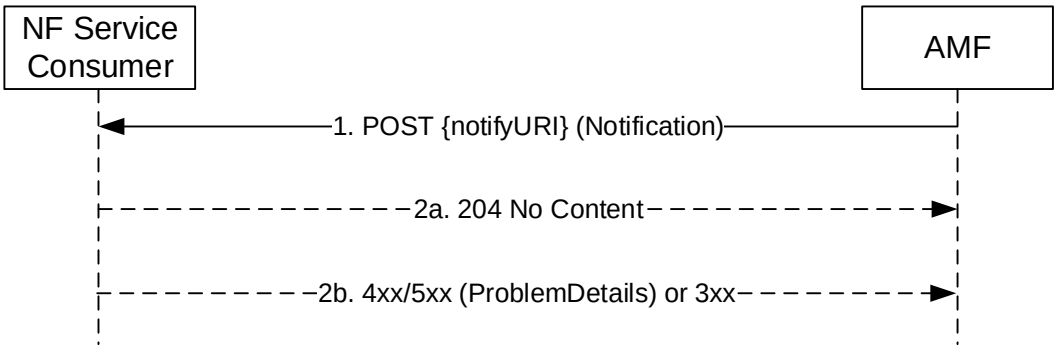


Figure 5.7.2.3-1: Notification

1. The AMF shall send a POST request targeting the notification URI received from the NF Service Consumer. The content of the POST request shall contain the following information:
   - MBS Session ID (i.e. TMGI, or TMGI and NID for an MBS session in an SNPN);
   - the Area Session ID, if this is a location dependent multicast MBS session; and
   - one or more failures including, for each failure, the related NG-RAN Node ID and failure cause.
   - a notification correlation ID if it is received in the N2MessageTransfer request.

2a. On success, the NF Service Consumer shall return a "204 No Content" response.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.6.5.2.3.1-3 shall be returned. For a 4xx/5xx response, the message body may contain a ProblemDetails attribute with the "cause" attribute set to one of the application errors listed in Table 6.6.5.2.3.1-3.

5.8 Namf_AIoT Service

5.8.1 Service Description

This service enables an NF Service Consumer (e.g., AIOTF) to:

- request the AMF to transfer AIoT data (i.e., AIoT Inventory/Command/Session Release messages) towards the NG-RAN and then forward to the AIoT devices; and
- be notified of the AIoT data related reporting from the NG-RAN or the AIoT devices.

5.8.2 Service Operations

5.8.2.1 Introduction

The service operations defined for the Namf_AIoT service are shown in table 5.8.2.1-1.

Table 5.8.2.1-1: Namf_AIoT Service Operations

Service Operation Name	Description	Initiated by
Namf_AIoT_MessageDelivery	This service operation enables the NF service consumer to request to transfer AIoT data to the NG-RAN and then forward to the AIoT devices.	AIOTF
Namf_AIoT_Notify	This service operation enables the NF service consumer to be notified of AIoT data related reporting from the NG-RAN.	AMF

5.8.2.2 Namf_AIoT_MessageDelivery

The Namf_AIoT_MessageDelivery service operation shall be used by the NF Service Consumer (i.e. AIOTF) to request the AMF to transfer AIoT NGAP Messages (i.e., AIoT inventory request, AIoT command request, AIoT session release command) to the NG-RAN. It is used during the following procedures:

- Inventory procedure (see clause 6.2.2 of TS 23.369 [63]);
- Command procedure (see clause 6.2.3 of TS 23.369 [63]);
- Message delivery to NG-RAN (see clause 6.2.4.2 of TS 23.369 [63]); and
- AIoT Session Release Procedure (see clause 6.2.5 of TS 23.369 [63]).

The NF Service Consumer shall invoke the service operation by sending an HTTP POST request to the URI of the "transfer" custom operation (see clause 6.7.4.1) of the AMF. See Figure 5.8.2.2-1.

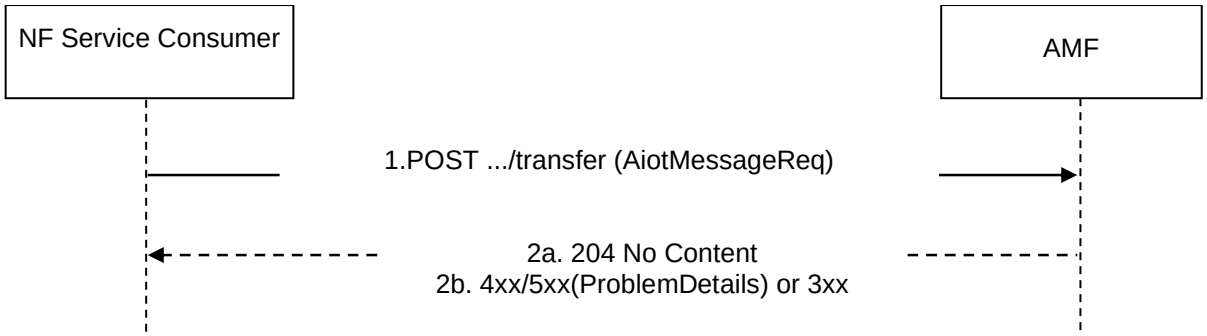


Figure 5.8.2.2-1 AIoT Message Delivery

1. The NF Service Consumer shall invoke the custom operation for AIoT message transfer by sending an HTTP POST request and the request body shall carry the AiotMessageReq data structure which contains the AIoT messages to deliver to NG-RAN.

2a. On success, the AMF shall respond with an HTTP "204 No Content" status code with an empty response body.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.7.4.2.2-2 shall be returned. For a 4xx/5xx response, the message body may contain a ProblemDetails attribute with the "cause" attribute set to one of the application errors, if any.

5.8.2.3 Namf_AIoT_Notify

If the NF service consumer invokes the Namf_AIoT_MessageDelivery service operation, the NF service consumer implicitly subscribes to receive the notification of AIoT NGAP messages from the NG-RAN.

The Namf_AIoT_Notify operation shall be used by the AMF to report the AIoT data related reporting to the NF service consumer. It is used during the following procedures:

- Inventory procedure (see clause 6.2.2 of TS 23.369 [63]);
- Command procedure (see clause 6.2.3 of TS 23.369 [63])
- Message delivery to AIOTF (see clause 6.2.4.3 of TS 23.369 [63]); and
- AIoT Session Release Procedure (see clause 6.2.5 of TS 23.369 [63]).

The AMF shall use the HTTP POST method to the AIoT Notification URI provided by the NF Service Consumer (i.e. AIOTF) via the Namf_AIoT_MessageDelivery service operation (see clause 5.8.2.2). See also Figure 5.8.2.3-1.

The notification to the NF service consumer comprises of the message type (as specified in clause 6.7.6.3.3) and the NGAP information received from NG-RAN. If the message type is "AIOT_SESSION_RELEASE_COMPLETE" or "INVENTORY_FAILURE", the AMF releases the session by removing the AIoT subscription context within AMF after sending the notification to the NF service consumer.

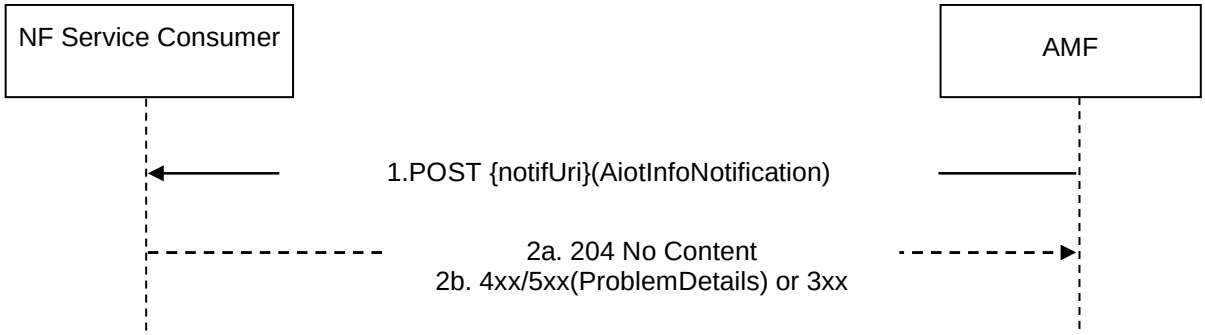


Figure 5.8.2.3-1 AIoT Notification

1. The AMF shall send an HTTP POST request targeting the AIoT Notification URI, and the content of the POST request shall contain the AiotInfoNotification data structure, with the AIoT messages received from NG-RAN.

2a. On success, an HTTP "204 No Content" status code shall be returned and the content of the HTTP POST response body shall be empty.

2b. On failure or redirection, one of the HTTP status code listed in Table 6.7.5.2.3.1-3 shall be returned. The message body shall contain a ProblemDetails object with "cause" set to one of the corresponding application errors.

6 API Definitions

6.1 Namf_Communication Service API

6.1.1 API URI

The Namf_Communication shall use the Namf_Communication API.

The API URI of the Namf_Communication API shall be:

{apiRoot}/<apiName>/<apiVersion>/

The request URI used in HTTP requests from the NF service consumer towards the NF service producer shall have the Resource URI structure defined in clause 4.4.1 of TS 29.501 [5], i.e.:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>

with the following components:

- The {apiRoot} shall be set as described in TS 29.501 [5].
- The <apiName> shall be "namf-comm".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 6.1.3.

6.1.2 Usage of HTTP

6.1.2.1 General

HTTP/2, as defined in IETF RFC 9113 [19], shall be used as specified in clause 5 of TS 29.500 [4].

HTTP/2 shall be transported as specified in clause 5.3 of TS 29.500 [4].

HTTP messages and bodies for the Namf_Communication service shall comply with the OpenAPI [23] specification contained in Annex A.

6.1.2.2 HTTP standard headers

6.1.2.2.1 General

The usage of HTTP standard headers shall be supported as specified in clause 5.2.2 of TS 29.500 [4].

6.1.2.2.2 Content type

The following content types shall be supported:

- JSON, as defined in IETF RFC 8259 [8], shall be used as content type of the HTTP bodies specified in the present specification as indicated in clause 5.4 of TS 29.500 [4].
- The Problem Details JSON Object (IETF RFC 9457 [36]). The use of the Problem Details JSON object in a HTTP response body shall be signalled by the content type "application/problem+json".

Multipart messages shall also be supported (see clause 6.1.2.4) using the content type "multipart/related", comprising:

- one JSON body part with the "application/json" content type; and
- one or more binary body parts with 3gpp vendor specific content subtypes.

The 3gpp vendor specific content subtypes defined in Table 6.1.2.2.2-1 shall be supported.

Table 6.1.2.2.2-1: 3GPP vendor specific content subtypes

content subtype	Description
vnd.3gpp.ngap	Binary encoded content, encoding NG Application Protocol (NGAP) IEs, as specified in clause 9.4 of TS 38.413 [12] (ASN.1 encoded).
vnd.3gpp.5gnas	Binary encoded content, encoding a 5GS NAS message, as specified in TS 24.501 [11].
NOTE: Using 3GPP vendor content subtypes allows to describe the nature of the opaque content (e.g. NGAP or 5GS NAS information) without having to rely on metadata in the JSON content.	

See clause 6.1.2.4 for the binary contents supported in the binary body part of multipart messages.

6.1.2.3 HTTP custom headers

6.1.2.3.1 General

In this release of this specification, no custom headers specific to the Namf_Communication service are defined. For 3GPP specific HTTP custom headers used across all service based interfaces, see clause 5.2.3 of TS 29.500 [4].

6.1.2.4 HTTP multipart messages

HTTP multipart messages shall be supported, to transfer opaque N1 Information (e.g. SM, LPP) and/or N2 Information (e.g. SM, NRPPa, PWS), in the following service operations (and HTTP messages):

- N1N2MessageTransfer Request and Response (POST);
- NonUeN2MessageTransfer Request and Response (POST);
- N1MessageNotify (POST);
- N2InfoNotify (POST);
- NonUeN2InfoNotify (POST);
- UEContextTransfer (POST);

- CreateUEContext (PUT)

HTTP multipart messages shall include one JSON body part and one or more binary body parts comprising:

- N1payload, and/or N2 payload (see clause 6.1.6.4).

The JSON body part shall be the "root" body part of the multipart message. It shall be encoded as the first body part of the multipart message. The "Start" parameter does not need to be included.

The multipart message shall include a "type" parameter (see IETF RFC 2387 [9]) specifying the media type of the root body part, i.e. "application/json".

NOTE: The "root" body part (or "root" object) is the first body part the application processes when receiving a multipart/related message, see IETF RFC 2387 [9]. The default root is the first body within the multipart/related message. The "Start" parameter indicates the root body part, e.g. when this is not the first body part in the message.

For each binary body part in a HTTP multipart message, the binary body part shall include a Content-ID header (see IETF RFC 2045 [10]), and the JSON body part shall include an attribute, defined with the RefToBinaryData type, that contains the value of the Content-ID header field of the referenced binary body part.

6.1.3 Resources

6.1.3.1 Overview

//{apiRoot}/namf-comm/<apiVersion>

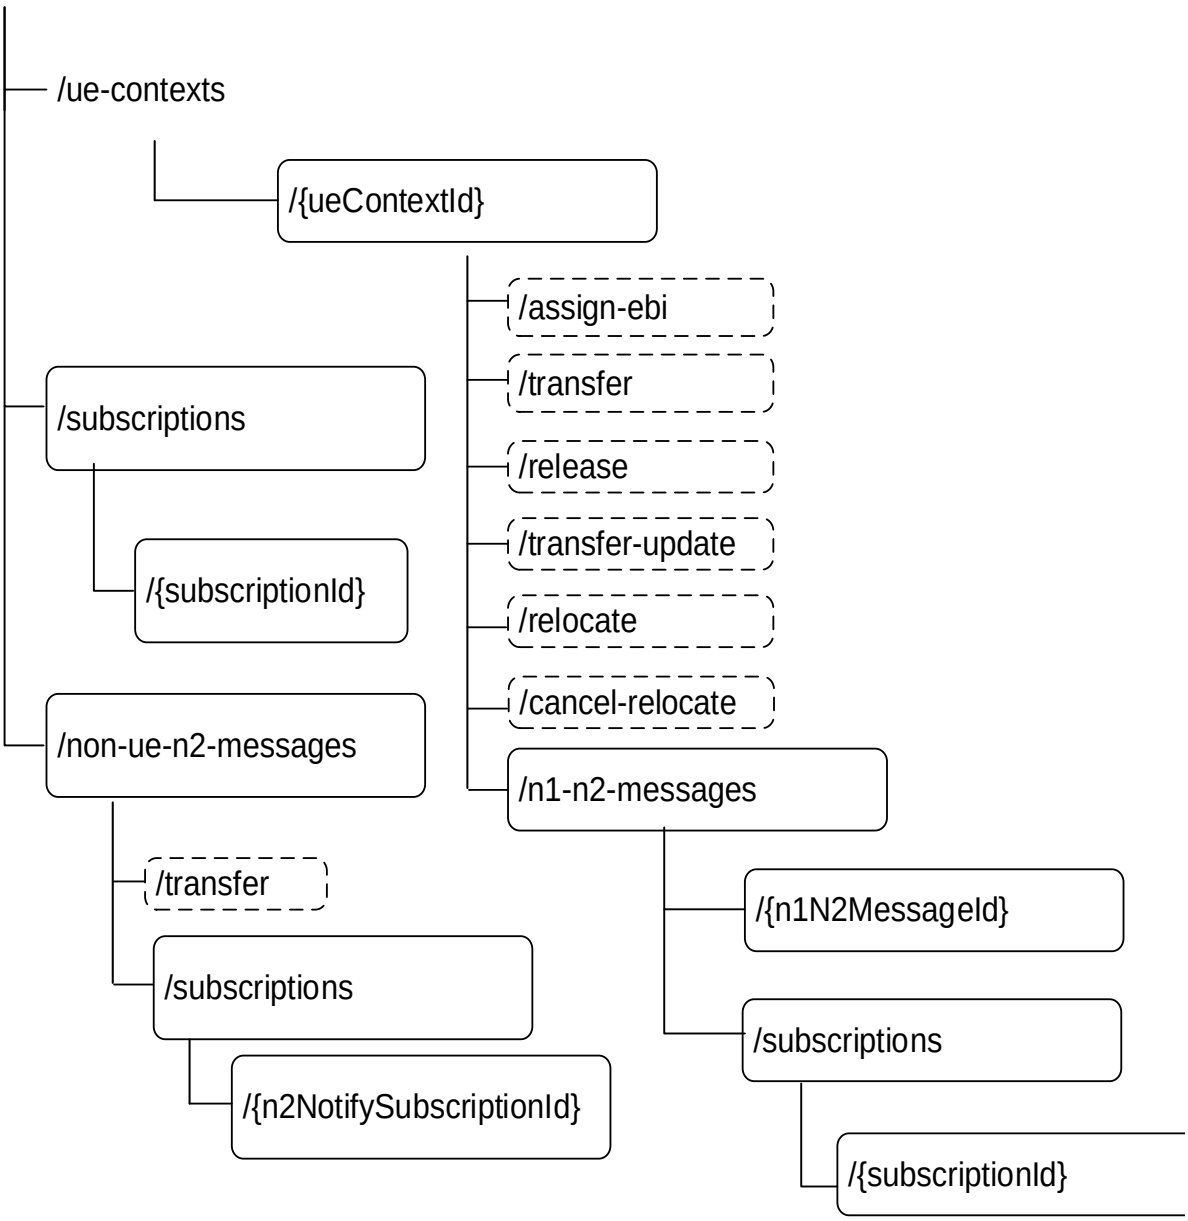


Figure 6.1.3.1-1: Resource URI structure of the Namf_Communication API

Table 6.1.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 6.1.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method or custom operation	Description (Mapped Service Operations)
Individual ueContext	/ue-contexts/{ueContextId}		
		PUT	CreateUEContext
	/ue-contexts/{ueContextId}/release	release (POST)	ReleaseUEContext
	/ue-contexts/{ueContextId}/assign-ebi	assign-ebi (POST)	EBIAssignment
	/ue-contexts/{ueContextId}/transfer	transfer (POST)	UEContextTransfer
	/ue-contexts/{ueContextId}/transfer-update	transfer-update (POST)	RegistrationStatusUpdate
	/ue-contexts/{ueContextId}/relocate	relocate (POST)	RelocateUEContext
	/ue-contexts/{ueContextId}/cancel-relocate	cancel-relocate (POST)	CancelRelocateUEContext
n1N2Message collection	/ue-contexts/{ueContextId}/n1-n2-messages	POST	N1N2MessageTransfer
N1N2 Subscriptions Collection for Individual UE Contexts	/ue-contexts/{ueContextId}/n1-n2-messages/subscriptions	POST	N1N2MessageSubscribe
N1N2 Individual Subscription	/ue-contexts/{ueContextId}/n1-n2-messages/subscriptions/{subscriptionId}	DELETE	N1N2MessageUnSubscribe
subscriptions collection	/subscriptions	POST	AMFStatusChangeSubscribe
individual subscription	/subscriptions/{subscriptionId}	PUT	AMFStatusChangeSubscribe
		DELETE	AMFStatusChangeUnSubscribe
Non UE N2Messages collection	/non-ue-n2-messages/transfer	transfer (POST)	NonUEN2MessageTransfer
Non UE N2Messages Subscriptions collection	/non-ue-n2-messages/subscriptions	POST	NonUEN2InfoSubscribe
Non UE N2 Message Notification Individual Subscription	/non-ue-n2-messages/subscriptions/{n2NotifySubscriptionId}	DELETE	NonUEN2InfoUnsubscribe

6.1.3.2 Resource: Individual ueContext

6.1.3.2.1 Description

This resource represents the an individual ueContext identified by the ueContextId.

This resource is modelled as the Document resource archetype (see clause C.1 of TS 29.501 [5]).

6.1.3.2.2 Resource Definition

Resource URI:{apiRoot}/namf-comm/<apiVersion>/ue-contexts/{ueContextId}

This resource shall support the resource URI variables defined in table 6.1.3.2.2-1.

Table 6.1.3.2.2-1: Resource URI variables for this resource

Name	Data Type	Definition
apiRoot	String	See clause 6.1.1
apiVersion	String	See clause 6.1.1.
ueContextId	String	Represents the 5G Globally Unique Temporary Identifier (See TS 23.501 [2] clause 5.9.4) Pattern: "5g-guti-[0-9]{5,6}[0-9a-fA-F]{14}" Or represents the Subscription Permanent Identifier (see TS 23.501 [2] clause 5.9.2) pattern: see pattern of type Supi in TS 29.571 [6] Or represents the Permanent Equipment Identifier (see TS 23.501 [2] clause 5.9.3) pattern: "(imei-[0-9]{15}|imeisv-[0-9]{16}|.+)"

When the ueContextId is composed by UE's SUPI or PEI, UE's PEI shall be used for the case:

- If the UE is emergency registered and the UE is UICCless;
- If the UE is emergency registered but SUPI is not authenticated.

For other cases, UE's SUPI shall be used.

6.1.3.2.3 Resource Standard Methods

6.1.3.2.3.1 PUT

This ueContextId identifies the individual ueContext resource is composed by UE's SUPI or PEI, See table 6.1.3.2.2-1.

This method shall support the URI query parameters specified in table 6.1.3.2.3.1-1.

Table 6.1.3.2.3.1-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 6.1.3.2.3.1-2 and the response data structures and response codes specified in table 6.1.3.2.3.1-3.

Table 6.1.3.2.3.1-2: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
UeContextCreate Data	M	1	Defines the UE Context to be created.

Table 6.1.3.2.3.1-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
UeContextCreatedData	M	1	201 Created	This case represents the successful creation of a new UE Context. Upon success, a response body is returned containing the newly created UE Context.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
UeContextCreateError	O	0..1	403 Forbidden	This case represents the creation of a new UE Context is not successful. The "cause" attribute may be used to indicate one of the following application errors: - HANDOVER_FAILURE
ProblemDetails	O	0..1	403 Forbidden	This error shall only be returned by an SCP or a SEPP for errors they originate.
NOTE 1: The mandatory HTTP error status code for the PUT method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.1.3.2.3.1-4: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/namf-comm/<apiVersion>/ue-contexts/{ueContextId}
3gpp-Sbi-Producer-Id	string	C	0..1	This header shall be included when the UE Context is created in a target AMF other than the initial AMF sending the response. When included, this header shall indicate the target AMF serving the created UE Context.

Table 6.1.3.2.3.1-5: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.3.2.3.1-6: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.3.2.4 Resource Custom Operations

6.1.3.2.4.1 Overview

Table 6.1.3.2.4.1-1: Custom operations

Operation Name	Custom operation URI	Mapped HTTP method	Description
release	/ue-contexts/{ueContextId}/release	POST	Release an existing individual ueContext resource. It is used for the Release UE Context service operation.
assign-ebi	/ue-contexts/{ueContextId}/assign-ebi	POST	Assign EPS bearer ID(s) towards EPS bearer(s) mapped from QoS Flow(s), for a PDU session for the UE. It is used for EBIAssignment service operation.
transfer	/ue-contexts/{ueContextId}/transfer	POST	Transfer an existing individual ueContext resource from old AMF to new AMF. It is used for the UEContextTransfer service operation.
transfer-update	/ue-contexts/{ueContextId}/transfer-update	POST	Update the source AMF about the status of UE registration at the target AMF. It is used for the RegistrationStatusUpdate service operation.
relocate	/ue-contexts/{ueContextId}/relocate	POST	Relocate an existing individual ueContext resource. It is used for the RelocateUEContext service operation.
relocate	/ue-contexts/{ueContextId}/cancel-relocate	POST	Cancel a UE Context Relocation. It is used for the CancelRelocateUEContext service operation.

6.1.3.2.4.2 Operation: release (POST)

6.1.3.2.4.2.1 Description

This ueContextId identifies the individual ueContext resource is composed by UE's SUPI or PEI, See table 6.1.3.2.2-1.

6.1.3.2.4.2.2 Operation Definition

This operation shall support the request data structures specified in table 6.1.3.2.4.2.2-1 and the response data structure and response codes specified in table 6.1.3.2.4.2.2-2.

Table 6.1.3.2.4.2.2-1: Data structures supported by the (POST) release Request Body on this resource

Data type	P	Cardinality	Description
UEContextRelease	M	1	The information used for releasing of the UE Context

Table 6.1.3.2.4.2.2-2: Data structures supported by the (POST) release Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	This case represents the handover is cancelled successfully.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	403 Forbidden	The "cause" attribute may be used to indicate one of the following application errors: - UNSPECIFIED - SUPI_OR_PEI_UNKNOWN See table 6.1.7.3-1 for the description of this error.
ProblemDetails	O	0..1	404 Not Found	The "cause" attribute may be used to indicate one of the following application errors: - CONTEXT_NOT_FOUND See table 6.1.7.3-1 for the description of this error.
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.1.3.2.4.2.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.3.2.4.2.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.3.2.4.3 Operation: assign-ebi (POST)

6.1.3.2.4.3.1 Description

This ueContextId identifies the individual ueContext resource is composed by UE's SUPI or PEI, see Table 6.1.3.2.2-1.

6.1.3.2.4.3.2 Operation Definition

This operation shall support the request data structures specified in table 6.1.3.2.4.3.2-1 and the response data structure and response codes specified in table 6.1.3.2.4.3.2-2.

Table 6.1.3.2.4.3.2-1: Data structures supported by the (POST) assign-ebi Request Body on this resource

Data type	P	Cardinality	Description
AssignEbiData	M	1	The information required for AMF to allocate EPS bearer ID(s) or to update the mapping of EBI and ARP for a QoS flow to which an EBI is already allocated.

Table 6.1.3.2.4.3.2-2: Data structures supported by the (POST) assign-ebi Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AssignedEbiData	M	1	200 OK	Represent successful assignment of EPS bearer ID service operation, with the assigned EBIs included, or represent successful update of the mapping of EBI and ARP for a QoS flow to which an EBI is already allocated. AMF may allocate only a subset of the requested EBIs, when not enough available EBI(s) can be allocated, e.g. when other PDU sessions with higher ARP have occupied too many EBIs. If the POST request body contained "releasedEbiList" the AMF shall release those EBI(s) and shall include the "releaseEbiList" IE in the POST response body. (NOTE 2)
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 3)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 3)
AssignEbiError	O	0..1	403 Forbidden	This represents the case when none of the requested EBI(s) can be assigned by the AMF. The "cause" attribute of the ProblemDetails shall be set to: - EBI_EXHAUSTED, if the number of EBIs allocated for the UE has already reached the maximum limit. - EBI_REJECTED_LOCAL_POLICY, if the EBI allocation is rejected due to local policies at the AMF as specified in clause 4.11.1.4.1 of TS 23.502 [3]. - EBI_REJECTED_NO_N26, if the EBI allocation was rejected when the AMF is in a serving PLMN that does not support 5GS-EPS interworking procedures with N26 interface as specified in clause 5.17.2.3.1 of TS 23.501 [2].
ProblemDetails	O	0..1	403 Forbidden	This error shall only be returned by an SCP for errors it originates.
AssignEbiError	O	0..1	409 Conflict	This represents the case when none of the requested EBI(s) can be assigned by the AMF. The "cause" attribute of the ProblemDetails shall be set to: - TEMPORARY_REJECT_REGISTRATION_ONGOING, if there is an ongoing registration procedure. - TEMPORARY_REJECT_HANDOVER_ONGOING, if there is an ongoing N2 handover procedure or an ongoing Xn handover procedure. (NOTE 2)

NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]).
NOTE 2: When receiving EBI assignment request during Xn Handover or N2 Handover, the AMF may either reject the request with the TEMPORARY_REJECT_HANDOVER_ONGOING application error in a 409 Conflict response or proceed with assigning EBIs with a 200 OK response. In the latter case, upon receipt of the 200 OK response, the SMF shall take the assigned EBIs into account in subsequent processing.
NOTE 3: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of TS 29.500 [4].

Table 6.1.3.2.4.3.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.3.2.4.3.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.3.2.4.4 Operation: transfer (POST)

6.1.3.2.4.4.1 Description

This ueContextId identifies the individual ueContext resource is composed by UE's 5G-GUTI or SUPI, see Table 6.1.3.2.2-1.

6.1.3.2.4.4.2 Operation Definition

This operation shall support the request data structures specified in table 6.1.3.2.4.4.2-1 and the response data structure and response codes specified in table 6.1.3.2.4.4.2-2.

Table 6.1.3.2.4.4.2-1: Data structures supported by the (POST) transfer Request Body on this resource

Data type	P	Cardinality	Description
UeContextTransferReqData	M	1	Represents to start transferring of an individual ueContext resource from old AMF to new AMF.

Table 6.1.3.2.4.4.2-2: Data structures supported by the (POST) transfer Response Body on this resource

Data type	P	Cardinality	Response codes	Description
UeContextTransferRspData	M	1	200 OK	Indicates the transferring of the individual ueContext resource is started successfully.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	403 Forbidden	Indicates that AMF can understand the request but cannot fulfil the request due to errors. If the integrity check of the included complete registration message fails at the source AMF the "cause" attribute is set to: - INTEGRITY_CHECK_FAIL. See table 6.1.7.3-1 for the description of these errors.
ProblemDetails	O	0..1	404 Not Found	If the AMF does not have the requested UE context, the AMF shall return this status code and the "cause" attribute is set to: - CONTEXT_NOT_FOUND See table 6.1.7.3-1 for the description of these errors.
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.1.3.2.4.4.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.3.2.4.4.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.3.2.4.5 Operation: transfer-update (POST)

6.1.3.2.4.5.1 Description

This ueContextId identifies the individual ueContext resource is composed by UE's 5G-GUTI, see Table 6.1.3.2.2-1.

6.1.3.2.4.5.2 Operation Definition

This operation shall support the request data structures specified in table 6.1.3.2.4.5.2-1 and the response data structure and response codes specified in table 6.1.3.2.4.5.2-2.

Table 6.1.3.2.4.5.2-1: Data structures supported by the (POST) transfer-update Request Body on this resource

Data type	P	Cardinality	Description
UeRegStatusUpdateReqData	M	1	Represents to the update of status on the transferring of an individual ueContext resource from old AMF to new AMF.

Table 6.1.3.2.4.5.2-2: Data structures supported by the (POST) transfer-update Response Body on this resource

Data type	P	Cardinality	Response codes	Description
UeRegStatusUpdateRspData	M	1	200 OK	Indicates the update of UE context transfer status is successful at the source AMF.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	403 Forbidden	Indicates that AMF can understand the request but cannot fulfil the request due to errors.
ProblemDetails	O	0..1	404 Not Found	If the AMF does not have the requested UE context, the AMF shall return this status code and the "cause" attribute is set to: - CONTEXT_NOT_FOUND
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.1.3.2.4.5.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.3.2.4.5.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.3.2.4.6 Operation: relocate (POST)

6.1.3.2.4.6.1 Description

The ueContextId identifying the individual ueContext resource is composed by UE's SUPI or PEI, see Table 6.1.3.2.2-1.

6.1.3.2.4.6.2 Operation Definition

This operation shall support the request data structures specified in table 6.1.3.2.4.6.2-1 and the response data structure and response codes specified in table 6.1.3.2.4.5.2-2.

Table 6.1.3.2.4.6.2-1: Data structures supported by the (POST) relocate Request Body on this resource

Data type	P	Cardinality	Description
UeContextRelocateData	M	1	Defines the UE Context to be relocated to a new AMF.

Table 6.1.3.2.4.6.2-2: Data structures supported by the (POST) relocate Response Body on this resource

Data type	P	Cardinality	Response codes	Description
UeContextRelocatedData	M	1	201 Created	This case represents the successful relocation of UE Context to a new AMF. Upon success, a response body is returned containing the newly created UE Context in new AMF.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetail	O	0..1	403 Forbidden	This case represents an unsuccessful relocation of UE Context to a new AMF. The "cause" attribute may be used to indicate one of the following application errors: - HANDOVER_FAILURE
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.1.3.2.4.6.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.3.2.4.6.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.3.2.4.7 Operation: cancel-relocate (POST)

6.1.3.2.4.7.1 Description

This ueContextId identifying the individual ueContext resource is composed by UE's SUPI or PEI, See table 6.1.3.2.2-1.

6.1.3.2.4.7.2 Operation Definition

This operation shall support the request data structures specified in table 6.1.3.2.4.7.2-1 and the response data structure and response codes specified in table 6.1.3.2.4.2.7-2.

Table 6.1.3.2.4.7.2-1: Data structures supported by the (POST) release Request Body on this resource

Data type	P	Cardinality	Description
UEContextCancelRelocateData	M	1	The information used for cancellation of UE Context Relocation.

Table 6.1.3.2.4.2.7-2: Data structures supported by the (POST) release Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	This case represents the handover is cancelled successfully.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	403 Forbidden	The "cause" attribute may be used to indicate one of the following application errors: - UNSPECIFIED - SUPI_OR_PEI_UNKNOWN See table 6.1.7.3-1 for the description of this error.
ProblemDetails	O	0..1	404 Not Found	The "cause" attribute may be used to indicate one of the following application errors: - CONTEXT_NOT_FOUND See table 6.1.7.3-1 for the description of this error.
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.1.3.2.4.2.7-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. v For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.3.2.4.2.7-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.3.3 Resource: N1N2 Subscriptions Collection for Individual UE Contexts

6.1.3.3.1 Description

This resource represents the collection under an individual UE context for storing the subscriptions for notifications of UE specific N1 and N2 message types. This resource is modelled as the Collection resource archetype (see clause C.2 of TS 29.501 [5]).

6.1.3.3.2 Resource Definition

Resource URI: **{apiRoot}/namf-comm/<apiVersion>/{ueContextId}/n1-n2-messages/subscriptions**

This resource shall support the resource URI variables defined in table 6.1.3.3.2-1.

Table 6.1.3.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.1.1
apiVersion	string	See clause 6.1.1.
ueContextId	string	Represents the Subscription Permanent Identifier (see TS 23.501 [2] clause 5.9.2) pattern: see pattern of type Supi in TS 29.571 [6] Or represents the Permanent Equipment Identifier (see TS 23.501 [2] clause 5.9.3) pattern: "(imei-[0-9]{15}|imeisv-[0-9]{16}|.+)"

When the ueContextId is composed by UE's SUPI or PEI, UE's PEI shall be used for the case:

- If the UE is emergency registered and the UE is UICCless;
- If the UE is emergency registered but SUPI is not authenticated.

For other cases, UE's SUPI shall be used.

6.1.3.3.3 Resource Standard Methods

6.1.3.3.3.1 POST

This method creates an individual N1/N2 information subscription resource for UE related N1/N2 information. This method is used by NF Service Consumers (e.g. PCF) to subscribe for notifications about UE related N1/N2 Information.

This method shall support the request data structures specified in table 6.1.3.3.3.1-2 and the response data structures and response codes specified in table 6.1.3.3.3.1-3.

Table 6.1.3.3.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
UeN1N2InfoSubscriptionCreateData	C	0..1	Representation of the subscription for N1 and/or N2 information notification. It shall contain the information regarding N1 and/or N2 information to be notified and the callback URI for the respective notifications.

Table 6.1.3.3.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
UeN1N2InfoSubscriptionCreatedData	C	0..1	201 Created	This case represents the successful creation of the subscription for N1 and/or N2 information notification. Upon success, a response body is returned containing the representation describing the status of the request. The Location header shall contain the location (URI) of the created subscription resource.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.1.3.3.3.1-4: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/namf-comm/<apiVersion>/ue-contexts/{ueContextId}/n1-n2-messages/subscriptions/{subscriptionId}

Table 6.1.3.3.3.1-5: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.3.3.3.1-6: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.3.3.4 Resource Custom Operations

There are no custom operations supported on this resource.

6.1.3.4 Resource: N1N2 Individual Subscription

6.1.3.4.1 Description

This resource represents the individual subscription for the subscription for notifications of UE specific N1 and N2 message types.

This resource is modelled as the Document resource archetype (see clause C.1 of TS 29.501 [5]).

6.1.3.4.2 Resource Definition

Resource URI: **{apiRoot}/namf-comm/<apiVersion>/{ueContextId}/n1-n2-messages/subscriptions/{subscriptionId}**

This resource shall support the resource URI variables defined in table 6.1.3.4.2-1.

Table 6.1.3.4.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.1.1
apiVersion	string	See clause 6.1.1.
ueContextId	string	Represents the Subscription Permanent Identifier (see TS 23.501 [2] clause 5.9.2) pattern: see pattern of type Supi in TS 29.571 [6] Or represents the Permanent Equipment Identifier (see TS 23.501 [2] clause 5.9.3) pattern: "(imei-[0-9]{15}|imeisv-[0-9]{16}|.+)"
subscriptionId	string	Represents the individual subscription to the UE specific N1/N2 message notification.

When the ueContextId is composed by UE's SUPI or PEI, UE's PEI shall be used for the case:

- If the UE is emergency registered and the UE is UICCless;
- If the UE is emergency registered but SUPI is not authenticated.

For other cases, UE's SUPI shall be used.

6.1.3.4.3 Resource Standard Methods

6.1.3.4.3.1 DELETE

This method deletes an individual N1/N2 message notification subscription resource for an individual UE. This method is used by NF Service Consumers (e.g. PCF) to unsubscribe for notifications about UE related N1/N2 information.

This method shall support the request data structures specified in table 6.1.3.4.3.1-2 and the response data structures and response codes specified in table 6.1.3.4.3.1-3.

Table 6.1.3.4.3.1-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 6.1.3.4.3.1-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	404 Not Found	If the resource corresponding to the SubscriptionId cannot be found, the AMF shall return this status code. The "cause" attribute is set to: - SUBSCRIPTION_NOT_FOUND
NOTE 1: The mandatory HTTP error status code for the DELETE method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.1.3.4.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.3.4.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.3.4.4 Resource Custom Operations

There are no custom operations supported on this resource.

6.1.3.5 Resource: N1N2 Messages Collection

6.1.3.5.1 Description

This resource represents the collection on which UE related N1 messages and N2 information transfer are initiated and the N1 information for the UE is stored temporarily until the UE is reachable. This resource is modelled with the Collection resource archetype (see clause C.2 of TS 29.501 [5]).

6.1.3.5.2 Resource Definition

Resource URI: {apiRoot}/namf-comm/<apiVersion>/ue-contexts/{ueContextId}/n1-n2-messages

This resource shall support the resource URI variables defined in table 6.1.3.5.2-1.

Table 6.1.3.5.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.1.1
apiVersion	string	See clause 6.1.1.
ueContextId	string	Represents the Subscription Permanent Identifier (see TS 23.501 [2] clause 5.9.2) pattern: see pattern of type Supi in TS 29.571 [6] Or represents the Permanent Equipment Identifier (see TS 23.501 [2] clause 5.9.3) pattern: "(imei-[0-9]{15}|imeisv-[0-9]{16})" Or represents the LCS Correlation ID (see TS 29.572 [25] clause 6.1.6.3.2) (NOTE) pattern: "(cid-.{1,255})"
NOTE: The LCS Correlation ID shall only be applied when transferring LCS related UE-Specific N1 and/or N2 messages.		

When the ueContextId is composed by UE's SUPI or UE's PEI, UE's PEI shall be used for the case:

- If the UE is emergency registered and the UE is UICCless;
- If the UE is emergency registered but SUPI is not authenticated.

For other cases, UE's SUPI shall be used.

The ueContextId composed by LCS Correlation ID may be used for transferring LCS related UE-Specific N1 and/or N2 messages, when the LCS Correlation ID was provided by the AMF to the LMF in a previous location request.

6.1.3.5.3 Resource Standard Methods

6.1.3.5.3.1 POST

This method initiates a N1 message and/or N2 message transfer at the AMF and may create a resource to store the N1 and/or N2 message as specified in clause 5.2.2.3.1.2, e.g. if asynchronous type communication is invoked or if the UE is paged.

This method shall support the request data structures specified in table 6.1.3.5.3.1-1 and the response data structures and response codes specified in table 6.1.3.5.3.1-2.

Table 6.1.3.5.3.1-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
N1N2MessageTransferReqData	M	1	This contains: - N1 message, if the NF Service Consumer requests to transfer an N1 message to the UE or; - N2 information, if the NF Service Consumer requests to transfer an N2 information to the 5G-AN or; - both, if the NF Service Consumer requests to transfer both an N1 message to the UE and an N2 information to the 5G-AN.

Table 6.1.3.5.3.1-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N1N2MessageTransferRspData	M	1	202 Accepted	This case represents the successful storage of the N1/N2 information at the AMF when asynchronous communication is invoked or when the AMF pages the UE. If the AMF pages the UE, it shall store the N1/N2 message information until the UE responds to paging. The cause included in the response body shall be set to one of the following values: - WAITING_FOR_ASYNCHRONOUS_TRANSFER - ATTEMPTING_TO_REACH_UE The HTTP response shall include a "Location" HTTP header that contains the resource URI of the created resource. In this release, the URI shall only be used by NF Service consumer to correlate the possible N1/N2 Message Transfer Failure Notification with the related N1/N2 Message Transfer Operation. The NF service consumer shall not send any service requests towards the URI received in the Location header.
N1N2MessageTransferRspData	M	1	200 OK	This represents the cases where: - the AMF is able to successfully transfer the N1/N2 message to the UE and/or the AN; - the AMF skips sending and discards the N1 message when UE is in CM-IDLE and the "skipInd" is set to "true" in the request; or - the AMF skips sending and discards the N2 message as well as the possibly included N1 message, when the UE is in CM-CONNECTED state and the UE is outside of the validity area included in the N1N2MessageTransfer Request. The cause included in the response body shall be to one of the following values: - N1_N2_TRANSFER_INITIATED - N1_MSG_NOT_TRANSFERRED - N2_MSG_NOT_TRANSFERRED
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. When the related UE context is not fully available at the target NF Service Consumer (e.g. AMF) during a planned maintenance case (e.g. AMF planned maintenance without UDSF case), the "cause" attribute shall be set to: - NF_CONSUMER_REDIRECT_ONE_TXN See table 6.1.7.3-1 for the description of these errors (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	403 Forbidden	The "cause" attribute may be used to indicate one of the following application errors: - UE_IN_NON_ALLOWED_AREA - UE_WITHOUT_N1_LPP_SUPPORT - UNSPECIFIED - SM_CONTEXT_RELOCATION_REQUIRED - INVALID_PRU See table 6.1.7.3-1 for the description of these errors.

ProblemDetails	O	0..1	404 Not Found	When the related UE is not found in the NF Service Consumer (e.g. AMF), the "cause" attribute shall be set to: - CONTEXT_NOT_FOUND See table 6.1.7.3-1 for the description of these errors.
N1N2MessageTransferError	O	0..1	409 Conflict	This represents the case where the AMF rejects the N1N2MessageTransfer request due to one of the following reasons. The cause attribute of the ProblemDetails structure shall be set to: - HIGHER_PRIORITY_REQUEST_ONGOING, if there is already an ongoing paging procedure with higher or same priority; - TEMPORARY_REJECT_REGISTRATION_ONGOING, if there is an ongoing registration procedure (see clause 4.2.3.3 of TS 23.502 [3]); - TEMPORARY_REJECT_HANDOVER_ONGOING, if there is an ongoing Xn, N2 or 5GS to EPS handover procedure (see clauses 4.9.1.2.1, 4.9.1.3.1 and 4.11.1.2.1 of TS 23.502 [3]). - TEMPORARY_REJECT_SR_ONGOING, if the AMF rejects a N1/N2 Message Transfer Request including a PDU Session Resource Setup Request Transfer IE due to an on-going Service Request procedure for the same PDU session (see clause 4.2.3.2 of TS 23.502 [3]); - UE_IN_CM_IDLE_STATE, if this is a request to transfer a N2 PDU Session Resource Modify Request or a N2 PDU Session Resource Release Command to a 5G-AN, and if the UE is in CM-IDLE state at the AMF for the Access Network Type associated to the PDU session. - MAX_ACTIVE_SESSIONS_EXCEEDED, if the RAT type is NB-IoT, and the UE already has 2 PDU Sessions with active user plane resources. - REJECTION_DUE_TO_PAGING_RESTRICTION, if Paging Restrictions information restricts the N1N2MessageTransfer request from causing paging as specified in TS 23.501 [2] clause 5.38.5 - MAX_LCS_UPP_CONN_REACHED, if LCS-UPP connection already exists between the UE (without support of multiple LCS-UPP connections capability) and one LMF and the request is to transfer "UPP-CM" N1 message to the UE from another LMF (see clause 5.2.2.3.1.2). See table 6.1.7.3-1 for the description of these errors. The AMF may additionally provide the "retryAfter" IE in order for the NF service consumer to throttle sending further N1/N2 Message Transfer request for a short period, e.g. when there is ongoing paging procedure with higher or same priority or a ongoing registration procedure.
N1N2MessageTransferError	O	0..1	504 Gateway Timeout	This represents the case where the UE is not reachable at the AMF and the AMF is unable to page the UE. The cause attribute of the ProblemDetails structure shall be set to: - UE_NOT_REACHABLE, if the UE is not reachable for paging; - UE_NOT_RESPONDING, if the UE is not responding for a previous paging. See table 6.1.7.3-1 for the description of these errors. The AMF may additionally provide the "retryAfter" IE in order for the NF service consumer to throttle sending further N1/N2 Message Transfer request for a short period, e.g. when UE is not responding to paging.

ProblemDetails	O	0..1	504 Gateway Timeout	This error shall only be returned by an SCP or a SEPP for errors they originate.
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.1.3.5.3.1-3: Headers supported by the 202 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	The URI of the resource located on the AMF to which the status of the N1N2 message transfer is held

Table 6.1.3.5.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	The URI of the resource located on an alternative service instance within the same AMF or AMF (service) set to which the request is redirected. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.3.5.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.3.6 Resource: subscriptions collection

6.1.3.6.1 Description

This resource represents a collection of subscriptions of NF service consumers to the status change of the AMF identified by the GUAMI(s).

This resource is modelled as the Collection resource archetype (see clause C.2 of TS 29.501 [5]).

6.1.3.6.2 Resource Definition

Resource URI:{apiRoot}/namf-comm/<apiVersion>/subscriptions

This resource shall support the resource URI variables defined in table 6.1.3.6.2-1.

Table 6.1.3.6.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.1.1
apiVersion	string	See clause 6.1.1.

6.1.3.6.3 Resource Standard Methods

6.1.3.6.3.1 POST

This method creates a new subscription. This method shall support the URI query parameters specified in table 6.1.3.6.3.1-1.

Table 6.1.3.6.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 6.1.3.6.3.1-2 and the response data structures and response codes specified in table 6.1.3.6.3.1-3.

Table 6.1.3.6.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
SubscriptionData	M	1	The request body contains the input parameters for the subscription. These parameters include, e.g.: - GUAMI(s) - amfStatusUri

Table 6.1.3.6.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
SubscriptionData	M	1	201 Created	This case represents the successful creation of a subscription. Upon success, the HTTP response shall include a "Location" HTTP header that contains the resource URI of the created resource.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	403 Forbidden	The "cause" attribute may be used to indicate one of the following application errors: - UNSPECIFIED See table 6.1.7.3-1 for the description of this error.
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.1.3.6.3.1-4: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/namf-comm/<apiVersion>/subscriptions/{subscriptionId}

Table 6.1.3.6.3.1-5: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.3.6.3.1-6: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.3.7 Resource: individual subscription

6.1.3.7.1 Description

This resource represents an individual subscription of a NF service consumer to the status change of the AMF identified by the GUAMI(s).

This resource is modelled as the Document resource archetype (see clause C.1 of TS 29.501 [5]).

6.1.3.7.2 Resource Definition

Resource URI: {apiRoot}/namf-comm/<apiVersion>/subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 6.1.3.7.2-1.

Table 6.1.3.7.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.1.1
apiVersion	string	See clause 6.1.1.
subscriptionId	string	Represents a specific subscription

6.1.3.7.3 Resource Standard Methods

6.1.3.7.3.1 DELETE

This method terminates an existing subscription. This method shall support the URI query parameters specified in table 6.1.3.7.3.1-1.

Table 6.1.3.4.3.1-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 6.1.3.7.3.1-2 and the response data structures and response codes specified in table 6.1.3.7.3.1-3.

Table 6.1.3.7.3.1-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 6.1.3.7.3.1-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
			204 No Content	This case represents a successful deletion of the subscription.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	404 Not Found	If the resource corresponding to the SubscriptionId cannot be found, the AMF shall return this status code. The "cause" attribute is set to: - SUBSCRIPTION_NOT_FOUND
NOTE 1: The mandatory HTTP error status code for the DELETE method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.1.3.7.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.3.7.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.3.7.3.2 PUT

This method replaces an existing subscription completely. This method shall support the URI query parameters specified in table 6.1.3.7.3.2-1.

Table 6.1.3.7.3.2-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 6.1.3.7.3.2-2 and the response data structures and response codes specified in table 6.1.3.7.3.2-3.

Table 6.1.3.7.3.2-2: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
SubscriptionData	M	1	The request body contains the input parameters for the subscription. These parameters include, e.g.: - GUAMI(s) - amfStatusUri

Table 6.1.3.7.3.2-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
SubscriptionData	M	1	200 OK	This case represents a successful replacement of the subscription.
n/a			204 No Content	Represents the events subscription modification provided by the NF Service Consumer is accepted entirely.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	403 Forbidden	This case represents the failure update of an existing subscription.
NOTE 1: The mandatory HTTP error status code for the PUT method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.1.3.7.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.3.7.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.3.8 Resource: Non UE N2 Messages Collection

6.1.3.8.1 Description

This resource represents the collection on which custom operations to transfer the N2 message towards the 5G-AN are specified. This resource is modelled with the Collection resource archetype (see clause C.2 of TS 29.501 [5]).

6.1.3.8.2 Resource Definition

Resource URI: **{apiRoot}/namf-comm/<apiVersion>/non-ue-n2-messages**

This resource shall support the resource URI variables defined in table 6.1.3.8.2-1.

Table 6.1.3.8.2-1: Resource URI variables for this resource

Name	Data Type	Definition
apiRoot	String	See clause 6.1.1
apiVersion	String	See clause 6.1.1.

6.1.3.8.3 Resource Standard Methods

There are no resource standard methods for the non-ue-n2-messages collection resource in this release of this specification.

6.1.3.8.4 Resource Custom Operations

6.1.3.8.4.1 Overview

Table 6.1.3.8.4.1-1: Custom operations

Operation Name	Custom operaration URI	Mapped HTTP method	Description
transfer	{resourceUri}/transfer	POST	Transfer the N2 message to 5G-AN.

6.1.3.8.4.2 Operation: transfer

6.1.3.8.4.2.1 Description

The {resourceUri}/transfer custom operation is used to initiate a non UE associated N2 information transfer to the identified 5G-AN nodes. This custom operation uses the HTTP POST method.

6.1.3.8.4.2.2 Operation Definition

This operation shall support the request data structures specified in table 6.1.3.8.4.2.2-1 and the response data structure and response codes specified in table 6.1.3.8.4.2.2-2.

Table 6.1.3.8.4.2.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
N2InformationTransferReqData	M	1	Representation of the data to be sent to the 5G-AN node(s) by the AMF.

Table 6.1.3.8.4.2.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N2InformationTransferRspData	M	1	200 OK	Indicates AMF has successfully initiated the transferring of N2 Information to the AN..
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
N2InformationTransferError	O	0..1	400 Bad Request	The "cause" attribute may be set to one of the errors defined in Table 5.2.7.2-1 of TS 29.500 [4].
ProblemDetails	O	0..1	400 Bad Request	This error shall only be returned by an SCP or a SEPP for errors they originate.
N2InformationTransferError	O	0..1	403 Forbidden	The "cause" attribute may be set to one of the following application errors: - UNSPECIFIED See table 6.1.7.3-1 for the description of these errors.
ProblemDetails	O	0..1	403 Forbidden	This error shall only be returned by an SCP or a SEPP for errors they originate.
N2InformationTransferError	O	0..1	404 Not Found	The "cause" attribute may be set to one of the following application errors: - CONTEXT_NOT_FOUND See table 6.1.7.3-1 for the description of these errors.
N2InformationTransferError	O	0..1	500 Internal Server Error	The "cause" attribute may be set to one of the errors defined in Table 5.2.7.2-1 of TS 29.500 [4].
ProblemDetails	O	0..1	500 Internal Server Error	This error shall only be returned by an SCP or a SEPP for errors they originate.
N2InformationTransferError	O	0..1	503 Service Unavailable	The "cause" attribute may be set to one of the errors defined in Table 5.2.7.2-1 of TS 29.500 [4].
ProblemDetails	O	0..1	503 Service Unavailable	This error shall only be returned by an SCP or a SEPP for errors they originate.
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.1.3.8.4.2.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.3.8.4.2.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.3.9 Resource: Non UE N2 Messages Subscriptions Collection

6.1.3.9.1 Description

This resource represents the collection on which individual subscriptions for non UE N2 messages from the 5G-AN are stored. This resource is modelled with the Collection resource archetype (see clause C.2 of TS 29.501 [5]).

6.1.3.9.2 Resource Definition

Resource URI: **{apiRoot}/namf-comm/<apiVersion>/non-ue-n2-messages/subscriptions**

This resource shall support the resource URI variables defined in table 6.1.3.9.2-1.

Table 6.1.3.9.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.1.1
apiVersion	string	See clause 6.1.1.

6.1.3.9.3 Resource Standard Methods

6.1.3.9.3.1 POST

This method creates an individual N2 information subscription resource for non UE related N2 information. This method is used by NF Service Consumers (e.g. LMF, CBCF/PWS-IWF) to subscribe for notifications about non UE related N2 Information from a specific 5G-AN node, or from any 5G-AN node.

This method shall support the request data structures specified in table 6.1.3.9.3.1-2 and the response data structures and response codes specified in table 6.1.3.9.3.1-3.

Table 6.1.3.9.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
NonUeN2InfoSubscriptionCreateData	M	1	Representation of the subscription for N2 information notification.

Table 6.1.3.9.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
NonUeN2InfoSubscriptionCreatedData	M	1	201 Created	This case represents the successful creation of the subscription for N2 information notification. Upon success, a response body is returned containing the representation describing the status of the request. The Location header shall carry the location (URI) of the created subscription resource.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	403 Forbidden	If the NF Service Consumer is not authorized to subscribe for non UE N2 message notifications, the AMF shall return this status code with the ProblemDetails
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.1.3.9.3.1-4: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/namf-comm/<apiVersion>/non-ue-n2-messages/subscriptions/{n2NotifySubscriptionId}

Table 6.1.3.9.3.1-5: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. Or the same URI, if a request is redirected to the same target resource via a different SCP.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.3.9.3.1-6: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. Or the same URI, if a request is redirected to the same target resource via a different SCP.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.3.9.4 Resource Custom Operations

There are no custom operations supported on this resource.

6.1.3.10 Resource: Non UE N2 Message Notification Individual Subscription

6.1.3.10.1 Description

This resource represents the individual subscription for the notifications of non UE specific N2 message types (e.g. NRPPa, PWS Notifications).

This resource is modelled with the Document resource archetype (see clause C.1 of TS 29.501 [5]).

6.1.3.10.2 Resource Definition

Resource URI: **{apiRoot}/namf-comm/<apiVersion>/non-ue-n2-messages/subscriptions/{n2NotifySubscriptionId}**

This resource shall support the resource URI variables defined in table 6.1.3.10.2-1.

Table 6.1.3.7.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.1.1
apiVersion	string	See clause 6.1.1.
n2NotifySubscriptionId	string	Represents the individual subscription to the non UE specific N2 message notification.

6.1.3.10.3 Resource Standard Methods

6.1.3.10.3.1 DELETE

This method deletes an individual N2 message notification subscription resource for non UE associated N2 information. This method is used by NF Service Consumers (e.g. LMF) to unsubscribe for notifications about non UE related N2 information.

This method shall support the request data structures specified in table 6.1.3.10.3.1-2 and the response data structures and response codes specified in table 6.1.3.10.3.1-3.

Table 6.1.3.10.3.1-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 6.1.3.10.3.1-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	404 Not Found	If the resource corresponding to the SubscriptionId cannot be found the AMF shall return this status code. The "cause" attribute is set to: - SUBSCRIPTION_NOT_FOUND
NOTE 1: The mandatory HTTP error status code for the DELETE method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.1.3.10.3.1-5: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.3.10.3.1-6: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.3.10.4 Resource Custom Operations

There are no custom operations supported on this resource.

6.1.4 Custom Operations without associated resources

There are no custom operations without associated resources supported on Namf_Communication Service.

6.1.5 Notifications

6.1.5.1 General

The notifications provided by the Namf_Communication service are specified in this clause.

Table 6.1.5.1-1: Callback overview

Notification	Resource URI	HTTP method or custom operation	Description (service operation)
AMF Status Change Notification	{amfStatusUri}	POST	
Non UE N2 Information Notification	{n2NotifyCallbackUri}	POST	
N1 Message Notification	{n1NotifyCallbackUri}	POST	
UE Specific N2 Information Notification	{n2NotifyCallbackUri}	POST	
N1N2 Transfer Failure Notification	{n1n2FailureTxfNotifURI}	POST	

6.1.5.2 AMF Status Change Notification

6.1.5.2.1 Description

If a NF service consumer (e.g. SMF) has subscribed to AMF Status Change on Namf_Communication Service, when AMF aware of a change of its own status, AMF shall create a notification including the current state, and shall deliver the notification to the call-back URI, following Subscribe/Notify mechanism defined in TS 29.501 [5].

6.1.5.2.2 Notification Definition

Call-back URI: {amfStatusUri}

Call-back URI is provided by NF Service Consumer during creation of the subscription.

6.1.5.2.3 Notification Standard Methods

6.1.5.2.3.1 POST

This method shall support the request data structures specified in table 6.1.5.2.3.1-1 and the response data structures and response codes specified in table 6.1.5.2.3.1-2.

Table 6.1.5.2.3.1-1: Data structures supported by the POST Request Body

Data type	P	Cardinality	Description
AmfStatusChangeNotification	M	1	Representation of the AMF status change notification.

Table 6.1.5.2.3.1-2: Data structures supported by the POST Response Body

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	This case represents a successful notification of the AMF status change.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	404 Not Found	When context of the notification is not found,the "cause" attribute shall be set to: - CONTEXT_NOT_FOUND
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.1.5.2.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer to which the notification should be sent. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.5.2.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer to which the notification should be sent. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.5.3 Non UE N2 Information Notification

6.1.5.3.1 Description

This resource represents the callback reference provided by the NF Service Consumer (e.g. LMF, CBCF/PWS-IWF) to receive notifications about N2 information that are not related to a UE.

6.1.5.3.2 Notification Definition

Callback URI: {n2NotifyCallbackUri}

This notification shall support the callback URI variables defined in table 6.1.5.2.2-1.

Table 6.1.5.3.2-1: Callback URI variables for this notification

Name	Definition
n2NotifyCallbackUri	Callback reference provided by the NF Service Consumer during the subscription to this notification.

6.1.5.3.3 Notification Standard Methods

6.1.5.3.3.1 POST

This method sends an N2 information notification to the NF Service Consumer (e.g. LMF, CBCF/PWS-IWF).

This method shall support the request data structures specified in table 6.1.5.3.3.1-2 and the response data structures and response codes specified in table 6.1.5.3.3.1-3.

Table 6.1.5.3.3.1-2: Data structures supported by the POST Request Body

Data type	P	Cardinality	Description
N2InformationNotification	M	1	Representation of the N2 information notification.

Table 6.1.5.3.3.1-3: Data structures supported by the POST Response Body

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	This case represents a successful notification of the N2 information to the NF service consumer.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.1.5.3.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer to which the notification should be sent. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].

Table 6.1.5.3.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer to which the notification should be sent
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.5.4 N1 Message Notification

6.1.5.4.1 Description

This resource represents the callback reference provided by the NF Service Consumer (e.g. LMF) to receive notifications about N1 message from the UE (e.g. LPP messages).

6.1.5.4.2 Notification Definition

Callback URI: { n1NotifyCallbackUri }

Callback URI is provided by the NF Service Consumer during the subscription to this notification. . The callback URI for N1 message notification may also be obtained from the NRF, if the NF Service Consumer has registered it in the NF Profile with the NRF.

6.1.5.4.3 Notification Standard Methods

6.1.5.4.3.1 POST

This method sends an N1 message notification to the NF Service Consumer (e.g. LMF).

This method shall support the request data structures specified in table 6.1.5.4.3.1-2 and the response data structures and response codes specified in table 6.1.5.4.3.1-3.

Table 6.1.5.4.3.1-2: Data structures supported by the POST Request Body

Data type	P	Cardinality	Description
N1MessageNotification	M	1	Representation of the N1 message notification.

Table 6.1.5.4.3.1-3: Data structures supported by the POST Response Body

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	This case represents a successful notification of the N1 message to the NF service consumer.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	403 Forbidden	This case represents, the NF service consumer failing to accept the processing of the notified N1 message. The detailed information shall be provided in the ProblemDetails structure.
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.1.5.4.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer to which the notification should be sent. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.5.4.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer to which the notification should be sent. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.5.5 UE Specific N2 Information Notification

6.1.5.5.1 Description

This resource represents the callback reference provided by the NF Service Consumer (e.g. LMF) to receive notifications about UE specific N2 information.

6.1.5.5.2 Notification Definition

Callback URI: {n2NotifyCallbackUri}

Callback URI is provided by the NF Service Consumer during the subscription to this notification.

6.1.5.5.3 Notification Standard Methods

6.1.5.5.3.1 POST

This method sends an N2 information notification to the NF Service Consumer (e.g. LMF).

This method shall support the request data structures specified in table 6.1.5.5.3.1-2 and the response data structures and response codes specified in table 6.1.5.5.3.1-3.

Table 6.1.5.5.3.1-2: Data structures supported by the POST Request Body

Data type	P	Cardinality	Description
N2InformationNotification	M	1	Representation of the N2 information notification.

Table 6.1.5.5.3.1-3: Data structures supported by the POST Response Body

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	This case represents a successful notification of the N2 information to the NF service consumer.
N2InfoNotificationRspData	M	1	200 OK	This case represents a successful notification of the N2 information to the NF service consumer when information needs to be returned in the response.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.1.5.5.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer to which the notification should be sent. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.5.5.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer to which the notification should be sent'. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.5.6 N1N2 Transfer Failure Notification

6.1.5.6.1 Description

This resource represents the callback reference provided by the NF Service Consumer (e.g. SMF) to receive notifications about failure to deliver N1 / N2 message.

6.1.5.6.2 Notification Definition

Callback URI: {n1n2FailureTxfNotifURI}

Callback URI is provided by the NF Service Consumer during the UE specific N1N2MessageTransfer operation (see clause 6.1.3.5.3.1.

6.1.5.6.3 Notification Standard Methods

6.1.5.6.3.1 POST

This method sends an N1/N2 message transfer failure notification to the NF Service Consumer (e.g. SMF).

This method shall support the request data structures specified in table 6.1.5.6.3.1-1 and the response data structures and response codes specified in table 6.1.5.6.3.1-3.

Table 6.1.5.6.3.1-1: Data structures supported by the POST Request Body

Data type	P	Cardinality	Description
N1N2MsgTxfrFailureNotification	M	1	Representation of the N1/N2 message transfer failure notification. The "cause" attribute shall be set to one of following cause value s (see clause 6.1.6.3.6): - UE_NOT_RESPONDING - UE_NOT_REACHABLE_FOR_SESSION - TEMPORARY_REJECT_REGISTRATION_ONGOING - TEMPORARY_REJECT_HANDOVER_ONGOING - REJECTION_DUE_TO_PAGING_RESTRICTION - AN_NOT_RESPONDING - FAILURE_CAUSE_UNSPECIFIED The AMF may additionally provide the “retryAfter” IE in order for the NF service consumer to throttle sending further N1/N2 Message Transfer request for a short period, e.g. when UE is not responding to paging.

Table 6.1.5.6.3.1-2: Data structures supported by the POST Response Body

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	This case represents a successful notification of the N1 / N2 message transfer to the NF service consumer.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.1.5.6.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer to which the notification should be sent. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.5.6.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer to which the notification should be sent. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.5.7 Void

6.1.6 Data Model

6.1.6.1 General

This clause specifies the application data model supported by the API.

Table 6.1.6.1-1 specifies the data types defined for the Namf_Communication service based interface protocol.

Table 6.1.6.1-1: Namf_Communication specific Data Types

Data type	Clause defined	Description
SubscriptionData	6.1.6.2.2	Data within an AMF Status Change Subscription request and response.
AmfStatusChangeNotification	6.1.6.2.3	Data within an AMF Status Change Notification request.
AmfStatusInfo	6.1.6.2.4	AMF Status Information
AssignEbiData	6.1.6.2.5	Data within an EBI assignment request.
AssignedEbiData	6.1.6.2.6	Data within a successful response to an EBI assignment request.
AssignEbiFailed	6.1.6.2.7	Represents failed assignment of EBI(s)
UEContextRelease	6.1.6.2.8	Data within a Release UE Context request.
N2InformationTransferReqData	6.1.6.2.9	Data within a N2 Information Transfer request containing the N2 information requested to be transferred to 5G AN.
NonUeN2InfoSubscriptionCreateData	6.1.6.2.10	Data within a create subscription requestfor non-UE specific N2 information notification.
NonUeN2InfoSubscriptionCreatedData	6.1.6.2.11	Data for the created subscription for non-UE specific N2 information notification.
UeN1N2InfoSubscriptionCreateData	6.1.6.2.12	Data within a create subscription request for UE specific N1 and/or N2 information notification.
UeN1N2InfoSubscriptionCreatedData	6.1.6.2.13	Data for the created subscription for UE specific N1 and/or N2 information notification.
N2InformationNotification	6.1.6.2.14	Data within a N2 information notification request.
N2InfoContainer	6.1.6.2.15	N2 information container.
N1MessageNotification	6.1.6.2.16	Data within a N1 message notification request.
N1MessageContainer	6.1.6.2.17	N1 Message Container.
N1N2MessageTransferReqData	6.1.6.2.18	Data within a N1/N2 message transfer request.
N1N2MessageTransferRspData	6.1.6.2.19	Data within a N1/N2 message transfer response.
RegistrationContextContainer	6.1.6.2.20	Registration Context Container used to send the UE context information, N1 message from UE, AN address etc during Registration with AMF re-allocation procedure.
AreaOfValidity	6.1.6.2.21	Area of validity information for N2 information transfer
UeContextTransferReqData	6.1.6.2.23	Data within a UE Context Transfer Request to start transferring of an individual ueContext resource from old AMF to new AMF.
UeContextTransferRspData	6.1.6.2.24	Data within a successful response to the UE Context Transfer request.
UeContext	6.1.6.2.25	Represents an individual ueContext resource
N2SmInformation	6.1.6.2.26	Represents the session management SMF related N2 information data part.
N2InfoContent	6.1.6.2.27	Represents a transparent N2 information content to be relayed by AMF.
NrppaInformation	6.1.6.2.28	Represents a NRPPa related N2 information data part.
PwsInformation	6.1.6.2.29	Represents a PWS related information data part.
N1N2MsgTxfrFailureNotification	6.1.6.2.30	Data within a N1/N2 Message Transfer Failure Notification request
N1N2MessageTransferError	6.1.6.2.31	Data within a N1/N2 Message Transfer Error response.
N1N2MsgTxfrErrDetail	6.1.6.2.32	N1/N2 Message Transfer Error Details
N2InformationTransferRspData	6.1.6.2.33	Data within a successful response to the N2 Information Transfer request to transfer N2 Information to the AN.
MmContext	6.1.6.2.34	Represents a Mobility Management Context in UE Context
SeafData	6.1.6.2.35	Represents SEAF data derived from data received from AUSF

NasSecurityMode	6.1.6.2.36	Indicates the NAS Security Mode
PduSessionContext	6.1.6.2.37	Represents a PDU Session Context in UE Context
NssaiMapping	6.1.6.2.38	Represents the mapping between a S-NSSAI in serving PLMN to a S-NSSAI in home PLMN.
UeRegStatusUpdateReqData	6.1.6.2.39	Data within a UE registration status update request to indicate a completion of transferring at a target AMF.
AssignEbiError	6.1.6.2.40	Data within a failure response to the EBI assignment request.
UeContextCreateData	6.1.6.2.41	Data within a request to create an individual ueContext resource
UeContextCreatedData	6.1.6.2.42	Data within a successful response for creating an individual ueContext resource
UeContextCreateError	6.1.6.2.43	Data within a failure response for creating a UE context
NgRanTargetId	6.1.6.2.44	Indicates a NG RAN as target of the handover
N2InformationTransferError	6.1.6.2.45	Data within a failure response for a non-UE related N2 Information Transfer.
PWSResponseData	6.1.6.2.46	Data related PWS included in a N2 Information Transfer response.
PWSErrorData	6.1.6.2.47	Data related to PWS error included in a N2 Information Transfer failure response.
NgKsi	6.1.6.2.49	Represents the ngKSI (see TS 33.501 [27])
KeyAmf	6.1.6.2.50	Represents the K_{amf} or $K'_{amf.}$ (see TS 33.501 [27]).
ExpectedUeBehavior	6.1.6.2.51	Represents the expected UE behavior (e.g. UE moving trajectory) and its validity period.
UeRegStatusUpdateRspData	6.1.6.2.52	Data within a UE registration status update response to provide the status of UE context transfer status update at a source AMF.
N2RanInformation	6.1.6.2.53	Represents the RAN related N2 information data part.
N2InfoNotificationRspData	6.1.6.2.54	Data within a N2 information notification response.
SmallDataRateStatusInfo	6.1.6.2.55	Represents the small data rate status
SmfChangeInfo	6.1.6.2.56	SMF change information for PDU session(s)
V2xContext	6.1.6.2.57	Represents the V2X services related parameters
ImmediateMdtConf	6.1.6.2.58	Immediate MDT Configuration
V2xInformation	6.1.6.2.59	V2X related N2 information
EpsNasSecurityMode	6.1.6.2.60	Indicates the EPS NAS Security Mode
UeContextRelocateData	6.1.6.2.61	Data within a Relocate UE Context request
UeContextRelocatedData	6.1.6.2.62	Data within a Relocate UE Context
EcRestrictionDataWb	6.1.6.2.64	Enhanced Coverage Restriction Data for WB-N1 mode.
ExtAmfEventSubscription	6.1.6.2.65	AMF event subscription extended with additional information received for the subscription
AmfEventSubscriptionAddInfo	6.1.6.2.66	Additional information received for an AMF event subscription, e.g. binding indications.
UeContextCancelRelocateData	6.1.6.2.67	Data structure used for cancellation of UE Context Relocation.
UeDifferentiationInfo	6.1.6.2.68	Represents the UE Differentiation Information and its validity time.
CeModeBInd	6.1.6.2.69	CE-mode-B Support Indicator
LteMInd	6.1.6.2.70	LTE-M Indication
NpnAccessInfo	6.1.6.2.71	NPN Access Information
ProseContext	6.1.6.2.72	Represents the ProSE services related parameters
AnalyticsSubscription	6.1.6.2.73	Analytics subscriptions created in the NWDAF.
NwdafSubscription	6.1.6.2.74	Individual NWDAF subscription identified by the subscription Id.
UpdpSubscriptionData	6.1.6.2.75	UE policy delivery related N1 message notification subscription data
ProSeInformation	6.1.6.2.76	5G ProSe related N2 information.

ReleaseSessionInfo	6.1.6.2.77	PDU session Id(s) and the cause for triggering the release
AreaOfInterestEventState	6.1.6.2.78	Area Of Interest Event State in old AMF
TssInformation	6.1.6.2.79	TSS related N2 information
AmPolicyInfoContainer	6.1.6.2.80	AM Policy Information Container
RslpInformation	6.1.6.2.81	Ranging/SL positioning related N2 information
A2xContext	6.1.6.2.82	Represents the A2X services related parameters
A2xInformation	6.1.6.2.83	A2X related N2 information
LcsUpContext	6.1.6.2.84	Represents the LCS UP related parameters
DeregInactTimerInfo	6.1.6.2.85	Network Slice Deregistration Inactivity Timer Information
TssRspPerNgran	6.1.6.2.86	TSS Information from NG-RAN
SliceReplacementMapping	6.1.6.2.87	Represents the mapping between a replaced S-NSSAI in serving PLMN to its alternative S-NSSAI.
SliceDeregInactConfig	6.1.6.2.88	Deregistration inactivity configuration
NrppaRspPerNgran	6.1.6.2.89	NRPPa Information related to failed NG-RAN
EpsBearerId	6.1.6.3.2	EPS Bearer Identifier
Ppi	6.1.6.3.2	Paging Policy Indicator
NasCount	6.1.6.3.2	Represents a NAS COUNT
5GMmCapability	6.1.6.3.2	Represents a 5GMM capability
UeSecurityCapability	6.1.6.3.2	Represents a UE Security Capability
S1UeNetworkCapability	6.1.6.3.2	Represents a S1 UE Network Capability
DrxParameter	6.1.6.3.2	Indicates the UE DRX Parameters
OmcIdentifier	6.1.6.3.2	Represents the OMC Identifier
MSClassmark2	6.1.6.3.2	Indicates the MS Classmark 2 of a 5G SRVCC UE
SupportedCodec	6.1.6.3.2	Indicates the supported codec of a 5G SRVCC UE
UePolicyContainer	6.1.6.3.2	Information about the UE policy in NAS
StatusChange	6.1.6.3.3	Enumeration for AMF status
N2InformationClass	6.1.6.3.4	Enumeration for N2 Information Class
N1MessageClass	6.1.6.3.5	Enumeration for N1 Message Class
N1N2MessageTransferCause	6.1.6.3.6	Enumeration for N1N2Message Transfer Cause
UeContextTransferStatus	6.1.6.3.7	Describes the status of an individual ueContext resource in UE Context Transfer procedures
N2InformationTransferResult	6.1.6.3.8	Describes the result of N2 information transfer by AMF to the AN.
CipheringAlgorithm	6.1.6.3.9	Indicates the supported Ciphering Algorithm
IntegrityAlgorithm	6.1.6.3.10	Indicates the supported Integrity Algorithm
ScType	6.1.6.3.12	Indicates the security context type.
KeyAmfType	6.1.6.3.13	Indicates the K_{amf} type.
TransferReason	6.1.6.3.14	Indicates UE Context Transfer Reason
PolicyReqTrigger	6.1.6.3.15	Policy Request Triggers
RatSelector	6.1.6.3.16	Indicates the RAT type for the transfer of N2 information
NgapIeType	6.1.6.3.17	Indicates the supported NGAP IE types
N2InfoNotifyReason	6.1.6.3.18	N2 Information Notify Reason
SmfChangeIndication	6.1.6.3.19	Indicates the I-SMF or V-SMF change or removal
SbiBindingLevel	6.1.6.3.20	SBI Binding Level
EpsNasCipheringAlgorithm	6.1.6.3.21	Indicates the supported EPS NAS Ciphering Algorithm
EpsNasIntegrityAlgorithm	6.1.6.3.22	Indicates the supported EPS NAS Integrity Algorithm
PeriodicCommunicationIndicator	6.1.6.3.23	Indicates the Periodic Communication Indicator
UuaaMmStatus	6.1.6.3.24	Indicates UUAA-MM status
ReleaseCause	6.1.6.3.25	The cause for triggering the release
NgranFailureInfo	6.1.6.3.26	Information related to a NG-RAN failure
XrDeviceWith2Rx	6.1.6.3.27	XR Device with 2Rx information
NrppaTransFailure	6.1.6.3.28	Cause for NRPPa transfer failure

Table 6.1.6.1-2 specifies data types re-used by the Namf_Communication service based interface protocol from other specifications and from other service APIs in current specification, including a reference to their respective

specifications and when needed, a short description of their use within the Namf_Communication service based interface.

Table 6.1.6.1-2: Namf_Communication re-used Data Types

Data type	Reference	Comments
Snssai	TS 29.571 [6]	
Arp	TS 29.571 [6]	
PduSesisonId	TS 29.571 [6]	
Guami	TS 29.571 [6]	Globally Unique AMF Identifier
AmfName	TS 29.571 [6]	The name of the AMF
Supi	TS 29.571 [6]	Subscription Permanent Identifier
Cause	TS 29.571 [6]	5G-AN Cause
ProblemDetails	TS 29.571 [6]	Detailed problems in failure case
SupportedFeatures	TS 29.571 [6]	Supported Features
TimeZone	TS 29.571 [6]	
UserLocation	TS 29.571 [6]	
AccessType	TS 29.571 [6]	
AllowedNssai	TS 29.531 [18]	
NfInstanceId	TS 29.571 [6]	
Uri	TS 29.571 [6]	
Ecgi	TS 29.571 [6]	EUTRA Cell Identifier
Ncgi	TS 29.571 [6]	NR Cell Identifier
Uint16	TS 29.571 [6]	
5Qi	TS 29.571 [6]	5G QoS Identifier
CorrelationID	TS 29.572 [25]	LCS Correlation ID
Pei	TS 29.571 [6]	
Dnn	TS 29.571 [6]	
Gpsi	TS 29.571 [6]	
GroupId	TS 29.571 [6]	
PlmnId	TS 29.571 [6]	
RfspIndex	TS 29.571 [6]	
EbiArpMapping	TS 29.502 [16]	EBI - ARP mapping
NsiId	TS 29.531 [18]	
TraceData	TS 29.571 [6]	Trace control and configuration parameters
ConfiguredSnssai	TS 29.531 [18]	
NgApCause	TS 29.571 [6]	Represents the NG AP cause IE
Area	TS 29.571 [6]	
ServiceAreaRestriction	TS 29.571 [6]	
CoreNetworkType	TS 29.571 [6]	
Ambr	TS 29.571 [6]	
SliceMbr	TS 29.571 [6]	
GlobalRanNodeId	TS 29.571 [6]	
NfGroupId	TS 29.571 [6]	Network Function Group Id
DurationSec	TS 29.571 [6]	
StnSr	TS 29.571 [6]	Session Transfer Number for SRVCC
CMsisdn	TS 29.571 [6]	Correlation MSISDN
DateTime	TS 29.571 [6]	
SmallDataRateStatus	TS 29.571 [6]	
NfSetId	TS 29.571 [6]	NF Set ID
NfServiceSetId	TS 29.571 [6]	NF Service Set ID
LMFIdentification	TS 29.572 [25]	LMF Identification
PlmnAssiUeRadioCapId	TS 29.571 [6]	
ManAssiUeRadioCapId	TS 29.571 [6]	
NrV2xAuth	TS 29.571 [6]	NR V2X services authorized
LteV2xAuth	TS 29.571 [6]	LTE V2X services authorized
BitRate	TS 29.571 [6]	Bit Rate
Pc5QoSPara	TS 29.571 [6]	PC5 QoS parameters
PduSessionInfo	TS 29.571 [6]	The Slice and DNN combination of a PDU session.
PcfUeCallbackInfo	TS 29.571 [6]	The callback information of the PCF for the UE to allow the PCF for the PDU session to send SM Policy Association Establishment and Termination events notification.
CnAssistedRanPara	TS 29.502 [16]	SMF derived CN assisted RAN Parameters Tuning
MoExpDataCounter	TS 29.571 [6]	MO Exception Data Counter
CagData	TS 29.503 [35]	Closed Access Group Data

NssaaStatus	TS 29.571 [6]	Subscribed S-NSSAI subject to NSSAA procedure and the status
JobType	TS 29.571 [6]	Job Type in the trace
MeasurementLteForMdt	TS 29.571 [6]	Measurements used for MDT in LTE in the trace
MeasurementNrForMdt	TS 29.571 [6]	Measurements used for MDT in NR in the trace
ReportingTrigger	TS 29.571 [6]	Reporting Triggers for MDT in the trace
ReportIntervalMdt	TS 29.571 [6]	Report Interval for MDT in LTE in the trace
ReportAmountMdt	TS 29.571 [6]	Report Amount for MDT in the trace
CollectionPeriodRmmLteMdt	TS 29.571 [6]	Collection period for RRM measurements LTE for MDT in the trace
MeasurementPeriodLteMdt	TS 29.571 [6]	Measurement period LTE for MDT in the trace in
AreaScope	TS 29.571 [6]	Area Scope
PositioningMethodMdt	TS 29.571 [6]	Positioning Method for MDT in the trace in LTE
ReportIntervalNrMdt	TS 29.571 [6]	Report Interval for MDT in NR in the trace
CollectionPeriodRmmNrMdt	TS 29.571 [6]	Collection period for RRM measurements NR for MDT in the trace
SensorMeasurement	TS 29.571 [6]	Sensor information for MDT in the trace
ScheduledCommunicationTime	TS 29.571 [6]	Scheduled Communication Time
StationaryIndication	TS 29.571 [6]	Stationary Indication
TrafficProfile	TS 29.571 [6]	Traffic Profile
BatteryIndication	TS 29.571 [6]	Battery Indication
NFType	TS 29.510 [29]	NF type
UeAuth	TS 29.571 [6]	UE authorisation for PC5 service
PartitioningCriteria	TS 29.571 [6]	Partitioning Criteria
RedirectResponse	TS 29.571 [6]	Response body of the redirect response message.
CagId	TS 29.571 [6]	CAG ID
NnwdafEventsSubscription	TS 29.520 [52]	Represents an Individual NWDAF Event Subscription resource
PresenceInfo	TS 29.571 [6]	
UePositioningCapabilities	TS 29.572 [25]	Indicates the positioning capabilities supported by the UE.
SmfSelectionData	TS 29.507 [32]	
EpsInterworkingInfo	TS 29.503 [35]	
IpAddress	TS 29.503 [35]	
Fqdn	TS 29.571 [6]	
PresenceState	TS 29.571 [6]	Presence State
SatelliteBackhaulCategory	TS 29.571 [6]	Satellite Backhaul Category
WirelineServiceAreaRestriction	TS 29.571 [6]	
PartiallyAllowedSnssai	TS 29.571 [6]	S-NSSAI with TAIs information
VarRepPeriod	TS 29.571 [6]	Variable Reporting Periodicity
AsTimeDistributionParam	TS 29.507 [32]	
PruInd	TS 29.503 [35]	PRU Indicator
SliceUsageControlInfo	TS 29.571 [6]	Slice Usage Control Information
MbsrOperationAllowed	TS 29.503 [35]	MBSR Operation Information
UpConnectionStatus	TS 29.572 [25]	User Plane Connection Status
LMFIdentification	TS 29.572 [25]	
TaiRange	TS 29.510 [29]	TAI range
BluetoothMeasurement	TS 29.571 [6]	Bluetooth Measurement Configuration
WlanMeasurement	TS 29.571 [6]	WLAN Measurement Configuration
Tai	TS 29.571 [6]	Tracking Area Identity
PduSessionPriority	TS 29.502 [16]	PDU Session Priority
RefToBinaryData	TS 29.571 [6]	Referenced binary body data
Uinteger	TS 29.571 [6]	Unsigned integer
PlmnIdNid	TS 29.571 [6]	PLMN ID and Network ID
AmfEventSubscription	Clause 6.2.6.2.2	Represents an individual event subscription resource on AMF
UeAccessBehaviorReportItem	Clause 6.2.6.2.29	Report Item for UE Access Behavior Trends event.

UeLocationTrendsReportItem	Clause 6.2.6.2.30	Report Item for UE Location Trends event.
EnergySavingIndicator	TS 29.571 [6]	Energy Saving Indicator

6.1.6.2 Structured data types

6.1.6.2.1 Introduction

Structured data types used in Namf_Communication service are specified in this clause.

6.1.6.2.2 Type: SubscriptionData

Table 6.1.6.2.2-1: Definition of type SubscriptionData

Attribute name	Data type	P	Cardinality	Description
amfStatusUri	Uri	M	1	This IE shall include the callback URI to receive notification of AMF status change.
guamiList	array(Guami)	C	1..N	This IE shall be absent for subscribing to status change for any GUAMI supported by the AMF, it shall be present for subscribing to specific GUAMIs supported by the AMF.

6.1.6.2.3 Type: AmfStatusChangeNotification

Table 6.1.6.2.3-1: Definition of type AmfStatusChangeNotification

Attribute name	Data type	P	Cardinality	Description
amfStatusInfoList	array(AmfStatusInfo)	M	1..N	This IE shall contain the status change information about the AMF

6.1.6.2.4 Type: AmfStatusInfo

Table 6.1.6.2.4-1: Definition of type AmfStatusInfo

Attribute name	Data type	P	Cardinality	Description
guamiList	array(Guami)	M	1..N	This IE shall contain the GUAMIs
statusChange	StatusChange	M	1	This IE shall contain the Status change of the related GUAMIs
targetAmfRemoval	AmfName	C	0..1	This IE shall contain the AMF Name of the target AMF in the AMF planned removal without UDSF scenario
targetAmfFailure	AmfName	C	0..1	This IE shall contain the AMF Name of the target AMF in the AMF Auto-recovery without UDSF scenario.

6.1.6.2.5 Type: AssignEbiData

Table 6.1.6.2.5-1: Definition of type AssignEbiData

Attribute name	Data type	P	Cardinality	Description	Applicability
pduSessionId	PduSessionId	M	1	Represents the identifier of the PDU Session requesting EBI(s) to be assigned.	
arpList	array(Arp)	C	1..N	This IE shall be present if the NF Service Consumer (e.g SMF) requests the AMF to assign EBI(s) for the PDU session. When present, this IE shall contain the list of ARP(s)of the QoS flow(s) for which EBI(s) are requested.	
releasedEbiList	array(EpsBearerId)	C	1..N	This IE shall be present if the NF Service Consumer (e.g. SMF) needs to release the assigned EBI(s) from QoS flows (e.g. when the QoS flow is released).	
oldGuami	Guami	C	0..1	This IE shall be present during an AMF planned removal procedure when the NF Service Consumer initiates a request towards the target AMF, for a UE associated to an AMF that is unavailable (see clause 5.21.2.2 of TS 23.501 [2]).	
modifiedEbiList	array(EbiArpMapping)	C	1..N	This IE shall be present if a PDU session modification procedure resulted in the change of ARP for a QoS flow to which an EBI is already allocated.	EAEA

6.1.6.2.6 Type: AssignedEbiData

Table 6.1.6.2.6-1: Definition of type AssignedEbiData

Attribute name	Data type	P	Cardinality	Description	Applicability
pduSessionId	PduSessionId	M	1	Represents the identifier of the PDU Session requesting EBI(s) to be assigned.	
assignedEbiList	array(EbiArpMapping)	M	0..N	This IE shall be present if the AMF assigned the requested EBI(s). This IE shall contain the successfully assigned EBIs. (NOTE)	
failedArpList	array(Arp)	C	1..N	This IE shall be present if the AMF fails to allocate EBIs for a set of ARP(s). (NOTE)	
releasedEbiList	array(EpsBearerId)	C	1..N	This IE shall be present if the NF Service Consumer requested the release of EBI(s) or if the AMF revoked an already assigned EBI towards the same PDU session. This IE shall contain the list of EBI(s) released at the AMF.	
modifiedEbiList	array(EpsBearerId)	C	1..N	This IE shall be present if the NF Service Consumer requested to update the ARP for a QoS flow to which an EBI is already allocated. This IE shall contain the list of EBI(s) whose ARP has been updated at the AMF.	EAEA
NOTE: The same ARP value may be returned in the assignedEbiList and in the failedArpList, if the request included the same ARP value more than once in the arpList and the AMF is not able to allocate an EBI for every occurrence of this ARP value.					

6.1.6.2.7 Type: AssignEbiFailed

Table 6.1.6.2.7-1: Definition of type AssignEbiFailed

Attribute name	Data type	P	Cardinality	Description
pduSessionId	PduSessionId	M	1	Represents the identifier of the PDU Session requesting EBI(s) to be assigned.
failedArpList	array(Arp)	C	1..N	This IE shall be present if the AMF fails to allocate EBIs for a set of ARPs.

6.1.6.2.8 Type: UEContextRelease

Table 6.1.6.2.8-1: Definition of type UEContextRelease

Attribute name	Data type	P	Cardinality	Description
supi	Supi	C	0..1	This IE shall be present if the UE is emergency registered and the SUPI is not authenticated.
unauthenticatedSupi	boolean	C	0..1	When present, this IE shall be set as follows: - true: unauthenticated SUPI; - false (default): authenticated SUPI. This IE shall be present if the SUPI is present in the message but is not authenticated and is for an emergency registered UE.
ngapCause	NgApCause	M	1	This IE shall contain the cause value received from the source 5G-AN in the handover Cancel message received over the NGAP interface.

6.1.6.2.9 Type: N2InformationTransferReqData

Table 6.1.6.2.9-1: Definition of type N2InformationTransferReqData

Attribute name	Data type	P	Cardinality	Description
taiList	array(Tai)	C	1..N	This IE shall be included if the N2 information needs to be sent to the 5G-AN nodes that serve the list of tracking areas provided.
ratSelector	RatSelector	C	0..1	This IE shall be included to indicate if the N2 information shall be transferred to ng-eNBs or gNBs exclusively.
globalRanNodeList	array(GlobalRanNodeId)	C	1..N	This IE shall be included if the N2 information needs to be sent to the list of RAN nodes provided.
n2Information	N2InfoContainer	M	1	This IE includes the information to be sent on the N2 interface to the identified 5G-AN nodes and additional information required for the processing of the message by the AMF.
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.1.8 is supported.

6.1.6.2.10 Type: NonUeN2InfoSubscriptionCreateData

Table 6.1.6.2.10-1: Definition of type NonUeN2InfoSubscriptionCreateData

Attribute name	Data type	P	Cardinality	Description
globalRanNodeList	array(GlobalRanNodeId))	C	1..N	This IE shall be included if the subscription is for N2 information from RAN node(s) for which the N2 information notification is subscribed (i.e N3IWF identifier or gNB identifier or Ng-eNB identifier). (NOTE)
anTypeList	array(AccessType)	C	1..N	This IE shall be included, if the globalRanNodeId IE is not included and if the N2 information from a specific access network needs to be subscribed. When included this IE shall contain the access type of the access network from which Non UE specific N2 information is to be notified. (NOTE)
n2InformationClass	N2InformationClass	M	1	This IE represents the class of N2 information that the NF Service Consumer requires to be notified.
n2NotifyCallbackUri	Uri	M	1	This IE represents the callback URI on which the N2 information shall be notified.
nfId	NfInstanceId	C	0..1	This IE shall be present if the subscription is for "NRPPa" N2 information class. When present, this IE shall carry the value to be used for NGAP "Routing ID" IE, which identifies the Network Function (e.g. LMF) instance handling the NRPPa. This IE may also be present if the subscription is for "PWS" N2 information class. When present, this IE shall carry the instance identity of the network function (e.g. CBCF or PWS-IWF) creating the subscription. This IE should be included when more than one CBCF/PWS-IWF instances are deployed in the network. The AMF may use this IE to identify whether the same CBCF/PWS-IWF instance has subscribed for N2 PWS information to receive the PWS Response data from the RAN. This IE shall be present if the subscription is for "TSS" N2 information class. When present, this IE shall identify the TSCTSF NF instance subscribing the TSS data.
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.1.8 is supported.
notifCorrelationId	string	O	0..1	When present, this IE shall contain the notification correlation ID of the subscription.
NOTE: Absence of both IEs means the subscription is for N2 information from all connected Access Network node(s) via any access type.				

6.1.6.2.11 Type: NonUeN2InfoSubscriptionCreatedData

Table 6.1.6.2.11-1: Definition of type NonUeN2InfoSubscriptionCreatedData

Attribute name	Data type	P	Cardinality	Description
n2NotifySubscriptionId	string	M	1	Represents the Id created by the AMF for the subscription to notify a non-UE related N2 information.
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.1.8 is supported.
n2InformationClass	N2InformationClass	O	0..1	This IE represents the class of N2 information that the NF Service Consumer subscribed to.

6.1.6.2.12 Type: UeN1N2InfoSubscriptionCreateData

Table 6.1.6.2.12-1: Definition of type UeN1N2InfoSubscriptionCreateData

Attribute name	Data type	P	Cardinality	Description
n2InformationClass	N2InformationClass	C	0..1	This IE shall be present if the NF service consumer subscribes for a N2 information notification. This IE represents the class of N2 information that the NF Service Consumer requires to be notified.
n2NotifyCallbackUri	Uri	C	0..1	This IE shall be present if the NF service consumer subscribes for a N2 information notification. This IE represents the callback URI on which the N2 information shall be notified.
n1MessageClass	N1MessageClass	C	0..1	This IE shall be present if the NF service consumer subscribes for a N1 message notification. This IE represents the class of N1 message that the NF Service Consumer requires to be notified.
n1NotifyCallbackUri	Uri	C	0..1	This IE shall be present if the NF service consumer subscribes for a N1 message notification. This IE represents the callback URI on which the N1 message shall be notified.
nfId	NfInstanceId	C	0..1	This IE shall be present if the subscription is for "NRPPa" N2 information class and/or "LPP" N1 information class. When present, this IE shall carry the value to be used for NGAP "Routing ID" IE, which identifies the Network Function (e.g. LMF) instance handling the NRPPa and/or LPP data.
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.1.8 is supported.
oldGuami	Guami	C	0..1	This IE shall be present during an AMF planned removal procedure when the NF Service Consumer initiates a request towards the target AMF, for a UE associated to an AMF that is unavailable (see clause 5.21.2.2 of TS 23.501 [2]).

6.1.6.2.13 Type: UeN1N2InfoSubscriptionCreatedData

Table 6.1.6.2.13-1: Definition of type UeN1N2InfoSubscriptionCreatedData

Attribute name	Data type	P	Cardinality	Description
n1n2NotifySubscriptionId	string	M	1	Represents the Id created by the AMF for the subscription to notify a UE related N1/N2 information.
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.1.8 is supported.

6.1.6.2.14 Type: N2InformationNotification

Table 6.1.6.2.14-1: Definition of type N2InformationNotification

Attribute name	Data type	P	Cardinality	Description	Applicability
n2NotifySubscriptionId	string	M	1	Represents the subscription Id for which the notification is generated. The NF Service Consumer uses this to co-relate the notification against a corresponding subscription. If the notification is due to an implicit subscription via NRF, then the value shall be set as "implicit". During the AMF planned removal procedure with UDSF deployed procedure, this IE shall be set to "" (empty string) and be ignored by the NF Service Consumer.	
n2InfoContainer	N2InfoContainer	C	0..1	This IE shall be present, except during Inter NG-RAN node N2 based handover procedure (see clause 5.2.2.3.6.2). When present, this IE shall contain the N2 information related to the corresponding N2 information class.	
toReleaseSessionList	array(PduSessionId)	C	1..N	This IE shall be present during N2 based handover procedure, if there are any PDU session(s) associated with Network Slice(s) which become no longer available. When present, this IE shall include all the PDU session(s) associated with no longer available S-NSSAI(s).	
lcsCorrelationId	CorrelationID	C	0..1	This IE shall be present, if an LCS correlation identifier is received in corresponding N1/N2 Message Transfer service operation. When present, this IE shall carry the LCS correlation identifier.	
notifyReason	N2InfoNotifyReason	C	0..1	This IE shall be present, if "n2InfoContainer" attribute is not present; this IE may be present otherwise. When present, this IE indicates the reason for the N2 information notification.	
smfChangeInfoList	array(SmfChangeInfo)	C	1..N	This IE shall be present during N2 based handover procedure, if there is I-SMF or V-SMF change or removal for the related PDU session(s). When present, this IE shall indicate the I-SMF/V-SMF situation after successful HO complete.	DTSSA
ranNodeId	GlobalRanNodeId	C	0..1	This IE shall be present during the AMF planned removal procedure with UDSF deployed procedure or during the Location Service Procedure to indicate the RAN Node ID from which the NRPPa message is received. When present, it shall contain the Global RAN Node ID. The IE shall contain either the gNB ID or the NG-eNB ID.	

initialAmfName	AmfName	C	0..1	This IE shall be present during the AMF planned removal procedure with UDSF deployed procedure. When present, it shall contain the AMF Name of the initial AMF.	
anN2IPv4Addr	Ipv4Addr	C	0..1	This IE shall be present during the AMF planned removal procedure with UDSF deployed procedure, if the Access Network N2 interface is using IPv4 address.	
anN2IPv6Addr	Ipv6Addr	C	0..1	This IE shall be present during the AMF planned removal procedure with UDSF deployed procedure, if the Access Network N2 interface is using IPv6 address.	
guami	Guami	C	0..1	This IE shall be present during Location Services procedures (see clause 5.2.2.3.6.3) and it may be present otherwise. When present, it shall contain the GUAMI serving the UE.	
notifySourceNgRan	boolean	C	0..1	This IE shall be present during an Inter NG-RAN node N2 based DAPS handover procedure , if the target AMF receives this indication in the Handover Notify from the target NG-RAN node (see clause 4.9.1.3.3a of TS 23.502 [3]). When present, it shall be set as follows: - true: Notify the Source NG-RAN about Handover Success - false (default): Do not notify the Source NG-RAN about Handover Success	
notifCorrelationId	string	O	0..1	When present, this IE shall contain the notification correlation ID of the subscription.	
toReleaseSessionInfo	array(ReleaseSessionInfo)	C	1..N	This IE shall be present during Handover procedure, if there are any PDU session(s) that cannot be supported in the target AMF for a reason other than no longer available S-NSSAI(s) as specified in step 1 of clause 5.2.2.3.6.2. When present, this IE shall include list of the PDU session(s) and the release cause.	

6.1.6.2.15 Type: N2InfoContainer

Table 6.1.6.2.15-1: Definition of type N2InfoContainer

Attribute name	Data type	P	Cardinality	Description	Applicability
n2InformationClass	N2InformationClass	M	1	This IE represents the class of N2 information to be transferred.	
smInfo	N2SmInformation	C	0..1	This IE shall be present if session management N2 information is to be transferred. When present, it represents a session management SMF related N2 information data part.	
ranInfo	N2RanInformation	C	0..1	This IE shall be present if RAN related N2 information is to be transferred (i.e. n2InformationClass is "RAN"). When present, it shall contain the RAN related N2 information data part.	
nrppaInfo	NrppaInformation	C	0..1	This IE shall be present if location service related N2 information is to be transferred. When present, it represents a NRPPa related N2 information data part.	
pwsInfo	PwsInformation	C	0..1	This IE shall be present if PWS related N2 information is to be transferred.	
v2xInfo	V2xInformation	C	0..1	This IE shall be present if V2X related N2 information is to be transferred.	
proseInfo	ProSeInformation	C	0..1	This IE shall be present if 5G ProSe related N2 information is to be transferred.	ProSe
tssInfo	TssInformation	C	0..1	This IE shall be present if TSS related N2 information is to be transferred.	NTSSM
rslpInfo	RslpInformation	C	0..1	This IE shall be present if Ranging/SL positioning related N2 information is to be transferred.	Ranging_SL
a2xInfo	A2xInformation	C	0..1	This IE shall be present if A2X related N2 information is to be transferred.	A2X

6.1.6.2.16 Type: N1MessageNotification

Table 6.1.6.2.16-1: Definition of type N1MessageNotification

Attribute name	Data type	P	Cardinality	Description
n1NotifySubscriptionId	string	C	0..1	Represents the subscription Id for which the notification is generated. The NF Service Consumer uses this to correlate the notification against a corresponding subscription. If the notification is due to an implicit subscription via NRF, then the value shall be set as "implicit". This IE shall be present if the notification is based on a subscription to N1MessgeNotification. An exception is for the case when initial AMF forwards NAS message to target AMF during AMF re-allocation procedure.
n1MessageContainer	N1MessageContainer	M	1	Contains the N1 message class and N1 message content.
lcsCorrelationId	CorrelationID	O	0..1	If the N1 message notified is for LCS procedures or PRU procedures, the NF Service Producer (e.g. AMF) may include an LCS correlation identifier. (NOTE)
registrationCtxtContainer	RegistrationContextContainer	C	0..1	If the N1 message notified is of type 5GMM (i.e. during Registration with AMF re-allocation procedure), the NF Service Producer (e.g. AMF) shall include this IE, if available.
newLmfIdentification	LMFIdentification	O	0..1	If a new LMF is selected by AMF, this IE may include the new selected LMF Identification.
guami	Guami	C	0..1	This IE shall be present during UE Assisted and UE Based Positioning Procedure (see clause 5.2.2.3.5.3) or the LCS Event Report, Event Reporting in RRC INACTIVE state procedures, LCS Cancel Location and LCS Periodic-Triggered Invoke Procedures (see clause 5.2.2.3.5.5) and it may be present otherwise. When present, it shall contain the GUAMI serving the UE.
cIoT5GSOptimisation	boolean	C	0..1	This IE shall be present when the N1 message class is "LPP/LCS" and the N1 message is received from the UE with Control Plane CIoT 5GS Optimisation. When present, it shall be set as follows: - true: Control Plane CIoT 5GS Optimisation was used and no signalling or data is currently pending for the UE at the AMF. - false (default): Control Plane CIoT 5GS Optimisation was not used or signalling or data is currently pending for the UE at the AMF.
ecgi	Ecgi	O	0..1	When present, this IE shall indicate the identifier of the E-UTRAN cell serving the UE. This IE may be present if the N1 message notified is for LCS procedures.
ncgi	Ncgi	O	0..1	When present, this IE shall indicate the identifier of the NR cell serving the UE or the PRU. This IE may be present if the N1 message notified is for LCS procedures or PRU procedures.
tai	Tai	O	0..1	When present, this IE shall indicate the identifier of the tracking area serving the PRU. This IE may be present if the N1 message notified is for PRU procedures.

supi	Supi	O	0..1	Contains the SUPI of the UE or PRU. This IE shall be present when the N1 message class is "LCS" and the default (any) LMF is used in the deferred 5GC-MT-LR procedure as described in clause 6.3.1 of TS 23.273 [42]. This IE shall also be present when the N1 message class is "UPP-CM". This IE may be present if the N1 message notified is for PRU procedures. (NOTE)
pruInd	PruInd	O	0..1	When present, this IE shall indicate whether the UE is allowed to serve as a PRU. This IE may be present if the N1 message notified is for PRU procedures.
NOTE: During UPP-CM procedures, LMF shall determine the corresponding LCS-UPP connection based on the SUPI of the UE.				

6.1.6.2.17 Type: N1MessageContainer

Table 6.1.6.2.17-1: Definition of type N1MessageContainer

Attribute name	Data type	P	Cardinality	Description
n1MessageClass	N1MessageClass	M	1	This IE shall contain the N1 message class for the message content specified in n1MessageContent.
n1MessageContent	RefToBinaryData	M	1	This IE shall reference the N1 message binary data corresponding to the n1MessageClass. See TS 24.501 [11]. See clause 6.1.6.4.2.
nfId	NfInstanceId	C	0..1	This IE shall be present when the n1MessageClass IE is set to "LPP", "LCS" or "UPP-CM". It should be present when the n1MessageClass IE is set to "SM". It may be present otherwise. When present, this IE shall carry the identifier of the Network Function (e.g. LMF or SMF) instance sending the N1 message. (NOTE)
serviceInstanceId	string	O	0..1	When present, this IE shall carry the Service Instance Identifier of the Service Instance (e.g. LMF) sending the N1 message.
NOTE: For a Home-routed PDU session, this IE shall carry the NF instance ID of the V-SMF; for a PDU session with I-SMF, this IE shall carry the NF instance ID of the I-SMF.				

6.1.6.2.18 Type: N1N2MessageTransferReqData

Table 6.1.6.2.18-1: Definition of type N1N2MessageTransferReqData

Attribute name	Data type	P	Cardinality	Description	Applicability
n1MessageContainer	N1MessageContainer	C	0..1	This IE shall be included if a N1 message needs to be transferred.	
n2InfoContainer	N2InfoContainer	C	0..1	This IE shall be included if a N2 information needs to be transferred.	
mtData	RefToBinaryData	C	0..1	This IE shall be included if mobile terminated data (i.e. CIoT user data container) needs to be transferred. When present, it shall reference the mobile terminated data (see clause 6.1.6.4.4).	CIOT
skipInd	boolean	C	0..1	This IE shall be present and set to "true" if the service consumer (e.g. SMF) requires the N1 message to be sent to the UE only when UE is in CM-CONNECTED, e.g. during SMF initiated PDU session release procedure (see clause 4.3.4.2 of TS 23.502 [3]). When present, this IE shall be set as following: - true: AMF should skip sending N1 message to UE, when the UE is in CM-IDLE. - false (default): the AMF shall send the N1 message to the UE.	
lastMsgIndication	boolean	O	0..1	This flag when present shall indicate that the message transferred is the last message. (See clause 4.13.3.3 and clause 4.13.3.6 of TS 23.502 [3].	
pduSessionId	PduSessionId	O	0..1	PDU Session ID for which the N1 / N2 message is sent, if the N1 / N2 message class is SM.	
lcsCorrelationId	CorrelationID	O	0..1	LCS Correlation ID, for which the N1/N2 message is sent, if - the N1 message class is LPP (see clause 6.11.1 of TS 23.273 [42]), LCS (see clause 6.3 of TS 23.273 [42]) and clause 6.17 of TS 23.273 [42]); and/or - the N2 Information class is NRPPa (see clause 6.11.2 of TS 23.273 [42]). (NOTE 4)	
servingLMFIdentification	LMFIdentification	C	0..1	This IE shall be included if UE support multiple LCS-UP connections and the N1/N2 message is associated with an LCS user-plane positioning procedure. It shall identify the LCS-UP connection between the UE and the LMF as defined in clause 28.20.4 of TS 23.003 [64].	
ppi	Ppi	O	0..1	This IE when present shall indicate the Paging policy to be applied. The paging policies are configured at the AMF.	

arp	Arp	O	0..1	This IE when present shall indicate the Allocation and Retention Priority of the PDU session for which the N1/N2 message transfer is initiated. To support priority paging, the AMF shall use this IE to determine whether to include the Paging Priority IE in the NGAP Paging Message (see clause 5.4.3.3 of TS 23.501 [2]). The set of ARP values associated with priority paging and mapping to Paging Priority IE values are configured at the AMF. This IE shall not be present when the N1/N2 message class is not SM.	
5qi	5Qi	O	0..1	This IE when present shall indicate the 5QI associated with the PDU session for which the N1 / N2 message transfer is initiated. This IE shall not be present when the N1/N2 message class is not SM.	
n1n2FailureTxfNotifURI	Uri	O	0..1	If included, this IE represents the callback URI on which the AMF shall notify the N1/N2 message transfer failure.	
smfReallocationInd	boolean	O	0..1	This IE shall indicate that the SMF is requested to be reallocated (see clause 4.3.5.2 of TS 23.502 [3]). When present, this IE shall be set as follows: - true: the SMF is requested to be reallocated. - false (default): the SMF is not requested to be reallocated.	
areaOfValidity	AreaOfValidity	O	0..1	This IE represents the list of TAs where the provided N2 information is valid. See clause 5.2.2.2.7 and 4.2.3.3 of TS 23.502 [3].	
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.1.8 is supported.	
oldGuami	Guami	C	0..1	This IE shall be present during an AMF planned removal procedure when the NF Service Consumer initiates a request towards the target AMF, for a UE associated to an AMF that is unavailable (see clause 5.21.2.2 of TS 23.501 [2]).	
maAcceptedInd	boolean	C	0..1	This IE shall be present if a request to establish a MA PDU session was accepted or if a single access PDU session was upgraded into a MA PDU session (see clauses 4.22.2 and 4.22.3 of TS 23.502 [3]). When present, it shall be set as follows: - true: MA PDU session - false (default): single access PDU session	MAPDU

extBufSupport	boolean	O	0..1	This IE may be present with value "true" if Extended Buffering is permitted, during Network triggered Service Request Procedure (see clause 4.2.3.3 of TS 23.502 [3]), UPF anchored Mobile Terminated Data Transport in Control Plane CIoT 5GS Optimisation procedure (see clause 4.24.2 of TS 23.502 [3]) or NEF Anchored Mobile Terminated Data Transport (see clause 4.25.5 of TS 23.502 [3]). When present, this IE shall indicate whether Extended Buffering applies or not: - true: Extended Buffering applies - false (default) Extended Buffering does not apply	
targetAccess	AccessType	C	0..1	This IE shall be included by a SMF for a MA PDU session to indicate the target access type (i.e. 3GPP access or Non-3GPP access) towards which the N2 information and optionally N1 information is requested to be sent. This IE may be included by an LMF to indicate the access type through which an LPP message shall be transmitted to the UE. This IE shall be included by an SMF and set to the old access type during an intra-AMF handover between 3GPP and non-3GPP accesses, when releasing the N2 PDU session resources in the old access.	MAPDU ELCS 3GA-N3GA-HO
nfId	NfInstanceId	O	0..1	This IE should be included by the SMF when invoking N1N2MessageTransfer service operation, if the n1MessageContainer IE is not present. When present, this IE shall carry the identifier of the NF instance invoking the service operation, i.e. the SMF instance hosting the SM Context for the PDU session. (NOTE 3)	
pruInd	boolean	O	0..1	When present, this IE shall be set to the value true to indicate that the LMF as NF consumer is requesting to initiate a positioning procedure towards a PRU, as specified in clause 6.11.2 of TS 23.273 [42].	

pduSessionPrio	PduSessionPriority	C	0..1	This IE shall be included by the SMF if the priority of the PDU session is to be changed. See also clauses 5.22.2 and 5.22.3 of TS 23.501 [2]. The AMF shall use the priority of the PDU session indicated in this IE for further PDU Session related priority handling (i.e. to determine the SBI Message Priority (SMP) to set in subsequent signaling it sends related to the PDU session).	
NOTE 1: For N1 message class "UPDP", as per TS 24.501 [11] Annex D, the messages between UE and PCF carry PTI which is used by the PCF to correlate the received N1 message in the notification with a prior transaction initiated by the PCF. NOTE 2: During Downlink Data Notification procedure, if the SMF receives the PPI value (=DSCP(0..63)) from the UPF and wants to set the PPI value in the N1N2MessgeTransfer message, the SMF shall map the PPI value received from N4 message to correct PPI value (0..7) used in N11 message. NOTE 3: If the n1MessageContainer IE is present, the nfId attribute in the n1MessageContainer IE should be used by the SMF and the AMF to identify the NF instance ID of the sending SMF. NOTE 4: For UPP-CM messages, the AMF shall determine the corresponding LCS-UP context based on the SUPI of the UE (carried in {ueContextId} variable in the resource URI, see clause 6.1.3.5.2) and the LMF instance ID (carried in the nfId attribute of the N1MessageContainer object, see clause 6.1.6.2.17).					

6.1.6.2.19 Type: N1N2MessageTransferRspData

Table 6.1.6.2.19-1: Definition of type N1N2MessageTransferRspData

Attribute name	Data type	P	Cardinality	Description
cause	N1N2MessageTransferCause	M	1	This IE shall provide the result of the N1/N2 message transfer processing at the AMF.
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.1.8 is supported.

6.1.6.2.20 Type: RegistrationContextContainer

Table 6.1.6.2.20-1: Definition of type RegistrationContextContainer

Attribute name	Data type	P	Cardinality	Description
ueContext	UeContext	M	1	This IE shall contain the UE Context information.
localTimeZone	TimeZone	O	0..1	This IE contains the time zone UE is currently located.
anType	AccessType	M	1	This IE shall contain the current access type of the UE.
anN2ApId	integer	M	1	This IE shall contain the RAN UE NGAP ID over N2 interface.
ranNodeId	GlobalRanNodeId	M	1	This IE shall contain the Global RAN Node ID. The IE shall contain either the gNB ID or the NG-eNB ID.
initialAmfName	AmfName	M	1	This IE shall contain the AMF Name of the initial AMF.
userLocation	UserLocation	M	1	This IE shall contain the user location received from 5G-AN.
anN2IPv4Addr	Ipv4Addr	C	0..1	If the Access Network N2 interface is using IPv4 address, this IE shall be included.
anN2IPv6Addr	Ipv6Addr	C	0..1	If the Access Network N2 interface is using IPv6 address, this IE shall be included.
rrcEstCause	string	C	0..1	This IE shall contain the RRC Establishment Cause, if received from the 5G-AN (See TS 38.413 [12], clause 9.2.5.1). It carries the value in hexadecimal representation Pattern: '^[0-9a-fA-F]+$'
ueContextRequest	boolean	C	0..1	This IE shall contain the indication on whether UE context including security information needs to be setup at the NG-RAN, if received from the NG-RAN by the initial AMF (See TS 38.413 [12], clause 9.2.5.1). When present, it shall be set as follows: - true: UE context including security information needs to be setup at the NG-RAN. - false (default): UE context including security information does not need to be setup at the NG-RAN.
initialAmfN2ApId	integer	C	0..1	This IE shall contain the AMF UE NGAP ID of the initial AMF over N2 interface, if available.
allowedNssai	AllowedNssai	O	0..1	This IE contains the allowed NSSAI of the UE. This IE also contains the mapped home network S-NSSAI for each allowed S-NSSAI.
configuredNssai	array(ConfiguredSnssai)	O	1..N	This IE shall contain the configured S-NSSAI(s) authorized by the NSSF in the serving PLMN, if received from the NSSF.
rejectedNssaiInPlmn	array(Snssai)	O	1..N	This IE shall contain the rejected NSSAI in the PLMN, if received from the NSSF.
rejectedNssaiInTa	array(Snssai)	O	1..N	This IE shall contain the rejected NSSAI in the current TA, if received from the NSSF.
selectedPlmnId	PlmnId	O	0..1	This IE shall contain the selected PLMN Id for the non-3GPP access, if received from the 5G-AN (See TS 38.413 [12], clause 9.2.5.1).
iabNodeInd	boolean	C	0..1	This IE shall contain the IAB Node Indication, if received from the 5G-AN (See TS 38.413 [12], clause 9.2.5.1). This IE shall be absent when mbsrNodeInd exists and is set to true. When present, it shall be set as follows: - true: 5G-AN is an IAB Node. - false (default): 5G-AN is not an IAB Node.
mbsrNodeInd	boolean	C	0..1	This IE shall contain the MBSR Node Indication, if received from the 5G-AN. This IE shall be absent when iabNodeInd exists and is set to true. When present, it shall be set as follows: - true: 5G-AN is an MBSR Node. - false (default): 5G-AN is not an MBSR Node.

ceModeBInd	CeModeBInd	O	0..1	This IE shall contain the CE-mode-B Support Indicator, if received from the 5G-AN (See TS 38.413 [12], clause 9.2.5.1).
lteMInd	LteMInd	O	0..1	This IE shall contain the LTE-M Indication, if received from the 5G-AN (See TS 38.413 [12], clause 9.2.5.1).
authenticatedInd	boolean	O	0..1	This IE shall contain the Authenticated Indication, if received from the 5G-AN (See TS 38.413 [12], clause 9.2.5.1). This IE shall be set as follows: - true: authenticated by the 5G-AN; - false (default): unauthenticated by the 5G-AN.
npnAccessInfo	NpnAccessInfo	O	0..1	This IE shall contain the NPN Access Information, if received from the 5G-AN (See TS 38.413 [12], clause 9.2.5.1).

6.1.6.2.21 Type: AreaOfValidity

Table 6.1.6.2.21-1: Definition of type AreaOfValidity

Attribute name	Data type	P	Cardinality	Description	Applicability
taiList	array(Tai)	M	0..N	An array of TAI representing the area of validity of the associated N2 information provided.	
taiRangeList	array(TaiRange)	O	1..N	A list of TAI ranges representing the area of validity of the associated N2 information provided. (NOTE)	AoV-En
NOTE: When the taiRangeList is present, the aggregation of taiList attribute and taiRangeList indicates the entire area of validity of the associated N2 information.					

6.1.6.2.22 Void

6.1.6.2.23 Type: UeContextTransferReqData

Table 6.1.6.2.23-1: Definition of type UeContextTransferReqData

Attribute name	Data type	P	Cardinality	Description
reason	TransferReason	M	1	Indicate the reason for the UEContextTransfer service request
accessType	AccessType	M	1	This IE shall contain the access type of the UE.
plmnId	PlmnIdNid	O	0..1	If present, this IE shall contain the PLMN ID or SNPN ID of the NF service consumer (e.g target AMF).
regRequest	N1MessageContainer	O	0..1	If present, this IE shall refer to the registration request message which triggers the UE Context Transfer. The message class shall be "5GMM" and message content shall be reference to N1 Message Content binary data, See clause 6.1.6.4.2.
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.1.8 is supported.

6.1.6.2.24 Type: UeContextTransferRspData

Table 6.1.6.2.24-1: Definition of type UeContextTransferRspData

Attribute name	Data type	P	Cardinality	Description	Applicability
ueContext	UeContext	M	1	Represents an individual ueContext resource after the modification is applied.	
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.1.8 is supported.	
ueRadioCapability	N2InfoContent	C	0..1	This IE shall be included to contain the "UE Radio Capability Information" if available during context transfer procedure. UE Radio Capability Information does not include NB-IoT UE radio capability, see clause 5.4.4.1 of TS 23.501 [2] (NOTE)	
ueRadioCapabilityForPaging	N2InfoContent	C	0..1	This IE shall be included to contain the "UE Radio Capability for Paging" if available during context transfer procedure. (NOTE)	
ueNbiotRadioCapability	N2InfoContent	C	0..1	This IE shall be included to contain "NB-IoT UE radio capability Information" if available during context transfer procedure, see clause 5.4.4.1 of TS 23.501 [2]	CIOT
xrDeviceWith2Rx	XrDeviceWith2Rx	C	0..1	This IE shall be included to contain the "XR Device with 2Rx" as defined in TS 38.413 [12] if available during context transfer procedure.	
NOTE: The source AMF may decide to not include ueRadioCapability and ueRadioCapabilityForPaging if the target AMF supports the RACS feature and if: a. the PlmnAssiUeRadioCapId is included in the MM Context for an intra-PLMN AMF mobility procedure; or b. the ManAssiUeRadioCapId is included in the MM Context for an intra-PLMN or an inter-PLMN AMF mobility procedure.					

6.1.6.2.25 Type: UeContext

Table 6.1.6.2.25-1: Definition of type UeContext

Attribute name	Data type	P	Cardinality	Description	Applicability
supi	Supi	C	0..1	This IE shall be present if available. When present, this IE contains SUPI of the UE.	
supiUnauthInd	boolean	C	0..1	This IE shall be present if SUPI is present. When present, it shall indicate whether the SUPI is unauthenticated.	
gpsiList	array(Gpsi)	C	1..N	This IE shall be present if available and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a. When present, this IE shall contain the GPSI(s) of the UE.	
pei	Pei	C	0..1	This IE shall be present if available and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a. When present, this IE shall contain Mobile Equipment Identity of the UE.	
udmGroupId	NfGroupId	O	0..1	When present, it shall indicate the identity of the UDM Group serving the UE.	
ausfGroupId	NfGroupId	O	0..1	When present, it shall indicate the identity of the AUSF Group serving the UE.	
pcfGroupId	NfGroupId	O	0..1	When present, it shall indicate the identity of the PCF Group serving the UE.	
chfGroupId	NfGroupId	O	0..1	When present, it shall indicate the identity of the CHF Group serving the UE.	
routingIndicator	string	O	0..1	When present, it shall indicate the Routing Indicator of the UE.	
hNwPubKeyId	integer	O	0..1	When present, it shall indicate the Home Network Public Key Identifier of the UE. (NOTE 4).	
groupList	array(GroupId)	C	1..N	This IE shall be present if the UE belongs to any subscribed internal group(s) and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a. When present, this IE shall list the subscribed internal group(s) to which the UE belongs to.	
drxParameter	DrxParameter	C	0..1	This IE shall be present if available and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a. When present, this IE shall contain the DRX parameter of the UE.	
subRfsp	RfspIndex	C	0..1	This IE shall be present if available and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a. When present, it shall indicate the subscribed RFSP Index of the UE.	
pcfRfsp	RfspIndex	C	0..1	This IE shall be present if available and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a. When present, this IE shall indicate the PCF determined RFSP Index of the UE.	
usedRfsp	RfspIndex	C	0..1	This IE shall be present if available and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a. When present, it shall indicate the used RFSP Index of the UE.	
subUeAmbr	Ambr	C	0..1	This IE shall be present if subscribed UE-AMBR has been retrieved from UDM and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a. When present, this IE shall indicate the value of subscribed UE AMBR of the UE.	
pcfUeAmbr	Ambr	C	0..1	This IE shall be present if available and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a. When present, this IE shall indicate the value of the PCF determined UE AMBR of the UE.	

subUeSliceMbrList	map(SliceMbr)	C	1..N	Map of SliceMbr, where the S-NSSAI shall be used as the key of the map. This IE shall be present if the list of subscribed UE-Slice-MBR(s) has been retrieved from UDM and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a. When present, this IE shall indicate the list of subscribed UE-Slice-MBR(s) per S-NSSAI for the UE.	
smsfId	NfInstanceId	C	0..1	This IE shall be present if the SMS service for UE is activated and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a. When present, it indicates the identifier of the SMSF network function instance serving the UE. The NF service consumer (e.g. target AMF) may use this information to identify the SMSF NF service profile from among the SMSF NF service profiles it received from the NRF.	
seafData	SeafData	C	0..1	This IE shall be present if available and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a or the case specified in clause 5.2.2.2.1.2. When present, this IE contains the security data derived from data received from AUSF of the UE.	
5gMmCapability	5GMmCapability	C	0..1	This IE shall be present if the UE had provided this IE during Registration Procedure and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a. When present, this IE shall contain 5G MM capability of the UE.	
pcfId	NfInstanceId	C	0..1	This IE shall be present if available and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a. When present, this IE indicates the identity of the PCF for AM Policy and/or UE Policy.	
pcfSetId	NfSetId	C	0..1	This IE shall be present, if available. When present, it shall contain the NF Set ID of the PCF for AM Policy and/or UE Policy.	
pcfAmpServiceSetId	NfServiceSetId	C	0..1	This shall be present, if available. When present, it shall contain the NF Service Set ID of the PCF's AM Policy service.	
pcfUepServiceSetId	NfServiceSetId	C	0..1	This shall be present, if available. When present, it shall contain the NF Service Set ID of the PCF's UE Policy service.	
pcfBindingLevel	SbiBindingLevel	C	0..1	This IE shall be present if available. When present, this IE shall contain the SBI binding level of the PCF's AM policy and UE Policy association resources. (NOTE 6)	
pcfAmPolicyUri	Uri	C	0..1	This IE shall be present if available and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a. When present this IE shall contain the URI of the individual AM policy resource (see TS 29.507 [32] clause 5.3.3.2) used by the AMF.	
amPolicyReqTriggerList	array(PolicyReqTrigger)	C	1..N	This IE shall be present if available and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a. When present this IE shall indicate the AM policy request triggers towards the PCF. The NF Service Consumer (e.g. target AMF) shall use these triggers to request AM policy from the PCF whenever these triggers are met. The possible AM policy control request triggers are specified in clause 6.1.2.5 of TS 23.503 [7].	

pcfUePolicyUri	Uri	C	0..1	This IE shall be present if available and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a. When present this IE shall contain the URI of the individual UE policy resource (see TS 29.507 [32] clause 5.3.3.2) used by the AMF.	
uePolicyReqTriggerList	array(PolicyReqTrigger)	C	1..N	This IE shall be present if available and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a. When present this IE shall indicate the UE policy request triggers towards the PCF. The NF Service Consumer (e.g. target AMF) shall use these triggers to request UE policy from the PCF whenever these triggers are met. The possible UE policy control request triggers are specified in clause 6.1.2.5 of TS 23.503 [7].	
hpcfId	NfInstanceId	O	0..1	This IE indicates the identity of PCF for UE Policy in home PLMN, when the UE is roaming.	
hpcfSetId	NfSetId	O	0..1	When present, this IE shall contain the NF Set ID of the PCF for UE Policy in home PLMN, when the UE is roaming.	
restrictedRatList	array(RatType)	O	1..N	When present, this IE shall indicate the list of RAT types that are restricted for the UE; see TS 29.571 [6] (NOTE 1)	
forbiddenAreaList	array(Area)	O	1..N	When present, this IE shall indicate the list of forbidden areas of the UE.	
serviceAreaRestriction	ServiceAreaRestriction	O	0..1	When present, this IE shall indicate subscribed Service Area Restriction for the UE.	
restrictedCnList	array(CoreNetworkType)	O	1..N	When present, this IE shall indicate the list of Core Network Types that are restricted for the UE.	
eventSubscriptionList	array(ExtAmfEventSubscription)	C	1..N	This IE shall be present if available and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a. When present, it shall indicate the event subscription(s) targeting the UE or the group the UE is part of. If the source AMF supports binding procedures and if it received binding indications for event notifications (i.e. with "callback" scope) or for subscription change event notifications (i.e. with "subscription-events" scope) for certain subscriptions, these binding indications should also be included. If the source AMF knows the NF type of the NF that created the subscription, this information should also be indicated. The UE access behavior trends report and/or UE location trends report may be included, if the NF service consumer is subscribed to the UE_ACCESS_BEHAVIOR_TRENDS event and/or UE_LOCATION_TRENDS event respectively. This information is required for calculating the statistical data of trends.	
mmContextList	array(MmContext)	C	1..2	This IE shall be present if available and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a. When present, this IE contains the MM Contexts of the UE.	

sessionContextList	array(PduSessionContext)	C	1..N	This IE shall be present if available and if it is neither case a) nor case b) specified in clause 5.2.2.2.1.1 step 2a. When present, this IE contains the PDU Session Contexts of the UE. (NOTE 2)	
epsInterworkingInfo	EpsInterworkingInfo	C	0..1	This IE shall contain the associations between APN/DNN and PGW-C+SMF for EPS interworking, if available.	
traceData	TraceData	C	0..1	This IE shall be present if signalling based trace has been activated (see TS 32.422 [30]) and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a.	
serviceGapExpiryTime	DateTime	C	0..1	This IE shall be present if Service Gap Control is enabled and if the AMF has started a Service Gap Timer which has not expired yet (see clause 5.31.16 of TS 23.501 [2]). The value of the IE shall indicate the expiry time (in UTC) of the active Service Gap Timer for the UE.	
stnSr	StnSr	O	0..1	This IE shall be present if available, for UE supporting 5G-SRVCC (see clause 5.2.2.2.11 of TS 23.502 [3]). When present, this IE contains STN-SR of the UE.	
cMsisdn	CMsisdn	O	0..1	This IE shall be present if available, for UE supporting 5G-SRVCC (see clause 5.2.2.2.11 of TS 23.502 [3]). When present, this IE contains C-MSISDN of the UE.	
msClassmark2	MSClassmark2	O	0..1	This IE shall be present if available, for UE supporting 5G-SRVCC (see clause 5.2.2.2.11 of TS 23.502 [3]). When present, this IE contains Mobile Station Classmark 2 of the UE.	
supportedCodecList	array(SupportedCodec)	O	1..N	This IE shall be present if available, for UE supporting 5G-SRVCC (see clause 5.2.2.2.11 of TS 23.502 [3]). When present, this IE shall indicate the list of speech codecs supported by the UE.	
smallDataRateStatusInfos	array(SmallDataRateStatusInfo)	O	1..N	List of Small Data Rate Control Statuses for released PDU Sessions, see clause 5.31.14.3 of TS 23.501 [2].	CIOT
restrictedPrimaryRatList	array(RatType)	O	1..N	When present, this IE shall indicate the list of RAT types that are restricted for use as primary RAT for the UE; see TS 29.571 [6] (NOTE 1)	
restrictedSecondaryRatList	array(RatType)	O	1..N	When present, this IE shall indicate the list of RAT types that are restricted for use as secondary RAT for the UE; see TS 29.571 [6] (NOTE 1)	
v2xContext	V2xContext	O	0..1	This IE shall be present if available (see clause 6.5.4 of TS 23.287 [47]). When present, this IE shall indicate the parameters related to the V2X services.	
lteCatMInd	boolean	C	0..1	This IE shall be present with value "true" if the UE is a LTE Category M UE based on indication provided by the NG-RAN or by the MME at EPS to 5GS handover, as specified in TS 23.502 [3]. When present, this IE shall be set as following: - true: the UE is a Category M UE - false (default): this UE is not a Category M UE.	

redCapInd	boolean	C	0..1	This IE shall be present with value "true" if the UE is a NR RedCap UE based on indication provided by the NG-RAN, as specified in TS 23.502 [3]. When present, this IE shall be set as following: - true: the UE is a NR RedCap UE - false (default): this UE is not a NR RedCap UE.	
eRedCapInd	boolean	C	0..1	This IE shall be present with value "true" if the UE is a NR eRedCap UE based on indication provided by the NG-RAN, as specified in clause 5.41 of TS 23.501 [2]. When present, this IE shall be set as following: - true: the UE is a NR eRedCap UE - false (default): this UE is not a NR eRedCap UE.	
moExpDataCounter	MoExpDataCounter	C	0..1	This IE shall be present if a non-zero MO Exception counter has not been reported yet to SMF. When present, this IE shall contain the MO Exception Data Counter, as specified in clause 5.31.14.3 of TS 23.501 [2].	
cagData	CagData	O	0..1	Closed Access Group Data When present, the provisioningTime attribute (from the CagData data type) shall be absent.	NPN
managementMdtInd	boolean	C	0..1	This flag shall be present with value "true" if Management Based Minimization of Drive Tests (MDT) is allowed, as specified in TS 32.422 [30]. When present, this IE shall be set as following: - true: management based MDT is allowed. - false (default): management based MDT is not allowed.	
adjacentPlmnMngtMdtInds	map(boolean)	C	1..N	A map (list of key-value pairs where PlmnId converted to string serves as key; see TS 29.571 [7]) of Booleans, each indicating whether Management Based MDT is allowed in the corresponding PLMN: - true: management based MDT is allowed in the PLMN. - false: management based MDT is not allowed in the PLMN.	
immediateMdtConf	ImmediateMdtConf	C	0..1	This IE shall be sent by the source AMF to the target AMF, for signalling based MDT if the Job Type indicates Immediate MDT. See clause 4.10 of TS 32.422 [30].	
ecRestrictionDataWb	EcRestrictionDataWb	C	0..1	This IE shall be present if the AMF determines whether Enhanced Coverage is restricted or not for the UE for WB-N1 mode. If absent, this IE indicates Enhanced Coverage is not restricted for WB-N1 mode. (NOTE 3)	

ecRestrictionDataNb	boolean	C	0..1	This IE shall be present if the AMF determines whether Enhanced Coverage is restricted or not for the UE for NB-N1 mode. If present, this IE shall indicate whether Enhanced Coverage for NB-N1 mode is restricted or not. - true: Enhanced Coverage for NB-N1 mode is restricted. - false or absent: Enhanced Coverage for NB-N1 mode is allowed. (NOTE 3)	
iabOperationAllowed	boolean	O	0..1	This IE shall be present if the UE is allowed for IAB operation. It may be present otherwise. When present, it shall indicate whether the UE is allowed for IAB operation, as follows: - true: indicates that the UE is allowed for IAB operation. - false: indicates that the UE is not allowed for IAB operation.	
mbsrOperationAllowed	MbsrOperationAllowed	O	0..1	Indicates whether the subscriber is allowed for MBSR operation as specified in clause 5.35A.4 of TS 23.501 [2], optionally, with corresponding location and time period.	
proseContext	ProseContext	O	0..1	This IE shall be present if available (see clause 6.7 of TS 23.304 [51]). When present, this IE shall indicate the parameters related to the ProSe services.	ProSe, ProSe_Multihop
analyticsSubscriptionList	array(AnalyticsSubscription)	C	1..N	This IE shall be present if the AMF has created analytics subscription(s) towards NWDAF related to the UE. If present, this IE shall include the list of analytics subscriptions, as specified in clauses 5.2.2.2.2 and 5.2.2.2.11 of TS 23.502 [3].	ASUC
pcfUepBindingInfo	string	C	0..1	This IE shall be present if Binding Indication was received for UE Policy Association resource from the PCF. When present, this IE shall contain the Binding indication of the PCF's UE Policy Association resource and shall be set to the value of the 3gpp-Sbi-Binding header defined in clause 5.2.3.2.6 of TS 29.500 [4], without the header name.	
pcfAmpBindingInfo	string	C	0..1	This IE shall be present if Binding Indication was received for AM Policy Association resource from the PCF. When present, this IE shall contain the Binding indications of the PCF's AM policy Association resource and shall be set to the value of the 3gpp-Sbi-Binding header defined in clause 5.2.3.2.6 of TS 29.500 [4], without the header name.	
usedServiceAreaRestriction	ServiceAreaRestriction	O	0..1	When present, this IE shall include the Service Area Restriction from PCF.	

praInAmPolicy	map(PresenceInfo)	O	1..N	When present, this IE shall include the map of PRA Information for the subscribed "PRA_CHANGE" PolicyReqTrigger in the AM Policy Association. The key of the map shall be the "praId" attribute within the PresenceInfo data type. The "presenceState" attribute within the PresenceInfo data type shall not be supplied here.	
praInUePolicy	map(PresenceInfo)	O	1..N	When present, this IE shall include the map of PRA Information for the subscribed "PRA_CHANGE" PolicyReqTrigger in the UE Policy Association. The key of the map shall be the "praId" attribute within the PresenceInfo data type. The "presenceState" attribute within the PresenceInfo data type shall not be supplied here.	
updpSubscriptionData	UpdpSubscriptionData	C	0..1	An AMF complying with this version of the specification shall include this IE if the pcfUePolicyUri IE is present and a subscription resource exists at the source AMF for UE policy delivery related N1 message notifications.	
smPolicyNotifyPduList	array(PduSessionInfo)	C	1..N	This IE shall be present if it has been received from the PCF for the UE, i.e. the PCF for the AM Policy Association and possibly the UE Policy Association. When present, this IE shall contain the information (Slice and DNN combination) of the PDU session(s) applicable for the notification of SM Policy Association Establishment and Termination events. (NOTE 5)	SPAE
pcfUeCallbackInfo	PcfUeCallbackInfo	C	0..1	This IE shall be present if the smPolicyNotifyPduList IE is present. When present, this IE shall contain the callback information of the PCF for the UE to receive SM Policy Association Establishment and Termination events notification from the PCF for the SM Policy. (NOTE 5)	SPAE
uePositioningCap	UePositioningCapabilities	O	0..1	When present, this IE shall indicate the positioning capabilities supported by the UE.	
snpnOnboardInd	boolean	C	0..1	This IE shall be present if the UE is registered for onboarding in an SNPN. When present, it shall indicate the following: - true: indicates that the UE is registered for onboarding in an SNPN. - false (default): indicates that the UE is not registered for onboarding in an SNPN.	eNPN

astiDistributionIndication	boolean	O	0..1	When present, this IE shall indicate whether the access stratum time distribution via Uu reference point should be activated or deactivated for the UE. When present, this IE shall be set as following: - true: ASTI distribution is activated for the UE. - false (default): ASTI distribution is deactivated for the UE.	
tsErrorBudget	integer	O	0..1	When present, this IE shall indicate the Uu time synchronization error budget for the time synchronization service (as described in clause 5.27.1 in TS 23.501 [2]). It indicates the value in nano seconds.	
smfSelInfo	SmfSelectionData	C	0..1	This IE shall be present if conditions for SMF Selection information replacement are received from the PCF for AM Policy. When present, It shall include the conditions for SMF selection information replacement, as determined by the PCF.	
pcfUeSliceMbrList	map(SliceMbr)	C	1..N	This IE shall be present when UE Slice MBR(s) were received from the PCF for AM Policy. When present, this IE shall include one or more UE-Slice-MBR(s) as determined by the PCF for allowed S-NSSAI(s). The key of the map is the S-NSSAI in the allowed NSSAI to which the UE-Slice-MBR belongs.	
smsfSetId	NfSetId	C	0..1	This IE shall be present if available. When present, this IE shall contain the NF Set ID of the SMSF serving the UE.	
smsfServiceSetId	NfServiceSetId	C	0..1	This shall be present, if available. When present, it shall contain the NF Service Set ID of the SMSF's service instance serving the UE.	
smsfBindingInfo	string	C	0..1	This IE shall be present if available. When present, this IE shall contain the binding indication of the UE Context for SMS in SMSF and shall be set to the value of the 3gpp-Sbi-Binding header defined in clause 5.2.3.2.6 of TS 29.500 [4], without the header name.	
disasterRoamingInd	boolean	C	0..1	This IE shall be present if the UE is registered for disaster roaming. It may be present otherwise. When present, this IE shall be set as follows: - true: UE is registered for Disaster Roaming service; - false (default): UE is not registered for Disaster Roaming service.	
disasterPlmn	PlmnId	C	0..1	This IE shall be included if the disasterRoamingInd is present and set to "true". When present, this IE includes the PLMN of the UE which has faced disaster condition	

satelliteBackhaulCat	SatelliteBackhaulCategory	O	0..1	When present, this IE shall be set to the last value that has been reported to the PCF if the satellite backhaul category change is subscribed with the "SAT_BACKHAUL_CHANGE" PolicyReqTrigger in the UE Policy Association.	
wlServAreaRes	WirelineServiceAreaRestriction	C	0..1	This IE shall be present if available and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a. When present, this IE shall indicate the value of the PCF determined Wireline Service Area Restriction.	
asTimeDisParam	AsTimeDistributionParam	C	0..1	This IE shall be present if available and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a. When present, this IE shall contain the 5G acess stratum time distribution parameters received from the PCF for AM Policy.	
amPolicyInfoContainer	AmPolicyInfoContainer	C	0..1	This IE shall be present if any of the information in the container is available and if it is not case b) specified in clause 5.2.2.2.1.1 step 2a. When present, this IE shall contain the AM Policy information parts received from the PCF for AM Policy.	
uePolicyContainer	UePolicyContainer	C	0..1	This IE shall be present when UE policy information is received from UE and stored in the source AMF. When present, this IE shall contain the UE policy information as received from the UE.	
a2xContext	A2xContext	O	0..1	This IE shall be present if available (see clause 6.3.5.4 of TS 23.256 [56]). When present, this IE shall indicate the parameters related to the A2X services.	A2X
lcsUpContext	LcsUpContext	O	0..1	This IE shall be present if available (see clause 4.3.7 of TS 23.273 [42]). When present, this IE shall indicate the parameters related to the LCS UP services.	
lcsUpContextList	array(LcsUpContext)	O	1..N	This IE may be present when lcsUpContext is present and the UE supports multiple LCS-UPP connections, each towards a different LMF, as specified in clause 4.3.7 of TS 23.273 [42]. When present, the IE shall contain the LCS UP context items in addition to lcsUpContext.	
reconnectInd	boolean	O	0..1	Indicates whether the UE is to reconnect to the network in the case the UE determines that it does not have the latest available clock quality information as described in clause 5.27.1.12 in TS 23.501 [2]. When present, this IE shall be set as follows: - true: the UE reconnects to the network in the case the UE determines that the reference report ID has changed; - false (default): the UE does not have an indication from CN to reconnect to the network in the case that the reference report ID has changed.	

amPolicyInd	boolean	C	0..1	This IE shall be present when the AM policy indicator is received from UDM. When present, this IE shall be set to the value received from UDM: - true: indicates that the AM policy association is enabled. - false: indicates that the AM policy association is disabled.	
uePolicyInd	boolean	C	0..1	This IE shall be present when the UE policy indicator is received from UDM. When present, this IE shall be set to the value received from UDM: - true: indicates that the UE policy association is enabled. - false: indicates that the UE policy association is disabled.	
energySavingInd	EnergySavingIndicator	C	0..1	This IE shall be present during intra-PLMN mobility procedures, if received from the UDM in UE AM subscription data.	

NOTE 1: If the restrictedPrimaryRatList and restrictedSecondaryRatList attributes are supported by the sender, the sender shall include the list of RAT Types that are restricted, if any, in the restrictedRatList attribute, shall include the list of RAT Types that are restricted for use as primary RAT, if any, in the restrictedPrimaryRatList attribute and shall include the list of RAT Types that are restricted for use as secondary RAT, if any, in the restrictedSsecondaryRatList attribute. If the restrictedPrimaryRatList and restrictedSecondaryRatList attributes are supported by the receiver, the receiver shall use the data in the restrictedPrimaryRatList attribute, if received, as the list of RAT Types that are restricted for use as primary RAT for the UE, and shall use the data in the restrictedSecondaryRatList attribute, if received, as the list of RAT Types that are restricted for use as secondary RAT for the UE, otherwise the receiver shall use the data in the restrictedRatList attribute, if received, as the list of RAT Types that are restricted for the UE.

NOTE 2: A particular PDU session not supported by the target AMF shall not be transferred, e.g. MA-PDU session context shall not be transferred if target AMF does not support ATSSS.

NOTE 3: After ecRestrictionDataWb and/or ecRestrictionDataNb attributes are sent from source AMF to target AMF to build the UeContext in the target AMF, the target AMF shall re-determine the EC restriction information based on the received subscription data from UDM and UE 5GMM capability because EC restriction information may change (e.g. due to that subscription data in UDM is changed but not notified the old AMF yet) and then compare the re-determined EC restriction information with the one received in the UeContext. If the target AMF finds EC restriction information has changed after comparing, the target AMF shall proceed as described in clause 5.31.12, TS 23.501 [2].

NOTE 4: If present, this attribute shall be used together with routingIndicator. This attribute is only used by the HPLMN in roaming scenarios.

NOTE 5: If the information as indicated in both IEs were received from the old AMF in UE Context, during PDU session establishment the AMF shall identify whether a non-roaming or local breakout PDU session is applicable for SM Policy Association events, i.e, whethe the slice and DNN combination of the PDU session is listed in the smPolicyNotifyPduList IE or not. If the PDU session is applicable for notification of SM Policy Association events , the AMF shall provide the callback information for the PCF of the UE contained in the pcfUeCallbackInfo IE to the SMF of a new PDU session via Create SM Context service operation together with the indication for notification of SM Policy Association events. See clause 4.3.2.2.1 of TS 23.502 [3].

NOTE 6: This IE is deprecated. An AMF complying with this version of specification shall use the pcfAmpBindingInfo IE to carry the Binding indication of the AM Policy Association resource and use the pcfUepBindingInfo IE to carry the binding indication of the UE Policy Association resource.

6.1.6.2.26 Type: N2SmInformation

Table 6.1.6.2.26-1: Definition of type N2SmInformation

Attribute name	Data type	P	Cardinality	Description	Applicability
pduSessionId	PduSessionId	M	1	Indicates the PDU Session Identity	
n2InfoContent	N2InfoContent	C	0..1	This IE shall be present if a SMF related IE should be transferred. When present, the IE contains one of NGAP SMF related IEs specified in clause 9.3.4 of TS 38.413 [12].	
sNssai	Snssai	C	0..1	This IE shall be present if network slice information to be transferred for session management. When present, the IE indicates the network slice the PDU session belongs to. (NOTE 1, NOTE 2)	
homePlmnSnssai	Snssai	C	0..1	This IE shall be present during EPS to 5GS handover procedure for Home Routed PDU session. This IE shall also be present during inter-VPLMN handover procedure for Home routed PDU session. When present, it shall carry the S-NSSAI for home PLMN.	ENS
iwkSnssai	Snssai	C	0..1	This IE shall be present during EPS to 5GS handover procedure with AMF relocation for Home Routed PDU session, or during EPS to 5GS handover using N26 interface with AMF relocation and with I-SMF insertion, if S-NSSAI for interworking is configured and used in the initial AMF, as specified in clause 4.11.1.2.2 and clause 4.23.12.7.1 of TS 23.502 [3]. When present, this IE shall carry the S-NSSAI for interworking configured and used in the initial AMF for the PDU session.	ENS
subjectToHo	boolean	C	0..1	This IE shall be present if n2InfoContent carries a "Handover Required Transfer" IE. When present, it Indicates whether the PDU session shall be subject to handover to the target node.	

NOTE 1: During EPS to 5GS handover procedure for Home Routed PDU session with AMF relocation, the source AMF shall set this IE to the S-NSSAI in the serving PLMN mapped from the S-NSSAI in home PLMN indicated by the homePlmnSnssai IE in the N2SmInformation data structure sent to target AMF.

NOTE 2: During inter-VPLMN handover procedure for Home Routed PDU session with AMF relocation, or during handover procedure from HPLMN to VPLMN with AMF relocation (see clause 4.9.1.3.2 of TS 23.502 [3]), the initial AMF shall set this IE to the S-NSSAI in the serving PLMN mapped from the S-NSSAI in home PLMN indicated by the homePlmnSnssai IE in the N2SmInformation data structure sent to target AMF.

6.1.6.2.27 Type: N2InfoContent

Table 6.1.6.2.27-1: Definition of type N2InfoContent

Attribute name	Data type	P	Cardinality	Description
ngapMessageType	Uinteger	C	0..1	This IE shall be present if PWS or TSS related N2 information is to be transferred, or during the AMF planned removal procedure with UDSF deployed procedure to transfer a RAN N2 message. When present, it shall indicate the NGAP Message type of the ngapData as specified in clause 6.1.6.4.3.3. Its value equals the value of the Procedure Code defined in ASN.1 in clause 9.4.7 in TS 38.413 [12].
ngapIeType	NgapIeType	C	0..1	This IE shall be present if SM, RAN, V2X, ProSe, Ranging_SL or NRPPa related N2 information is to be transferred. When present, it shall indicate the NGAP IE type of the ngapData as specified in clause 6.1.6.4.3.2.
ngapData	RefToBinaryData	M	1	This IE reference the N2 Information binary data corresponding to the N2 information class. See clause 6.1.6.4.3.

6.1.6.2.28 Type: NrppaInformation

Table 6.1.6.2.28-1: Definition of type NrppaInformation

Attribute name	Data type	P	Cardinality	Description
nfId	NfInstanceId	M	1	This IE shall carry the identifier of the Network Function (e.g. LMF) instance that is sending or receiving the NRPPa data.
nrppaPdu	N2InfoContent	M	1	This IE represents the encoded NGAP NRPPa-PDU IE, which is transparent to AMF.
serviceInstanceId	string	O	0..1	When present, this IE shall carry the Service Instance Identifier of the Service Instance (e.g. LMF) that is sending or receiving the NRPPa data.

6.1.6.2.29 Type: PwsInformation

Table 6.1.6.2.29-1: Definition of type PwsInformation

Attribute name	Data type	P	Cardinality	Description
messageIdentifier	Uint16	M	1	Identifies the warning message. Sender shall set this field to 0, if the pwsContainer IE carries PWS Failure Indication or PWS Restart Indication. The receiver shall ignore this IE if the pwsContainer IE carries PWS Failure Indication or PWS Restart Indication.
serialNumber	Uint16	M	1	identifies a particular message from the source and type indicated by the Message Identifier. Sender shall set this field to 0, if the pwsContainer IE carries PWS Failure Indication or PWS Restart Indication. The receiver shall ignore this IE if the pwsContainer IE carries PWS Failure Indication or PWS Restart Indication.
pwsContainer	N2InfoContent	M	1	This IE represents the PWS N2 information data part to be relayed between CBCF and AN.
bcEmptyAreaList	array(GlobalRanNodeId)	C	1..N	This IE shall be present if the NF consumer has previously requested the AMF to send the N2 response information for: - WRITE-REPLACE-WARNING-REQUEST and the AMF has received WRITE-REPLACE-WARNING-RESPONSE from RAN node(s) not including the *Broadcast Completed Area List* IE, or - PWS-CANCEL-REQUEST and the AMF has received PWS-CANCEL-RESPONSE from RAN node(s) not including the *Broadcast Cancelled Area List* IE. When present, this IE shall list the RAN node(s) that has sent a - WRITE-REPLACE-WARNING-RESPONSE not including the *Broadcast Completed Area List* IE, or - PWS-CANCEL-RESPONSE not including the *Broadcast Cancelled Area List* IE.
sendRanResponse	boolean	O	0..1	This IE shall be present to request the AMF to send the N2 response information it has received from the RAN nodes to the NF Service Consumer. When present, this IE shall be set as follows: - true: send RAN response - false (default): do not send RAN response. The N2 information received from the RAN corresponds to the *Broadcast-Completed-Area-List* IE or the *Broadcast-Cancelled-Area-List* IE defined in TS 38.413 [12]. See clause 6.1.6.4.3.3.
omcId	OmcIdentifier	O	0..1	IE shall be present if the AMF is required to write the n2Information it has received from the RAN nodes into trace records on the OMC. When present, it indicates the identifier of OMC.

nfId	NfInstanceId	O	0..1	When present, this IE shall carry the instance identity of the NF Service Consumer (e.g. CBCF or PWS-IWF). This IE should be included when more than one CBCF/PWS-IWF instances are deployed in the network and the sendRanResponse IE is present with the value "true". The AMF may use this IE to identify whether the same CBCF/PWS-IWF instance has subscribed for N2 PWS information to receive the PWS Response data from the RAN.

6.1.6.2.30 Type: N1N2MsgTxfrFailureNotification

Table 6.1.6.2.30-1: Definition of type N1N2MsgTxfrFailureNotification

Attribute name	Data type	P	Cardinality	Description
cause	N1N2MessageTransferCause	M	1	This IE shall provide the result of the N1/N2 message transfer at the AMF.
n1n2MsgDataUri	Uri	M	1	This IE shall contain the N1N2MessageTransfer request resource URI returned in the Location header when the N1/N2 message transfer was initiated (see clause 6.1.3.5.3.1). This IE shall be used by the NF Service Consumer to correlate the notification with the UE or session for which the earlier N1/N2 message transfer was initiated. If no Location header was returned when the N1/N2 message transfer was initiated, e.g. when a 200 OK response was sent for a UE in RRC inactive state, this IE shall be set to a dummy URI, i.e. an URI with no authority and an empty path (e.g. "http:").
retryAfter	Uinteger	O	0..1	This IE may be included if the AMF requests the NF Service Consumer to throttle sending further N1/N2 Message Transfer request for a short period, e.g. when UE is not responding to paging. When present, this IE indicates the period in number of seconds. The NF consumer should not send new N1/N2 message transfer request during the indicated period. (NOTE)
maxWaitingTime	DurationSec	O	0..1	This IE may be present if: - extBufSupport attribute with value "true" received in the N1N2MessageTransfer request; and - the paging has failed, e.g. for a UE using extended idle mode DRX. When present, this IE shall indicate the estimated maximum waiting time in seconds before the UE will be reachable.
NOTE: This IE should be configured with a value less than 10 minutes, i.e. 600 seconds.				

6.1.6.2.31 Type: N1N2MessageTransferError

Table 6.1.6.2.31-1: Definition of type N1N2MessageTransferError

Attribute name	Data type	P	Cardinality	Description
error	ProblemDetails	M	1	This IE shall provide the result of the N1/N2 message transfer processing at the AMF.
errInfo	N1N2MsgTxfrErr Detail	O	0..1	This IE may be included to provide additional information related to the error.

6.1.6.2.32 Type: N1N2MsgTxfrErrDetail

Table 6.1.6.2.32-1: Definition of type N1N2MsgTxfrErrDetail

Attribute name	Data type	P	Cardinality	Description
retryAfter	Uinteger	O	0..1	This IE may be included if the AMF requests the NF Service Consumer to stop sending the N1/N2 message before timeout, and to retry the N1/N2 message transfer request that was rejected after a timeout. The value shall be in seconds. When included, the value shall be set to an estimate of the AMF on how long it will take before the AMF considers paging procedure as completed. (NOTE)
highestPrioArp	Arp	O	0..1	This IE may be included if the "cause" attribute in the ProblemDetails is set to "HIGHER_PRIORITY_REQUEST_ONGOING". When included this IE shall contain the ARP value of the highest priority QoS flow for which currently paging is ongoing. The NF Service Consumer shall not initiate an Namf_Communication_N1N2MessageTransfer operation for the same UE with an ARP value having a lower priority than this or the same priority as this, until the retryAfter timer expires.
maxWaitingTime	DurationSec	C	0..1	This IE shall be present when: - extBufSupport attribute with value "true" received in the request; and - the UE is not reachable due to the UE in MICO mode or the UE using extended idle mode DRX. When present, this IE shall indicate the estimated maximum waiting time in seconds before the UE will be reachable. If the UE is in MICO mode, the AMF determines the Estimated Maximum Wait time based on the next expected periodic registration by the UE or by implementation. If the UE is using extended idle mode DRX, the AMF determines the Estimated Maximum Wait time based on the start of the next Paging Time Window. (see clause 4.25.5 of 3GPP 23.502 [3])
NOTE: This IE should be configured with a value less than 10 minutes, i.e. 600 seconds.				

6.1.6.2.33 Type: N2InformationTransferRspData

Table 6.1.6.2.33-1: Definition of type N2InformationTransferRspData

Attribute name	Data type	P	Cardinality	Description
result	N2InformationTransferResult	M	1	This IE shall provide the result of the N2 information transfer processing at the AMF.
nrppaRspPerNgranList	array(NrppaRspPerNgran)	C	1..N	This IE may be present, if the n2InformationClass is "NRPPa" in N2InformationTransferReqData, and the "result" IE is set to the value "PARTIAL_N2_INFO_TRANSFER". When present, this IE shall indicate the information of the failure related to NG-RAN nodes for the NRPPa transfer.
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.1.8 is supported.
pwsRspData	PWSResponseData	C	0..1	This IE shall be present if the n2InformationClass is "PWS" in N2InformationTransferReqData.
tssRspPerNgranList	array(TssRspPerNgran)	O	1..10	This IE may be present, if the n2InformationClass is "TSS" in N2InformationTransferReqData, to contain the Timing Synchronization Status Failure message, or Timing Synchronization Status Response message if the Criticality Diagnostics IE is present, or to report a failure related to a NG-RAN,

6.1.6.2.34 Type: MmContext

Table 6.1.6.2.34-1: Definition of type MmContext

Attribute name	Data type	P	Cardinality	Description	Applicability
accessType	AccessType	M	1	This IE shall contain the access type of the MM context.	
nasSecurityMode	NasSecurityMode	C	0..1	This IE shall be present if available in 3GPP access MM context. When present, this IE shall contain the used NAS security mode of the UE.	
epsNasSecurityMode	EpsNasSecurityMode	C	0..1	This IE shall be present in 3GPP access MM context if selected EPS NAS security algorithms have been previously provided to the UE, as specified in clause 6.7.2 of TS 33.501 [27]. When present, this IE shall contain the selected EPS NAS security algorithms provided to the UE.	
nasDownlinkCount	NasCount	C	0..1	This IE shall be present if available in 3GPP access MM context. When present, this IE shall contain the NAS downlink count of the UE.	
nasUplinkCount	NasCount	C	0..1	This IE shall be present if available in 3GPP access MM context. When present, this IE shall contain the NAS uplink count of the UE.	
ueSecurityCapability	UeSecurityCapability	C	0..1	This IE shall be present if available in 3GPP access MM context. When present, this IE shall contain the UE security capability	
s1UeNetworkCapability	S1UeNetworkCapability	C	0..1	This IE shall be present if available in 3GPP access MM context. When present, this IE shall contain the S1 UE network capabilities.	
allowedNssai	array(Snssai)	C	1..N	This IE shall be present if the source AMF (or the initial AMF during inter-PLMN handover with AMF relocation procedure as specified in clause 4.9.1.3.2 of TS 23.502 [3]) and the target AMF are in the same PLMN and if available. When present, this IE shall contain the allowed NSSAI for the access type. (NOTE 3)	
nssaiMappingList	array(NssaiMapping)	C	1..N	This IE shall be present if the source AMF (or the initial AMF during inter-PLMN handover with AMF relocation procedure as specified in clause 4.9.1.3.2 of TS 23.502 [3]) and the target AMF are in the same PLMN and if available. When present, this IE shall contain the mapping of the allowed NSSAI and if available the partially allowed NSSAI for the UE.	
allowedHomeNssai	array(Snssai)	C	1..N	This IE shall be present if the source AMF and the target AMF are in different PLMNs and if available. When present, this IE shall contain the home S-NSSAIs corresponding to the allowed NSSAI for the access type and if available the partially allowed NSSAI.	
partiallyAllowedNssai	array(PartiallyAllowedSnssai)	C	1..N	This IE shall be present if the source and target AMF supports the partially allowed S-NSSAI feature and if the source AMF and target AMF pertain to the same PLMN. When present, this IE shall contain the partially allowed S-NSSAI list and the TAI list where the S-NSSAI(s) are allowed. See TS 23.502 [3] clause 4.2.2.2.2. (NOTE 3)	PAR-NS
replacedSnssaiMappingList	array(SliceReplacementMapping)	C	1..N	This IE shall be present if the source AMF and the target AMF are in the same PLMN, the Network Slice Replacement is supported and there is at least one S-NSSAI which has been replaced with an alternative S-NSSAI. When present, this IE shall contain the mapping of the replaced S-NSSAI(s) to the alternative S-NSSAI(s). See clause 5.15.19 of TS 23.501 [2].	

nsInstanceList	array(NsiId)	C	1..N	This IE shall be present if available. When present, it shall indicate the Network Slice Instances selected for the UE.	
expectedUEbehavior	ExpectedUeBehavior	C	0..1	This IE shall be present if available. When present it shall indicate the expected UE moving trajectory and its validity period. See TS 23.502 [3] clause 4.15.6.3.	
ueDifferentiationInfo	UeDifferentiationInfo	C	0..1	This IE shall be present if available. When present it shall indicate UE Differentiation Information and its validity period.	
plmnAssiUeRadioCapId	PlmnAssiUeRadioCapId	C	0..1	This IE shall be present if the source AMF supports RACS feature and if available. When present it shall be the PLMN-assigned UE Radio Capability ID. (NOTE 1, NOTE 2)	
manAssiUeRadioCapId	ManAssiUeRadioCapId	C	0..1	This IE shall be present if the source AMF supports RACS feature and if available. When present it shall be the Manufacturer-assigned UE Radio Capability ID.	
ucmfDicEntryId	string	C	0..1	This IE shall be present if the source AMF supports RACS feature and if available. When present it shall be the UCMF allocated dicEntryId received from the UCMF.	
n3IwfId	GlobalRanNodeId	C	0..1	This IE shall be present during Registration procedure with AMF changes as specified in clause 4.2.2.2 of TS 23.502 [3] and inter AMF handover procedure, if the old AMF holds UE context established via N3IWF and if the PDU sessions associated with the non-3GPP access are transferred to the new AMF (see clause 5.2.2.2.1.1 and 5.2.2.2.3.1). When present, this IE shall contain the Global RAN Node ID of N3IWF.	
wagfId	GlobalRanNodeId	C	0..1	This IE shall be present during Registration procedure with AMF changes as specified in clause 4.2.2.2 of TS 23.502 [3] and inter AMF handover procedure, if the old AMF holds UE context established via W-AGF and if the PDU sessions associated with the non-3GPP access are transferred to the new AMF (see clause 5.2.2.2.1.1 and 5.2.2.2.3.1). When present, this IE shall contain the Global RAN Node ID of W-AGF.	
tngfId	GlobalRanNodeId	C	0..1	This IE shall be present during Registration procedure with AMF changes as specified in clause 4.2.2.2 of TS 23.502 [3] and inter AMF handover procedure, if the old AMF holds UE context established via TNGF and if the PDU sessions associated with the non-3GPP access are transferred to the new AMF (see clause 5.2.2.2.1.1 and 5.2.2.2.3.1). When present, this IE shall contain the Global RAN Node ID of TNGF.	
anN2ApId	integer	C	0..1	This IE shall be present during Registration procedure with AMF changes, as specified in clause 4.2.2.2 of TS 23.502 [3] and inter AMF handover procedure, if the old AMF holds UE context established via N3IWF/W-AGF/TNGF and the UE is in CM-CONNECTED state via N3IWF/W-AGF/TNGF and if the PDU sessions associated with the non-3GPP access are transferred to the new AMF (see clause 5.2.2.2.1.1 and 5.2.2.2.3.1). When present, this IE shall contain the RAN UE NGAP ID over N2 interface.	

nssaaStatusList	array(NssaaStatus)	C	1..N	This IE shall be present if available. When present, it shall contain the subscribed S-NSSAIs subject to NSSAA procedure and for which a status information is available. See TS 23.501 [2] clause 5.15.5.2.1 and TS 23.502 [3] clause 5.2.2.2.2.	
pendingNssaiMappingList	array(NssaiMapping)	C	1..N	This IE shall be present if available. When present, this IE shall contain the mapping of the pending NSSAI for the UE.	
uuaaMmStatus	UuaaMmStatus	C	0..1	This IE shall be present if available in 3GPP access MM context. When present, this IE shall indicate the status of UUAA-MM if the AMF is configured to perform the UAV authentication/authorization at 5GS registration as described in clause 5.2.2 of TS 23.256 [56].	
deregInactTimerList	map(DeregInactTimerInfo)	C	1..N	This IE shall be present if there are ongoing Network Slice Deregistration Inactivity Timer(s) in the old AMF for certain S-NSSAI(s) for the UE during an intra PLMN mobility procedure. When present, this IE shall indicate the list of Ongoing Network Slice Deregistration Inactivity Timer Information per S-NSSAI for the UE. The S-NSSAI shall be used as the key of the map.	SliceUsageCtrl
voSupportMatchInd	boolean	O	0..1	This IE indicates whether the UE radio capabilities are compatible with the network configuration for IMS voice. The AMF may include this IE in intra PLMN handover when the network configuration considered in the decision for the Voice Support Match Indicator is homogenous for the entire serving PLMN. The target AMF uses it as an input for setting the IMS voice over PS Session Supported Indication over 3GPP access as specified in clause 5.16.3.2 of TS 23.501 [2]. When present, this IE shall be set as follows: - true: the UE radio capabilities are compatible with the network configuration; - false: the UE radio capabilities are not compatible with the network configuration.	
NOTE 1: If the AMF supports RACS and the AMF detects that the selected PLMN during a service request procedure is different from the currently registered PLMN for the UE, the AMF stores the UE Radio Capability ID of the newly selected PLMN in the UE context as described in clause 5.2.2.2 of TS 23.502 [3], and provides this UE Radio Capability ID to the target AMF during any subsequent inter-AMF mobility. NOTE 2: In the case of Indirect Network Sharing (as specified in the clause 5.18 of TS 23.501 [2]), if the AMF supports the RACS feature, upon UE mobility between the AMF of the participating operator network and the AMF of the hosting operator network, the new AMF shall delete the UE Radio Capability ID received from the old AMF, if any, unless the operator policy explicitly specifies that it may be retained. NOTE 3: The source AMF shall send the partially allowed S-NSSAIs in the allowedNssai IE, if the target AMF does not support the PAR-NS feature.					

6.1.6.2.35 Type: SeafData

Table 6.1.6.2.35-1: Definition of type SeafData

Attribute name	Data type	P	Cardinality	Description
ngKsi	NgKsi	M	1	Indicates the KSI used for the derivation of the keyAmf sent.
keyAmf	KeyAmf	M	1	Indicates the K_{amf} or K'_{amf}
nh	string	C	0..1	This IE shall be present during N2 handover procedure as specified in clause 6.9.2.3.3 of TS 33.501 [27]. When present, this IE indicates the Next Hop value used for the key derivation. The value is encoded as a string of hexadecimal characters. Pattern: '^[A-Fa-f0-9]+$'
ncc	integer	C	0..1	This IE shall be present during N2 handover procedure as specified in clause 6.9.2.3.3 of TS 33.501 [27]. When present, this IE indicates the NH Chaining Counter. The value is within the range 0 to 7.
keyAmfChangeInd	boolean	C	0..1	This IE shall be included, with a value "true", if the source AMF requires the target AMF to perform AS key re-keying, during N2 handover procedure as specified in clause 6.9.2.3.3 of TS 33.501 [27].
keyAmfHDerivationInd	boolean	C	0..1	This IE shall be included, with a value "true", if the source AMF has performed horizontal K_{AMF} derivation, which means a new K_{AMF} has been calculated.

6.1.6.2.36 Type: NasSecurityMode

Table 6.1.6.2.36-1: Definition of type NasSecurityMode

Attribute name	Data type	P	Cardinality	Description
integrityAlgorithm	IntegrityAlgorithm	M	1	Indicates the integrity protection algorithm
cipheringAlgorithm	CipheringAlgorithm	M	1	Indicates the ciphering algorithm

6.1.6.2.37 Type: PduSessionContext

Table 6.1.6.2.37-1: Definition of type PduSessionContext

Attribute name	Data type	P	Cardinality	Description	Applicability
pduSessionId	PduSessionId	M	1	Indicates the identifier of the PDU Session.	
smContextRef	Uri	M	1	Indicates the resource URI of the SM context, including the apiRoot (see clause 6.1.3.3.2 of TS 29.502 [16]). When present, it shall carry the URI of SM Context of: - I-SMF, for a PDU session with I-SMF; or - V-SMF, for HR PDU session; or - SMF, for non-roaming PDU session without I-SMF, or LBO roaming PDU session;	
sNssai	Snssai	M	1	Indicates the associated S-NSSAI for the PDU Session. It shall be the S-NSSAI in HPLMN in non-roaming, LBO roaming or HR roaming.	
altSnssai	Snssai	C	0..1	This IE shall be present if the S-NSSAI in the HPLMN (as indicated in the sNssai IE) was replaced by an alternative S-NSSAI in the HPLMN. When present, this IE shall indicate the alternative S-NSSAI in the HPLMN. See clause 5.15.19 of TS 23.501 [2].	
additionalSnssai	Snssai	C	0..1	This IE shall be present in intra-VPLMN mobility of LBO roaming and HR roaming. When present, this IE shall indicate the associated S-NSSAI in VPLMN for the PDU Session.	
altAdditionalSnssai	Snssai	C	0..1	This IE shall be present if S-NSSAI in the VPLMN (as indicated in the additionalSnssai IE) was replaced by an alternative S-NSSAI in the VPLMN. When present, this IE shall indicate the alternative S-NSSAI in the VPLMN. See clause 5.15.19 of TS 23.501 [2].	
dnn	Dnn	M	1	This IE shall indicate the Data Network Name. The DNN shall be the full DNN (i.e. with both the Network Identifier and Operator Identifier) for a HR PDU session, and it should be the full DNN in LBO and non-roaming scenarios. If the Operator Identifier is absent, the serving core network operator shall be assumed.	
selectedDnn	Dnn	C	0..1	This IE shall be present, if another DNN other than the UE requested DNN is selected for this PDU session. When present, it shall contain the selected DNN. The DNN shall be the full DNN (i.e. with both the Network Identifier and Operator Identifier) for a HR PDU session, and it should be the full DNN in LBO and non-roaming scenarios. If the Operator Identifier is absent, the serving core network operator shall be assumed.	
accessType	AccessType	M	1	Indicates the access type of the PDU session.	

additionalAccessType	AccessType	C	0..1	Indicates the additional access type for a MA PDU session, if the UE registers to both 3GPP access and Non-3GPP access.	
allocatedEbiList	array(EbiArpMapping)	C	1..N	This IE shall be present when at least one EBI is allocated to the PDU session. When present, this IE shall contain the EBIs currently allocated to the PDU session.	
hsmfId	NfInstanceId	C	0..1	This IE shall be present for non-roaming and home-routed PDU sessions. When present, it shall indicate the associated: - home SMF for HR PDU Session, or - SMF, for non-roaming PDU session, regardless of whether an I-SMF is involved or not.	
hsmfSetId	NfSetId	C	0..1	This IE shall be present, if available. When present, this IE shall contain the NF Set ID of the home SMF or the SMF indicated by hsmfId.	
hsmfServiceSetId	NfServiceSetId	C	0..1	This IE shall be present, if available. When present, this IE shall contain the NF Service Set ID of the selected PDUSession service instance of home SMF or the SMF indicated by hsmfId.	
smfBinding	SbiBindingLevel	C	0..1	This IE shall be present if available, for a non-roaming PDU session. When present, this IE shall contain the SBI binding level of the SMF's SM context resource.	
vsmfId	NfInstanceId	C	0..1	This IE shall be present for roaming PDU sessions. When present, it shall indicate the associated visited SMF for home-routed the PDU Session, or the SMF for the local-breakout PDU session (regardless of whether an I-SMF is involved or not).	
vsmfSetId	NfSetId	C	0..1	This IE shall be present, if available. When present, this IE shall contain the NF Set ID of the V-SMF.	
vsmfServiceSetId	NfServiceSetId	C	0..1	This IE shall be present, if available. When present, this IE shall contain the NF Service Set ID of the V-SMF's PDUSession service instance.	
vsmfBinding	SbiBindingLevel	C	0..1	This IE shall be present, if available. When present, this IE shall contain the SBI binding level of the V-SMF's SM context resource.	
ismfId	NfInstanceId	C	0..1	This IE shall be present if I-SMF is involved in the PDU session. When present, it shall indicate the associated I-SMF for the PDU Session.	DTSSA
ismfSetId	NfSetId	C	0..1	This IE shall be present, if available. When present, this IE shall contain the NF Set ID of the I-SMF.	DTSSA

ismfServiceSetId	NfServiceSetId	C	0..1	This IE shall be present, if available. When present, this IE shall contain the NF Service Set ID of the I-SMF's PDUSession service instance.	DTSSA
ismfBinding	SbiBindingLevel	C	0..1	This IE shall be present if available. When present, this IE shall contain the SBI binding level of the I-SMF's SM Context resource.	DTSSA
nsInstance	NsiId	C	0..1	This IE shall be present if available. When present, this IE shall Indicate Network Slice Instance for the PDU Session	
smfServiceInstanceId	string	O	0..1	When present, this IE shall contain the serviceInstanceId of the SMF PDUSession service instance serving the SM Context, i.e. of: - the I-SMF, for a PDU session with I-SMF; - the V-SMF, for a HR PDU session; or - the SMF, for a non-roaming or an LBO roaming PDU session without I-SMF. This IE may be used by the AMF to identify PDU session contexts affected by a failure or restart of the SMF service instance (see clause 6.2 of TS 23.527 [33]).	
maPduSession	boolean	C	0..1	This IE shall be present if available. When present, this IE shall indicate whether it is an MA PDU session. true: indicates the PDU session is MA PDU session; false (default): the PDU session is not MA PDU session.	
cnAssistedRanPara	CnAssistedRanPara	C	0..1	This IE shall be present if available. When present, this IE shall contain the PDU Session specific parameters received from the SMF and used by the AMF to derive the Core Network assisted RAN parameters tuning.	
nrfManagementUri	Uri	C	0..1	If included, this IE shall contain the API URI of the NFManagement Service (see clause 6.1.1 of TS 29.510 [29]) of the NRF or hNRF. It shall be present if it is returned from the NSSF or hNSSF (see clause 6.1.6.2.7 of TS 29.531 [18]).	
nrfDiscoveryUri	Uri	C	0..1	If included, this IE shall contain the API URI of the NFDiscovery Service (see clause 6.2.1 of TS 29.510 [29]) of the NRF or hNRF. It shall be present if it is returned from the NSSF or hNSSF (see clause 6.1.6.2.7 of TS 29.531 [18]).	

nrfAccessTokenUri	Uri	C	0..1	If included, this IE shall contain the API URI of the Access Token Service (see clause 6.3.2 of TS 29.510 [29]) of the NRF or hNRF. It shall be present if it is returned from the NSSF or hNSSF (see clause 6.1.6.2.7 of TS 29.531 [18]).	
smfBindingInfo	string	C	0..1	This IE shall be present if available, for a non-roaming PDU session. When present, this IE shall contain the Binding indications of the SMF's SM context resource and shall be set to the value of the 3gpp-Sbi-Binding header defined in clause 5.2.3.2.6 of TS 29.500 [4], without the header name.	
vsmfBindingInfo	string	C	0..1	This IE shall be present, if available. When present, this IE shall contain the Binding indications of the V-SMF's SM context resource and shall be set to the value of the 3gpp-Sbi-Binding header defined in clause 5.2.3.2.6 of TS 29.500 [4], without the header name.	
ismfBindingInfo	string	C	0..1	This IE shall be present if available. When present, this IE shall contain the Binding indications of the I-SMF's SM Context resource and shall be set to the value of the 3gpp-Sbi-Binding header defined in clause 5.2.3.2.6 of TS 29.500 [4], without the header name.	DTSSA
interPlmnApiRoot	Uri	C	0..1	This IE shall be present if this information is available. When present, it shall contain the apiRoot of the SM context to be used in inter-PLMN signalling request targeting the SM context. (NOTE)	
pgwFqdn	Fqdn	O	0..1	FQDN of the PGW in the PGW-C+SMF, to be included for interworking with EPS.	
pgwIpAddr	IpAddress	O	0..1	IP Address of the PGW in the PGW-C+SMF, to be included for interworking with EPS.	
plmnId	PlmnId	O	0..1	PLMN where the PGW-C+SMF is located.	
anchorSmfSupported Features	SupportedFeatures	O	0..1	When present, this IE shall include the features of the Nsmf_PDUSession service (see clause 6.1.8 of TS 29.502 [16]) that are supported by the H-SMF (or the SMF for a PDU sessions with I-SMF). (NOTE 2)	

anchorSmfOauth2Required	boolean	O	0..1	This IE may be present when new AMF and old AMF belong to the same PLMN. When present, this IE shall indicate whether the H-SMF (or the SMF for a PDU session with I-SMF) requires Oauth2-based authorization for accessing its Nsmf_PDUSession service - true: OAuth2 based authorization is required. - false: OAuth2 based authorization is not required. The absence of this IE means that no indication is available about the usage of Oauth2 for authorization of the anchor SMF's Nsmf_PDUSession service.	
hrsboAllowedInd	boolean	C	0..1	This IE shall be present during an intra-PLMN N2 handover, if this information is available (see clause 6.7.2.6 of TS 23.548 [58]). When present, it shall indicate whether HR-SBO is allowed for the PDU session and it shall be set as follows: - true: HR-SBO is allowed - false: HR-SBO is not allowed The absence of this IE shall not be interpreted as meaning that HR-SBO is allowed or not allowed.	
localOffloadingMgtAllowedInd	boolean	C	0..1	This IE shall be present if the information of whether I-SMF based Local Offloading Management is allowed is available in subscription data. When present, it shall indicate whether I-SMF based Local Offloading Management is allowed for the PDU session and it shall be set as follows: - true: allowed - false: not allowed The absence of this IE shall not be interpreted as meaning that I-SMF based Local Offloading Management is allowed or not allowed.	
pduSessionPrio	PduSessionPriority	C	0..1	This IE shall be present if available. The AMF shall use the priority of the PDU session indicated in this IE for further PDU Session related priority handling (i.e. to determine the SBI Message Priority (SMP) to set in subsequent signaling it sends related to the PDU session).	

NOTE 1: During an inter-PLMN mobility, the target AMF shall replace the apiRoot of the smContextRef with the interPlmnApiRoot if available and send the resulting smContextRef in the Create SM Context request towards the target V-SMF, I-SMF or anchor SMF. See TS 29.502 [16].

NOTE 2: The new AMF may use this IE to know the supported features of the H-SMF (or the SMF for a PDU session with I-SMF) and take action based on the supported features, e.g. the new AMF shall release the PDU session when V-SMF needs to be changed but the H-SMF does not support V-SMF change.

6.1.6.2.38 Type: NssaiMapping

Table 6.1.6.2.38-1: Definition of type NssaiMapping

Attribute name	Data type	P	Cardinality	Description
mappedSnssai	Snssai	M	1	Indicates the mapped S-NSSAI in the serving PLMN
hSnssai	Snssai	M	1	Indicates the S-NSSAI in home PLMN

6.1.6.2.39 Type: UeRegStatusUpdateReqData

Table 6.1.6.2.39-1: Definition of type UeRegStatusUpdateReqData

Attribute name	Data type	P	Cardinality	Description	Applicability
transferStatus	UeContextTransferStatus	M	1	This IE shall indicate if the previous UE context transfer was completed.	
toReleaseSessionList	array(PduSessionId)	C	1..N	This IE shall be present during UE Context Transfer procedure, if there are any PDU session(s) associated with Network Slice(s) which become no longer available. When present, this IE shall include all the PDU session(s) associated with no longer available S-NSSAI(s).	
pcfReselectedInd	boolean	C	0..1	This IE shall be present and set to true if the target AMF has decided to select a new PCF for AM Policy and/or UE Policy other than the one which was included in the UeContext by the old AMF. When present, it shall be set as follows: - true: the target AMF has selected new PCF(s) other than the one which was included in the UeContext by the old AMF for AM Policy and/or UE Policy.	
smfChangeInfoList	array(SmfChangeInfo)	C	1..N	This IE shall be present during an inter-AMF registration procedure, if there is an I-SMF or V-SMF change or removal for the related PDU session(s). When present, this IE shall indicate the I-SMF/V-SMF situation after the registration completion at the target AMF.	DTSSA
analyticsNotUsedList	array(Uri)	C	1..N	This IE shall be present to include the list of resource URIs of the analytics subscription(s) that are not taken over in the target AMF.	
toReleaseSessionInfo	array(ReleaseSessionInfo)	C	1..N	This IE shall be present during UE Context Transfer procedure, if there are any PDU session(s) that cannot be supported in the target AMF for a reason other than no longer available S-NSSAI(s) as specified in step 1 of clause 5.2.2.2.2.1. When present, this IE shall include list of the PDU session(s) and the release cause.	

6.1.6.2.40 Type: AssignEbiError

Table 6.1.6.2.40-1: Definition of type AssignEbiError

Attribute name	Data type	P	Cardinality	Description
error	ProblemDetails	M	1	Represents the application error information. The application level error cause shall be encoded in the "cause" attribute.
failureDetails	AssignEbiFailed	M	1	Describes the details of the failure including the list of ARPs for which the EBI assignment failed.

6.1.6.2.41 Type: UeContextCreateData

Table 6.1.6.2.41-1: Definition of type UeContextCreateData

Attribute name	Data type	P	Cardinality	Description	Applicability
ueContext	UeContext	M	1	Represents an individual ueContext resource to be created	
targetId	NgRanTargetId	M	1	Represents the identification of target RAN	
sourceToTargetData	N2InfoContent	M	1	This IE shall be included to contain the "Source to Target Transparent Container".	
pduSessionList	array(N2SmInformation)	M	1..N	This IE shall be included to contain the list of N2SmInformation, where each N2SmInformation includes the "Handover Required Transfer" received from the source RAN per PDU session ID.	
n2NotifyUri	Uri	M	1	This IE shall contain a callback URI to receive the N2 Information Notification.	
ueRadioCapability	N2InfoContent	C	0..1	This IE shall be included to contain the "UE Radio Capability Information" if available. (NOTE)	
ueRadioCapabilityForPaging	N2InfoContent	C	0..1	This IE shall be included to contain the "UE Radio Capability for Paging" if available. (NOTE)	
ngapCause	NgApCause	C	0..1	This IE shall be present, if available. When present, it shall represent the NGAP Cause received from RAN.	
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.1.8 is supported.	
servingNetwork	PlmnIdNid	C	0..1	A Source AMF complying with this release of the specification shall include this IE to indicate the current Serving Network. When present, this IE shall contain the serving core network operator PLMN ID and, for an SNPN, the NID that together with the PLMN ID identifies the SNPN.	
xrDeviceWith2Rx	XrDeviceWith2Rx	C	0..1	This IE shall be included to contain the "XR Device with 2Rx" as defined in TS 38.413 [12] if available during context transfer procedure.	
NOTE: The source AMF may decide to not include ueRadioCapability and ueRadioCapabilityForPaging if the target AMF supports the RACS feature and if: a. the PlmnAssiUeRadioCapId is included in the MM Context for an intra-PLMN AMF mobility procedure; or b. the ManAssiUeRadioCapId is included in the MM Context for an intra-PLMN or an inter-PLMN AMF mobility procedure.					

6.1.6.2.42 Type: UeContextCreatedData

Table 6.1.6.2.42-1: Definition of type UeContextCreatedData

Attribute name	Data type	P	Cardinality	Description
ueContext	UeContext	M	1	Represents the newly created individual ueContext resource
targetToSourceData	N2InfoContent	M	1	This IE shall contain the "Target to Source Transparent Container".
pduSessionList	array(N2SmInformation)	M	1..N	This IE shall be included to contain the list of N2SmInformation, where each N2SmInformation includes the "Handover Command Transfer" received from the SMF, per PDU session ID.
pcfReselectedInd	boolean	C	0..1	This IE shall be present and set to true if the target AMF has decided to select a new PCF for AM Policy and/or UE Policy other than the one which was included in the UeContext by the old AMF. When present, it shall be set as follows: - true: the target AMF has selected a new PCF other than the one which was included in the UeContext by the old AMF for AM Policy and/or UE Policy.
failedSessionList	array(N2SmInformation)	C	1..N	This IE shall be included to contain a list of N2SmInformation, where each N2SmInformation includes the "Handover Preparation Unsuccessful Transfer" N2 SM content either received from the SMF for a PDU session failed to be handed over or generated by the target AMF for a PDU session not accepted by the target AMF (e.g. due to no response from the SMF within a maximum wait timer or due to non-available S-NSSAI in the target AMF). See NOTE.
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.1.8 is supported.
analyticsNotUsedList	array(Uri)	C	1..N	This IE shall be present to include the list of resource URIs of the analytics subscription(s) that are not taken over in the target AMF.
NOTE: As an exception, the AMF generates N2 SM Information (Handover Preparation Unsuccessful Transfer IE) for a PDU session not accepted by the AMF, since this N2 SM IE needs to be included in the Handover Command sent by the source AMF to the source NG-RAN; this N2 SM IE carries a Cause value.				

6.1.6.2.43 Type: UeContextCreateError

Table 6.1.6.2.43-1: Definition of type UeContextCreateError

Attribute name	Data type	P	Cardinality	Description	Applicability
error	ProblemDetails	M	1	Represents the detailed application error information. The application level error cause shall be encoded in the "cause" attribute.	
ngapCause	NgApCause	C	0..1	This IE shall be present, if available. When present, it shall represent the NGAP Cause received from RAN.	
targetToSourceFailureData	N2InfoContent	C	0..1	This IE shall be present if a "Target to Source Failure Transparent Container" has been received from the target NG-RAN. When present, this IE shall contain this container.	NPN

6.1.6.2.44 Type: NgRanTargetId

Table 6.1.6.2.44-1: Definition of type NgRanTargetId

Attribute name	Data type	P	Cardinality	Description
ranNodeId	GlobalRanNodeId	M	1	Indicates the identity of the RAN node. The IE shall contain either the gNB ID or the NG-eNB ID.
tai	Tai	M	1	Indicates the selected TAI.

6.1.6.2.45 Type: N2InformationTransferError

Table 6.1.6.2.45-1: Definition of type N2InformationTransferError

Attribute name	Data type	P	Cardinality	Description
error	ProblemDetails	M	1	More information on the error shall be provided in the "cause" attribute of the "ProblemDetails" structure.
pwsErrorInfo	PWSErrorData	C	0..1	This IE shall be present if the n2InformationClass is "PWS" in N2InformationTransferReqData.
nrppaErrorInfo	array(NrppaRspPerNgran)	O	1..N	This IE may be present if the n2InformationClass is "NRPPa" in N2InformationTransferReqData.

6.1.6.2.46 Type: PWSResponseData

Table 6.1.6.2.46-1: Definition of type PWSResponseData

Attribute name	Data type	P	Cardinality	Description
ngapMessageType	Uinteger	M	1	This IE shall identify the message type of the message being sent. Its value is the numeric code of the Procedure Code defined in ASN.1 in clause 9.4.7 in TS 38.413 [12].
serialNumber	Uint16	M	1	This IE shall contain the Serial Number of the associated PWS response message.
messageIdentifier	integer	M	1	This IE shall contain the Message Identifier of the associated PWS response message.
unknownTAIList	array(Tai)	O	1..N	This IE shall contain the Unknown Tracking Area List which may be present in the associated PWS response message.
n2PwsSubMissInd	boolean	O	0..1	This IE should be present when sendRanResponse IE with the value true is included in the request, i.e. the RAN responses are expected to be notified to the NF service consumer (i.e. the sender CBCF or PWS-IWF), and the corresponding N2 information subscription subscription is not available in the AMF. When present, this IE shall be set as following: - true: Corresponding N2 information subscription to receive the requested RAN responses is missing in the AMF.

6.1.6.2.47 Type: PWSErrorData

Table 6.1.6.2.47-1: Definition of type PWSErrorData

Attribute name	Data type	P	Cardinality	Description
namfCause	integer	M	1	Represents the cause value for the error that the AMF detected. Cause values: 0 - Message accepted 1 - Parameter not recognised 2 - Parameter value invalid 3 - Valid message not identified 4 - Tracking area not valid 5 - Unrecognised message 6 - Missing mandatory element 7 - AMF capacity exceeded 8 - AMF memory exceeded 9 - Warning broadcast not supported 10 - Warning broadcast not operational 11 - Message reference already used 12 - Unspecified error 13 - Transfer syntax error 14 - Semantic error 15 - Message not compatible with receiver state

6.1.6.2.48 Void

6.1.6.2.49 Type: NgKsi

Table 6.1.6.2.49-1: Definition of type NgKsi

Attribute name	Data type	P	Cardinality	Description
tsc	ScType	M	1	Indicates whether the security context type is native or mapped.
ksi	integer	M	1	Indicates the key set identifier value. The value is within the range 0 to 6.

6.1.6.2.50 Type: KeyAmf

Table 6.1.6.2.50-1: Definition of type KeyAmf

Attribute name	Data type	P	Cardinality	Description
keyType	KeyAmfType	M	1	Indicates whether the keyAmf represents K_{amf} or $K'_{amf.}$
keyVal	string	M	1	Indicates the key value. The key value is encoded as a string of hexadecimal characters. Pattern: '^[A-Fa-f0-9]$'

6.1.6.2.51 Type: ExpectedUeBehavior

Table 6.1.6.2.51-1: Definition of type ExpectedUeBehavior

Attribute name	Data type	P	Cardinality	Description
expMoveTrajectory	array(UserLocation)	M	1..N	This IE shall contain a list of user location areas where the UE is expected to move.
validityTime	DateTime	M	1	This IE shall contain the UTC time upto which the UE moving trajectory is valid.

6.1.6.2.52 Type: UeRegStatusUpdateRspData

Table 6.1.6.2.52-1: Definition of type UeRegStatusUpdateRspData

Attribute name	Data type	P	Cardinality	Description
regStatusTransferComplete	boolean	M	1	This IE shall indicate if the status update of UE context transfer is completed successfully at the source AMF or not. The value shall be set to true if the context transfer is completed successfully and false if the context transfer did not complete successfully.

6.1.6.2.53 Type: N2RanInformation

Table 6.1.6.2.53-1: Definition of type N2RanInformation

Attribute name	Data type	P	Cardinality	Description
n2InfoContent	N2InfoContent	M	1	This IE shall contain the N2 RAN information to transfer.

6.1.6.2.54 Type: N2InfoNotificationRspData

Table 6.1.6.2.54-1: Definition of type N2InfoNotificationRspData

Attribute name	Data type	P	Cardinality	Description
secRatDataUsageList	array(N2SmInformation)	C	1..N	This IE shall be present in the N2InfoNotify response sent by the source AMF to the target AMF during an Inter NG-RAN node N2 based handover procedure (see clause 5.2.2.3.6.2), if Secondary Rat Usage Data are available at the source AMF for one or more PDU sessions. When present, this IE shall contain a list of N2SmInformation, where each N2SmInformation includes the "Secondary RAT Data Usage Report Transfer" information received from the source RAN for a given PDU session. The sNssai IE and subjectToHo IE shall not be included in N2SmInformation.

6.1.6.2.55 Type: SmallDataRateStatusInfo

Table 6.1.6.2.55-1: Definition of type SmallDataRateStatusInfo

Attribute name	Data type	P	Cardinality	Description
singleNssai	Snssai	M	1	S-NSSAI
dnn	Dnn	M	1	This IE shall indicate the Data Network Name. The DNN shall be the full DNN (i.e. with both the Network Identifier and Operator Identifier) for a HR PDU session, and it should be the full DNN in LBO and non-roaming scenarios. If the Operator Identifier is absent, the serving core network operator shall be assumed.
smallDataRateStatus	SmallDataRateStatus	M	1	Small data rate status related to the S-NSSAI and Dnn.

6.1.6.2.56 Type: SmfChangeInfo

Table 6.1.6.2.56-1: Definition of type SmfChangeInfo

Attribute name	Data type	P	Cardinality	Description
pduSessionIdList	array(PduSessionId)	M	1..N	PDU Session ID(s) for which the smfChangeInd applies.
smfChangeInd	SmfChangeIndication	M	1	Indicates the I-SMF or V-SMF change or removal.

6.1.6.2.57 Type: V2xContext

Table 6.1.6.2.57-1: Definition of type V2xContext

Attribute name	Data type	P	Cardinality	Description
nrV2xServicesAuth	NrV2xAuth	C	0..1	This IE shall be present if the UE is authorized to use the NR sidelink for V2X services.
lteV2xServicesAuth	LteV2xAuth	C	0..1	This IE shall be present if the UE is authorized to use the LTE sidelink for V2X services.
nrUeSidelinkAmbr	BitRate	C	0..1	This IE shall be present if the UE is authorized for NR V2X services. When present, this IE contains subscription data on UE-PC5-AMBR for NR V2X services.
lteUeSidelinkAmbr	BitRate	C	0..1	This IE shall be present if the UE is authorized for LTE V2X services. When present, this IE contains subscription data on UE-PC5-AMBR for LTE V2X services.
pc5QoSPara	Pc5QoSPara	C	0..1	This IE shall be present if the UE is authorized for NR V2X services. When present, this IE contains policy data on the PC5 QoS parameters.

6.1.6.2.58 Type: ImmediateMdtConf

Table 6.1.6.2.58-1: Definition of type ImmediateMdtConf

Attribute name	Data type	P	Cardinality	Description
jobType	JobType	M	1	This IE shall indicate the Job type for MDT, see TS 32.422 [30].
measurementLteList	array(MeasurementLteForMdt)	C	1..N	This IE shall be present if available. When present, this IE shall contain a list of the measurements that shall be collected for LTE.
measurementNrList	array(MeasurementNrForMdt)	C	1..N	This IE shall be present if available, when present, this IE shall contain a list of the measurements that shall be collected for NR.
reportingTriggerList	array(ReportingTrigger)	C	1..N	This IE shall be present if available. When present, this IE shall contain a list of the reporting triggers.
reportInterval	ReportIntervalMdt	C	0..1	This IE shall be present if available. When present, this IE shall indicate the interval between the periodical measurements to be taken when UE is in connected in LTE.
reportIntervalNr	ReportIntervalNrMdt	C	0..1	This IE shall be present if available. When present, this IE shall indicate the interval between the periodical measurements to be taken when UE is in connected in NR.
reportAmount	ReportAmountMdt	C	0..1	This IE shall be present if available. When present, this IE shall indicate the number of measurement reports that shall be taken for periodical reporting while UE is in connected.
eventThresholdRsrp	integer	C	0..1	This IE shall be present if available. When present, this IE shall indicate the Event Threshold for RSRP. Minimum = 0. Maximum = 97.
eventThresholdRsrq	integer	C	0..1	This IE shall be present if available. When present, this IE shall indicate the Event Threshold for RSRQ. Minimum = 0. Maximum = 34.
eventThresholdRsrpNr	integer	C	0..1	This IE shall be present if available. When present, this IE shall indicate the Event Threshold for RSRP in NR. Minimum = 0. Maximum = 127.
eventThresholdRsrqNr	integer	C	0..1	This IE shall be present if available. When present, this IE shall indicate the Event Threshold for RSRQ in NR. Minimum = 0. Maximum = 127.
collectionPeriodRmmLte	CollectionPeriodRmmLteMdt	C	0..1	This IE shall be present if available. When present, it shall contain the collection period that should be used to collect available measurement samples in case of RRM configured measurements.
collectionPeriodRmmNr	CollectionPeriodRmmNrMdt	C	0..1	This IE shall be present if available. When present, it shall contain the collection period that should be used to collect available measurement samples in case of RRM configured measurements when UE is in NR.
measurementPeriodLte	MeasurementPeriodLteMdt	C	0..1	This IE shall be present if available. When present, it shall contain the measurement period that should be used for the Data Volume and Scheduled IP Throughput measurements in LTE.
areaScope	AreaScope	O	0..1	When present, this IE shall contain the area in Cells or Tracking Areas where the MDT data collection shall take place, see TS 32.422 [30].
positioningMethod	PositioningMethodMdt	O	0..1	When present, it shall indicate the positioning method that shall be used for the MDT job in LTE.
addPositioningMethodList	array(PositioningMethodMdt)	O	1..N	This IE may be present if positioningMethod IE is present. When present, it shall indicate a list of the additional positioning methods that shall be used for the MDT job
mdtAllowedPlmnIdList	array(PlmnId)	O	1..16	When present, this IE shall contain the PLMNs related to MDT.

sensorMeasurementList	array(SensorMeasurement)	C	1..N	This IE shall be present if available. When present, this IE shall include a list the sensor measurements to be collected for UE in NR if they are available.
sensorMeasurementLteList	array(SensorMeasurement)	C	1..N	This IE shall be present if available. When present, this IE shall include a list of the sensor measurements to be collected for UE in LTE if they are available.
eventThresholdSinrNr	integer	C	0..1	This IE shall be present if the report trigger parameter is configured for A2 event reporting or A2 event triggered periodic reporting and the job type parameter is configured for Immediate MDT or combined Immediate MDT and Trace in NR. When present, this IE shall indicate the Event Threshold for SINR, and the value shall be between 0-127.
bluetoothMeasurementNr	BluetoothMeasurement	O	0..1	When present, this IE shall include the bluetooth measurements to be collected for UE in NR if they are available.
bluetoothMeasurementLte	BluetoothMeasurement	O	0..1	When present, this IE shall include the bluetooth measurements to be collected for UE in LTE if they are available.
wlanMeasurementNr	WlanMeasurement	O	0..1	When present, this IE shall include the WLAN Measurements to be collected for UE in NR if they are available.
wlanMeasurementLte	WlanMeasurement	O	0..1	When present, this IE shall include the WLAN Measurements to be collected for UE in LTE if they are available.

6.1.6.2.59 Type: V2xInformation

Table 6.1.6.2.59-1: Definition of type V2xInformation

Attribute name	Data type	P	Cardinality	Description
n2Pc5Pol	N2InfoContent	C	0..1	This IE shall be present if N2 PC5 policy should be transferred. When present, the IE contains the NGAP V2X related IEs specified in clause 9.3.1.150 of TS 38.413 [12].

6.1.6.2.60 Type: EpsNasSecurityMode

Table 6.1.6.2.60-1: Definition of type EpsNasSecurityMode

Attribute name	Data type	P	Cardinality	Description
integrityAlgorithm	EpsNasIntegrityAlgorithm	M	1	Indicates the integrity protection algorithm for EPS NAS
cipheringAlgorithm	EpsNasCipheringAlgorithm	M	1	Indicates the ciphering algorithm for EPS NAS.

6.1.6.2.61 Type: UeContextRelocateData

Table 6.1.6.2.61-1: Definition of type UeContextRelocateData

Attribute name	Data type	P	Cardinality	Description	Applicability
ueContext	UeContext	M	1	Represents an individual ueContext resource to be relocated.	
targetId	NgRanTargetId	M	1	Represents the identification of target RAN	
sourceToTargetData	N2InfoContent	M	1	This IE shall be included to contain the "Source to Target Transparent Container".	
forwardRelocationRequest	RefToBinaryData	M	1	This IE shall be present, and it shall contain the reference to the binary data carrying the Forward Relocation Request message (see clause 6.1.6.4).	
pduSessionList	array(N2SmInformation)	C	1..N	This IE shall contain the list of N2SmInformation, where each N2SmInformation includes a PDU Session Resource Setup Request Transfer IE (see clause 9.3.4.1 of TS 38.413 [24]) received from the SMF(s) per PDU session ID.	
ueRadioCapability	N2InfoContent	C	0..1	This IE shall be included to contain the "UE Radio Capability Information" if available.	
ngapCause	NgApCause	C	0..1	This IE shall be present, if available. When present, it shall represent the NGAP Cause mapped from the received S1-AP cause from the source E-UTRAN. Refer to TS 29.010 [50] for the mapping of cause values between S1AP and NGAP.	
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.1.8 is supported.	
xrDeviceWith2Rx	XrDeviceWith2Rx	C	0..1	This IE shall be included to contain the "XR Device with 2Rx" as defined in TS 38.413 [12] if available during context transfer procedure.	

6.1.6.2.62 Type: UeContextRelocatedData

Table 6.1.6.2.62-1: Definition of type UeContextRelocatedData

Attribute name	Data type	P	Cardinality	Description
ueContext	UeContext	M	1	Represents an individual ueContext resource relocated to a new AMF.

6.1.6.2.63 Void

6.1.6.2.64 Type: EcRestrictionDataWb

Table 6.1.6.2.64-1: Definition of type EcRestrictionData

Attribute name	Data type	P	Cardinality	Description
ecModeARestricted	boolean	O	0..1	If present, indicates whether Enhanced Coverage Mode A is restricted or not. true: Enhanced Coverage Mode A is restricted. false or absent: Enhanced Coverage Mode A is not restricted.
ecModeBRestricted	boolean	M	1	This IE indicates whether Enhanced Coverage Mode B is restricted or not. true: Enhanced Coverage Mode B is restricted. false: Enhanced Coverage Mode B is not restricted.

6.1.6.2.65 Type: ExtAmfEventSubscription

Table 6.1.6.2.65-1: Definition of type ExtAmfEventSubscription as a list of to be combined data types

Data type	Cardinality	Description	Applicability
AmfEventSubscription	1	AMF event subscription	
AmfEventSubscriptionAddInfo	1	Additional information for the AMF event subscription, e.g. Binding Indications, NF type of the NF that created the subscription.	

6.1.6.2.66 Type: AmfEventSubscriptionAddInfo

Table 6.1.6.2.66-1: Definition of type AmfEventSubscriptionAddInfo

Attribute name	Data type	P	Cardinality	Description
bindingInfo	array(string)	O	1..2	Binding indications received for event notifications (i.e. with "callback" scope) or for subscription change event notifications (i.e. with "subscription-events" scope) for an AMF event subscription. When present, entries of the array shall be set to the value of the 3gpp-Sbi-Binding header defined in clause 5.2.3.2.6 of TS 29.500 [4], without the header name. Example of an array entry: "bl= nf-set; nfset=set1.udmset.5gc.mnc012.mcc345; servname=nudm-ee;scope=subscription-events"
subscribingNfType	NFType	O	0..1	This IE should be present if the information is available. When present, it shall contain the NF type of the NF that created the subscription. (NOTE 1)
eventSyncInd	boolean	O	0..1	This IE should be present with value "true" when the event subscription shall be synchronized with UDM during EPS to 5GS mobility registration procedure, as specified in clause 5.3.2.4.2. When present, this IE shall be set as following: - true: the event subscription shall be synchronized with UDM. - false: the event subscription shall not be synchronized with UDM.
nfConsumerInfo	array(string)	C	1..N	When present, this IE shall contain the NF Service Consumer information received together with the AMF event subscription and entries of the array shall be set to the value of the 3gpp-Sbi-Consumer-Info header defined in clause 5.2.3.3.7 of TS 29.500 [4], without the header name.
aoiStateList	map(AreaOfInterestEventState)	O	1..N	Map of subscribed Area of Interest (AoI) Event State in the old AMF. For the subscribed AoI Event(s), the JSON pointer to an AmfEventArea element in the areaList IE (or a PresenceInfo element in presenceInfoList IE) of the AmfEvent data type (see clause 6.2.6.2.3) shall be the key of the map. (NOTE 2)
accessToken	string	O	0..1	See clause 13.4.1.4 of TS 33.501 [27], and clause 5.2.2.2.1.1 and 5.2.2.2.3.1 for the use of this IE. When present, this IE shall contain a JWS Compact Serialized representation of the JWS signed JSON object containing AccessTokenClaims (see clause 6.3.5.2.4 of TS 29.510 [29]) that was received by the source AMF for authorizing the subscription.
amfSetLevelBulkSubs	boolean	C	0..1	This IE shall be present and set to true if the source AMF supports the AMF Set level Bulk Subscription feature (see Table 6.2.8-1), the subscription is a subscription for a group of UEs and this is an AMF Set level bulk subscription. The presence of this IE with the false value shall be prohibited.

ueAccessBehaviorTrends	array(UeAccessBehaviorReportItem)	O	1..N	When present, this IE shall contain the UE access behavior trend information collected and calculated by the AMF. This IE may be present when there is a subscription for the event "UE_ACCESS_BEHAVIOR_TRENDS" and the event subscription is transferred from source AMF to a target AMF and at least one occurrence of the event is already available in the source AMF.
ueLocationTrends	array(UeLocationTrendsReportItem)	O	1..N	When present, this IE shall contain the UE location trend information collected and calculated by the AMF. This IE may be present when there is a subscription for the event "UE_LOCATION_TRENDS" and the event subscription is transferred from source AMF to a target AMF and at least one occurrence of the event is already available in the source AMF.
NOTE 1: In scenarios where an "intermediate NF" (e.g. UDM) creates a subscription on behalf of a "source NF" (e.g. NEF), this IE shall contain the NF type of the "intermediate NF". The NF type of the "source NF" may be available in the AmfEventSubscription. NOTE 2: The new AMF may use the information to determine whether the UE presence state in the AOI(s) has changed, thus should be reported to the NF consumer.				

6.1.6.2.67 Type: UeContextCancelRelocateData

Table 6.1.6.2.67-1: Definition of type UeContextCancelRelocateData

Attribute name	Data type	P	Cardinality	Description
supi	Supi	C	0..1	This IE shall be present if the UE is emergency registered and the SUPI is not authenticated.
relocationCancelRequest	RefToBinaryData	M	1	This IE shall be present, and it shall contain the reference to the binary data carrying the GTP-C Relocation Cancel Request message (see clause 6.1.6.4).

6.1.6.2.68 Type: UeDifferentiationInfo

Table 6.1.6.2.68-1: Definition of type UeDifferentiationInfo

Attribute name	Data type	P	Cardinality	Description
periodicComInd	PeriodicCommunicationIndicator	O	0..1	This IE indicates whether the UE communicates periodically or not, e.g. only on demand.
periodicTime	DurationSec	O	0..1	This IE indicates the interval time of periodic communication (see TS 23.502 [3] clause 4.15.6.3).
scheduledComTime	ScheduledCommunicationTime	O	0..1	This IE indicates time and day of the week when the UE is available for communication (see TS 23.502 [3] clause 4.15.6.3).
stationaryInd	StationaryIndication	O	0..1	This IE indicates whether the UE is stationary or mobile (see TS 23.502 [3] clause 4.15.6.3).
trafficProfile	TrafficProfile	O	0..1	This IE indicates the type of data transmission: single packet transmission (UL or DL), dual packet transmission (UL with subsequent DL or DL with subsequent UL), multiple packets transmission
batteryInd	BatteryIndication	O	0..1	This IE indicates the power consumption type(s) of the UE (see TS 23.502 [3] clause 4.15.6.3).
validityTime	DateTime	O	0..1	When present, this IE identifies the UTC time when the expected UE behaviour parameters expire and shall be deleted locally if it expire (see TS 23.502 [3] clause 4.15.6.3). When absent, no expiry for the expected UE behaviour parameters applies.

6.1.6.2.69 Type: CeModeBInd

Table 6.1.6.2.69-1: Definition of type CeModeBInd

Attribute name	Data type	P	Cardinality	Description
ceModeBSupportInd	boolean	M	1	This IE shall contain the CE-mode-B Support Indicator (See TS 38.413 [12], clause 9.3.1.156). This IE shall be set as follows: - true: CE-mode-B is supported; - false: CE-mode-B is not supported.

6.1.6.2.70 Type: LteMInd

Table 6.1.6.2.70-1: Definition of type LteMInd

Attribute name	Data type	P	Cardinality	Description
lteCatMInd	boolean	M	1	This IE shall contain the LTE-M Indication (See TS 38.413 [12], clause 9.3.1.157). This IE shall be set as follows: - true: LTE-M is indicated by the UE; - false: LTE-M is not indicated by the UE.

6.1.6.2.71 Type: NpnAccessInfo

Table 6.1.6.2.71-1: Definition of type NpnAccessInfo

Attribute name	Data type	P	Cardinality	Description
cellCagInfo	array(CagId)	O	1..N	This IE shall contain the CAG List of the CAG cell.

6.1.6.2.72 Type: ProseContext

Table 6.1.6.2.72-1: Definition of type ProseContext

Attribute name	Data type	P	Cardinality	Description	Applicability
directDiscovery	UeAuth	C	0..1	This IE shall be present if the UE is authorized to use the NR sidelink for the ProSe Direct Discovery service.	ProSe
directComm	UeAuth	C	0..1	This IE shall be present if the UE is authorized to use the NR sidelink for the ProSe Direct Communication service.	ProSe
l2Relay	UeAuth	C	0..1	This IE shall be present if the UE is authorized to act as a 5G ProSe Layer-2 UE-to-Network Relay.	ProSe
l3Relay	UeAuth	C	0..1	This IE shall be present if the UE is authorized to act as a 5G ProSe Layer-3 UE-to-Network Relay.	ProSe
l2Remote	UeAuth	C	0..1	This IE shall be present if the UE is authorized to act as a 5G ProSe Layer-2 Remote UE.	ProSe
l3Remote	UeAuth	C	0..1	This IE shall be present if the UE is authorized to act as a 5G ProSe Layer-3 Remote UE.	ProSe
l2UeRelay	UeAuth	C	0..1	This IE shall be present if the UE is authorized to act as a 5G ProSe Layer-2 UE-to-UE Relay.	ProSe
l3UeRelay	UeAuth	C	0..1	This IE shall be present if the UE is authorized to act as a 5G ProSe Layer-3 UE-to-UE Relay.	ProSe
l2End	UeAuth	C	0..1	This IE shall be present if the UE is authorized to act as a 5G ProSe Layer-2 End UE.	ProSe
l3End	UeAuth	C	0..1	This IE shall be present if the UE is authorized to act as a 5G ProSe Layer-3 End UE.	ProSe
multiPathComm	UeAuth	C	0..1	This IE shall be present if the UE is authorized to use multi-path communication via direct Uu path and via 5G ProSe Layer-2 UE-to-Network Relay as a 5G ProSe Layer-2 Remote UE.	ProSe
nrUePc5Ambr	BitRate	C	0..1	This IE shall be present if the UE is authorized to use the NR sidelink for the ProSe services. When present, this IE contains the ProSe NR UE-PC5-AMBR.	ProSe
pc5QoSPara	Pc5QoSPara	C	0..1	This IE shall be present if the UE is authorized to use the NR sidelink for the ProSe services. When present, this IE contains policy data on the PC5 QoS parameters for the ProSe services on the NR sidelink.	ProSe
l3IntermRelay	UeAuth	C	0..1	This IE shall be present if the UE is authorized to act as a 5G ProSe Layer-3 intermediate UE-to-Network Relay.	ProSe_Multihop
l3MultihopRemote	UeAuth	C	0..1	This IE shall be present if the UE is authorized to act as a 5G ProSe Layer-3 Remote UE supporting Multi-hop 5G ProSe Layer-3 UE-to-Network Relay.	ProSe_Multihop
l3NetMultihopRelay	UeAuth	C	0..1	This IE shall be present if the UE is authorized to act as a 5G ProSe Layer-3 UE-to-Network Relay supporting Multi-hop 5G ProSe Layer-3 UE-to-Network Relay.	ProSe_Multihop
l3UeMultihopRelay	UeAuth	C	0..1	This IE shall be present if the UE is authorized to act as a 5G ProSe Layer-3 UE-to-UE Relay supporting Multi-hop 5G ProSe Layer-3 UE-to-UE Relay.	ProSe_Multihop
l3EndMultihopRelay	UeAuth	C	0..1	This IE shall be present if the UE is authorized to act as a 5G ProSe Layer-3 End UE supporting Multi-hop 5G ProSe Layer-3 UE-to-UE Relay.	ProSe_Multihop
l2IntermRelay	UeAuth	C	0..1	This IE shall be present if the UE is authorized to act as a 5G ProSe Layer-2 intermediate UE-to-Network Relay.	ProSe_Multihop
l2MultihopRemote	UeAuth	C	0..1	This IE shall be present if the UE is authorized to act as a 5G ProSe Layer-2 Remote UE supporting Multi-hop 5G ProSe Layer-2 UE-to-Network Relay.	ProSe_Multihop
l2NetMultihopRelay	UeAuth	C	0..1	This IE shall be present if the UE is authorized to act as a 5G ProSe Layer-2 UE-to-Network Relay supporting Multi-hop 5G ProSe Layer-2 UE-to-Network Relay.	ProSe_Multihop

6.1.6.2.73 Type: AnalyticsSubscription

Table 6.2.6.2.73-1: Definition of type AnalyticsSubscription

Attribute name	Data type	P	Cardinality	Description
nwdafId	NfInstanceId	C	0..1	This IE shall be present, if available. When present, this IE shall contain the NF Instance ID of the NWDAF. (NOTE).
nwdafSetId	NfSetId	C	0..1	This IE shall be present, if available. When present, this IE shall contain the NF Set ID of the NWDAF. (NOTE).
nwdafSubscriptionList	array(NwdafSubscription)	M	1..N	List of NWDAF subscriptions identified by subscription Id.
NOTE: At least one nwdafId or nwdafSetId shall be included.				

6.1.6.2.74 Type: NwdafSubscription

Table 6.2.6.2.74-1: Definition of type NwdafSubscription

Attribute name	Data type	P	Cardinality	Description
nwdafEvtSubsServiceUri	Uri	M	1	It identifies the resource URI of the individual NWDAF subscription.
nwdafEventsSubscription	NnwdafEventsSubscription	M	1	The created Individual NWDAF Event Subscription resource

6.1.6.2.75 Type: UpdpSubscriptionData

Table 6.1.6.2.75-1: Definition of type UpdpSubscriptionData

Attribute name	Data type	P	Cardinality	Description
updpNotifySubscriptionId	string	M	1	Represents the Id created by the AMF for the subscription to notify a UE policy delivery related N1 information.
updpNotifyCallbackUri	Uri	M	1	This IE represents the callback URI on which the UE policy delivery related N1 message shall be notified.
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.1.8 is supported by the NF service consumer.
updpCallbackBinding	string	C	0..1	This IE shall be present if Binding Indication was received for the PCF for the callback URI. When present, this IE shall contain the Binding indication of callback URI and shall be set to the value of the 3gpp-Sbi-Binding header defined in clause 5.2.3.2.6 of TS 29.500 [4], without the header name.

6.1.6.2.76 Type: ProSeInformation

Table 6.1.6.2.76-1: Definition of type ProSeInformation

Attribute name	Data type	P	Cardinality	Description
n2Pc5ProSePol	N2InfoContent	M	0..1	This attribute contains the N2 PC5 policy for 5G ProSe. This IE contains the NGAP ProSe related IEs specified in TS 38.413 [12].

6.1.6.2.77 Type: ReleaseSessionInfo

Table 6.1.6.2.77-1: Definition of type ReleaseSessionInfo

Attribute name	Data type	P	Cardinality	Description
releaseSessionList	array(PduSessionId)	M	1..N	This IE shall include the PDU session Id(s) to be released.
releaseCause	ReleaseCause	M	1	This IE shall include the cause to release the PDU session(s).

6.1.6.2.78 Type: AreaOfInterestEventState

Table 6.1.6.2.78-1: Definition of type AreaOfInterestEventState

Attribute name	Data type	P	Cardinality	Description
presence	PresenceState	M	1	This IE shall contain the UE presence state for the indicated area of interest.
individualPraIdList	array(string)	C	1..N	This IE shall be present if the indicated area of interest referring to a set of Core Network predefined Presence Reporting Areas and the UE is in at least one individual PRA within the set of Core Network predefined Presence Reporting Areas. When present, this IE shall contain the PRA Identifier of the individual PRA(s) where the UE is located.

6.1.6.2.79 Type: TssInformation

Table 6.1.6.2.79-1: Definition of type TssInformation

Attribute name	Data type	P	Cardinality	Description
nfId	NfInstanceId	C	0..1	This IE shall be present when the N2InfoContainer containing the TssInformation is included in N2InformationTransferReqData. When present, this IE shall carry the NF instance identity of the NF Service Consumer (e.g. TSCTSF).
tssContainer	array(N2InfoContent)	C	1..10	This IE shall be present if the TSS N2 information to be relayed between TSCTSF and AN contains: - one Timing Synchronization Status Request message sent from the TSCTSF to NG-RANs, or - one or more Timing Synchronization Status Report message(s) sent from the NG-RAN(s) to the TSCTSF. When present, it shall represent the N2 information information to be transferred between the TSCTSF and the NG-RAN node(s).
tssRspPerNgranList	array(TssRspPerNgran)	O	1..10	This IE may be present if TSS related N2 information is to be transferred from NG-RANs to the TSCTSF, i.e., to contain the Timing Synchronization Status Failure message, or Timing Synchronization Status Response message with the Criticality Diagnostics IE being present, or to report a failure related to a NG-RAN.

6.1.6.2.80 Type: AmPolicyInfoContainer

Table 6.1.6.2.80-1: Definition of type AmPolicyInfoContainer

Attribute name	Data type	P	Cardinality	Description
sliceUsgCtrlInfoSets	map(SliceUsage ControlInfo)	C	1..N	This IE shall be present when available. When present, this IE shall indicate the network slice usage control related information (e.g. Network Slice Deregistration Inactivity Timer) received from PCF of AM Policy. (NOTE) The key of the map is the S-NSSAI to which the network slice usage control related information (the value part of the map) is related.
NOTE: The SliceUsageControlInfo within the sliceUsgCtrlInfoSets attribute does not include any information of the PDU Session Inactivity Timer.				

6.1.6.2.81 Type: RslpInformation

Table 6.1.6.2.81-1: Definition of type RslpInformation

Attribute name	Data type	P	Cardinality	Description
n2Pc5RslpPol	N2InfoContent	M	1	This attribute contains the N2 PC5 policy for Ranging/SL positioning. This IE contains the Ranging and Sidelink Positioning Service Information specified in TS 38.413 [12].

6.1.6.2.82 Type: A2xContext

Table 6.1.6.2.82-1: Definition of type A2xContext

Attribute name	Data type	P	Cardinality	Description
nrA2xServicesAuth	NrA2xAuth	C	0..1	This IE shall be present if the UE is authorized to use the NR sidelink for A2X services.
lteA2xServicesAuth	LteA2xAuth	C	0..1	This IE shall be present if the UE is authorized to use the LTE sidelink for V2X services.
nrUeSidelinkAmbr	BitRate	C	0..1	This IE shall be present if the UE is authorized for NR A2X services. When present, this IE contains subscription data on UE-PC5-AMBR for NR A2X services.
lteUeSidelinkAmbr	BitRate	C	0..1	This IE shall be present if the UE is authorized for LTE A2X services. When present, this IE contains subscription data on UE-PC5-AMBR for LTE A2X services.
pc5QoSPara	Pc5QoSPara	C	0..1	This IE shall be present if the UE is authorized for NR A2X services. When present, this IE contains policy data on the PC5 QoS parameters.

6.1.6.2.83 Type: A2xInformation

Table 6.1.6.2.83-1: Definition of type A2xInformation

Attribute name	Data type	P	Cardinality	Description
n2Pc5Pol	N2InfoContent	C	0..1	This IE shall be present if N2 PC5 policy should be transferred. When present, the IE contains the NGAP A2X related IEs specified in clause 9.3.1.150 of TS 38.413 [12].

6.1.6.2.84 Type: LcsUpContext

Table 6.1.6.2.84-1: Definition of type LcsUpContext

Attribute name	Data type	P	Cardinality	Description
upConnectionStatus	UpConnectionStatus	O	0..1	UP Connection Status
servingLMFIdentification	LMFIdentification	O	0..1	Serving LMF ID When present, this IE shall Identify the LMF routing information of LCS UP connection between the UE and the LMF, as defined in clause 28.20.4 of TS 23.003 [64].

6.1.6.2.85 Type: DeregInactTimerInfo

Table 6.1.6.2.85-1: Definition of type DeregInactTimerInfo

Attribute name	Data type	P	Cardinality	Description	Applicability
deregInactExpiryTime	DateTime	M	1	The value of the IE shall indicate the expiry time (in UTC) of the active Network Slice Deregistration Inactivity Timer of a Network Slice subject to Network-Controlled Slice Usage Control.	

6.1.6.2.86 Type: TssRspPerNgran

Table 6.1.6.2.86-1: Definition of type TssRspPerNgran

Attribute name	Data type	P	Cardinality	Description
ngranId	GlobalRanNodeId	M	1	Indicates the identity of the NG-RAN node. The IE shall contain the gNB ID.
ngranFailureInfo	NgranFailureInfo	O	1	This IE may be present to indicate a failure related to the NG-RAN, e.g. when the AMF detects that the NG-RAN has failed with or without restart, or that the NG-RAN is not reachable.
tssContainer	N2InfoContent	O	1	This IE may be present to contain the TSS N2 information data part to be relayed between TSCTSF and AN, e.g., Timing Synchronization Status Response/Failure messages.

6.1.6.2.87 Type: SliceReplacementMapping

Table 6.1.6.2.87-1: Definition of type SliceReplacementMapping

Attribute name	Data type	P	Cardinality	Description
replacedSnssai	Snssai	M	1	Indicates the replaced S-NSSAI.
altSnssai	Snssai	M	1	Indicates the alternative S-NSSAI

6.1.6.2.88 Type: SliceDeregInactConfig

Table 6.1.6.2.88-1: Definition of type SliceDeregInactConfig

Attribute name	Data type	P	Cardinality	Description	Applicability
deregInactTimer	DurationSec	C	0..1	This IE shall indicate the value of the slice deregistration inactivity timer for a certain S-NSSAI, received from the PCF. This IE shall be present if received from the PCF.	

6.1.6.2.89 Type: NrppaRspPerNgran

Table 6.1.6.2.89-1: Definition of type NrppaRspPerNgran

Attribute name	Data type	P	Cardinality	Description
ngranId	GlobalRanNodeId	M	1	Indicates the identity of the NG-RAN node. The IE shall contain the gNB ID.
cause	NrppaTransFailure	O	0..1	This IE may be present to indicate a failure related to the NG-RAN, e.g. when the AMF detects that the NG-RAN is not reachable.

6.1.6.3 Simple data types and enumerations

6.1.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

6.1.6.3.2 Simple data types

The simple data types defined in table 6.1.6.3.2-1 shall be supported.

Table 6.1.6.3.2-1: Simple data types

Type Name	Type Definition	Description
EpsBearerId	integer	Integer identifying an EPS bearer, within the range 0 to 15, as specified in clause 11.2.3.1.5, bits 5 to 8, of TS 24.007 [15].
Ppi	integer	This represents the Paging Policy Indicator. The value is within the range 0 to 7.
NasCount	Uinteger	Unsigned integer identifying the NAS COUNT as specified in TS 33.501 [27]
5GMmCapability	Bytes	String with format "byte" as defined in OpenAPI Specification [23], i.e. base64-encoded characters, encoding the "5GMM capability" IE as specified in clause 9.11.3.1 of TS 24.501 [11] (starting from octet 1).
UeSecurityCapability	Bytes	String with format "byte" as defined in OpenAPI Specification [23], i.e. base64-encoded characters, encoding the "UE security capability" IE as specified in clause 9.11.3.54 of TS 24.501 [11] (starting from octet 1).
S1UeNetworkCapability	Bytes	String with format "byte" as defined in OpenAPI Specification [23], i.e. base64-encoded characters, encoding the "S1 UE network capability" IE as specified in clause 9.11.3.48 of TS 24.501 [11] (starting from octet 1).
DrxParameter	Bytes	String with format "byte" as defined in OpenAPI Specification [23], i.e. base64-encoded characters, encoding the "5GS DRX Parameters" IE as specified in clause 9.11.3.2A of TS 24.501 [11] (starting from octet 1).
OmcIdentifier	string	The OMC Identifier indicates the identity of an Operation and Maintenance Centre to which Trace Records shall be sent. minLength: 1 maxLength: 20
MSClassmark2	Bytes	String with format "byte" as defined in OpenAPI Specification [23], i.e. base64-encoded characters, encoding the Mobile Station Classmark 2 as specified in clause 9.11.3.31C of TS 24.501 [11]) (starting from octet 1).
SupportedCodec	Bytes	String with format "byte" as defined in OpenAPI Specification [23], i.e. base64-encoded characters, encoding the Supported Codec as specified in clause 9.11.3.51A of TS 24.501 [11]) (starting from octet 1).
UePolicyContainer	Bytes	String with format "byte" as defined in OpenAPI Specification [23], i.e. base64-encoded characters, as specified in clause 9.11.3.40 of TS 24.501 [11] (starting from octet 1).

6.1.6.3.3 Enumeration: StatusChange

Table 6.1.6.3.3-1: Enumeration StatusChange

Enumeration value	Description
"AMF_UNAVAILABLE"	The AMF is unavailable to serve the UEs identified by the GUAMI(s).
"AMF_AVAILABLE"	The AMF is available to serve the UEs identified by the GUAMI(s).

6.1.6.3.4 Enumeration: N2InformationClass

Table 6.1.6.3.4-1: Enumeration N2InformationClass

Enumeration value	Description	Applicability
"SM"	N2 SM information.	
"NRPPa"	N2 NRPPa information.	
"PWS"	N2 PWS information of PWS type.	
"PWS-BCAL"	N2 Broadcast Completed Area List or the Broadcast Cancelled Area List.	
"PWS-RF"	N2 Restart Indication or Failure Indication	
"RAN"	N2 RAN related information.	
"V2X"	N2 V2X information	
"PROSE"	N2 5G ProSe information.	ProSe
"TSS"	N2 Timing Synchronisation Status information	
"RANGING_SL"	N2 ranging and sidelink positioning information transport over PC5	Ranging_SL
"A2X"	N2 A2X information	A2X

NOTE: Some of the values in the enumeration deviate from the naming conventions indicated in clause 5.1.4 of TS 29.501 [5] (i.e. to use UPPER_WITH_UNDERSCORE); however, it is kept as currently defined in this specification to maintain backwards compatibility.

6.1.6.3.5 Enumeration: N1MessageClass

Table 6.1.6.3.5-1: Enumeration N1MessageClass

Enumeration value	Description
"5GMM"	The whole NAS message as received (for e.g. used in forwarding the Registration message to target AMF during Registration procedure with AMF redirection).
"SM"	N1 Session Management message
"LPP"	N1 LTE Positioning Protocol message
"SMS"	N1 SMS message as specified in TS 23.040 [44] and TS 24.011 [45]
"UPDP"	The N1 messages for UE Policy Delivery (See Annex D of TS 24.501 [11].
"LCS"	The N1 message of Location service message type
"UPP-CM"	The N1 message type for UPP-CM messages

6.1.6.3.6 Enumeration: N1N2MessageTransferCause

Table 6.1.6.3.6-1: Enumeration N1N2MessageTransferCause

Enumeration value	Description
"ATTEMPTING_TO_REACH_UE"	This cause represents the case where the AMF has initiated paging to reach the UE in order to deliver the N1 message.
"N1_N2_TRANSFER_INITIATED"	This cause represents the case where the AMF has initiated the N1/N2 message transfer towards the UE and/or the AN.
"WAITING_FOR_ASYNCHRONOUS_TRANSFER"	This cause represents the case where the AMF has stored the N1/N2 message due to Asynchronous Transfer.
"UE_NOT_RESPONDING"	This cause represents the case that the AMF has initiated paging to reach the UE but the UE is not responding to the paging, or the case of a UE in RRC Inactive state when NG-RAN paging is not successful (e.g. NG-RAN initiated a UE context release with a cause indicating the non-delivery of the N1 message).
"N1_MSG_NOT_TRANSFERRED"	This cause represents the case where the AMF has skipped sending N1 message to the UE, when UE is in CM-IDLE and the "skipInd" is set to "true" in the request.
"N2_MSG_NOT_TRANSFERRED"	This cause indicates that the AMF has skipped sending the N2 message (i.e. PDU Session Resource Setup Request) as well as the possibly included N1 message to the 5G-AN, when the UE is in CM-CONNECTED state and the UE is outside of the validity area included in the N1N2MessageTransfer Request.
"UE_NOT_REACHABLE_FOR_SESSION"	This cause indicates that the UE is not reachable for the non-3GPP PDU session, due to the UE being in CM-IDLE for non-3GPP access and the PDU session is not allowed to move to 3GPP access.
"TEMPORARY_REJECT_REGISTRATION_ONGOING"	This cause represents the case that the AMF has initiated paging to reach the UE but there is an ongoing registration procedure.
"TEMPORARY_REJECT_HANDOVER_ONGOING"	This cause indicates that the AMF has initiated N1 signalling towards the UE but the N1 message could not be delivered due to an ongoing Xn, N2 or 5GS to EPS handover procedure.
"REJECTION_DUE_TO_PAGING_RESTRICTION"	This cause represents the case that the UE has rejected the page as specified in TS 23.501 [2] clause 5.38.4.
"AN_NOT_RESPONDING"	This cause indicates that the AMF has initiated a N2 request to transfer a N2 PDU (e.g. to setup, modify or release PDU session resources) but the AN is not responding to the N2 request.
"FAILURE_CAUSE_UNSPECIFIED"	This cause indicates that the N1/N2 message transfer failed due to unspecified reasons.

6.1.6.3.7 Enumeration: UeContextTransferStatus

Table 6.1.6.3.7-1: Enumeration UeContextTransferStatus

Enumeration value	Description
"TRANSFERRED"	Indicates a UE Context Transfer procedure is completed successful for the individual ueContext resource
"NOT_TRANSFERRED"	Indicates a UE Context Transfer procedure either did not complete successfully or the Registration request from the UE is redirected to another NF Service Consumer (e.g. AMF).

6.1.6.3.8 Enumeration: N2InformationTransferResult

Table 6.1.6.3.8-1: Enumeration N2InformationTransferResult

Enumeration value	Description
"N2_INFO_TRANSFER_INITIATED"	This cause code represents the case where the AMF has initiated the N2 information transfer towards the AN.
"PARTIAL_N2_INFO_TRANSFER"	This cause code represents the case where the AMF has initiated the N2 information transfer towards the target RAN Node(s) but the transfer has failed for part of the RAN Node(s).

6.1.6.3.9 Enumeration: CipheringAlgorithm

Table 6.1.6.3.9-1: Enumeration CipheringAlgorithm

Enumeration value	Description
"NEA0"	Null ciphering algorithm
"NEA1"	128-bit SNOW 3G based algorithm
"NEA2"	128-bit AES based algorithm
"NEA3"	128-bit ZUC based algorithm

6.1.6.3.10 Enumeration: IntegrityAlgorithm

Table 6.1.6.3.10-1: Enumeration IntegrityAlgorithm

Enumeration value	Description
"NIA0"	Null Integrity Protection algorithm
"NIA1"	128-bit SNOW 3G based algorithm
"NIA2"	128-bit AES based algorithm
"NIA3"	128-bit ZUC based algorithm

6.1.6.3.11 Void

6.1.6.3.12 Enumeration: ScType

Table 6.1.6.3.12-1: Enumeration ScType

Enumeration value	Description
"NATIVE"	Native security context (for KSI_{AMF})
"MAPPED"	Mapped security context (for KSI_{ASME})

6.1.6.3.13 Enumeration: KeyAmfType

Table 6.1.6.3.13-1: Enumeration KeyAmfType

Enumeration value	Description
"KAMF"	The K_{amf} value is sent.
"KPRIMEAMF"	The $K'_{amf.}$ value is sent.

6.1.6.3.14 Enumeration: TransferReason

Table 6.1.6.3.14-1: Enumeration TransferReason

Enumeration value	Description
"INIT_REG"	It indicates the AMF requests UE context for initial registration or disaster roaming initial registration.
"MOBI_REG"	It indicates the AMF requests UE context for mobility registration or disaster roaming mobility registration.
"MOBI_REG_UE_VALIDATED"	It indicates the AMF requests UE context for mobility registration or disaster roaming mobility registration of a validated UE.

6.1.6.3.15 Enumeration: PolicyReqTrigger

Table 6.1.6.3.15-1: Enumeration PolicyReqTrigger

Enumeration value	Description
"LOCATION_CHANGE"	The AM policy request shall be triggered when the UE's location (Tracking Area) changes.
"PRA_CHANGE"	The AM policy request shall be triggered when the UE is entering / leaving a Presence Reporting Area.
"ALLOWED_NSSAI_CHANGE"	The policy request shall be triggered when the allowed NSSAI of the UE has changed.
"NWDAF_DATA_CHANGE"	The AM policy request shall be triggered when the NWDAF instance IDs used for the UE and/or associated Analytics IDs have changed.
"PLMN_CHANGE"	The UE policy request shall be triggered when the serving PLMN of UE has changed.
"CON_STATE_CHANGE"	The UE policy request shall be triggered when the connectivity state of UE has changed.
"SMF_SELECT_CHANGE"	The AM policy request shall be triggered when the UE request for an unsupported DNN or the UE request for a DNN within the list of DNN candidates for replacement per S-NSSAI.
"ACCESS_TYPE_CHANGE"	The AM policy request shall be triggered when the access type and the RAT type combinations available in the AMF for a UE with simultaneous 3GPP and non-3GPP connectivity have changed.
"SAT_BACKHAUL_CHANGE"	The UE policy request shall be triggered when the UE's satellite backhaul category changes.
"CONF_NSSAI_CHANGE"	The UE policy request shall be triggered when the configured NSSAI has changed.
"LBO_INFO_CHANGE"	The UE policy request shall be triggered when the LBO information has changed, i.e. LBO roaming allowed or not allowed for the DNN(s) and S-NSSAI(s).

6.1.6.3.16 Enumeration: RatSelector

Table 6.1.6.3.16-1: Enumeration RatSelector

Enumeration value	Description
"E-UTRA"	The N2 information shall be transferred to ng-eNBs only.
"NR"	The N2 information shall be transferred to gNBs only.

NOTE: Some of the values in the enumeration deviate from the naming conventions indicated in clause 5.1.4 of TS 29.501 [5] (i.e. to use UPPER_WITH_UNDERSCORE); however, it is kept as currently defined in this specification to maintain backwards compatibility.

6.1.6.3.17 Enumeration: NgapIeType

Table 6.1.6.3.17-1: Enumeration NgapIeType

Enumeration value	Description
"PDU_RES_SETUP_REQ"	PDU Session Resource Setup Request Transfer
"PDU_RES_REL_CMD"	PDU Session Resource Release Command Transfer
"PDU_RES_MOD_REQ"	PDU Session Resource Modify Request Transfer
"HANDOVER_CMD"	Handover Command Transfer
"HANDOVER_REQUIRED"	Handover Required Transfer
"HANDOVER_PREP_FAIL"	Handover Preparation Unsuccessful Transfer
"SRC_TO_TAR_CONTAINER"	Source to Target Transparent Container
"TAR_TO_SRC_CONTAINER"	Target to Source Transparent Container
"TAR_TO_SRC_FAIL_CONTAINER"	Target to Source Failure Transparent Container
"RAN_STATUS_TRANS_CONTAINER"	RAN Status Transfer Transparent Container
"SON_CONFIG_TRANSFER"	SON Configuration Transfer
"NRPPA_PDU"	NRPPa-PDU
"UE_RADIO_CAPABILITY"	UE Radio Capability
"RIM_INFO_TRANSFER"	RIM Information Transfer
"SECONDARY_RAT_USAGE"	Secondary RAT Data Usage Report Transfer
"PC5_QOS_PARA"	PC5 QoS Parameters
"EARLY_STATUS_TRANS_CONTAINER"	Early Status Transfer Transparent Container
"UE_RADIO_CAPABILITY_FOR_PAGING"	UE Radio Capability for Paging

6.1.6.3.18 Enumeration: N2InfoNotifyReason

Table 6.1.6.3.18-1: Enumeration N2InfoNotifyReason

Enumeration value	Description
"HANDOVER_COMPLETED"	Indicates that the N2 Information Notification is delivered when the handover procedure is completed successfully.

6.1.6.3.19 Enumeration: SmfChangeIndication

Table 6.1.6.3.19-1: Enumeration SmfChangeIndication

Enumeration value	Description
"CHANGED"	I-SMF or V-SMF changed. (NOTE 1)
"REMOVED"	I-SMF or V-SMF is removed. (NOTE 2)
NOTE 1: This enumeration value shall also be used if the UE moves from HPLMN to a VPLMN, a V-SMF is inserted and the I-SMF is removed, or from VPLMN to HPLMN, an I-SMF is inserted and the V-SMF is removed. NOTE 2: This enumeration value shall also be used if the UE moves from VPLMN to HPLMN, without an I-SMF inserted in the HPLMN.	

6.1.6.3.20 Enumeration: SbiBindingLevel

Table 6.1.6.3.20-1: Enumeration SbiBindingLevel

Enumeration value	Description
"NF_INSTANCE_BINDING"	Indicates binding to NF instance
"NF_SET_BINDING"	Indicates binding to NF Set
"NF_SERVICE_SET_BINDING"	Indicates binding to NF Service Set
"NF_SERVICE_INSTANCE_BINDING"	Indicates binding to NF Service instance

6.1.6.3.21 Enumeration: EpsNasCipheringAlgorithm

This data type enumerates the algorithms for data ciphering in EPS NAS, as specified in clause 5.1.3.2 of TS 33.401 [49].

Table 6.1.6.3.21-1: Enumeration EpsNasCipheringAlgorithm

Enumeration value	Description
"EEA0"	Null ciphering algorithm
"EEA1"	128-bit SNOW 3G based algorithm
"EEA2"	128-bit AES based algorithm
"EEA3"	128-bit ZUC based algorithm

6.1.6.3.22 Enumeration: EpsNasIntegrityAlgorithm

This data type enumerates the algorithms for data integrity protection in EPS NAS, as specified in clause 5.1.4.2 of TS 33.401 [49].

Table 6.1.6.3.22-1: Enumeration EpsNasIntegrityAlgorithm

Enumeration value	Description
"EIA0"	Null Integrity Protection algorithm
"EIA1"	128-bit SNOW 3G based algorithm
"EIA2"	128-bit AES based algorithm
"EIA3"	128-bit ZUC based algorithm

6.1.6.3.23 Enumeration: PeriodicCommunicationIndicator

This data type enumerates types of Periodic Communication Indicator.

Table 6.1.6.3.23-1: Enumeration PeriodicCommunicationIndicator

Enumeration value	Description
"PIORIODICALLY"	Periodically
"ON_DEMAND"	On demand

6.1.6.3.24 Enumeration: UuaaMmStatus

This data type enumerates types of UUAA-MM status.

Table 6.1.6.3.24-1: Enumeration UuaaMmStatus

Enumeration value	Description
"SUCCESS"	Success
"PENDING"	Pending
"FAILED"	Failed

6.1.6.3.25 Enumeration: ReleaseCause

Table 6.1.6.3.25-1: Enumeration ReleaseCause

Enumeration value	Description
"SNPN_SNPN_MOBILITY"	This cause represents the case where the continuity of the PDU Session(s) cannot be supported between networks due to SNPN-SNPN mobility.
"NO_HR_AGREEMENT"	This cause represents the case where the continuity of the PDU Session(s) cannot be supported between networks due to inter-PLMN mobility where no HR agreement exists.
"UNSPECIFIED"	This cause indicates that the continuity of the PDU Session(s) cannot be supported between networks due to unspecified reasons.

6.1.6.3.26 Enumeration: NgranFailureInfo

The enumeration NgranFailureInfo indicates a NG-RAN failure event.

Table 6.1.6.3.26-1: Enumeration NgranFailureInfo

Enumeration value	Description
"NG_RAN_NOT_REACHABLE"	This value indicates that the AMF has failed to reach the NG-RAN when sending a N2 information, e.g., a NGAP message.
"NG_RAN_FAILURE_WITH_RESTART"	This value indicates that the AMF has detected a restart of a NG-RAN.
"NG_RAN_FAILURE_WITHOUT_RESTART"	This value indicates that the AMF has detected a NG-RAN failure without a restart.

6.1.6.3.27 Enumeration: XrDeviceWith2Rx

Table 6.1.6.3.27-1: Enumeration XrDeviceWith2Rx

Enumeration value	Description
"TRUE"	Indicates that the UE is a 2Rx XR UE.

6.1.6.3.28 Enumeration: NrppaTransFailure

Table 6.1.6.3.28-1: Enumeration NrppaTransFailure

Enumeration value	Description
"NG_RAN_NODE_NOT_REACHABLE"	This value indicates that the AMF has failed to reach the NG-RAN when sending a N2 information, e.g., a NGAP message.
"NG_RAN_NODE_UNKNOWN"	N2 message cannot be transferred as the requested 5G RAN Node(s) are unknown to the AMF.

6.1.6.4 Binary data

6.1.6.4.1 Introduction

This clause defines the binary data that shall be supported in a binary body part in an HTTP multipart message (see clauses 6.1.2.2.2 and 6.1.2.4).

Table 6.1.6.4.1-1: Binary Data Types

Name	Clause defined	Content type
N1 Message	6.1.6.4.2	vnd.3gpp.5gnas
N2 Information	6.1.6.4.3	vnd.3gpp.ngap
Mobile Terminated Data	6.1.6.4.4	vnd.3gpp.5gnas
GTP-C message	6.1.6.4.5	vnd.3gpp.gtpc

6.1.6.4.2 N1 Message

N1 Message shall encode a 5GS NAS message of a specified type (e.g. SM, LPP) as specified in TS 24.501 [11], using the vnd.3gpp.5gnas content-type.

N1 Message may encode e.g. the following 5GS NAS messages:

- For message class SM:
  - PDU Session Modification Command (see clause 8.3.7 of TS 24.501 [11]) during network initiated PDU session modification procedure (see clause 4.3.3 of TS 23.502 [3]);
  - PDU Session Release Command (see clause 8.3.12 of TS 24.501 [11]) during network initiated PDU session release procedure (see clause 4.3.4 of TS 23.502 [3]).
  - PDU Session Establishment Accept (see clause 8.3.2 in TS 24.501 [11]) during UE-requested PDU Session Establishment (see clause 4.3.2.2 in TS 23.502 [3]).
- For message class LPP:
  - UE Positioning Request messages as specified in TS 36.355 [13] during UE assisted and UE based positioning procedure (see clause 6.11.1 of TS 23.273 [42]).
- For message class 5GMM:
  - REGISTRATION REQUEST message as specified in see clause 8.2.5 of TS 24.501 [11], during registration procedures (see clause 4.2.2.2 of TS 23.502 [3]).
- For message class UPDP:
  - MANAGE UE POLICY COMMAND / MANAGE UE POLICY COMPLETE / MANAGE UE POLICY REJECT (see Annex D.5.1 to Annex D.5.3 of TS 24.501 [11]) during network initiated UE policy management procedure (see Annex D.2.1 of TS 24.501 [11]);
  - UE STATE INDICATION (see Annex D.5.4 of TS 24.501 [11]) during UE initiated UE state indication procedure (see Annex D.2.2 of TS 24.501 [11]).
  - UE POLICY PROVISIONING REQUEST / UE POLICY PROVISIONING REJECT (see clause 7.2 of TS 24.587 [53]) during UE-requested V2X policy provisioning procedure and/or 5G ProSe policy provisioning procedure (see clause 5.3.2 of TS 24.587 [53] and/or clause 5.3.2 of TS 24.554 [54] respectively) and/or UE-requested A2X policy provisioning procedure (see clause 5.3.2 of TS 24.577 [60]).
- For message class LCS:
  - Location services messages between UE and LMF (lcs-PeriodicTriggeredInvoke/lcs-EventReport/lcs-CancelDeferredLocation) as specified in TS 24.080 [43] during deferred 5GC-MT-LR procedure procedure (see clause 6.3 of TS 23.273 [42]).
  - Location services messages between PRU and LMF during PRU association and disassociation procedures (see clause 6.17 of TS 23.273 [42]).
- For message class SMS:
  - SMS payload information as specified in TS 23.040 [44] and TS 24.011 [45], e.g. CP-DATA, CP-ACK, CP-ERROR.

- For message class UPP-CM:
  - UPP-CM messages as specified in clause 10.3 of TS 24.572 [61].

6.1.6.4.3 N2 Information

6.1.6.4.3.1 Introduction

N2 Information shall encode NG Application Protocol (NGAP) IEs, as specified in clause 9.4 of TS 38.413 [12] (ASN.1 encoded), using the vnd.3gpp.ngap content-type.

6.1.6.4.3.2 NGAP IEs

For N2 information class SM, N2 Information may encode following NGAP SMF related IE specified in TS 38.413 [12], as summarized in Table 6.1.6.4.3.2-1.

Table 6.1.6.4.3.2-1: N2 Information content for class SM

NGAP IE	Reference (TS 38.413 [12])	Related NGAP message
PDU Session Resource Setup Request Transfer	9.3.4.1	PDU SESSION RESOURCE SETUP REQUEST
PDU Session Resource Release Command Transfer	9.3.4.12	PDU SESSION RESOURCE RELEASE COMMAND
PDU Session Resource Modify Request Transfer	9.3.4.3	PDU SESSION RESOURCE MODIFY REQUEST
Handover Command Transfer	9.3.4.10	HANDOVER COMMAND
Handover Required Transfer	9.3.4.14	HANDOVER REQUIRED
Handover Preparation Unsuccessful Transfer	9.3.4.18	HANDOVER COMMAND
Secondary RAT Data Usage Report Transfer	9.3.4.23	SECONDARY RAT DATA USAGE REPORT

For N2 information class RAN, N2 Information may encode one of the following NGAP Transparent Container IEs specified in TS 38.413 [12], as summarized in Table 6.1.6.4.3.2-2.

Table 6.1.6.4.3.2-2: N2 Information content for class RAN

NGAP IE	Reference (TS 38.413 [12])	Related NGAP message
Source to Target Transparent Container	9.3.1.20	HANDOVER REQUIRED, HANDOVER REQUEST
Target to Source Transparent Container	9.3.1.21	HANDOVER COMMAND, HANDOVER REQUEST ACKNOWLEDGE
Target to Source Failure Transparent Container	9.3.1.186	HANDOVER FAILURE
UE Radio Capability	9.3.1.74	UE RADIO CAPABILITY INFO INDICATION. (NOTE 1).
UE Radio Capability for Paging	9.3.1.68	UE RADIO CAPABILITY INFO INDICATION. (NOTE 1).
SON Configuration Transfer	9.3.3.6	UPLINK RAN CONFIGURATION TRANSFER, DOWNLINK RAN CONFIGURATION TRANSFER
RAN Status Transfer Transparent Container	9.2.3.13, 9.2.3.14	UPLINK RAN STATUS TRANSFER, DOWNLINK RAN STATUS TRANSFER
Early Status Transfer Transparent Container	9.2.3.16, 9.2.3.17	UPLINK RAN EARLY STATUS TRANSFER DOWNLINK RAN EARLY STATUS TRANSFER
RIM Information Transfer	9.3.3.28	UPLINK RIM INFORMATION TRANSFER, DOWNLINK RIM INFORMATION TRANSFER
NOTE 1: The AMF receives the UE Radio Capability and UE Radio Capability for Paging within a UE CAPABILITY INFO INDICATION message and then the AMF shall store the UE Radio Capability information and UE Radio Capability for Paging, and transfer them to the target AMF during an inter AMF mobility procedure.		

For N2 information class NRPPa, N2 Information may encode the following NGAP NRPPA Transport related IE specified in TS 38.413 [12], as summarized in Table 6.1.6.4.3.2-3

Table 6.1.6.4.3.2-3: N2 Information content for class NRPPa

NGAP IE	Reference (TS 38.413 [12])	Related NGAP message
NRPPa-PDU	9.3.3.14	DOWNLINK UE ASSOCIATED NRPPA TRANSPORT UPLINK UE ASSOCIATED NRPPA TRANSPORT DOWNLINK NON UE ASSOCIATED NRPPA TRANSPORT UPLINK NON UE ASSOCIATED NRPPA TRANSPORT

For N2 information class V2X, N2 Information may encode the following V2X related IE specified in TS 38.413 [12], as summarized in Table 6.1.6.4.3.2-4

Table 6.1.6.4.3.2-4: N2 Information content for class V2X

NGAP IE	Reference (TS 38.413 [12])	Related NGAP message
PC5 QoS Parameters	9.3.1.150	INITIAL CONTEXT SETUP REQUEST UE CONTEXT MODIFICATION REQUEST HANDOVER REQUEST PATH SWITCH REQUEST ACKNOWLEDGE

For N2 information class PROSE, N2 Information may encode the following ProSe related IE specified in TS 38.413 [12], as summarized in Table 6.1.6.4.3.2-5

Table 6.1.6.4.3.2-5: N2 Information content for class PROSE

NGAP IE	Reference (TS 38.413 [12])	Related NGAP message
5G ProSe PC5 QoS Parameters	9.3.1.234	INITIAL CONTEXT SETUP REQUEST UE CONTEXT MODIFICATION REQUEST HANDOVER REQUEST PATH SWITCH REQUEST ACKNOWLEDGE
5G ProSe Authorized	9.3.1.233	INITIAL CONTEXT SETUP REQUEST UE CONTEXT MODIFICATION REQUEST HANDOVER REQUEST PATH SWITCH REQUEST ACKNOWLEDGE
5G ProSe UE PC5 Aggregate Maximum Bit Rate	9.3.1.148	INITIAL CONTEXT SETUP REQUEST UE CONTEXT MODIFICATION REQUEST HANDOVER REQUEST PATH SWITCH REQUEST ACKNOWLEDGE

Table 6.1.6.4.3.2-6: Void

For N2 information class RANGING_SL, N2 Information may encode one of the following related IEs specified in TS 38.413 [12], as summarized in Table 6.1.6.4.3.2-7.

Table 6.1.6.4.3.2-7: N2 Information content for class RANGING_SL

NGAP IE	Reference (TS 38.413 [12])	Related NGAP message
Ranging and Sidelink Positioning Service Information	9.3.1.269	INITIAL CONTEXT SETUP REQUEST UE CONTEXT MODIFICATION REQUEST HANDOVER REQUEST PATH SWITCH REQUEST ACKNOWLEDGE

For N2 information class A2X, N2 Information may encode the following A2X related IE specified in TS 38.413 [12], as summarized in Table 6.1.6.4.3.2-8

Table 6.1.6.4.3.2-8: N2 Information content for class A2X

NGAP IE	Reference (TS 38.413 [12])	Related NGAP message
PC5 QoS Parameters	9.3.1.150	INITIAL CONTEXT SETUP REQUEST UE CONTEXT MODIFICATION REQUEST HANDOVER REQUEST PATH SWITCH REQUEST ACKNOWLEDGE

6.1.6.4.3.3 NGAP Messages

For N2 information class PWS, N2 Information shall encode one of the NGAP Messages specified in TS 38.413 [12] indicated in Table 6.1.6.4.3.3-1.

Table 6.1.6.4.3.3-1: N2 PWS Request Information content

NGAP message	Reference (TS 38.413 [12])
WRITE-REPLACE WARNING REQUEST	9.2.8.1
PWS CANCEL REQUEST	9.2.8.3

For N2 information class PWS-BCAL, N2 Information shall encode one of the NGAP Messages specified in TS 38.413 [12] indicated in Table 6.1.6.4.3.3-2.

Table 6.1.6.4.3.3-2: N2 PWS Response Information content

NGAP message	Reference (TS 38.413 [12])
WRITE-REPLACE WARNING RESPONSE	9.2.8.2
PWS CANCEL RESPONSE	9.2.8.4

N2 Information received by the AMF for PWS may be processed by the AMF before re-encoding and transferring to the Service Consumer.

If a subscription exists for N2InformationClass "PWS-BCAL" and the received N2 Message Type is a WRITE-REPLACE-WARNING-RESPONSE, then the AMF may aggregate the Broadcast Completed Area Lists it has received from the NG-RAN nodes for a message identified by its Serial Number and Message Identifier (see table 6.1.6.4.3.3-1) and transfer the ASN.1 (re-)encoded Message Type, Message Identifier, Serial Number and the (aggregated) Broadcast Completed Area List IE in the N2 Info Container in the N2InfoNotify, and the "bcEmptyAreaList" attribute if the Broadcast Completed Area List IE is not present in the PWS N2 information.

If a subscription exists for N2InformationClass "PWS-BCAL" and the received N2 Message Type is a PWS-CANCEL-RESPONSE, then the AMF may aggregate the Broadcast Cancelled Area Lists IE it has received from the NG-RAN nodes for a message identified by its Serial Number and Message Identifier (see table 6.1.6.4.3.3-1) and transfer the ASN.1 (re-)encoded the Message Type, Message Identifier, Serial Number, the (aggregated) Broadcast Cancelled Area List IE in the N2 Info Container in the N2InfoNotify, and the "bcEmptyAreaList" attribute if the PWS-CANCEL-RESPONSE does not contain a Broadcast Cancelled Area List, in the PWS N2 information.

For the ASN.1 definition for encoding the WRITE-REPLACE-WARNING-RESPONSE and the PWS-CANCEL-RESPONSE, see clause 9.4 of TS 38.413 [12].

If a subscription exists for N2InformationClass "PWS-RF" and the received N2 Message Type is a PWS-RESTART-INDICATION, then the AMF may transfer the ASN.1 encoded string from the PWS-RESTART-INDICATION (see table 6.1.6.4.3.3-3) in the N2 Info Container in the N2InfoNotify.

If a subscription exists for N2InformationClass "PWS-RF" and the received N2 Message Type is a PWS-FAILURE-INDICATION (see table 6.1.6.4.3.3-3), then the AMF may transfer the ASN1 encoded string from the PWS-FAILURE-INDICATION in the N2 Info Container in the N2InfoNotify.

For N2 information class PWS-RF, N2 Information shall encode one of the NGAP Messages specified in TS 38.413 [12] indicated in Table 6.1.6.4.3.3-3.

Table 6.1.6.4.3.3-3: N2 PWS Indication Information content

NGAP message	Reference (TS 38.413 [12])
PWS RESTART INDICATION	9.2.8.5
PWS FAILURE INDICATION	9.2.8.6

The Message Type shall be present and encoded as the first N2 PWS Indication IE in any NonUeN2InfoNotify for PWS messages to enable the receiver to decode the N2 PWS IEs.

For N2 information class RAN, N2 Information shall encode one of the following NGAP messages specified in TS 38.413 [12], as summarized in Table 6.1.6.4.3.3-4.

Table 6.1.6.4.3.3-4: N2 Information content for class RAN

NGAP message	Reference (TS 38.413 [12])
Any UE specific Uplink NGAP message	

For N2 information class TSS, N2 Information shall encode the following NGAP message specified in TS 38.413 [12], as summarized in Table 6.1.6.4.3.3-5.

Table 6.1.6.4.3.3-5: N2 Information content for class TSS

NGAP message	Reference (TS 38.413 [12])
TIMING SYNCHRONISATION STATUS REQUEST	9.2.18.1
TIMING SYNCHRONISATION STATUS RESPONSE	9.2.18.2
TIMING SYNCHRONISATION STATUS FAILURE	9.2.18.3
TIMING SYNCHRONISATION STATUS REPORT	9.2.18.4

6.1.6.4.4 Mobile Terminated Data

Mobile Terminated Data shall encode the user data to be sent by the AMF to the UE in the Payload Container specified in TS 24.501 [11], using the vnd.3gpp.5gnas content-type, as summarized in Table 6.1.6.4.4-1.

Table 6.1.6.4.4-1: Mobile Terminated Data

Mobile Terminated Data	Reference (TS 24.501 [11])	Related NAS SM message
Payload container contents in octets 4 to n	9.11.3.39 (Figure 9.11.3.39.1)	DL NAS Transport

6.1.6.4.5 GTP-C Message

GTP-C Message shall encode a GTP-C message of a specified type (e.g. Forward Relocation Request) as specified in TS 29.274 [41], using the vnd.3gpp.gtpc content-type. The GTP-C message carried in the HTTP multipart message shall include the UDP/IP headers.

GTP-C Message may encode e.g. the following GTP-C messages:

- Mobility Management message:
  - Forward Relocation Request (see clause 7.3.1 of TS 29.274 [41]) during EPS to 5GS handover with AMF re-allocation procedure (see clause 4.11.1.2.2 of TS 23.502 [3]);

- Relocation Cancel Request (see clause 7.3.16 of TS 29.274 [41]) during EPS to 5GS handover with AMF re-allocation procedure (see clause 4.11.1.2.3 of TS 23.502 [3]), if handover cancel is triggered.

6.1.7 Error Handling

6.1.7.1 General

HTTP error handling shall be supported as specified in clause 5.2.4 of TS 29.500 [4].

6.1.7.2 Protocol Errors

Protocol Error Handling shall be supported as specified in clause 5.2.7.2 of TS 29.500 [4].

6.1.7.3 Application Errors

The common application errors defined in the Table 5.2.7.2-1 in TS 29.500 [4] may also be used for the Namf_Communication service. The following application errors listed in Table 6.1.7.3-1 are specific for the Namf_Communication service.

Table 6.1.7.3-1: Application errors

Application Error	HTTP status code	Description
NF_CONSUMER_REDIRECT_ONE_TXN	307 Temporary Redirect	The request has been asked to be redirected to a specified target.
HANDOVER_FAILURE	403 Forbidden	Creation of UE context or relocation in the target AMF failed during Handover procedure causing a failure of handover.
INTEGRITY_CHECK_FAIL	403 Forbidden	Integrity check of the complete registration message included in the UE context transfer request failed.
EBI_EXHAUSTED	403 Forbidden	Allocation of EPS Bearer ID failed due to exhaustion of EBI as the maximum number of EBIs has already been allocated to the UE.
EBI_REJECTED_LOCAL_POLICY	403 Forbidden	Allocation of EPS Bearer ID failed due to local policy at the AMF as specified in clause 4.11.1.4.1 of TS 23.502 [3].
EBI_REJECTED_NO_N26	403 Forbidden	The allocation of EPS Bearer ID was rejected when the AMF is in a serving PLMN that does not support 5GS-EPS interworking procedures with N26 interface.
SUPI_OR_PEI_UNKNOWN	403 Forbidden	The SUPI or PEI included in the message is unknown.
UE_IN_NON_ALLOWED_AREA	403 Forbidden	UE is currently in a non-allowed area hence the N1/N2 message transfer cannot be completed because the request is not associated with a regulatory prioritized service.
UNSPECIFIED	403 Forbidden	The request is rejected due to unspecified reasons.
SM_CONTEXT_RELOCATION_REQUIRED	403 Forbidden	The request is rejected because the SM Context should be relocated to another SMF, e.g. when AMF detects that an I-SMF or V-SMF insertion, change or removal is needed, as specified in clause 4.23 of TS 23.502 [3].
UE_WITHOUT_N1_LPP_SUPPORT	403 Forbidden	UE does not support LPP in N1 mode hence the N1 LPP message cannot be sent to the UE.
INVALID_SM_CONTEXT	403 Forbidden	The request is rejected because the SM Context is invalid for the PDU session, i.e. active SM Context for the PDU session (with same PDU Session ID) has been created on another SMF. (NOTE)
INVALID_PRU	403 Forbidden	The request is rejected because the request is to initiate a positioning procedure towards a PRU and the target UE is not a valid PRU.
CONTEXT_NOT_FOUND	404 Not Found	The requested UE Context does not exist on the AMF
HIGHER_PRIORITY_REQUEST_ONGOING	409 Conflict	Paging triggered N1/N2 transfer cannot be initiated since already there is a paging due to a higher priority session ongoing.
TEMPORARY_REJECT_REGISTRATION_ONGOING	409 Conflict	N1/N2 message transfer towards UE / AN cannot be initiated or the EBI assignment fails due to an ongoing registration procedure.
TEMPORARY_REJECT_HANDOVER_ONGOING	409 Conflict	N1/N2 message transfer towards UE / AN cannot be initiated due to an ongoing Xn, N2 or 5GS to EPS handover procedure, or the EBI assignment fails due to an ongoing Xn, N2, or 5GS to EPS handover procedure.
TEMPORARY_REJECT_SR_ONGOING	409 Conflict	A N1/N2 Message Transfer Request including a PDU Session Resource Setup Request Transfer IE towards UE / AN cannot be initiated due to an ongoing Service Request procedure for the same PDU session.
UE_IN_CM_IDLE_STATE	409 Conflict	N2 message transfer towards 5G-AN cannot be initiated due to the UE being in CM-IDLE state for the Access Network Type associated to the PDU session.

MAX_ACTIVE_SESSIONS_EXCEEDED	409 Conflict	If the RAT type is NB-IoT, and the UE already has 2 PDU Sessions with active user plane resources.
REJECTION_DUE_TO_PAGING_RESTRICTION	409 Conflict	If Paging Restrictions information restricts the N1N2MessageTransfer request from causing paging as defined in TS 23.501 [2] clause 5.38.5.
MAX_LCS_UPP_CONN_REACHED	409 Conflict	The request from a new LMF to transfer "UPP-CM" N1 message to the UE is rejected due to the maximum number of LCS-UPP connection of the UE has been reached.
UE_NOT_REACHABLE	504 Gateway Timeout	The UE is not reachable for paging.
UE_NOT_RESPONDING	504 Gateway Timeout	The UE is not responding for paging.
NOTE: More than one SM Contexts may be present in the network for the same PDU Session ID, e.g. when the UE established a new PDU session with the same PDU Session ID and the AMF failed to release the old SM Context in the old SMF. In such a scenario, if the old SMF tries to send N1 and/or N2 Message to the RAN/UE, the AMF shall respond with this application error if the AMF identified that service operation is invoked by the SMF holding the old SM Context.		

6.1.8 Feature Negotiation

The feature negotiation mechanism specified in clause 6.6 of TS 29.500 [4] shall be used to negotiate the features applicable between the AMF and the NF Service Consumer, for the Namf_Communication service, if any.

The NF Service Consumer shall indicate the features it supports for the Namf_Communication service, if any, by including the supportedFeatures attribute in content of the HTTP Request Message for following service operations:

- N1N2MessgeTransfer, as specified in clause 5.2.2.3.1;
- N1N2MessageSubscribe, as specified in clause 5.2.2.3.3;
- NonUeN2InfoSubscribe, as specified in clause 5.2.2.4.2;
- UeContextTransfer, as specified in clause 5.2.2.2.1;
- CreateUEContext, as specified in clause 5.2.2.2.3

The AMF shall determine the supported features for the service operations as specified in clause 6.6 of TS 29.500 [4] and shall indicate the supported features by including the supportedFeatures attribute in content of the HTTP response for the service operation.

The syntax of the supportedFeatures attribute is defined in clause 5.2.2 of TS 29.571 [6].

The following features are defined for the Namf_Communication service.

Table 6.1.8-1: Features of supportedFeatures attribute used by Namf_Communication service

Feature Number	Feature	M/O	Description
1	DTSSA	O	Deployments Topologies with specific SMF Service Areas. An AMF that supports this feature shall support the procedures specified in clause 5.34 of TS 23.501 [2] and in clause 4.23 of TS 23.502 [3].
2	ENS	O	This feature bit indicates whether the AMF supports procedures related to Network Slicing (see TS 23.501 [2] clause 5.15.7). This includes supporting the RelocateUEContext service operation (see clause 5.2.2.2.5).
3	CIOT	O	Cellular IoT Support of this feature implies the support of all the CIoT features specified in clause 5.31 of TS 23.501 [2], including in particular corresponding service's extensions to support: - NB-IoT and LTE-M RAT types; - Control Plane CIoT 5GS Optimisation; - Rate control of user data.
4	MAPDU	O	This feature bit indicates whether the AMF supports Multi-Access PDU session procedures related to Access Traffic Steering, Switching and Splitting (see clauses 4.2.10 and 5.32 of TS 23.501 [2]).
5	NPN	O	Non-Public Network Support of this feature implies support of NPN information and receipt of a Create UE context error response with a binary part during an Inter-AMF N2 Handover.
6	ELCS	O	This feature indicates supports of enhanced LCS, including the capability for the AMF to send an LCS message through the target access type requested by the LMF.
7	ES3XX	M	Extended Support of HTTP 307/308 redirection An NF Service Consumer (e.g. SMF) that supports this feature shall support handling of HTTP 307/308 redirection for any service operation of the Namf_Communication service. An NF Service Consumer that does not support this feature does only support HTTP redirection as specified for 3GPP Release 15.
8	EAEA	O	EBI and ARP mapping update in EBIAssignment Support of this feature implies support of updating the mapping of EBI and ARP in EBIAssignment for a QoS flow to which an EBI is already allocated.
9	ProSe	O	This feature indicates the support of UE policy and N2 information provisioning for 5G ProSe.
10	UAV	O	Uncrewed Aerial Vehicle This feature indicates the support of UAV feature at AMF. When this feature is supported at the AMF, the AMF shall perform the UUAA-MM procedure defined in TS 23.256 [56].
11	SPAE	O	SM Policy Association Events This feature bit indicates whether the AMF supports the SM Policy Association establishment and termination event notification information handling, i.e. whereby the PCF for UE subscribes to SM Policy Association events to the PCF for SM Policy via the AMF and SMF, as specified in clause 4.3.2.2.1 and clause 4.3.3.2 of TS 23.502 [3].
12	eNPN	O	Enhanced support of Non-Public Networks (eNPN) This feature indicates the AMF supports UE registration for onboarding in an SNPN, see clause 5.30.2.10.2.6 and clause 5.30.2.10.2.7 in TS 23.501 [2]).

13	3GA-N3GA-HO	O	Handover between 3GPP and non-3GPP accesses An AMF and SMF that supports Handover between 3GPP and non-3GPP accesses shall support this feature, i.e. setting the targetAccess IE in N1N2MessageTransfer Request to the old access type when releasing the N2 PDU session resources in the old access (see clauses 5.2.2.3.1.1 and 6.1.6.2.18)
14	PAR-NS	O	Partially Allowed/Rejected Network Slice This feature indicates the AMF supports the partially allowed network slice and the partially reject Network slice. See TS 23.501 [2] clause 5.15.17.
15	NTSSM	O	Network Timing Synchronization Status Monitoring This feature bit indicates that the AMF supports transferring TSS related information in the N2InformationTransferReqData and a subscription, e.g. created by a TSCTSF, to get notification for Non-UE related N2 Information for the Network Timing Synchronization Status information.
16	RACS	O	Support of RACS feature as specified in clause 5.4.4.1a in TS 23.501 [2]). During an Inter AMF mobility procedure, the source AMF may decide to not include ueRadioCapability and ueRadioCapabilityForPaging in the UeContextTransferRspData or UeContextCreateData if the target AMF supports RACS feature, the target AMF can retrieve the same using UE Radio Capability ID Id(s) included in the MM Context.
17	Ranging_SL	O	This feature indicates the support of UE policy and N2 information provisioning for Ranging/SL positioning as specified in TS 23.586 [59].
18	A2X	O	This feature indicates the support of UE policy and N2 information provisioning for A2X communication as specified in TS 23.256 [56]
19	AoV-En	O	This feature indicates the support of enhanced AreaOfValidity handling. When invoking N1N2MessageTransfer to deliver N2 information, the SMF may use the TAI range list to efficiently indicate the area scope to deliver the N2 information, if the AMF supports this feature.
20	ASUC	O	Analytics Subscriptions in UE Context An AMF that supports Analytics Subscriptions in UE context shall support this feature, i.e., - As source AMF, includes Analytics Subscriptions in UE context to the target AMF if the target AMF also supports this feature; and - As target AMF, informs the not reused Analytics Subscriptions (i.e. the Analytics Subscriptions that are not taken over by the target AMF) to the source AMF. and - As source AMF, unsubscribes to all the not reused Analytics Subscriptions as informed by the target AMF. See clauses 5.2.2.2.1.1, 5.2.2.2.2.1 and 5.2.2.2.3.1.
21	SliceUsageCtrl	O	Network Slice Usage Control An AMF supporting this feature shall support the Network Slice Usage Control as specified in clause 5.15.15 in TS 23.501 [2]).
22	ProSe_Multihop	O	Support of Multi-hop 5G ProSe Relay An AMF supporting this feature shall support the indications of the UE authorization status related to Multi-hop 5G ProSe Relay as specified in clause 4.3.4 of TS 23.304 [51]). If the AMF supports this feature, the "ProSe" feature shall be also supported by the AMF.

Feature number: The order number of the feature within the supportedFeatures attribute (starting with 1).
Feature: A short name that can be used to refer to the bit and to the feature.
M/O: Defines if the implementation of the feature is mandatory ("M") or optional ("O").
Description: A clear textual description of the feature.

6.1.9 Security

As indicated in TS 33.501 [27], the access to the Namf_Communication API may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [28]), using the "Client Credentials" authorization grant, where the NRF (see TS 29.510 [29]) plays the role of the authorization server.

If Oauth2 authorization is used, an NF Service Consumer, prior to consuming services offered by the Namf_Communication API, shall obtain a "token" from the authorization server, by invoking the Access Token Request service, as described in TS 29.510 [29], clause 5.4.2.2.

NOTE: When multiple NRFs are deployed in a network, the NRF used as authorization server is the same NRF that the NF Service Consumer used for discovering the Namf_Communication service.

The Namf_Communication API defines the following scopes for OAuth2 authorization as specified in TS 33.501 [27].

Table 6.1.9-1: OAuth2 scopes defined in Namf_Communications API

Scope	Description
"namf-comm"	Access to the Namf_Communications API.
"namf-comm:ue-contexts:mobility"	Access to service operations applying to UE context resources for inter-AMF mobility, i.e., UEContextTransfer, RegistrationStatusUpdate, CreateUEContext, ReleaseUEContext, RelocateUEContext and CancelRelocateUEContext.
"namf-comm:ue-contexts:assign-ebi"	Access to service operations applying to UE context resources for EBI assignment, i.e., EBIAssignment.
"namf-comm:n1-n2-messages"	Access to service operations applying to the n1-n2-messages resource, i.e., N1N2MessageSubscribe, N1N2MessageUnSubscribe, N1N2MessageTransfer, N1MessageNotify, and N2InfoNotify.
"namf-comm:non-ue-n2-messages"	Access to service operations applying to the non-ue-n2-messages resource, i.e., NonUeN2MessageTransfer, NonUeN2InfoSubscribe, NonUeN2InfoUnSubscribe, and NonUeN2InfoNotify.

6.1.10 HTTP redirection

An HTTP request may be redirected to a different AMF service instance, within the same AMF or a different AMF of an AMF set, e.g. when an AMF service instance is part of an AMF (service) set or when using indirect communications (see TS 29.500 [4]). See the ES3XX feature in clause 6.1.8.

An SCP that reselects a different AMF producer instance will return the NF Instance ID of the new AMF producer instance in the 3gpp-Sbi-Producer-Id header, as specified in clause 6.10.3.4 of TS 29.500 [4].

If an AMF within an AMF set redirects a service request to a different AMF of the set using an 307 Temporary Redirect or 308 Permanent Redirect status code, the identity of the new AMF towards which the service request is redirected shall be indicated in the 3gpp-Sbi-Target-Nf-Id header of the 307 Temporary Redirect or 308 Permanent Redirect response as specified in clause 6.10.9.1 of TS 29.500 [4].

6.2 Namf_EventExposure Service API

6.2.1 API URI

The Namf_EventExposure shall use the Namf_EventExposure API.

The API URI of the Namf_EventExposure API shall be:

{apiRoot}/<apiName>/<apiVersion>/

The request URI used in HTTP requests from the NF service consumer towards the NF service producer shall have the Resource URI structure defined in clause 4.4.1 of TS 29.501 [5], i.e.:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>

with the following components:

- The {apiRoot} shall be set as described in TS 29.501 [5].
- The <apiName> shall be "namf-evts".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 6.2.3.

6.2.2 Usage of HTTP

6.2.2.1 General

HTTP/2, as defined in IETF RFC 9113 [19], shall be used as specified in clause 5 of TS 29.500 [4].

HTTP/2 shall be transported as specified in clause 5.3 of TS 29.500 [4].

HTTP messages and bodies for the Namf_EventExposure service shall comply with the OpenAPI [23] specification contained in Annex A.

6.2.2.2 HTTP standard headers

6.2.2.2.1 General

The usage of HTTP standard headers shall be supported as specified in clause 5.2.2 of TS 29.500 [4].

6.2.2.2.2 Content type

The following content types shall be supported:

- JSON, as defined in IETF RFC 8259 [8], shall be used as content type of the HTTP bodies specified in the present specification as indicated in clause 5.4 of TS 29.500 [4].
- The Problem Details JSON Object (IETF RFC 9457 [36]). The use of the Problem Details JSON object in a HTTP response body shall be signalled by the content type "application/problem+json".

- JSON Patch (IETF RFC 6902 [14]). The use of the JSON Patch format in a HTTP request body shall be signalled by the content type "application/json-patch+json".

6.2.2.3 HTTP custom headers

6.2.2.3.1 General

In this release of this specification, no custom headers specific to the Namf_EventExposure service are defined. For 3GPP specific HTTP custom headers used across all service based interfaces, see clause 5.2.3 of TS 29.500 [4].

6.2.3 Resources

6.2.3.1 Overview

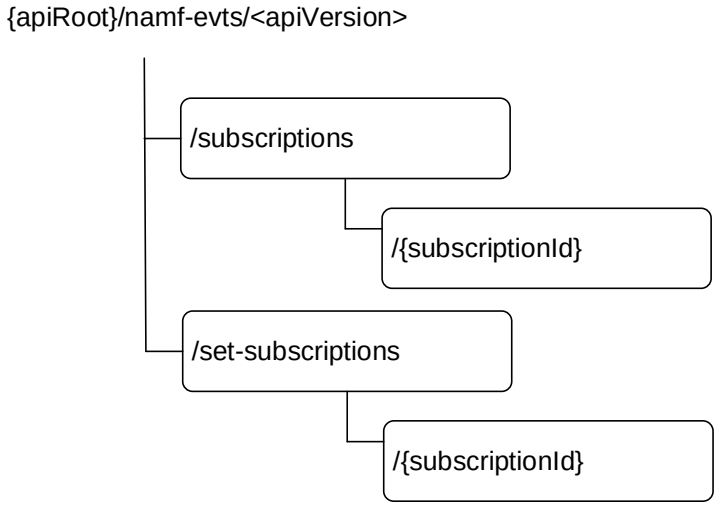


Figure 6.2.3.1-1: Resource URI structure of the Namf_EventExposure API

Table 6.2.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 6.2.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method or custom operation	Description
Subscriptions collection	/subscriptions	POST	Mapped to the service operation Subscribe, when to create a subscription
Individual subscription	/subscriptions/{subscriptionId}	PATCH	Mapped to the service operation Subscribe, when to modify
		DELETE	Mapped to the service operation Unsubscribe
AMF set level bulk subscriptions collection	/set-subscriptions	POST	Mapped to the service operation Subscribe, when creating an AMF set level bulk subscription
Individual AMF set level bulk subscription	/set-subscriptions/{subscriptionId}	PATCH	Mapped to the service operation Subscribe, when modifying an AMF set level bulk subscription
		DELETE	Mapped to the service operation Unsubscribe for an AMF set level bulk subscription

6.2.3.2 Resource: Subscriptions collection

6.2.3.2.1 Description

This resource represents a collection of subscriptions created by NF service consumers of Namf_EventExposure service.

This resource is modelled as the Collection resource archetype (see clause C.2 of TS 29.501 [5]).

6.2.3.2.2 Resource Definition

Resource URI: **{apiRoot}/namf-evts/<apiVersion>/subscriptions**

This resource shall support the resource URI variables defined in table 6.2.3.2.2-1.

Table 6.2.3.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.2.1
apiVersion	string	See clause 6.2.1.

6.2.3.2.3 Resource Standard Methods

6.2.3.2.3.1 POST

This method shall support the URI query parameters specified in table 6.2.3.2.3.1-1.

Table 6.2.3.2.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 6.2.3.2.3.1-2 and the response data structures and response codes specified in table 6.2.3.2.3.1-3.

Table 6.2.3.2.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
AmfCreateEventSubscription	M	1	Describes of an AMF Event Subscription to be created

Table 6.2.3.2.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AmfCreatedEventSubscription	M	1	201 Created	Represents successful creation of an AMF Event Subscription
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	403 Forbidden	Indicates the creation of subscription has failed due to application error. The "cause" attribute may be used to indicate one of the following application errors: - UE_NOT_SERVED_BY_AMF (for a subscription targeting a specific UE) - MUTING_EXC_INSTR_NOT_ACCEPTED
ProblemDetails	O	0..1	501 Not Implemented	Indicates the creation of subscription has failed due to application error. The "cause" attribute may be used to indicate one of the following application errors: - UNSUPPORTED_EVENT_TYPE

NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]).
NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].

Table 6.2.3.2.3.1-4: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/namf-evts/<apiVersion>/subscriptions/{subscriptionId}

Table 6.2.3.2.3.1-5: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.2.3.2.3.1-6: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.2.3.2.4 Resource Custom Operations

None.

6.2.3.3 Resource: Individual subscription

6.2.3.3.1 Description

This resource represents an individual of subscription created by NF service consumers of Namf_EventExposure service.

This resource is modelled as the Document resource archetype (see clause C.1 of TS 29.501 [5]).

6.2.3.3.2 Resource Definition

Resource URI: **{apiRoot}/namf-evts/<apiVersion>/subscriptions/{subscriptionId}**

This resource shall support the resource URI variables defined in table 6.2.3.3.2-1.

Table 6.2.3.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.2.1
apiVersion	string	See clause 6.2.1.
subscriptionId	string	String identifies an individual subscription to the AMF event exposure service

6.2.3.3.3 Resource Standard Methods

6.2.3.3.3.1 PATCH

This method shall support the URI query parameters specified in table 6.2.3.3.3.1-1.

Table 6.2.3.3.3.1-1: URI query parameters supported by the PATCH method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 6.2.3.3.3.1-2 and the response data structures and response codes specified in table 6.2.3.3.3.1-3.

Table 6.2.3.3.3.1-2: Data structures supported by the PATCH Request Body on this resource

Data type	P	Cardinality	Description
array(AmfUpdateEventSubscriptionItem)	M	1..N	Document describes the modification(s) to a AMF Event Subscription
array(AmfUpdateEventOptionItem)	M	1..1	Document describing the modification to the event subscription options (e.g subscription expiry time).

Table 6.2.3.3.3.1-3: Data structures supported by the PATCH Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AmfUpdatedEventSubscription	M	1	200 OK	Represents a successful update on AMF Event Subscription
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	403 Forbidden	Indicates the modification of subscription has failed due to application error. The "cause" attribute may be used to indicate one of the following application errors: - MUTING_EXC_INSTR_NOT_ACCEPTED
ProblemDetails	O	0..1	404 Not Found	Indicates the modification of subscription has failed due to application error. The "cause" attribute may be used to indicate one of the following application errors: - SUBSCRIPTION_NOT_FOUND
ProblemDetails	O	0..1	501 Not Implemented	Indicates the modification of subscription has failed due to application error. The "cause" attribute may be used to indicate one of the following application errors: - UNSUPPORTED_EVENT_TYPE
NOTE 1: The mandatory HTTP error status code for the PATCH method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.2.3.3.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.2.3.3.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.2.3.3.3.2 DELETE

This method shall support the URI query parameters specified in table 6.2.3.3.3.2-1.

Table 6.2.3.3.3.2-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 6.2.3.3.3.2-2 and the response data structures and response codes specified in table 6.2.3.3.3.2-3.

Table 6.2.3.3.3.2-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 6.2.3.3.3.2-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	404 Not Found	Indicates the modification of subscription has failed due to application error. The "cause" attribute may be used to indicate one of the following application errors: - SUBSCRIPTION_NOT_FOUND.
NOTE 1: The mandatory HTTP error status code for the DELETE method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.2.3.3.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.2.3.3.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.2.3.3.4 Resource Custom Operations

None.

6.2.3.4 Resource: AMF set level bulk subscriptions collection

6.2.3.4.1 Description

This resource represents a collection of AMF set level bulk subscriptions created by NF service consumers of Namf_EventExposure service.

This resource is modelled as the Collection resource archetype (see clause C.2 of TS 29.501 [5]).

6.2.3.4.2 Resource Definition

Resource URI: **{apiRoot}/namf-evts/<apiVersion>/set-subscriptions**

This resource shall support the resource URI variables defined in table 6.2.3.4.2-1.

Table 6.2.3.4.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.2.1
apiVersion	string	See clause 6.2.1.

6.2.3.4.3 Resource Standard Methods

6.2.3.4.3.1 POST

This method shall support the URI query parameters specified in table 6.2.3.4.3.1-1.

Table 6.2.3.4.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 6.2.3.4.3.1-2 and the response data structures and response codes specified in table 6.2.3.4.3.1-3.

Table 6.2.3.4.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
AmfCreateEventSubscription	M	1	Describes an AMF Set level Bulk Event Subscription to be created

Table 6.2.3.4.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AmfCreatedEventSubscription	M	1	201 Created	Represents successful creation of an AMF Set level Bulk Event Subscription
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	403 Forbidden	Indicates the creation of subscription has failed due to application error. The "cause" attribute may be used to indicate one of the following application errors: - MUTING_EXC_INSTR_NOT_ACCEPTED
ProblemDetails	O	0..1	501 Not Implemented	Indicates the creation of subscription has failed due to application error. The "cause" attribute may be used to indicate one of the following application errors: - UNSUPPORTED_EVENT_TYPE
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.2.3.4.3.1-4: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/namf-evts/<apiVersion>/set-subscriptions/{subscriptionId}

Table 6.2.3.4.3.1-5: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.2.3.4.3.1-6: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.2.3.4.4 Resource Custom Operations

None.

6.2.3.5 Resource: Individual AMF set level bulk subscription

6.2.3.5.1 Description

This resource represents an individual AMF set level bulk subscription created by NF service consumers of Namf_EventExposure service.

This resource is modelled as the Document resource archetype (see clause C.1 of TS 29.501 [5]).

6.2.3.5.2 Resource Definition

Resource URI: **{apiRoot}/namf-evts/<apiVersion>/set-subscriptions/{subscriptionId}**

This resource shall support the resource URI variables defined in table 6.2.3.5.2-1.

Table 6.2.3.5.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.2.1
apiVersion	string	See clause 6.2.1.
subscriptionId	string	String identifying an individual AMF set level bulk subscription to the AMF event exposure service

6.2.3.5.3 Resource Standard Methods

6.2.3.5.3.1 PATCH

This method shall support the URI query parameters specified in table 6.2.3.5.3.1-1.

Table 6.2.3.y.3.1-1: URI query parameters supported by the PATCH method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 6.2.3.5.3.1-2 and the response data structures and response codes specified in table 6.2.3.5.3.1-3.

Table 6.2.3.5.3.1-2: Data structures supported by the PATCH Request Body on this resource

Data type	P	Cardinality	Description
array(AmfUpdateEventSubscriptionItem)	M	1..N	Describes the modification(s) to an AMF Set level bulk event subscription
array(AmfUpdateEventOptionItem)	M	1..1	Describes the modification to the AMF Set level bulk event subscription options (e.g subscription expiry time).

Table 6.2.3.5.3.1-3: Data structures supported by the PATCH Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AmfUpdatedEventSubscription	M	1	200 OK	Represents a successful update on the AMF Set level bulk Event Subscription
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	403 Forbidden	Indicates the modification of subscription has failed due to application error. The "cause" attribute may be used to indicate one of the following application errors: - MUTING_EXC_INSTR_NOT_ACCEPTED
ProblemDetails	O	0..1	404 Not Found	Indicates the modification of subscription has failed due to application error. The "cause" attribute may be used to indicate one of the following application errors: - SUBSCRIPTION_NOT_FOUND
ProblemDetails	O	0..1	501 Not Implemented	Indicates the modification of subscription has failed due to application error. The "cause" attribute may be used to indicate one of the following application errors: - UNSUPPORTED_EVENT_TYPE
NOTE 1: The mandatory HTTP error status code for the PATCH method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.2.3.5.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.2.3.5.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.2.3.5.3.2 DELETE

This method shall support the URI query parameters specified in table 6.2.3.5.3.2-1.

Table 6.2.3.5.3.2-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 6.2.3.5.3.2-2 and the response data structures and response codes specified in table 6.2.3.5.3.2-3.

Table 6.2.3.5.3.2-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 6.2.3.5.3.2-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	404 Not Found	Indicates the modification of subscription has failed due to application error. The "cause" attribute may be used to indicate one of the following application errors: - SUBSCRIPTION_NOT_FOUND.
NOTE 1: The mandatory HTTP error status code for the DELETE method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.2.3.5.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.2.3.5.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.2.3.5.4 Resource Custom Operations

None.

6.2.4 Custom Operations without associated resources

There are no custom operations without associated resources supported on Namf_EventExposure Service.

6.2.5 Notifications

6.2.5.1 Introduction

This clause specifies the notifications provided by the Namf_EventExposure service.

Table 6.2.5.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
AMF Event Notification	{eventNotifyUri}	POST	
AMF Event Notification	{subsChangeNotifyUri}	POST	

6.2.5.2 AMF Event Notification

If a NF service consumer has subscribed to an event(s) supported by Namf_EventExposure service, when AMF aware of a state change of the event, AMF shall create a notification including the event state report, and shall deliver the notification to the call-back URI, following Subscribe/Notify mechanism defined in TS 29.501 [5].

6.2.5.2.1 Notification Definition

Call-back URI: **{callbackUri}**

Call-back URI is provided by NF Service Consumer during creation of the subscription. If the notification is to inform the change (or addition) of subscription ID and if the "subsChangeNotifyUri" was provided in the AmfEventSubscription, then this callback URI shall be the "subsChangeNotifyUri" provided in the AmfEventSubscription. Otherwise, this callback URI shall be the "eventNotifyUri" provided in the AmfEventSubscription.

6.2.5.2.3 Notification Standard Methods

6.2.5.2.3.1 POST

This method shall support the request data structures specified in table 6.2.5.2.3.1-1 and the response data structures and response codes specified in table 6.2.5.2.3.1-2.

Table 6.2.5.2.3.1-2: Data structures supported by the POST Request Body

Data type	P	Cardinality	Description
AmfEventNotification	M	1	Represents the notification to be delivered

Table 6.2.5.2.3.1-3: Data structures supported by the POST Response Body

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.2.5.2.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer to which the notification should be sent. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].

Table 6.2.5.2.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer to which the notification should be sent
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.2.6 Data Model

6.2.6.1 General

This clause specifies the application data model supported by the API.

Table 6.2.6.1-1 specifies the data types defined for the Namf_EventExposure service based interface protocol.

Table 6.2.6.1-1: Namf_EventExposure specific Data Types

Data type	Clause defined	Description
AmfEventSubscription	6.2.6.2.2	Represents an individual event subscription resource on AMF
AmfEvent	6.2.6.2.3	Describes an event to be subscribed
AmfEventNotification	6.2.6.2.4	Data within an AMF Event Notification request.
AmfEventReport	6.2.6.2.5	Represents a report triggered by a subscribed event type
AmfEventMode	6.2.6.2.6	Describes how the reports shall be generated by a subscribed event
AmfEventState	6.2.6.2.7	Represents the state of a subscribed event
RmInfo	6.2.6.2.8	Represents the registration state of a UE for an access type
CmInfo	6.2.6.2.9	Represents the connection management state of a UE for an access type
CommunicationFailure	6.2.6.2.11	Describes a communication failure detected by AMF
AmfCreateEventSubscription	6.2.6.2.12	Data within a create AMF event subscription request
AmfCreatedEventSubscription	6.2.6.2.13	Data within a create AMF event subscription response
AmfUpdateEventSubscriptionItem	6.2.6.2.14	Document describing the modification(s) to an AMF Event Subscription
AmfUpdatedEventSubscription	6.2.6.2.15	Represents a successful update on an AMF Event Subscription
AmfEventArea	6.2.6.2.16	Represents an area to be monitored by an AMF event.
LadnInfo	6.2.6.2.17	LADN Information
AmfUpdateEventOptionItem	6.2.6.2.18	Document describing the modifications to AMF event subscription options.
5GsUserStateInfo	6.2.6.2.19	Represents the 5GS User state of the UE for an access type
TrafficDescriptor	6.2.6.2.20	Represents the Traffic Descriptor
UEIdExt	6.2.6.2.21	UE Identity
AmfEventSubsSyncInfo	6.2.6.2.22	AMF Event Subscriptions Information for synchronization
AmfEventSubscriptionInfo	6.2.6.2.23	Individual AMF Event Subscription Information
TargetArea	6.2.6.2.24	TA list or TAI range list or any TA
SnssaiTaiMapping	6.2.6.2.25	List of restricted or unrestricted S-NSSAIs per TAI(s)
SupportedSnssai	6.2.6.2.26	Supported S-NSSAIs
UeInAreaFilter	6.2.6.2.27	Describe the filter related to UEs In Area Report event.
IdleStatusIndication	6.2.6.2.28	Represents the idle status indication.
UeAccessBehaviorReportItem	6.2.6.2.29	Report Item for UE Access Behavior Trends event.
UeLocationTrendsReportItem	6.2.6.2.30	Report Item for UE Location Trends event.
DispersionArea	6.2.6.2.31	Dispersion Area
MmTransactionLocationReportItem	6.2.6.2.32	UE MM Transaction Report Item per Location
MmTransactionSliceReportItem	6.2.6.2.33	UE MM Transaction Report Item per Slice
SliceAreaRestrictionInfo	6.2.6.2.34	Information of a slice subject to area restriction
ScheduledArea	6.2.6.2.35	Scheduled Area
TrajectorySegment	6.2.6.2.36	Trajectory Segment
Trajectory	6.2.6.2.37	Trajectory
SmCommFailureFilter	6.2.6.2.38	Filter for Session Management Communication Failure
SignallingMeasurementInfo	6.2.6.2.39	AMF Signalling Measurement Information
UavAltitudeReportingConfig	6.2.6.2.40	UAV Altitude Reporting Configuration
SignallingMeasurementUeRelatedInfo	6.2.6.2.41	Signalling Measurement UE related information
UeRelatedInfo	6.2.6.2.42	UE related information
UeSignallingInfo	6.2.6.2.43	UE signalling information
UeStateInfo	6.2.6.2.44	UE state information
AmfTimerInfo	6.2.6.2.45	AMF timer information
AmfEventType	6.2.6.3.3	Describes the supported event types of Namf_EventExposure Service
AmfEventTrigger	6.2.6.3.4	Describes how AMF should generate the report for the event
LocationFilter	6.2.6.3.5	Describes the supported filters of LOCATION_REPORT or UE_LOCATION_TRENDS event type
UeReachability	6.2.6.3.7	Describes the reachability of the UE

RmState	6.2.6.3.9	Describes the registration management state of a UE
CmState	6.2.6.3.10	Describes the connection management state of a UE
5GsUserState	6.2.6.3.11	Describes the 5GS User State of a UE
LossOfConnectivityReason	6.2.6.3.12	Describes the reason for loss of connectivity
ReachabilityFilter	6.2.6.3.13	Event filter for REACHABILITY_REPORT event type.
UeType	6.2.6.3.14	Describe UE type
AccessStateTransitionType	6.2.6.3.15	Access State Transition Type
SubTerminationReason	6.2.6.3.16	Subscription Termination Reason
TrajectoryReportReason	6.2.6.3.17	Trajectory Tracking Event Report Reason
AltReportEventTrigger	6.2.6.3.18	Event-based altitude reporting trigger
UavAltRptFailureCause	6.2.6.3.19	UAV Flight Information Reporting Failure Cause
FailureReason	6.2.6.3.20	Failure reason
UeSignallingType	6.2.6.3.21	UE signalling type
StateChangeType	6.2.6.3.22	UE state change type

Table 6.2.6.1-2 specifies data types re-used by the Namf_EventExposure service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the Namf_EventExposure service based interface.

Table 6.2.6.1-2: Namf_EventExposure re-used Data Types

Data type	Reference	Comments
Supi	TS 29.571 [6]	
GroupId	TS 29.571 [6]	
DurationSec	TS 29.571 [6]	
Gpsi	TS 29.571 [6]	
Uri	TS 29.571 [6]	
Pei	TS 29.571 [6]	
UserLocation	TS 29.571 [6]	
Tai	TS 29.571 [6]	
TimeZone	TS 29.571 [6]	
AccessType	TS 29.571 [6]	
Ecgi	TS 29.571 [6]	EUTRA Cell Identifier
Ncgi	TS 29.571 [6]	NR Cell Identifier
NfInstanceId	TS 29.571 [6]	
ProblemDetails	TS 29.571 [6]	Problem Details
SupportedFeatures	TS 29.571 [6]	Supported Features
DateTime	TS 29.571 [6]	
NgApCause	TS 29.571 [6]	
PresenceInfo	TS 29.571 [6]	Presence Reporting Area Information
PresenceState	TS 29.571 [6]	Describes the presence state of the UE to a specified area of interest
Dnn	TS 29.571 [6]	
Snssai	TS 29.571 [6]	
DddTrafficDescriptor	TS 29.571 [6]	Downlink Data Delivery Traffic Descriptor
SamplingRatio	TS 29.571 [6]	Sampling Ratio.
RedirectResponse	TS 29.571 [6]	Response body of the redirect response message.
NotificationFlag	TS 29.571 [6]	Notification flag
ExtSnssai	TS 29.571 [6]	
N3gaLocation	TS 29.571 [6]	Non-3GPP Location
SnssaiDnnItem	TS 29.571 [6]	Combination of S-NSSAIs and DNNs
NfSignallingInfo	TS 29.571 [6]	Network Function Signalling Information
ReferenceId	TS 29.503 [35]	
NsiId	TS 29.531 [18]	NSI ID
NFType	TS 29.510 [29]	NF type
TaiRange	TS 29.510 [29]	
MutingExceptionInstructions	TS 29.571 [6]	Muting exception instructions.
MutingNotificationsSettings	TS 29.571 [6]	Muting notifications settings.
LcsBroadcastAssistanceTypesData	TS 29.503 [35]	LCS broadcasting assistance data type which presence a bitmap.
Altitude	TS 29.572 [25]	Altitude
UePositioningCapabilities	TS 29.572 [25]	Indicates the positioning capabilities supported by the UE.
UeUpPositioningCapabilities	TS 29.572 [25]	Indicates the user plane positioning capabilities supported by the UE.
TimeWindow	TS 29.122 [62]	Time Window
Float	TS 29.571 [6]	Number with format "float"

6.2.6.2 Structured data types

6.2.6.2.1 Introduction

Structured data types used in Namf_EventExposure service are specified in this clause.

6.2.6.2.2 Type: AmfEventSubscription

Table 6.2.6.2.2-1: Definition of type AmfEventSubscription

Attribute name	Data type	P	Cardinality	Description	Applicability
eventList	array(AmfEvent)	M	1..N	Describes the events to be subscribed in subscription request or the events successfully subscribed for this subscription in subscription response.	
eventNotifyUri	Uri	M	1	Identifies the recipient of notifications sent by AMF for this subscription (NOTE 1)	
notifyCorrelationId	string	M	1	Identifies the notification correlation ID. The AMF shall include this ID in the notifications. The value of this IE shall be unique per subscription for a given NF service consumer.	
nfId	NfInstanceId	M	1	Indicates the instance identity of the network function creating the subscription.	
subsChangeNotifyUri	Uri	C	0..1	This IE shall be present if the subscription is created by an NF service consumer on behalf of another NF (e.g UDM creating event subscription at AMF for event notifications towards NEF). When present, this IE Identifies the recipient of notifications sent by AMF, for the creation of a new subscription ID, that is considered as a change of subscription ID by the NF service consumer for event subscriptions related to single UE or as the creation of a new subscription Id for event subscriptions related to UE groups (e.g during mobility procedures involving AMF change). (NOTE 3).	
subsChangeNotifyCorrelationId	string	C	0..1	This IE shall be present when an NF Service Consumer (e.g. UDM) is subscribing for events on behalf of another NF Service Consumer (e.g. NEF). When present, this IE shall contain the notification correlation ID. The AMF shall include it in the notifications for the creation of a new subcription ID that is considered as a change of subscription ID by the NF service consumer for event subscriptions related to single UE or as the creation of a new subscription Id for event subscriptions related to UE groups. The value of this IE shall be unique per subscription for a given NF service consumer that is sending this IE. (NOTE 3).	
supi	Supi	C	0..1	Subscription Permanent Identifier (NOTE 2) (NOTE 4)	
groupId	GroupId	C	0..1	Identifies a group of UEs. (NOTE 2)	
excludeSupiList	array(Supi)	O	1..N	This IE may be present for a group subscription. When present, this IE shall carry the SUPI of the group member UE(s) that are excluded from the group subscription.	DGEM
excludeGpsiList	array(Gpsi)	O	1..N	This IE may be present for a group subscription. When present, this IE shall carry the GPSI of the group member UE(s) that are excluded from the group subscription.	DGEM
includeSupiList	array(Supi)	O	1..N	This IE may be present for a group subscription. When present, this IE shall carry the SUPI of the group member UE(s) that are included for the group subscription.	DGEM

includeGpsiList	array(Gpsi)	O	1..N	This IE may be present for a group subscription. When present, this IE shall carry the GPSI of the group member UE(s) that are included for the group subscription.	DGEM
gpsi	Gpsi	C	0..1	Generic Public Subscription Identifier (NOTE 2) (NOTE 4)	
pei	Pei	C	0..1	Permanent Equipment Identifier (NOTE 2) (NOTE 4)	
anyUE	boolean	C	0..1	This IE shall be present and set to "TRUE" if the event subscription is applicable to any UE. Default value "FALSE" is used, if not present. The attribute shall be set to "TRUE", when the AMF event type is "SNSSAI_TA_MAPPING_REPORT". (NOTE 2)	
options	AmfEventMode	O	0..1	This IE may be included if the NF service consumer wants to describe how the reports of the event have to be generated. The absence of this IE, when creating an AMF event subscription or when transferring the UE context to another AMF, shall be interpreted as a "ONE_TIME" AMF event trigger.	
sourceNfType	NFType	O	0..1	This IE should be present for a subscription that is created by an "intermediate NF" (e.g. UDM) on behalf of a "source NF" (e.g. NEF). When present, it shall contain the NF type of the "source NF".	
termNotifyInd	boolean	O	0..1	When present this IE shall indicate whether the notification of event subscription termination from the AMF is requested by the NF consumer. - true: Event subscription termination notification requested - false (default): Event subscription termination notification not requested	STEN
NOTE 1: When an NF Service Consumer subscribes on behalf of another NF, the Notification URI identifies a resource under the authority of the other NF. NOTE 2: One and only one of the followings shall be included: - information about a single UE (i.e. SUPI, GPSI, PEI); - groupId;and, - anyUE set to "TRUE". NOTE 3: Same values of "subsChangeNotifyUri" and "subsChangeNotifyCorrelationId" shall be provided by an NF service consumer to all the serving AMF if the subscriptions apply to a group and triggered by one subscription from another NF. This allows the NF service consumer to associate the subscription Id creation notifications received from different serving AMFs to the same group Id subscription. NOTE 4: At most one of these identifier IEs may be present.					

6.2.6.2.3 Type: AmfEvent

Table 6.2.6.2.3-1: Definition of type AmfEvent

Attribute name	Data type	P	Cardinality	Description	Applicability
type	AmfEventType	M	1	Describes the AMF event type to be reported	
immediateFlag	boolean	O	0..1	Indicates if an immediate event report containing the currently available value / status of the event is requested. The report contains the value / status of the event currently available at the AMF at the time of the subscription (NOTE 1). If the flag is not present then immediate reporting shall not be done and the first report is sent at event detection time. When the subscribing NF subscribes on behalf of another NF, the IERSR feature controls whether or not an immediate report is sent within the subscribe response message or within a notification request message (see clause 5.3.2.2.2). Otherwise immediate reports are always sent within the subscribe response message. The default value is false.	
areaList	array(AmfEventArea)	O	1..N	Identifies the area to be applied. More than one instance of AmfEventArea IE shall be used only when the AmfEventArea is provided during event subscription for Presence Reporting Area subscription.	
locationFilterList	array(LocationFilter)	O	1..N	Describes the filters to be applied for LOCATION_REPORT event type. If this attribute is not present in the request, it indicates the change of the TA used by the UE should be reported.	
locationTrendsFilterList	array(LocationFilter)	O	1..N	Describes the filters to be applied for UE_LOCATION_TRENDS event type. If present, only the following filters are applied to UE_LOCATION_TRENDS event type: "TAI", "CELL_ID", "RAN_NODE", and "N3IWF". If this attribute is not present in the request, it indicates the TA granularity of UE location trends should be reported, if the event type is UE_LOCATION_TRENDS.	
refId	ReferenceId	O	0..1	Indicates the Reference Id associated with the event. (NOTE 3)	
trafficDescriptorList	array(TrafficDescriptor)	O	1..N	Indicates the filters to be applied for AVAILABILITY_AFTER_DDN_FAILURE event type.	

reportUeReachable	boolean	C	0..1	This IE shall be present and set to value "true" by the source AMF to request the target AMF to notify the subscriber when UE becomes reachable, during inter-AMF mobility procedures. When present, this IE shall be set as following: - true: target AMF shall notify the subscriber when UE becomes reachable - false (default): target AMF shall not notify the subscriber when UE becomes reachable, until next reporting trigger is detected, i.e. DDN failure detected (for AVAILABILITY_AFTER_DDN_FAILURE event) or UE becomes unreachable for downlink traffic (for "UE Reachable for DL Traffic" of REACHABILITY_REPORT event) This IE only applies to following Event Types: - AVAILABILITY_AFTER_DDN_FAILURE - REACHABILITY_REPORT (for "UE Reachable for DL Traffic")	
reachabilityFilter	ReachabilityFilter	O	0..1	When present, this IE shall indicate the filter to be applied for the REACHABILITY_REPORT event type. If the subscription of REACHABILITY_REPORT is for "UE Reachability Status Change", the AMF shall report the current reachability state (regardless of whether the immediateFlag is set or not) and subsequent updated reachability state of the UE, when AMF becomes aware of a UE reachability state change between REACHABLE, UNREACHABLE and REGULATORY_ONLY. If the subscription of REACHABILITY_REPORT is for "UE Reachable for DL Traffic", the AMF shall report the "REACHABLE" state, immediately if UE is reachable at the time of the subscription to the event, otherwise when the UE transitions to CM-CONNECTED mode or when the UE will become reachable for paging, as specified in table 4.15.3.1-1, clauses 4.2.5 and 4.3.3 of TS 23.502 [3]. If this IE is absent, the subscription of REACHABILITY_REPORT is for "UE Reachability Status Change".	

udmDetectInd	boolean	O	0..1	The IE may be present for subscription for "UE Reachable for DL Traffic". When present, this IE shall indicate whether the UE Reachability Event will be detected at UDM (i.e. with Nudm_UECM_Registration) or not: - true: UE Reachability will be detected at UDM - false (default) UE Reachability will not be detected at UDM	
maxReports	integer	O	0..1	This IE may be present if the trigger is set to "CONTINUOUS" or "PERIODIC". When present, this IE describes the maximum number of reports that can be generated by the subscribed event. If the AMF event subscription is for a group of UEs, this parameter shall be applied to each individual member UE of the group. If the event subscription is transferred from source AMF to a target AMF, this IE shall contain: - the remaining number of reports for the event subscription, in the case of individual UE event subscription; or - the remaining number of reports for the event subscription for this specific UE, in the case of a group event subscription. If the group subscription has not expired and all reports have been sent already for this event, the remaining number of reports shall be set to "0". (NOTE 2)	
presenceInfoList	map(PresenceInfo)	O	1..N	Map of PRA Information, the "praId" attribute within the PresenceInfo data type shall also be the key of the map. The "presenceState" attribute within the PresenceInfo data type shall not be supplied. When present, the areaList shall be absent.	MPRA
maxResponseTime	DurationSec	C	0..1	This IE shall be present, when the UDM subscribes to "REACHABILITY_REPORT" event for "UE Reachable for DL Traffic" on behalf of the AF and the AF sets the Maximum Response Time in the Monitoring Configuration. When present, this IE shall indicate the Maximum Response Time configured by the AF.	
targetArea	TargetArea	C	0..1	The IE shall be present for subscription for SNSSAI_TA_MAPPING_REPORT event type. When present, this IE shall indicate the TAI list to be applied.	

snssaiFilter	array(ExtSnssai)	O	1..N	The IE may be present for subscription for SNSSAI_TA_MAPPING_REPORT event type. This IE shall be present for subscription of UE_MM_TRANSACTION_REPORT event to receive the UE Mobility Management Transaction numbers based on slices. When present, this IE shall indicate the S-NSSAI list to be applied. (NOTE 4)	
ueInAreaFilter	UeInAreaFilter	O	0..1	This IE may be present and contain the filter to be applied for UES_IN_AREA_REPORT event type related to UAVs or UEs subscribed to LCS Broadcast Assistance Type(s). When present, this IE shall indicate the list of items to be applied together as filter.	UARF, OBGAD
minInterval	DurationSec	O	0..1	This IE may be present when the NF consumer subscribes to "REACHABILITY_REPORT" event for "UE Reachable for DL Traffic" or to the "LOCATION_REPORT" event with "CONTINOUS" reporting mode. When present, this IE indicates the minimal interval to report the event, i.e. when an event is reported, a subsequent event report shall not be sent during the interval.	
nextReport	DateTime	O	0..1	This IE may be present when the event subscription is transferred from source AMF to a target AMF and minInterval is configured for this event. When present, this IE shall indicate the UTC time point before when a subsequent event report shall be throttled.	
idleStatusInd	boolean	O	0..1	Idle Status Indication request. May be present if type is REACHABILITY_REPORT or AVAILABILITY_AFTER_DDN_FAILURE true: Idle status indication is requested false (default): Idle status indication is not requested	
dispersionArea	DispersionArea	C	0..1	This IE shall be present for subscription to the UE_MM_TRANSACTION_REPORT event to receive the UE Mobility Management Transaction numbers based on location, or for subscription to the UE_LOCATION_TRENDS event. When present, this IE indicates the target area where the related events to be reported for dispersion analytics. (NOTE 4)	
nextPeriodicReportTime	DateTime	O	0..1	This IE should be present when the event subscription is transferred from source AMF to a target AMF and there are periodic report(s) to be generated for the event. When present, this IE shall indicate the timestamp (in UTC) when the next periodic report for the event to be generated and notified to the NF consumer.	

adjustAoIOnRa	boolean	O	0..1	This IE may be present if the (event) type IE is set to "PRESENCE_IN_AOI_REPORT". When present, it shall be set as follows: - true: the AMF may adjust the received AoI based on the UE's registration area. - false (default) the AoI shall remain unchanged, i.e. it shall not be adjusted based on the UE's registration area. See clause 5.3.4.4 of TS 23.501 [2] and clauses 4.15.9.3.2, 4.15.9.4, 5.2.2.3.1 and Annex D.1 of TS 23.502 [3].	AOIEF
ranTimingSynchroStatusChange	boolean	O	0..1	This IE may be present if the (event) type IE is set to "PRESENCE_IN_AOI_REPORT". When present, it shall be set as follows: - true: this is a subscription for RAN timing synchronization status change event. - false (default): this is not a subscription for RAN timing synchronization status change event See clause 5.3.1 for the handling of this IE by the AMF.	AOIEF
notifyForSupiList	array(Supi)	O	1..N	This IE may be present if the (event) type IE is set to "PRESENCE_IN_AOI_REPORT" and the subscription targets Any UE. If this IE is present, the AMF shall report the AoI events only if an event concerns a UE belonging to the provided list of SUPIs, or if the notifyForGroupList IE is also present, if the event concerns a UE belonging to an Internal Group of the provided list of Internal Groups. If neither this IE nor the notifyForGroupList IE is present, the AMF shall report the AoI events for any UE. See clause 5.3.4.4 of TS 23.501 [2] and clause 5.2.2.3.1 of TS 23.502 [3].	AOIEF
notifyForGroupList	array(GroupId)	O	1..N	This IE may be present if the (event) type IE is set to "PRESENCE_IN_AOI_REPORT". If this IE is present, the AMF shall report the AoI events only if an event concerns a UE belonging to an Internal Group of the provided list of Internal Groups or, if the notifyForSupiList IE is also present, if the event concerns a UE belonging to the provided list of SUPIs. If neither this IE nor the notifyForSupiList IE is present, the AMF shall report the AoI events for any UE. See clause 5.3.4.4 of TS 23.501 [2] and clause 5.2.2.3.1 of TS 23.502 [3].	AOIEF

notifyForSnssaiDnnList	array(SnssaiDnnItem)	O	1..N	This IE may be present if the (event) type IE is set to "PRESENCE_IN_AOI_REPORT". If this IE is present, the AMF shall report the AoI events only if an event concerns a UE having a PDU session established for the provided DNN(s)/S-NSSAI(s). If the IE is not present, the AMF shall report the AoI events for any UE, i.e. without checking DNNs/S-NSSAIs. See clause 5.3.4.4 of TS 23.501 [2] and clause 5.2.2.3.1 of TS 23.502 [3].	AOIEF
assignTrajectory	Trajectory	C	0..1	This IE shall be present if the (event) type IE is set to "TRAJECTORY_TRACKING_REPORT". When present, this IE shall contain the assigned trajectory of the UE.	
reportingThreshold	integer	O	0..1	This IE may be present if the event type IE is set to "UES_IN_AREA_REPORT" event type related to UEs subscribed to LCS Broadcast Assistance Type(s). This IE shall indicate the threshold for reporting when the UE number is increased to match, or exceed than the reporting threshold, or is decresed to be lower than the reporting threshold, the event report be generated.	OBGAD
smCommFailureFilter	SmCommFailureFilter	O	0..1	This IE may be present if the (event) type IE is set to "COMMUNICATION_FAILURE_REPORT". When present, this IE shall include the information of corresponding PDU session (DNN and Slice combination) for which the related SM Communication Failure to be reported.	
uePosCapRequestedInd	boolean	O	0..1	This IE may be present if the (event) type IE is set to "PRESENCE_IN_AOI_REPORT". When present, this IE shall be set to true to indicate that the NF service consumer (e.g. NWDAF) wants to receive the UE positioning capabilities for each UE reported in the Area of Interest. Presence of this IE with false value shall be prohibited.	
twList	array(TimeWindow)	O	1..N	This IE may be present if the (event) type IE is set to "SIGNALLING_MEASUREMENT_REPORT" for One-Time reporting and/or for "SIGNALLING_MEASUREMENT_UE_RELATED_REPORT". When present, this IE shall contain the time windows list during which the signalling information statistics will be collected. See clause 6.22 of TS 23.288 [38].	
uavAltitudeReportingConfig	UavAltitudeReportingConfig	C	0..1	This IE shall be present if the (event) type IE is set to "ALTITUDE_REPORT". When present, this IE shall contain the altitude reporting information of the UE.	

NOTE 1: The requested value of the location is the last known location (i.e. age of location may be greater than zero) if the immediate Flag is set to true. An NF Service Consumer requesting to receive the current location (i.e. age of location equal to zero) shall not set the immediateFlag to true when subscribing to a location event report.
NOTE 2: When creating an AMF event subscription with multiple events, the same maximum number of reports shall apply to each event. Accordingly, maxReports in this attribute should not be present when creating an AMF event subscription; if it is present, it shall contain the same value for all events and maxReports in the AmfEventMode shall have precedence over the maxReports in this attribute. maxReports in this attribute and maxReports in the AmfEventMode have different semantics when transferring the event subscription from a source AMF to a target AMF.
NOTE 3: Each Monitoring Configuration subscribed via UDM Event Exposure service uses a Reference Id as the key. This IE shall carry the Reference Id when UDM subscribes to the AMF event for the corresponding Monitoring Configuration.
NOTE 4: For a subscription to the UE_MM_TRANSACTION_REPORT event, either the snssaiFilter IE or the dispersionArea shall be present. The AMF shall report the UE MM Transaction numbers based on slices or location according to the presence of the IE.

6.2.6.2.4 Type: AmfEventNotification

Table 6.2.6.2.4-1: Definition of type AmfEventNotification

Attribute name	Data type	P	Cardinality	Description	Applicability
notifyCorrelationId	string	C	0..1	This IE shall be included if the notification is not for informing creation of a new subscription Id. This IE shall also be included if the notification is for informing the creation of a new subscription Id and the corresponding event subscription did not contain subsChangeNotifyCorrelationId attribute (see clause 6.2.6.2.2). When present, this IE shall indicate the notification correlation Id provided by the NF service consumer during event subscription. This parameter can be useful if the NF service consumer uses a common call-back URI for multiple subscriptions.	
subsChangeNotifyCorrelationId	string	C	0..1	This IE shall be included if the notification is for informing the creation of a new subscription Id at the AMF and the corresponding event subscription contains the subsChangeNotifyCorrelationId attribute (see clause 6.2.6.2.2). When present, this IE shall be set to the value of the subsChangeNotifyCorrelationId provided during subscription (see clause 6.2.6.2.2).	
reportList	array(AmfEventReport)	C	1..N	This IE shall be present if a event is reported. When present, this IE represents the event reports to be delivered.	
eventSubsSyncInfo	AmfEventSubsSyncInfo	C	0..1	This IE may be present for AMF to initiate event subscription synchronization with UDM during UE mobility procedures. When present, this IE shall contain the information for event subscription synchronization, including all active event subscriptions specificially targeting the UE.	ESSYNC
amfId	NfInstanceId	C	0..1	This IE shall be present for an AMF set level bulk subscription. When present, it shall be set to the NF instance ID of the AMF instance sending the event report. See clause 5.3.1.4.3.	ASETSUB

6.2.6.2.5 Type: AmfEventReport

Table 6.2.6.2.5-1: Definition of type AmfEventReport

Attribute name	Data type	P	Cardinality	Description	Applicability
type	AmfEventType	M	1	Describes the type of the event which triggers the report	
state	AmfEventState	M	1	Describes the state of the event which triggered the report. This IE shall be set to "TRUE" when subscriptionId IE is present.	
timeStamp	DateTime	M	1	This IE shall contain the UTC time at which the event is generated.	
subscriptionId	Uri	C	0..1	This IE shall be included when the event notification is for informing the creation of a subscription Id at the AMF during mobility of a UE across AMFs. When present, this IE shall contain the URI of the created subscription resource at the AMF; this shall contain an absolute URI set to the Resource URI specified in clause 6.2.3.3.2. The type IE shall be set to: - SUBSCRIPTION_ID_CHANGE, when the AMFcreates a subscription Id for a UE specific event subscription during mobility registration and handover procedures involving an AMF change. - SUBSCRIPTION_ID_ADDITION, when the AMF creates a subscription Id for a group Id specific event subscription during mobility registration and handover procedures involving an AMF change.	
anyUe	boolean	C	0..1	This IE shall be included and shall be set to "true", if the event subscription is a bulk subscription for number of UEs and the event reported is for one of those UEs. (NOTE 3)	
supi	Supi	C	0..1	This IE shall be present if available. When present, this IE identifies the SUPI of the UE associated with the report (NOTE 1, NOTE 3).	
areaList	array(AmfEventArea)	C	1..N	This IE shall be present when the AMF event type is "PRESENCE_IN_AOI_REPORT". When present, this IE represents the specified Area(s) of Interest the UE is currently IN / OUT / UNKNOWN. If the AMF event is subscribed towards a PRA identifier referring to a Set of Core Network predefined Presence Reporting Areas, the AMF shall report both the subscribed PRA Identifier and the additional PRA identifier of the actually individual PRA(s) where the UE is currently IN / OUT, as specified in clause 5.6.11 of TS 23.501 [2]. (NOTE 3)	
refId	ReferenceId	C	0..1	This IE shall be present if a Reference Id has previously been associated with the event triggering the report. When present, this IE shall indicate the Reference Id associated with the event which triggers the report.	
gpsi	Gpsi	C	0..1	This IE shall be present if available. When present, this IE identifies the GPSI of the UE associated with the report (NOTE 1, NOTE 3).	

pei	Pei	O	0..1	This IE may be included if the event reported is for a particular UE or any UE. This IE identifies the PEI of the UE associated with the report (NOTE 1, NOTE 3).	
location	UserLocation	O	0..1	Represents the location information of the UE This IE shall convey exactly one of the following: - E-UTRA user location - NR user location - Non-3GPP access user location. If the additionalLocation IE is present, this IE shall contain either an E-UTRA user location or NR user location.	
additionalLocation	UserLocation	O	0..1	This IE shall be present if the "location IE" is present and the AMF reports both a 3GPP user location and a non-3GPP access user location. When present, this IE shall convey the non-3GPP access user location.	
timezone	TimeZone	O	0..1	Describes the time zone of the UE	
accessTypeList	array(AccessType)	O	1..N	Describes the access type(s) of the UE. When reporting that the UE is reachable for DL traffic, this IE shall indicate the access type(s) through which the UE is reachable. This attribute shall be absent if the AMF event type is "SNSSAI_TA_MAPPING_REPORT".	
rmInfoList	array(RmInfo)	O	1..N	Describes the registration management state of the UE	
cmInfoList	array(CmInfo)	O	1..N	Describes the connection management state of the UE	
reachability	UeReachability	O	0..1	Describes the reachability of the UE	
commFailure	CommunicationFailure	O	0..1	Describes a communication failure for the UE.	
numberOfUes	integer	O	0..1	Represents the number of UEs in the specified area	
5gsUserStateList	array(5GsUserStateInfo)	O	1..N	Represents the 5GS User State of the UE per access type	
typeCode	string	C	0..1	This IE shall be present when the AMF event type is "TYPE_ALLOCATION_CODE_REPORT". When present, this IE represents the Type Allocation code (TAC), to indicate terminal model and vendor information of the UE. Pattern: '^imeitac-[0-9]{8}$'.	ENA
registrationNumber	integer	C	0..1	This IE shall be present when the AMF event type is "FREQUENT_MOBILITY_REGISTRATION_REPORT". When present, this IE represents the number of the mobility registration procedures during a period identified by the expiry time included in the event subscription request.	ENA

ueIdExtList	array(UEIdExt)	C	1..N	This IE shall be present if multiple SUPIs and / or GPSIs need to be included and the subscribing NF indicated support of the ENA feature, unless the subscribing NF indicated to omit UE IDs in the event reports by including ueIdOmitInd IE with the value true. This attribute provides additional SUPIs and / or GPSIs to the supi attribute or gpsi attribute if present. The ueIdExtList attribute may be present even if both the supi and gpsi attributes are absent, e.g., in a report of "UES_IN_AREA_REPORT" or "PRESENCE_IN_AOI_REPORT" event type. (NOTE 3)	ENA, AIML_CN
lossOfConnectReason	LossOfConnectivityReason	O	0..1	Describes the reason for loss of connectivity. This IE should be present when the AMF event type is "LOSS_OF_CONNECTIVITY".	
maxAvailabilityTime	DateTime	O	0..1	Indicates the time (in UTC) until which the UE is expected to be reachable. This IE may be present in REACHABILITY_REPORT event report for "UE Reachable_for DL Traffic". This information may be used by the SMS Service Center to prioritize the retransmission of pending Mobile Terminated Short Message to UEs using a power saving mechanism (eDRX, PSM etc.).	
snssaiTaiList	array(SnssaiTaiMapping)	C	1..N	This IE shall be present when the AMF event type is "SNSSAI_TA_MAPPING_REPORT". When present, this IE represents the list of supported S-NSSAIs at the TAI(s). It shall also include the indication if S-NSSAI is restricted at the AMF.	
idleStatusIndication	IdleStatusIndication	O	0..1	Idle Status Indication May be present when type is REACHABILITY_REPORT or AVAILABILITY_AFTER_DDN_FAILURE	
ueAccessBehaviorTrends	array(UeAccessBehaviorReportItem)	C	1..N	This IE shall be present to report "UE_ACCESS_BEHAVIOR_TRENDS" event. When present, this IE shall include the UE access behavior trends within the report period.	
ueLocationTrends	array(UeLocationTrendsReportItem)	C	1..N	This IE shall be present to report "UE_LOCATION_TRENDS" event. When present, this IE shall include the UE location trends within the report period. (NOTE 2)	
mmTransLocationReportList	array(MmTransactionLocationReportItem)	C	1..N	This IE shall be present to report "UE_MM_TRANSACTION_REPORT" event based on location. When present, this IE shall include the number of UE MM transactions per location within the report period.	

mmTransSliceReportList	array(MmTransactionSliceReportItem)	C	1..N	This IE shall be present to report "UE_MM_TRANSACTION_REPORT" event based on slices. When present, this IE shall include the number of UE MM transactions per slice within the report period.	
termReason	SubTerminationReason	O	0..1	This IE may be present when the event type is SUBSCRIPTION_TERMINATION. When present, this IE shall indicate the reason for the subscription termination.	
unavailabilityPeriod	DurationSec	O	0..1	This IE shall be present when the event type is LOSS_OF_CONNECTIVITY and Unavailability Period Duration is reported by the UE or known to the AMF as specified in clause 5.4.13.3 of TS 23.501 [2]. When present, it contains the Unavailability Period Duration reported by the UE or known to the AMF as specified in clause 5.4.1.4 of TS 23.501 [2]. If the UE is already not available when the event is subscribed, it is set to the remaining value of Unavailability Period Duration.	
trajRepReason	TrajectoryReportReason	C	0..1	This IE shall be present to report "TRAJECTORY_TRACKING_REPORT" event. When present, this IE shall indicate the reason of the generated report.	
tai	Tai	C	0..1	This IE shall be present to report "TRAJECTORY_TRACKING_REPORT" event. When present, this IE shall indicate the TA of the UE/UAV.	
altitude	Altitude	C	0..1	This IE may be present to report "TRAJECTORY_TRACKING_REPORT" event, when the UE moves outside of the scheduled altitude range of the assigned trajectory. This IE may be present to report "ALTITUDE_REPORT" event, when the UE meets altitude reporting condition. When present, this IE shall indicate the altitude of the UE/UAV.	
uePosCap	UePositioningCapabilities	C	0..1	This IE shall be present and indicate the positioning capabilities supported by the UE, if the (event) type IE is set to "PRESENCE_IN_AOI_REPORT, the uePosCapRequestedInd is present and set to true in the subscription, one of the supi or gpsi attributes is present and the UE positioning capabilities of the related UE is available in AMF.	AIML_CN

ueUpPosCap	array(UeUpPositioningCapabilities)	C	1..N	This IE shall be present and indicate the user plane positioning capabilities supported by the UE, if the (event) type IE is set to "PRESENCE_IN_AOI_REPORT, the uePosCapRequestedInd is present and set to true in the subscription, one of the supi or gpsi attributes is present and the UE user plane positioning capabilities of the related UE is available in AMF.	AIML_CN
signallingMeasurementInfo	SignallingMeasurementInfo	C	0..1	This IE shall be present if the (event) type IE is "SIGNALLING_MEASUREMENT_REPORT". When present, this IE shall indicate the AMF signalling measurement information (e.g. the signalling information per service etc.).	AIML_CN
uavAltRptFailureInd	UavAltRptFailureCause	C	0..1	This IE shall be present to report "ALTITUDE_REPORT" when the UAV Flight information reporting request failed indication is received by NG-RAN as specified in clause 9.3.1 of TS 38.413 [2]. (NOTE 4)	
signallingMeasurementUeRelatedInfo	SignallingMeasurementUeRelatedInfo	C	0..1	This IE shall be present if the (event) type IE is "SIGNALLING_MEASUREMENT_UE_RELATED_REPORT". When present, this IE shall indicate the AMF signalling measurement information (e.g. signalling information for requests from UE/RAN, UE state transition information, timer information, etc.).	AIML_CN
expiry	DateTime	C	0..1	This IE shall be included when the type IE is set to "SUBSCRIPTION_ID_ADDITION", i.e. a new group subscription is additionally created in the AMF. When present, this IE shall represent the UTC time after which the subscribed event(s) shall stop generating report and the subscription becomes invalid.	

NOTE 1: If the event report corresponds to an event subscription of a single UE, then the same UE identifier (i.e. SUPI and/or GPSI and/or PEI) received during subscription creation shall be included in the report. If the event report corresponds to an event subscription for group of UEs or any UE, then the SUPI and if available the GPSI shall be included in the event report. SUPI, PEI and GPSI shall not be present in report for UES_IN_AREA_REPORT event type.
NOTE 2: The items shall be listed in descending order by the value of "duration" attribute.
NOTE 3: When a subscription for "PRESENCE_IN_AOI_REPORT" event targets any UE but no UE is "IN" the AOI when the AMF generates the first notification (e.g. for one-time reporting or for the first notification for continuously reporting), the anyUe IE shall be present with the value true and IEs indicating UE IDs (Supi, Gpsi, Pei and ueIdExtList) shall not be present; the areaList IE shall be present including the subscribed AOI with the Presence Status set to "IN", i.e. no UE is "IN" the AOI.
NOTE 4: The AMF shall not teminate a subscription to the "ALTITUDE_REPORT" event when reporting a UAV Altitude Reporting Failure.

6.2.6.2.6 Type: AmfEventMode

Table 6.2.6.2.6-1: Definition of type AmfEventMode

Attribute name	Data type	P	Cardinality	Description	Applicability
trigger	AmfEventTrigger	M	1	Describes how the reports are triggered.	
maxReports	integer	C	0..1	This IE shall be present if the trigger is set to "CONTINUOUS" while "expiry" attribute is not present. This IE may be present if the trigger is set to "PERIODIC". When present, this IE describes the maximum number of reports that can be generated by each subscribed event in the subscription. If the AMF event subscription is for a list of events, this parameter shall be applied to each individual event in the list. If the AMF event subscription is for a group of UEs, this parameter shall be applied to each individual member UE of the group. If the event subscription is transferred from source AMF to target AMF, this IE shall contain: - the remaining number of reports for the event subscription, in the case of individual UE event subscription; - the maximum number of reports for each event of the AMF event subscription for each individual member of the group, in the case of a group event subscription. (NOTE 1) (NOTE 2)	
expiry	DateTime	C	0..1	This IE shall be included in an event subscription response, if, based on operator policy and taking into account the expiry time included in the request, the AMF needs to include an expiry time. This IE may be included in an event subscription request. When present, this IE shall represent the UTC time after which the subscribed event(s) shall stop generating report and the subscription becomes invalid. If the trigger value included in an event subscription response is "ONE_TIME" and if an event report is included in the subscription response then the value of the expiry included in the response shall be an immediate timestamp. (NOTE 1)	
repPeriod	DurationSec	C	0..1	This IE shall be present if the trigger is set to "PERIODIC". When present, this IE describes the period time for the event reports. If the AMF event subscription is for a group of UEs, this parameter shall be applied to each individual member UE of the group. (NOTE 3)	
sampRatio	SamplingRatio	O	0..1	This IE may be included in an event subscription request for a group of UEs or any UE to indicate the ratio of the random subset to target UEs. Event reports only relate to the subset. If the AMF event subscription is for a list of AMF event, this parameter shall be applied to each individual event.	

partitioningCriteria	array(PartitioningCriteria)	O	1..N	This IE may be included in an event subscription request for a group of UEs or any UE when sampRatio is provided. When present, this IE shall define the criteria for determining the UEs for which the sampling ratio shall apply.	
notifFlag	NotificationFlag	O	0..1	Indicates the notification flag, which is used to mute/unmute notifications and to retrieve events stored during a period of muted notifications.	EneNA
mutingExcInstructions	MutingExceptionInstructions	O	0..1	This IE may be included in the event subscription request if the notifFlag IE is present and set to "DEACTIVATE". When present, it shall indicate the instructions for the subscription and stored events when an exception (e.g. the buffer of stored event reports is full, or the number of stored event reports exceeds a certain number) occurs at AMF while the events are muted. See TS 23.288 [38], clause 6.2.7.2. Write-Only: true	ENAPH3
mutingNotSettings	MutingNotificationsSettings	O	0..1	This IE may be included if the event notifications muting is activated. This IE Indicates the AMF muting notification settings. See TS 23.288 [38], clause 6.2.7.2. Read-Only: true	ENAPH3
varRepPeriodInfo	array(VarRepPeriod)	O	1..N	This IE may be present if the trigger is set to "PERIODIC". This IE Indicates the variable reporting periodicity information. See TS 23.502 [3], clause 4.15.1. (NOTE 3)	ENAPH3
NOTE 1: If the AmfEventTrigger is set to "CONTINOUS", at least one of the "maxReports" and "expiry" attributes shall be included. NOTE 2: See NOTE 2 of Table 6.2.6.2.3-1 regarding the precedence between maxReports in AmfEvent and maxReports in this attribute. NOTE 3: If both repPeriod and varRepPeriodInfo attributes are present, the repPeriod shall be applied if non of the conditions trigger the variable reporting is met.					

6.2.6.2.7 Type: AmfEventState

Table 6.2.6.2.7-1: Definition of type AmfEventState

Attribute name	Data type	P	Cardinality	Description
active	boolean	M	1	Represents the active state of the subscribe event. "TRUE" value indicates the event will continue generating reports; "FALSE" value indicates the event will not generate further report.
remainReports	integer	O	0..1	Represents the number of remain reports to be generated by the subscribed event.
remainDuration	DurationSec	O	0..1	Represents how long the subscribed event will continue generating reports.

6.2.6.2.8 Type: RmInfo

Table 6.2.6.2.8-1: Definition of type RmInfo

Attribute name	Data type	P	Cardinality	Description
rmState	RmState	M	1	Describes the registration management state of the UE
accessType	AccessType	M	1	Describes the access type of the UE that applies to the registration management state reported.

6.2.6.2.9 Type: CmInfo

Table 6.2.6.2.9-1: Definition of type CmInfo

Attribute name	Data type	P	Cardinality	Description
cmState	CmState	M	1	Describes the Connection management state of the UE
accessType	AccessType	M	1	Describes the access type of the UE that applies to the Connection management state reported.

6.2.6.2.10 Void

6.2.6.2.11 Type: CommunicationFailure

Table 6.2.6.2.11-1: Definition of type CommunicationFailure

Attribute name	Data type	P	Cardinality	Description
nasReleaseCode	string	O	0..1	Describes the NAS release code for the communication failure. This IE shall be formatted following the regular expression pattern: "^(MM|SM)-[0-9]{1,3}$" Examples: MM-7 SM-27
ranReleaseCode	NgApCause	O	0..1	Describes the RAN release code for the communication failure. If present, this IE shall contain the decimal value of the NG AP cause code values as specified in TS 38.413 [12].

6.2.6.2.12 Type: AmfCreateEventSubscription

Table 6.2.6.2.12-1: Definition of type AmfCreateEventSubscription

Attribute name	Data type	P	Cardinality	Description
subscription	AmfEventSubscription	M	1	Represents the AMF Event Subscription resource to be created.
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.2.8 is supported.
oldGuami	Guami	C	0..1	This IE shall be present during an AMF planned removal procedure when the NF Service Consumer initiates a request towards the target AMF, for a UE associated to an AMF that is unavailable (see clause 5.21.2.2 of TS 23.501 [2]).
udrRestartInd	Boolean	O	0..1	May be present in Event Exposure subscribe messages from the UDM. If present: - true: indicates that the subscription message sent by the UDM is due to UDR data restoration. Therefore, the Event Exposure subscription context may already exist in the AMF. - false (or absent): indicates that this is a normal subscription message (i.e. not motivated by a UDR data restoration).

6.2.6.2.13 Type: AmfCreatedEventSubscription

Table 6.2.6.2.13-1: Definition of type AmfCreatedEventSubscription

Attribute name	Data type	P	Cardinality	Description
subscription	AmfEventSubscription	M	1	Represents the newly created AMF Event Subscription resource.
subscriptionId	Uri	M	1	Represents the URI of the newly created AMF Event Subscription resource. This shall contain an absolute URI set to the Resource URI specified in clause 6.2.3.3.2. (NOTE 2)
reportList	array(AmfEventReport)	O	1..N	Represents the immediate event reports (i.e. the current value / status of the events subscribed), if available (NOTE 1).
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.2.8 is supported.
NOTE 1: If the subscription is on behalf of another NF and the NF service consumer has not indicated supporting of IERSR feature (see 6.2.8), then the reports attribute shall be absent. NOTE 2: TS 23.502 [3] specifies this attribute as "Subscription Correlation ID".				

6.2.6.2.14 Type: AmfUpdateEventSubscriptionItem

Table 6.2.6.2.14-1: Definition of type AmfUpdateEventSubscriptionItem

Attribute name	Data type	P	Cardinality	Description	Applicability
op	string	M	1	This IE indicates the patch operation as defined in IETF RFC 6902 [14] to be performed on attributes of the "Individual subscription" resource (see clause 6.2.3.3). This IE shall support the following values: Enum: "add" Enum: "replace" Enum: "remove"	

path	string	M	1	This IE contains a JSON pointer value (as defined in IETF RFC 6901 [40]) that references a location of attributes of the "Individual subscription" resource (see clause 6.2.3.3) on which the patch operation shall be performed. This IE shall contain the JSON pointer to a valid index of the "/eventList" array in the AMF Event Subscription, formatted with following pattern: '\/eventList\/[0-]$\|\/eventList\/[1-9][0-9]*$' Example: "/eventList/0" stands for the first member of the array; "/eventList/10" stands for the 11th member of the array; "/eventList/-" stands for a new (non-existent) member after the last existing array element. Only allowed with "add" operation. To update the PRA Information, this IE shall contain the JSON pointer to a valid key of the "/presenceInfoList" object in the AMF Event Subscription, the key shall be formatted as the "praId" attribute within the PresenceInfo data type. These attributes shall only be updated when both the NF Service Consumer and the AMF support the MPRA feature. Pattern: '^(\/eventList\/0|\/eventList\/[1-9][0-9]*){1}(\/presenceInfoList\/0|\/presenceInfoList\/[1-9][0-9]*)?$' Example: "/eventList/10/presenceInfoList/123" stands for the PresenceInfo with PRA ID 123 for the 11th member of the array. (NOTE 1) To remove list of group member UE(s) from a group subscription, this IE shall contain the JSON pointer to the "/excludeSupiList" object or "/excludeGpsiList" object in the AMF Event Subscription. These attributes shall only be updated when both the NF Service Consumer and the AMF support the DGEM feature. Pattern: '^\/excludeSupiList\|\/excludeGpsiList$' (NOTE 2) To add list of group member UE(s) into a group subscription, this IE shall contain the JSON pointer to the "/includeSupiList" object or "/includeGpsiList" object in the AMF Event Subscription. These attributes shall only be updated when both the NF Service Consumer and the AMF support the DGEM feature.	

				Pattern: '^\/includeSupiList|\/includeGpsiList$' (NOTE 3) To modify or remove the notifyForSupiList IE, the notifyForGroupList IE or the notifyForSnssaiDnnList IE, this IE shall contain the JSON pointer to the "/notifyForSupiList", "/notifyForGroupList" or "/notifyForSnssaiDnnList" attribute in the AMF Event Subscription. When modifying these IEs, the new list of SUPIs, Internal Groups or DNN/S-NSSAIs shall replace any earlier received list of SUPIs, Internal Groups or DNNs/S-NSSAIs respectively. These attributes shall only be updated when both the NF Service Consumer and the AMF support the AOIEF feature. Pattern: '^(\/eventList\/0\|\/eventList\/[1-9][0-9]*){1}(\/notifyForSupiList)$' Pattern: '^(\/eventList\/0|\/eventList\/[1-9][0-9]*){1}(\/notifyForGroupList)$' Pattern: '^(\/eventList\/0\|\/eventList\/[1-9][0-9]*){1}(\/notifyForSnssaiDnnList)$' (NOTE 4)	
value	Any Type	C	0..1	This IE contains the new value of the attribute (as indicated in "path") be added or updated of an existing AMF event to be modified. It shall be present if the patch operation is "add" or "replace"	

NOTE 1: Update of PRA information by extending the schema of the path IE with JSON pointer to a valid key of the "/presenceInfoList" object shall only be used if the AMF supports the MPRA feature.
NOTE 2: Remove group member UE(s) by extending the schema of the path IE with JSON pointer to the "/excludeSupiList" object or "/excludeGpsiList" object shall only be used if the AMF supports the DGEM feature.
NOTE 3: Add group member UE(s) by extending the schema of the path IE with JSON pointer to the "/includeSupiList" object or "/includeGpsiList" object shall only be used if the AMF supports the DGEM feature.
NOTE 4: Modifying the list of SUPIs or DNNs/S-NSSAIs shall only be used if the AMF supports the AOIEF feature.

6.2.6.2.15 Type: AmfUpdatedEventSubscription

Table 6.2.6.2.15-1: Definition of type AmfUpdatedEventSubscription

Attribute name	Data type	P	Cardinality	Description
subscription	AmfEventSubscription	M	1	Represents the updated AMF Event Subscription resource.
reportList	array(AmfEventReport)	O	1..N	Represents the immediate event reports (i.e. the current value / status of the events subscribed), if available (NOTE).

NOTE: For newly added AMF event subscription(s) with the immediateFlag attribute set to true, immediate event report(s) of the corresponding AMF event subscription shall be provided, if available and if the NF service consumer had directly subscribed to the AMF. Otherwise, if the NF service consumer had subscribed to the AMF on behalf of a third NF (e.g. UDM had subscribed to the AMF on behalf of NEF), the immediate event report(s) shall not be included in the response but shall be included in a notification sent directly to the third NF.

6.2.6.2.16 Type: AmfEventArea

Table 6.2.6.2.16-1: Definition of type AmfEventArea

Attribute name	Data type	P	Cardinality	Description	Applicability
presenceInfo	PresenceInfo	C	0..1	This IE shall be present if the Area of Interest subscribed is not a LADN service area or a slice service area (e.g Presence Reporting Area or a list of TAIs / cell Ids) . (See NOTE1, NOTE 2)	
ladnInfo	LadnInfo	C	0..1	This IE shall be present if the Area of Interest subscribed is a LADN service area.	
sliceAreaRestrictionInfo	SliceAreaRestrictionInfo	C	0..1	This IE shall be present if the Area of Interest subscribed is the service area supporting an S-NSSAI for a PDU session associated with a partially allowed NSSAI or with a slice restricted to NS-AoS (see clause 5.15.17 and 5.15.18 of TS 23.501 [2]).	SAR
sNssai	Snssai	O	0..1	When present, it shall contain the associated S-NSSAI of the area. (NOTE 3)	ENA
nsiId	NsiId	O	0..1	When present, this IE shall contain the associated NSI ID of the S-NSSAI. (NOTE 3)	ENA

NOTE 1: When the AmfEventArea is provided during event subscription, then for UE specific presence reporting area subscription, the praId along with what constitutes that UE specific presence reporting area (i.e. set of Tai and/or set of ecgi and/or set of ncgi and/or set of globalRanNodeId) shall be provided.

NOTE 2: If the subscription is for a Set of Core Network Predefined Presence Reporting Areas and both the AMF and the NF service consumer support the "APRA" feature, the PRA Identifier for the Set shall be carried in the "praId" IE and the individual PRA identifier shall be carried in the "additionalPraId" IE; if the subscription is for a Set of Core Network Predefined Presence Reporting Areas and the AMF or NF service consumer does not support the "APRA" feature, the individual PRA identifier shall be carried in the "praId" IE and the "additionalPraId" IE shall not be present.

NOTE 3: If the NWDAF needs to collect input data on the number of UEs registered in a S-NSSAI or a combination of S-NSSAI and NSI ID, the NF service consumer (e.g. NWDAF) shall provide the S-NSSAI or the combination of S-NSSAI and the NSI as filtering information to the AMF (when subscribing to the Presence-In-AOI-Report event to the AMF).

6.2.6.2.17 Type: LadnInfo

Table 6.2.6.2.17-1: Definition of type LadnInfo

Attribute name	Data type	P	Cardinality	Description
ladn	string	M	1	Represents the Local Access Data Network DNN. The AMF shall identify the list of tracking areas corresponding to the LADN DNN based on local configuration.
presence	PresenceState	C	0..1	This IE shall be included when the UE presence in area of interest is reported. When present, this IE contains the status of UE presence within the Area of Interest (IN / OUT / UNKNOWN).

6.2.6.2.18 Type: AmfUpdateEventOptionItem

Table 6.2.6.2.18-1: Definition of type AmfUpdateEventOptionItem

Attribute name	Data type	P	Cardinality	Description	Applicability
op	string	M	1	This IE indicates the patch operation as defined in IETF RFC 6902 [14] to be performed on attributes of the "Individual subscription" resource (see clause 6.2.3.3). This IE shall support the following values: Enum: "replace"	
path	string	M	1	This IE contains a JSON pointer value (as defined in IETF RFC 6901 [40]) that references a location of attributes of the "Individual subscription" resource (see clause 6.2.3.3) on which the patch operation shall be performed. This IE shall contain the JSON pointer to "/options/expiry" attribute of the event subscription resource. Pattern: "^\/options\/expiry$" To update the notifFlag attribute, this IE shall contain the JSON pointer to "/options/notifFlag" attribute of the event subscription resource. This attribute shall only be updated when both the NF Service Consumer and the AMF support the EneNA feature. Pattern: "^\/options\/notifFlag$" To update the mutingExcInstructions attribute, this IE shall contain the JSON pointer to "/options/mutingExcInstructions" attribute of the event subscription resource. This attribute shall only be updated when both the NF Service Consumer and the AMF support the ENAPH3 feature. Pattern: "^\/options\/mutingExcInstructions$"	
value	Any Type	M	1	This IE contains the new value of the attribute (as indicated in "path") to be updated.	

6.2.6.2.19 Type: 5GsUserStateInfo

Table 6.2.6.2.19-1: Definition of type 5GsUserStateInfo

Attribute name	Data type	P	Cardinality	Description
5gsUserState	5GsUserState	M	1	Describes the 5GS user state of the UE
accessType	AccessType	M	1	Describes the access type of the UE that applies to the 5GS user state reported.

6.2.6.2.20 Type: TrafficDescriptor

Table 6.2.6.2.20-1: Definition of type TrafficDescriptor

Attribute name	Data type	P	Cardinality	Description
dnn	Dnn	C	0..1	This IE shall be present if it is available. When present, it shall indicate the Data Network Name.
sNssai	Snssai	C	0..1	This IE shall be present if it is available. When present, it shall indicate the associated S-NSSAI for the PDU Session.
dddTrafficDescriptorList	array(DddTrafficDescriptor)	C	1..N	This IE shall be present if it is available. When present, it shall indicate the Traffic Descriptor related to the traffic.

6.2.6.2.21 Type: UEIdExt

Table 6.2.6.2.21-1: Definition of type UEIdExt

Attribute name	Data type	P	Cardinality	Description	Applicability
supi	Supi	C	0..1	This IE shall be present if available. When present, this IE identifies the SUPI of the UE associated with the report.	
gpsi	Gpsi	C	0..1	This IE shall be present if available. When present, this IE identifies the GPSI of the UE associated with the report.	
uePosCap	UePositioningCapabilities	C	0..1	This IE shall be present and indicate the UE positioning capabilities supported by the UE, if the (event) type IE is set to "PRESENCE_IN_AOI_REPORT", if the uePosCapRequestedInd is present and set to true in the subscription, one of the supi or gpsi attributes is present and the UE positioning capabilities of the related UE is available in AMF.	AIML_CN
ueUpPosCap	array(UeUpPositioningCapabilities)	C	1..N	This IE shall be present and indicate the UE user plane positioning capabilities supported by the UE, if the (event) type IE is set to "PRESENCE_IN_AOI_REPORT", if the uePosCapRequestedInd is present and set to true in the subscription, one of the supi or gpsi attributes is present and the UE user plane positioning capabilities of the related UE is available in AMF.	AIML_CN

6.2.6.2.22 Type: AmfEventSubsSyncInfo

Table 6.2.6.2.22-1: Definition of type AmfEventSubsSyncInfo

Attribute name	Data type	P	Cardinality	Description	Applicability
subscriptionList	array(AmfEventSubscriptionInfo)	M	1..N	This IE shall contain all active subscriptions in the AMF for the target UE. Transferred subscriptions that are not authorized by the target AMF shall not be regarded active. Based on local policy, the target AMF may consider that transferred subscriptions containing no or an invalid access token are not authorized.	

6.2.6.2.23 Type: AmfEventSubscriptionInfo

Table 6.2.6.2.23-1: Definition of type AmfEventSubscriptionInfo

Attribute name	Data type	P	Cardinality	Description	Applicability
subId	Uri	M	1	This IE shall contain the URI of the subscription resource of events with Reference Id.	
notifyCorrelationId	string	M	1	This IE shall contain the notification correlation ID of the subscription.	
refIdList	array(ReferenceId)	M	1..N	This IE shall contain the Reference Ids of the events in the subscription, one Reference Id per event.	
oldSubId	Uri	C	0..1	This IE shall be present if new event subscription Id is created in the new AMF, i.e. the event subscription has been retrieved from an old AMF in UE context during EPS to 5GS mobility. When present, this IE shall include the URI of the subscription resouce on the source AMF.	

6.2.6.2.24 Type: TargetArea

Table 6.2.6.2.24-1: Definition of type TargetArea

Attribute name	Data type	P	Cardinality	Description
taList	array(Tai)	C	1..N	When present, this IE shall contain the list of TAIs. (NOTE)
taiRangeList	array(TaiRange)	C	1..N	When present, this IE shall contain range(s) of TAIs. (NOTE)
anyTa	boolean	C	0..1	This IE shall be present and set to "TRUE" if the event subscription is applicable to any TA. Default value "FALSE" is used, if not present (NOTE)
NOTE: One and only one of the followings shall be included: - taList or taiRangeList; and, - anyTa set to "TRUE".				

6.2.6.2.25 Type: SnssaiTaiMapping

Table 6.2.6.2.25-1: Definition of type SnssaiTaiMapping

Attribute name	Data type	P	Cardinality	Description
reportingArea	TargetArea	M	1	This IE shall contain the list of TAIs/TAI ranges or anyTa. The taList and taiRangeList shall be absent, and the anyTa shall be set to "TRUE", if the mapping is related to all of the TAs in the AMF.
accessTypeList	array(AccessType)	O	1..N	Describes the access type(s) of the reportingArea.
supportedSnssaiList	array(SupportedSnssai)	C	1..N	This IE shall be present if available. When present, this IE represents the list of S-NSSAIs (including indication of S-NSSAIs restricted by AMF) at the reportingArea.

6.2.6.2.26 Type: SupportedSnssai

Table 6.2.6.2.26-1: Definition of type SupportedSnssai

Attribute name	Data type	P	Cardinality	Description
sNssai	ExtSnssai	M	1	This IE shall contain the supported S-NSSAI.
restrictionInd	boolean	O	0..1	If present, this IE shall contain the indication if the S-NSSAI available in sNssai IE is restricted at the AMF. When present, this IE shall be set as follows: - true: the S-NSSAI available in sNssai IE is restricted at the AMF; - false (default): the S-NSSAI available in sNssai IE is not restricted at the AMF.

6.2.6.2.27 Type: UeInAreaFilter

Table 6.2.6.2.27-1: Definition of type UeInAreaFilter

Attribute name	Data type	P	Cardinality	Description	Applicability
ueType	UeType	C	0..1	When present, this IE shall contain the list of UE types. When this IE is received, The AMF shall report the number of UEs with the indicated UE type in the area.	UARF
aerialSrvDnnInd	boolean	C	0..1	This IE may be present when the UE type is "AERIAL_UE". When present, this IE shall contain an indication of DNN(s) subject to aerial service. Default value "FALSE" is used, if not present. This IE may be set to "TRUE" if the NF service consumer wants to retrieve the number of UEs in the area with established PDU sessions for DNN(s) subject to aerial service.	UARF
ueIdOmitInd	boolean	O	0..1	This IE may be present when the UE type is "AERIAL_UE". When present, this IE shall indicate whether UE ID(s) should be omitted in the event reports: - true: UE ID(s) to be omitted in report - false (default): UE IDs are not to be omitted in report.	UARF
lcsBroadcastingAssistanceDataType	LcsBroadcastAssistanceTypesData	O	0..1	When present, this IE represents a bitmap indicating broadcast location assistance data types for which the UE is subscribed to receive ciphering keys to decipher broadcast assistance data.	OBGAD
NOTE 1: When the value of IE ueType is AERIAL_UE, the IE ueType and IE aerialSrvDnnInd shall be considered with "AND" for filtering. NOTE 2: Either the attributes applicable to UARF or the attributes applicable to OBGAD shall be present.					

6.2.6.2.28 Type: IdleStatusIndication

Table 6.2.6.2.28-1: Definition of type IdleStatusIndication

Attribute name	Data type	P	Cardinality	Description	Applicability
timeStamp	DateTime	O	0..1	Point in UTC time when the UE returned to Idle	
activeTime	DurationSec	O	0..1	Active Time granted to the UE.	
subsregTimer	DurationSec	O	0..1	time or a value overridden/assigned by local policy Subscribed periodic registration time or a value overridden/assigned by local policy.	
edrxCycleLength	integer	O	0..1	Contains the eDRX cycle length in milliseconds.	
suggestedNumOfDlPackets	integer	O	0..1	Suggested number of downlink packets to be buffered	

6.2.6.2.29 Type: UeAccessBehaviorReportItem

Table 6.2.6.2.29-1: Definition of type UeAccessBehaviorReportItem

Attribute name	Data type	P	Cardinality	Description	Applicability
stateTransitionType	AccessStateTransitionType	M	1	Indicate the type the state transition behavior.	
spacing	DurationSec	M	1	Indicates the average and variance of the time interval separating two consecutive occurrences of the state transition as indicated by the stateTransitionType IE.	
spacingVar	Float	C	0..1	Indicates the variance of the time interval separating two consecutive occurrences of the state transition as indicated by the stateTransitionType IE. An implementation complying with this version of the specification shall include this IE.	
duration	DurationSec	M	1	Indicate the average of duration in the resulting state as indicated by stateTransitionType IE.	
durationVar	Float	C	0..1	Indicates the variance of duration in the resulting state as indicated by stateTransitionType IE. An implementation complying with this version of the specification shall include this IE.	
occurrences	integer	C	0..1	Represents the number of occurrences of the state transition of type stateTransitionType in the current reporting interval. This information is required for calculating spacing, spacingVar, duration and durationVar after handover to a target AMF. An implementation complying with this version of the specification shall include this IE if the event subscription is transferred from source AMF to a target AMF and at least one occurrence of the event is already available in the source AMF.	
timestamp	DateTime	C	0..1	Indicates the date and time of the last occurrences of the indicated state transition. This information is required for calculating spacing, spacingVar, duration and durationVar after handover to a target AMF. An implementation complying with this version of the specification shall include this IE.	

6.2.6.2.30 Type: UeLocationTrendsReportItem

Table 6.2.6.2.30-1: Definition of type UeLocationTrendsReportItem

Attribute name	Data type	P	Cardinality	Description	Applicability
tai	Tai	C	0..1	Indicates the TAI where the UE arrived. (NOTE)	
ranNodeId	GlobalRanNodeId	C	0..1	Indicates the global identifier of the RAN node where the UE arrived. (NOTE)	
ncgi	Ncgi	C	0..1	Indicates the NR cell where the UE arrived. (NOTE)	
ecgi	Ecgi	C	0..1	Indicates the EUTRAN cell where the UE arrived. (NOTE)	
n3gaLocation	N3gaLocation	C	0..1	Indicates the Non-3GPP location where the UE arrived. (NOTE)	
spacing	DurationSec	M	1	Indicates the average and variance of the time interval separating two consecutive arrivals at the indicated location.	
spacingVar	Float	C	0..1	Indicates the variance of the time interval separating two consecutive arrivals at the indicated location. An implementation complying with this version of the specification shall include this IE.	
duration	DurationSec	M	1	Indicate the average of duration of stay in the indicated location.	
durationVar	Float	C	0..1	Indicates the variances of duration of stay in the indicated location. An implementation complying with this version of the specification shall include this IE.	
occurrences	integer	C	0..1	Represents the number of arrivals at the indicated location in the current reporting interval. This information is required for calculating spacing, spacingVar, duration and durationVar after handover to a target AMF. An implementation complying with this version of the specification shall include this IE if the event subscription is transferred from source AMF to a target AMF and at least one occurrence of the event is already available in the source AMF.	
timestamp	DateTime	M	1	Indicates the date and time (in UTC) of UE last arrival to the indicated location.	
NOTE: At least one of the "tai", "ranNodeId", "ncgi", "ecgi" and "n3gaLocation" shall be present.					

6.2.6.2.31 Type: DispersionArea

Table 6.2.6.2.31-1: Definition of type DispersionArea

Attribute name	Data type	P	Cardinality	Description	Applicability
taiList	array(Tai)	C	1..N	Indicates the TAIs where the UE information to be counted for Dispersion Analytics. (NOTE)	
ranNodeIdList	array(GlobalRanNodeId)	C	1..N	Indicates the Global RAN Node IDs where the UE information to be counted for Dispersion Analytics. (NOTE)	
ncgiList	array(Ncgi)	C	1..N	Indicates the NR cells where the UE information to be counted for Dispersion Analytics. (NOTE)	
ecgiList	array(Ecgi)	C	1..N	Indicates the EUTRAN cells where the UE information to be counted for Dispersion Analytics. (NOTE)	
n3gaInd	boolean	C	0..1	Indicates whether that the UE information shall be counted for Non-3GPP access or not. When present, it should be set as following: - true: The UE information shall be counted for Non-3GPP access. - false (default): the UE information for Non-3GPP access shall not be counted.	
NOTE: One and only one of the "taiList", "ranNodeIdList", "ncgiList", "ecgiList" or "n3gaInd" shall be present.					

6.2.6.2.32 Type: MmTransactionLocationReportItem

Table 6.2.6.2.32-1: Definition of type MmTransactionLocationReportItem

Attribute name	Data type	P	Cardinality	Description	Applicability
tai	Tai	C	0..1	Indicates the TAI where the UE MM transactions are counted. (NOTE)	
ncgi	Ncgi	C	0..1	Indicates the NR cell where the UE MM transations are counted. (NOTE)	
ecgi	Ecgi	C	0..1	Indicates the EUTRAN cell where the UE MM transations are counted. (NOTE)	
n3gaLocation	N3gaLocation	C	0..1	Indicates the Non-3GPP location where UE MM transations are counted. (NOTE)	
timestamp	DateTime	M	1	Indicates the timestamp (in UTC) when the UE enters the location.	
transactions	integer	M	1	Totally number of UE MM Transactions counted within the location.	
NOTE: At least one of the "tai", "ncgi" or "ecgi" shall be present.					

6.2.6.2.33 Type: MmTransactionSliceReportItem

Table 6.2.6.2.33-1: Definition of type MmTransactionSliceReportItem

Attribute name	Data type	P	Cardinality	Description	Applicability
snssai	Snssai	M	1	Indicates the S-NSSAI of the slice where the UE MM Transactions are counted.	
timestamp	DateTime	M	1	Indicates the timestamp (in UTC) when the slice is assigned to the UE. (NOTE)	
transactions	integer	M	1	Totally number of UE MM Transactions counted for the indicated slice.	
NOTE: The timestamps for assigned slices of a UE are not passed between AMFs, i.e. when a UE moves to a new AMF the timestamps for assigned slices of the UE are set to the date and time when the mobility happened in the new AMF.					

6.2.6.2.34 Type: SliceAreaRestrictionInfo

Table 6.2.6.2.34-1: Definition of type SliceAreaRestrictionInfo

Attribute name	Data type	P	Cardinality	Description
sNssai	Snssai	M	1	Represents an S-NSSAI that is part of the partially allowed NSSAI or if the support of the S-NSSAI is restricted to a NS-AoS. This IE shall be present if the NF service consumer wants to subscribe to the AOI where the S-NSSAI is supported. See clauses 5.15.17 and 5.15.18 of TS 23.501 [2].
presence	PresenceState	C	0..1	This IE shall be included when the UE presence in area of interest is reported. When present, this IE indicates whether the UE is inside or outside of the service area supporting an S-NSSAI for a PDU session associated with a partially allowed NSSAI or with a slice restricted to NS-AoS or whether the UE presence in the reporting area is unknown.

6.2.6.2.35 Type: ScheduledArea

Table 6.2.6.2.35-1: Definition of type ScheduledArea

Attribute name	Data type	P	Cardinality	Description
taiList	array(Tai)	C	1..N	The scheduled area in the assigned trajectory defined by a list of TA(s). (NOTE)
ranNodeIdList	array(GlobalRanNodeId)	C	1..N	The scheduled area in the assigned trajectory defined by a list of Global RAN Node IDs. (NOTE)
ncgiList	array(Ncgi)	C	1..N	The scheduled area in the assigned trajectory defined by a list of NR cells. (NOTE)
ecgiList	array(Ecgi)	C	1..N	The scheduled area in the assigned trajectory defined by a list of EUTRAN cells. (NOTE)
enterTime	DateTime	O	0..1	When present, this IE shall indicate the scheduled time that the UE entering the area.
leaveTime	DateTime	O	0..1	When present, this IE shall indicate the scheduled time that the UE leaving the area.
altitudeLow	Altitude	O	0..1	When present, this IE shall indicate the lowest allowed altitude of the UE within the area.
altitudeHigh	Altitude	O	0..1	When present, this IE shall indicate the highest allowed altitude of the UE within the area.
NOTE: At least one of the "taiList", "ranNodeIdList", "ncgiList" or "ecgiList" shall be present.				

6.2.6.2.36 Type: TrajectorySegment

Table 6.2.6.2.36-1: Definition of type TrajectorySegment

Attribute name	Data type	P	Cardinality	Description
scheduledAreaList	array(ScheduledArea)	M	1..N	the list of scheduled areas in the assigned trajectory segment.

6.2.6.2.37 Type: Trajectory

Table 6.2.6.2.37-1: Definition of type Trajectory

Attribute name	Data type	P	Cardinality	Description
scheduledAreaList	array(ScheduledArea)	C	1..N	When present, this IE shall contain the list of scheduled areas in the assigned trajectory.
segmentList	array(TrajectorySegment)	C	1..N	When present, this IE shall contain the list of assigned trajectory segments.
acceptableDeviationTime	DurationSec	O	0..1	When the UE deviates from the assigned trajectory for longer than the acceptable deviation time, a "TRAJECTORY_TRACKING_REPORT" is triggered. Absence indicates 0 seconds.
NOTE: Either the scheduledAreaList IE or the segmentList shall be present.				

6.2.6.2.38 Type: SmCommFailureFilter

Table 6.2.6.2.38-1: Definition of type SmCommFailureFilter

Attribute name	Data type	P	Cardinality	Description
dnn	Dnn	M	1	Indicates the DNN of the interested PDU session for the subscribed SM related Communication Failures.
snssai	Snssai	M	1	Indicates the S-NSSAI of the interested PDU session for the subscribed SM related Communication Failures.

6.2.6.2.39 Type: SignallingMeasurementInfo

Table 6.2.6.2.39-1: Definition of type SignallingMeasurementInfo

Attribute name	Data type	P	Cardinality	Description
nfSignallingInfo	NfSignallingInfo	O	0..1	When present, this IE shall indicate the signalling information of the AMF per AMF service, e.g. the number of requests to each service and related statistics (e.g. successful vs failed requests and more).

6.2.6.2.40 Type: UavAltitudeReportingConfig

Table 6.2.6.2.40-1: Definition of type UavAltitudeReportingConfig

Attribute name	Data type	P	Cardinality	Description
rptThresholdMin	Altitude	M	1	Contains the threshold lower altitude, i.e., the threshold altitude below which reporting shall be triggered.
rptThresholdMax	Altitude	M	1	Contains the threshold upper altitude, i.e., the threshold altitude above which reporting shall be triggered.
altReportPeriod	integer	O	0..1	When present, this IE shall indicate the reporting periodicy, which concerns the time during which specific criteria for the event needs to be met in order to trigger a measurement report. It indicates the value in millisecond(ms). Minimum: 120. Maximum: 1800000.
altReportEventTrigger	array(AltReportEventTrigger)	O	1..N	Contains the event-based altitude reporting requirement.

6.2.6.2.41 Type: SignallingMeasurementUeRelatedInfo

Table 6.2.6.2.41-1: Definition of type SignallingMeasurementUeRelatedInfo

Attribute name	Data type	P	Cardinality	Description
ueRelatedInfoList	array(UeRelatedInfo)	O	1..N	When present, this IE shall provide a list of UE-related information entries. Each entry corresponds to one UE.

6.2.6.2.42 Type: UeRelatedInfo

Table 6.2.6.2.42-1: Definition of type UeRelatedInfo

Attribute name	Data type	P	Cardinality	Description
supi	Supi	C	0..1	When present, this IE shall contain SUPI of the UE. (NOTE)
gpsi	Gpsi	C	0..1	When present, this IE shall identify the GPSI of the UE associated with the report. (NOTE)
pei	Pei	C	0..1	When present, this IE shall identify the PEI of the UE associated with the report. (NOTE)
ueSignallingInfoList	array(UeSignallingInfo)	O	1..N	When present, this IE shall provide statistics related to signalling messages received from the UE or RAN (e.g., Initial Registration, Service Request), categorized by type.
ueStateInfoList	array(UeStateInfo)	O	1..N	When present, this IE shall provide statistics about state transitions experienced by the UE (e.g., transitions between CM-IDLE and CM-CONNECTED states).
timerInfoList	array(AmfTimerInfo)	O	1..N	When present, this IE shall provide the timer information (e.g., T3512, T3521) which has been set for the UE, including their durations.
dnns	array(Dnn)	O	1..N	When present, it shall indicate DNN(s) for which the UE has established PDU session(s).
snssais	array(Snssai)	O	1..N	When present, it shall indicate the allowed S-NSSAI(s) for the UE.
NOTE: At least one of the IE identifiers shall be present.				

6.2.6.2.43 Type: UeSignallingInfo

Table 6.2.6.2.43-1: Definition of type UeSignallingInfo

Attribute name	Data type	P	Cardinality	Description
ueSignallingType	UeSignallingType	M	1	Identifies the type of signalling request received by the AMF from the UE/RAN over N1 or N2 interfaces (e.g., Initial Registration, Service Request, Mobility Registration Update).
numOfReq	Uinteger	M	1	Total number of requests of the specified ueSignallingType received by the AMF from the UE/RAN during the measurement period.
avgRespTime	Uinteger	O	0..1	When present, it shall indicate average time duration from receiving request from UE/RAN to response to UE/RAN.
numOfReqUnresp	Uinteger	O	0..1	When present, it shall indicate the number of requests of the specified ueSignallingType received from the UE/RAN for which no response was sent by the AMF within the measurement period. This counter only applies to UE-originated requests, not to AMF-initiated signalling. (NOTE)
numOfReqReject	Uinteger	O	0..1	When present, it shall indicate the number of requests of the specified ueSignallingType received from the UE/RAN that were explicitly rejected by the AMF (e.g., Registration Reject, Service Reject).
numOfPosteriorReq	Uinteger	O	0..1	The number of posterior requests, i.e. requests that were triggered by a previous request received by the same NF.
reasonOfFailure	FailureReason	O	0..1	When present, it shall indicate the reason for failed responses to UE-originated requests associated to their initial requests. If the latest procedure is completed successfully, this attribute shall be absent.
NOTE: The number of failed requests equals to "numOfReqUnresp" plus "numOfReqReject". The number of successful requests equals to "numOfReq" minus the number of failed requests.				

6.2.6.2.44 Type: UeStateInfo

Table 6.2.6.2.44-1: Definition of type UeStateInfo

Attribute name	Data type	P	Cardinality	Description
stateChangeType	StateChangeType	M	1	Type of state transition.
count	Uinteger	M	1	Number of times the state transition occurred.

6.2.6.2.45 Type: AmfTimerInfo

Table 6.2.6.2.45-1: Definition of type AmfTimerInfo

Attribute name	Data type	P	Cardinality	Description
amfTimerType	string	M	1	Indicates the timer type that AMF has set for the UE including MM timer as described in Table 10.2.1 of TS 24.501 [11] and back-off timer as described in clause 5.3.9 and clause 5.4.5.2.4 of TS 24.501 [11].
timerDuration	DurationSec	M	1	Indicates the AMF timer duration
dnn	Dnn	O	0..1	This IE may be present if "amfTimerType" attribute is one of the back-off timers. (NOTE)
snssai	Snssai	O	0..1	This IE may be present if "amfTimerType" attribute is one of the back-off timers. (NOTE)
NOTE: If the back-off timer is associated to a DNN and an S-NSSAI, the "dnn" attribute and the "snssai" attribute shall be present. If both "dnn" attribute and "snssai" attribute are absent, the timer shall apply for the access of this UE.				

6.2.6.3 Simple data types and enumerations

6.2.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

6.2.6.3.2 Simple data types

The simple data types defined in table 6.2.6.3.2-1 shall be supported.

Table 6.2.6.3.2-1: Simple data types

Type Name	Type Definition	Description

6.2.6.3.3 Enumeration: AmfEventType

Table 6.2.6.3.3-1: Enumeration AmfEventType

Enumeration value	Description
"LOCATION_REPORT"	A NF subscribes to this event to receive the Last Known Location or the current Location of a UE or a group of UEs, and Updated Location of the UE or any UE in the group when AMF becomes aware of a location change of the UE.
"PRESENCE_IN_AOI_REPORT"	A NF subscribes to this event to receive the current present state of a UE in a specific Area of Interest (AOI), and notification when a specified UE enters or leaves the specified area. The area could be identified by a TA list, an area ID, specific interested area name like "LADN" or a specific interested area name like "S-NSSAI".
"TIMEZONE_REPORT"	A NF subscribes to this event to receive the current time zone of a UE or a group of UEs, and updated time zone of the UE or any UE in the group when AMF becomes aware of a time zone change of the UE.
"ACCESS_TYPE_REPORT"	A NF subscribes to this event to receive the current access type(s) of a UE or a group of UEs, and updated access type(s) of the UE or any UE in the group when AMF becomes aware of the access type change of the UE.
"REGISTRATION_STATE_REPORT"	A NF subscribes to this event to receive the current registration state of a UE or a group of UEs, and report for updated registration state of a UE or any UE in the group when AMF becomes aware of a registration state change of the UE.
"CONNECTIVITY_STATE_REPORT"	A NF subscribes to this event to receive the current connection management state of a UE or a group of UEs, and report for updated connection management state of a UE or any UE in the group when AMF becomes aware of a connection management state change of the UE.
"REACHABILITY_REPORT"	A NF subscribes to this event to receive the current reachability of a UE or a group of UEs, and report for updated reachability of a UE or any UE in the group when AMF becomes aware of a reachability change of the UE.
"COMMUNICATION_FAILURE_REPORT"	A NF subscribes to this event to receive the Communication failure report of a UE or group of UEs or any UE.
"UES_IN_AREA_REPORT"	A NF subscribes to this event to receive the number of UEs in a specific area.
"SUBSCRIPTION_ID_CHANGE"	This event type is used by the AMF to inform the NF service consumer that the subscription Id for the event subscription is changed (e.g. Subscription Id creation at the target AMF for individual UE level event subscriptions, during mobility registration or handover procedures involving an AMF change). This event needs no explicit subscription form an NF service consumer.

"SUBSCRIPTION_ID_ADDITION"	This event type is used by the AMF to inform the NF service consumer that a new subscription Id is added (e.g creation of an event subscription for a UE group level event subscription at the target AMF, during mobility registration or handover procedures involving AMF change for a UE belonging to a group Id and when such a UE is the first UE of the group registering at the target AMF). This event needs no explicit subscription form the NF service consumer.
"SUBSCRIPTION_TERMINATION"	This event type is used by the AMF to inform the NF service consumer that the subscription is terminated at the AMF, e.g. the AMF inform the UDM that the subscription is terminated because the AMF has identified the subscription is no longer valid at the NEF.
"LOSS_OF_CONNECTIVITY"	An NF subscribes to this event to receive the event report of a UE or group of UEs when AMF detects that a target UE is no longer reachable for either signalling or user plane communication. Such condition is identified when Mobile Reachable timer expires in the AMF (see TS 23.501 [2]), when the UE detaches and when AMF deregisters from UDM for an active UE. If the UE is already not reachable for either signalling or user plane communication when the event is subscribed, the AMF reports the event directly.
"5GS_USER_STATE_REPORT"	A NF subscribes to this event to receive the 5GS user state of a UE.
"AVAILABILITY_AFTER_DDN_FAILURE"	A NF subscribes to this event to be notified about the Availability of a UE after a DDN failure.
"TYPE_ALLOCATION_CODE_REPORT"	A NF subscribes to this event to receive the TAC of a UE or group of UEs.
"FREQUENT_MOBILITY_REGISTRATION_REPORT"	A NF subscribes to this event to receive the number of mobility registration procedures during a period of a UE or group of UEs.
"SNSSAI_TA_MAPPING_REPORT"	A NF subscribes to this event to receive the related access type and the list of supported S-NSSAIs (including indication of S-NSSAIs restricted by AMF) at the TAI(s).
"UE_ACCESS_BEHAVIOR_TRENDS"	A NF subscribes to this event to receive the UE access behavior trends (e.g. access type change, handover, etc.) during a period for a UE or a group of UEs, as specified in clause 4.15.4.2 of TS 23.502 [3].
"UE_LOCATION_TRENDS"	A NF subscribes to this event to receive the UE Location Trends within a period for a UE or a group of UEs, as specified in clause 4.15.4.2 of TS 23.502 [3].
"UE_MM_TRANSACTION_REPORT"	A NF subscribes to this event to receive the Total Number of Mobility Management transactions during a period for a UE or a group of UEs, as specified in clause 5.2.2.3.1 of TS 23.502 [3].
"TRAJECTORY_TRACKING_REPORT"	A NF subscribes to this event to receive the Assigned Trajectory Tracking Report, e.g. when UE is deviating the assigned trajectory or when UE moving across different segments of the assigned trajectory, as specified in in clause 5.13.2 of TS 23.256 [56] and clause 5.2.2.3.1 of TS 23.502 [3].

"SIGNALLING_MEASUREMENT_REPORT"	A NF subscribes to this event to receive the signalling measurement information from the AMF.
"SIGNALLING_MEASUREMENT_UE_RELATED_REPORT"	A NF subscribes to this event to receive the signalling measurement information related to the UEs from the AMF.
"ALTITUDE_REPORT"	A NF subscribes to this event to configure the aerial UE to perform altitude reporting. An event report is triggered when the UE meets the altitude reporting condition as specified in clause 5.16.2 of TS 23.256 [56].

6.2.6.3.4 Enumeration: AmfEventTrigger

Table 6.2.6.3.4-1: Enumeration AmfEventTrigger

Enumeration value	Description
"ONE_TIME"	Defines that AMF should generate report for the event only once. After reporting, the subscription to this event will be terminated.
"CONTINUOUS"	Defines that AMF should continuously generate reports for the event, until the subscription to this event ends, due to end of report duration or up to the maximum number of reports or the event being unsubscribed explicitly
"PERIODIC"	Defines that AMF should periodically generate reports for the event, until the subscription to this event ends, due to end of report duration or up to the maximum number of reports or the event being unsubscribed explicitly.

6.2.6.3.5 Enumeration: LocationFilter

Table 6.2.6.3.5-1: Enumeration LocationFilter

Enumeration value	Description
"TAI"	Indicates any change of the TA used by the UE should be reported
"CELL_ID"	Indicates any change of the Cell used by the UE should be reported
"RAN_NODE"	Indicates any change of the RAN node serving the UE shall be reported.
"N3IWF"	Indicates any change of the N3IWF node used by the UE should be reported
"UE_IP"	Indicates any change of the UE local IP address should be reported
"UDP_PORT"	Indicates any change of local UDP port used by the UE reported
"TNAP_ID"	Indicates any change of the TNAP ID used by the UE should be reported
"GLI"	Indicates any change of the Global Line Id used by the UE should be reported
"TWAP_ID"	Indicates any change of the TWAP ID used by the UE should be reported

6.2.6.3.6 Void

6.2.6.3.7 Enumeration: UeReachability

Table 6.2.6.3.7-1: Enumeration UeReachability

Enumeration value	Description
"UNREACHABLE"	Indicates the UE is not reachable, e.g. when the Mobile Reachable Timer in AMF expires.
"REACHABLE"	Indicates the UE is reachable for services and downlink traffic.
"REGULATORY_ONLY"	Indicates the UE is reachable only for Regulatory Prioritized Service as the UE is in Not Allowed Areas.

6.2.6.3.8 Void

6.2.6.3.9 Enumeration: RmState

Table 6.2.6.3.9-1: Enumeration RmState

Enumeration value	Description
"REGISTERED"	Indicates the UE in RM-REGISTERED state
"DEREGISTERED"	Indicates the UE in RM-DEREGISTERED state

6.2.6.3.10 Enumeration: CmState

Table 6.2.6.3.10-1: Enumeration CmState

Enumeration value	Description
"IDLE"	Indicates the UE is in CM-IDLE state
"CONNECTED"	Indicates the UE is in CM-CONNECTED state

6.2.6.3.11 Enumeration: 5GsUserState

Table 6.2.6.3.11-1: Enumeration 5GsUserState

Enumeration value	Description
"DEREGISTERED"	Indicates the UE in RM-DEREGISTERED state
"CONNECTED_NOT_REACHABLE_FOR_PAGING"	Indicates the UE is in the RM-REGISTERED state in 5GS and the UE is not reachable for paging.
"CONNECTED_REACHABLE_FOR_PAGING"	Indicates the UE is in the RM-REGISTERED state in 5GS and the UE is reachable for paging.
"NOT_PROVIDED_FROM_AMF"	Indicates that the 5GS User State cannot be retrieved from the AMF (NOTE)
NOTE: This value is not sent by AMF (it may be sent by UDM to HSS).	

6.2.6.3.12 Enumeration: LossOfConnectivityReason

Table 6.2.6.3.12-1: Enumeration LossOfConnectivityReason

Enumeration value	Description
"DEREGISTERED"	Indicates the UE is deregistered.
"MAX_DETECTION_TIME_EXPIRED"	Indicates the mobile reachable timer is expired.
"PURGED"	Indicates the UE is purged.
"UNAVAILABLE_PERIOD"	Indicates the unavailability period of the UE.

6.2.6.3.13 Enumeration: ReachabilityFilter

Table 6.2.6.3.13-1: Enumeration ReachabilityFilter

Enumeration value	Description
"UE_REACHABILITY_STATUS_CHANGE"	Indicates subscription for "UE Reachability Status Change".
"UE_REACHABLE_DL_TRAFFIC"	Indicates subscription for "UE Reachable for DL Traffic".

6.2.6.3.14 Enumeration: UeType

Table 6.2.6.3.14-1: Enumeration UeType

Enumeration value	Description
"AERIAL_UE"	Indicates the UE is an Aerial UE

6.2.6.3.15 Enumeration: AccessStateTransitionType

Table 6.2.6.3.15-1: Enumeration AccessStateTransitionType

Enumeration value	Description
"ACCESS_TYPE_CHANGE_3GPP"	Indicates that the UE's access type has changed to 3GPP access.
"ACCESS_TYPE_CHANGE_N3GPP"	Indicates that the UE's access type has changed to non-3GPP access.
"RM_STATE_CHANGE_DEREGISTERED"	Indicates that the UE's RM state has change to RM-DEREGISTERED.
"RM_STATE_CHANGE_REGISTERED"	Indicates that the UE's RM state has change to RM-REGISTERED.
"CM_STATE_CHANGE_IDLE"	Indicates that the UE's CM state has change to CM-IDLE.
"CM_STATE_CHANGE_CONNECTED"	Indicates that the UE's CM state has change to CM-CONNECTED
"HANDOVER"	Indicates that the UE has performed a successful handover.
"MOBILITY_REGISTRATION_UPDATE"	Indicates that the UE has performed a successful mobility registration update.

6.2.6.3.16 Enumeration: SubTerminationReason

Table 6.2.6.3.16-1: Enumeration SubTerminationReason

Enumeration value	Description
"INVALID_SUBSCRIPTION"	Indicates that the subscription is terminated because the AMF has identified that the subscription is no longer valid on the NF hosting the notification URI.
"SUBSCRIPTION_NOT_AUTHORIZED"	Indicates that the subscription is terminated because the AMF identified that the subscription is no longer authorized. This may occur during an inter-AMF mobility, based on local policy of the target AMF, e.g. if the transferred subscription contains no or an invalid access token.
"CONFLICT_SUBSCRIPTION"	Indicates that the subscription is terminated because the AMF has identified that the subscription is conflicting with another subscription.

6.2.6.3.17 Enumeration: TrajectoryReportReason

Table 6.2.6.3.17-1: Enumeration TrajectoryReportReason

Enumeration value	Description
"TRAJECTORY_DEVIATED"	Indicates that the event report is triggered due to the UE deviates the assigned trajectory.
"TRAJECTORY_SEGMENT_CHANGE"	Indicates that the event report is triggered due to the UE moves across different assigned trajectory segments.

6.2.6.3.18 Enumeration: AltReportEventTrigger

Table 6.2.6.3.18-1: Enumeration AltReportEventTrigger

Enumeration value	Description
"TA_CHANGE"	Indicates the change of UAV's serving TA.
"RAN_NODE_CHANGE"	Indicates the change of UAV's serving RAN node.

6.2.6.3.19 Enumeration: UavAltRptFailureCause

Table 6.2.6.3.19-1: Enumeration UavAltRptFailureCause

Enumeration value	Description
"AERIAL_UE_FLIGHT_INFORMATION_REPORTING_FAILED"	Indicates aerial UE Flight Information Reporting Request failed due to NG-RAN node failing to perform Aerial UE Flight Information Reporting as specified in clause 9.3.1.2 of TS 38.413 [2].
"AERIAL_UE_FLIGHT_INFORMATION_REPORTING_STOPPED"	Indicates the failure of an ongoing Aerial UE Flight Information Reporting as specified in clause 9.3.1.16 of TS 38.413 [2].

6.2.6.3.20 Enumeration: FailureReason

Table 6.2.6.3.20 -1: Enumeration FailureReason

Enumeration value	Description
"SUBSCRIPTION_REJECT"	Rejection due to subscription restrictions.
"AUTHENTICATION_FAILURE"	Rejection due to failure in authentication procedure
"SECURITY_MODE_REJECT"	Rejection due to security procedure failure.
"MISSING_OR_INVALID_INFORMATION"	Failure due to missing or invalid mandatory information in the request.
"CONGESTION_REJECT"	Rejection due to congestion control in AMF or core network.
"POLICY_REJECT"	Rejection due to policy control decisions.
"RESOURCES_EXHAUSTED"	Failure due to AMF resource limitations (e.g., overload).
"INTERNAL_ERROR"	Failure due to internal AMF processing error.
"UNSPECIFIED"	For any reason not covered by an explicit value above.

6.2.6.3.21 Enumeration: UeSignallingType

Table 6.2.6.3.21-1: Enumeration UeSignallingType

Enumeration value	Description
"INITIAL_REGISTRATION"	Initial registration.
"PERIODIC_REGISTRATION"	Periodic registration.
"MOBILITY_REGISTRATION"	Mobility registration.
"SERVICE_REQUEST"	Service request.
"UL_NAS_TRANSPORT"	UL NAS transport

6.2.6.3.22 Enumeration: StateChangeType

Table 6.2.6.3.22-1: Enumeration StateChangeType

Enumeration value	Description
"ACCESS_TYPE_CHANGE_TO_3GPP_ACCESS"	Access Type change to 3GPP access.
"ACCESS_TYPE_CHANGE_TO_NON3GPP_ACCESS"	Access Type change to non-3GPP access.
"RM_STATE_CHANGE_TO_RM_DEREGISTERED"	RM state change to RM-DEREGISTERED.
"RM_STATE_CHANGE_TO_RM_REGISTERED"	RM state change to RM-REGISTERED.
"CM_STATE_CHANGE_TO_CM_IDLE"	CM state change to CM-IDLE.
"CM_STATE_CHANGE_TO_CM_CONNECTED"	CM state change to CM-CONNECTED.
"HANDOVER"	Handover.
"MOBILITY_REGISTRATION_UPDATE"	Mobility Registration Update.

6.2.6.4 Binary data

None.

6.2.7 Error Handling

6.2.7.1 General

HTTP error handling shall be supported as specified in clause 5.2.4 of TS 29.500 [4].

6.2.7.2 Protocol Errors

Protocol Error Handling shall be supported as specified in clause 5.2.7 of TS 29.500 [4].

6.2.7.3 Application Errors

The common application errors defined in the Table 5.2.7.2-1 in TS 29.500 [4] may also be used for the Namf_EventExposure service, and the following application errors listed in Table 6.2.7.3-1 are specific for the Namf_EventExposure service.

Table 6.2.7.3-1: Application errors

Application Error	HTTP status code	Description
UE_NOT_SERVED_BY_AMF	403 Forbidden	Indicates the creation of a subscription targeting a specific UE has failed due to an application error when the UE is not served by the AMF (i.e. it is not known to the AMF).
UNSPECIFIED	403 Forbidden	The request is rejected due to unspecified reasons.
MUTING_EXC_INSTR_NOT_ACCEPTED	403 Forbidden	Indicates the AMF does not accept the received muting exception instructions.
SUBSCRIPTION_NOT_FOUND	404 Not Found	Indicates the modification of subscription has failed due to an application error when the subscription is not found in the AMF.
UNSUPPORTED_EVENT_TYPE	501 Not Implemented	Indicates that the request for creation or modification of a subscription is rejected, because none of the requested events are supported by the AMF.

6.2.8 Feature Negotiation

The feature negotiation mechanism specified in clause 6.6 of TS 29.500 [4] shall be used to negotiate the features applicable between the AMF and the NF Service Consumer, for the Namf_EventExposure service, if any.

The NF Service Consumer shall indicate the features it supports for the Namf_EventExposure service, if any, by including the supportedFeatures attribute in content of the HTTP Request Message for subscription resource creation.

The AMF shall determine the supported features for the service operations as specified in clause 6.6 of TS 29.500 [4] and shall indicate the supported features by including the supportedFeatures attribute in content of the HTTP response for subscription resource creation.

The syntax of the supportedFeatures attribute is defined in clause 5.2.2 of TS 29.571 [6].

The following features are defined for the Namf_EventExposure service:

Table 6.2.8-1: Features of supportedFeatures attribute used by Namf_EventExposure service

Feature Number	Feature	M/O	Description
1	ENA	O	Enablers for Network Automation for 5G An AMF and an NF that support this feature shall support the procedures specified in TS 23.288 [38].
2	APRA	O	Additional Presence Reporting Area An AMF that supports this feature shall support subscription of "PRESENCE_IN_AOI_REPORT" event with a Set of Core Network Predefined Presence Reporting Areas and generating event report including both PRA Set ID and additional PRA ID referring to an individual PRA in the Set. An NF service consumer that supports this feature shall support receiving "PRESENCE_IN_AOI_REPORT" event with additional PRA ID referring to an individual PRA in the Set.
3	ESSYNC	O	Event Subscription Synchronization An AMF and UDM that supports this feature shall support the event subscription synchronization procedure, as specified in clause 5.3.2.4.2.
4	ES3XX	M	Extended Support of HTTP 307/308 redirection An NF Service Consumer (e.g. NEF) that supports this feature shall support handling of HTTP 307/308 redirection for any service operation of the Namf_EventExposure service. An NF Service Consumer that does not support this feature does only support HTTP redirection as specified for 3GPP Release 15.
5	IERSR	O	Immediate Event Report in Subscription Creation Response for Subscriptions on behalf of another NF An NF consumer (e.g. UDM) supporting this feature shall be able to handle the immediate event reports in the Subscription Creation Response for subscriptions on behalf of another NF, as specified in clause 5.3.2.2.2.
6	EneNA	O	Enhancement of Enablers for Network Automation for 5G An AMF and an NF that support this feature shall support the enhancement of network data analytics specified in TS 23.288 [38].
7	DGEM	O	Dynamic Group-based Event Monitoring An AMF supporting this feature shall allow the NF consumer to remove or add list of group member UE(s) for a group-based event monitoring subscription (see clause 5.3.2.2.4).
8	UARF	O	UEs in Area Report Filter for UEs related to UAVs This feature indicates the support of enhanced filter for UEs-In-Area-Report event. When this feature is supported at the AMF, the AMF shall apply additional filters provided in ueInAreaFilter IE.
9	MPRA	O	Map type PRA information Support of this feature implies support of map type presenceInfoList during subscription creation and support of PresenceInfo modification during subscription modification (see clauses 6.2.6.2.3 and 6.2.6.2.14).
10	STEN	O	Subscription Termination Event Notification An AMF supporting this feature shall support sending a notification to the NF consumer to inform that the AMF event subscription is terminated if requested by NF consumer; an NF consumer supporting this feature shall support processing the Subscription Termination Event Notification from the AMF, e.g. clean-up the local context for the indicated AMF event subscription.
11	ENAPH3	O	Enablers for Network Automation for 5G, Phase 3 An AMF supporting this feature shall support the handling of event muting exception instructions as specified in clause 6.2.7.2 of TS 23.288 [38].

12	AOIEF	O	AOI Event Filters specified in 3GPP Rel-18, e.g. for the support of 5G Timing Resiliency and TSC & URLLC enhancements. An AMF supporting this feature shall support subscriptions to the Presence-In-AOI-Report event including: - the indication that the AoI may be adjusted based on the UE's Registration Area; - the "RAN timing synchronization status change event"; and - the notifyForSupiList IE, the notifyForGroupList and or the notifyForSnssaiDnnList IE and shall support notifying the NF service consumer about AOI events only if the event is for a UE belonging to the provided list of SUPIs or Internal Groups and/or for a UE having a PDU session established with the provided DNN/S-NSSAI. See clause 5.3.1.
13	SAR	O	Slice Area Restriction. An AMF supporting this feature shall support to indicate whether the UE is inside or outside of the service area supporting an S-NSSAI for a PDU session associated with a partially allowed NSSAI or with a slice restricted to NS-AoS or whether the UE presence in the reporting area is unknown.
14	ASETSUB	O	AMF set level Bulk Subscription An NF service consumer and an AMF supporting this feature shall support applying a bulk subscription targeting a group of UEs or Any UE to the whole AMF set (see clauses 5.3.1.4.2 and 5.3.1.4.3), i.e. they shall support AMF set level bulk subscriptions (see clause 6.2.3.1).
15	OBGAD	O	On-demand broadcast of GNSS assistance data An AMF supporting this feature shall support the LMF subscription on number of UEs presence in a geographical area subscribing corresponding assistance data type and notify the LMF the number of UEs presence in a geographical area subscribing corresponding LCS assistance data type.
16	AIML_CN	O	Core Network Enhanced Support for AIML An AMF that supports this feature shall be capable of sending the UE positioning capabilities and the UE UP positioning capabilities to the NF service consumer.
Feature number: The order number of the feature within the supportedFeatures attribute (starting with 1). Feature: A short name that can be used to refer to the bit and to the feature. M/O: Defines if the implementation of the feature is mandatory ("M") or optional ("O"). Description: A clear textual description of the feature.			

6.2.9 Security

As indicated in TS 33.501 [27], the access to the Namf_EventExposure API may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [28]), using the "Client Credentials" authorization grant, where the NRF (see TS 29.510 [29]) plays the role of the authorization server.

If Oauth2 authorization is used, an NF Service Consumer, prior to consuming services offered by the Namf_EventExposure API, shall obtain a "token" from the authorization server, by invoking the Access Token Request service, as described in TS 29.510 [29], clause 5.4.2.2.

NOTE: When multiple NRFs are deployed in a network, the NRF used as authorization server is the same NRF that the NF Service Consumer used for discovering the Namf_EventExposure service.

The Namf_EventExposure API defines scopes for OAuth2 authorization as specified in TS 33.501 [27]; it defines a single scope consisting on the name of the service (i.e., "namf-evts"), and it does not define any additional scopes at resource or operation level.

6.2.10 HTTP redirection

An HTTP request may be redirected to a different AMF service instance, within the same AMF or a different AMF of an AMF set, e.g. when an AMF service instance is part of an AMF (service) set or when using indirect communications (see TS 29.500 [4]). See the ES3XX feature in clause 6.2.8.

An SCP that reselects a different AMF producer instance will return the NF Instance ID of the new AMF producer instance in the 3gpp-Sbi-Producer-Id header, as specified in clause 6.10.3.4 of TS 29.500 [4].

If an AMF within an AMF set redirects a service request to a different AMF of the set using an 307 Temporary Redirect or 308 Permanent Redirect status code, the identity of the new AMF towards which the service request is redirected shall be indicated in the 3gpp-Sbi-Target-Nf-Id header of the 307 Temporary Redirect or 308 Permanent Redirect response as specified in clause 6.10.9.1 of TS 29.500 [4].

6.3 Namf_MT Service API

6.3.1 API URI

The Namf_MT shall use the Namf_MT API.

The API URI of the Namf_MT API shall be:

{apiRoot}/<apiName>/<apiVersion>/

The request URI used in HTTP requests from the NF service consumer towards the NF service producer shall have the Resource URI structure defined in clause 4.4.1 of TS 29.501 [5], i.e.:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>

with the following components:

- The {apiRoot} shall be set as described in TS 29.501 [5].
- The <apiName> shall be "namf-mt".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 6.3.3.

6.3.2 Usage of HTTP

6.3.2.1 General

HTTP/2, as defined in IETF RFC 9113 [19], shall be used as specified in clause 5 of TS 29.500 [4].

HTTP/2 shall be transported as specified in clause 5.3 of TS 29.500 [4].

HTTP messages and bodies for the Namf_MT service shall comply with the OpenAPI [23] specification contained in Annex A.

6.3.2.2 HTTP standard headers

6.3.2.2.1 General

The usage of HTTP standard headers shall be supported as specified in clause 5.2.2 of TS 29.500 [4].

6.3.2.2.2 Content type

The following content types shall be supported:

- JSON, as defined in IETF RFC 8259 [8], shall be used as content type of the HTTP bodies specified in the present specification as indicated in clause 5.4 of TS 29.500 [4].
- The Problem Details JSON Object (IETF RFC 9457 [36]). The use of the Problem Details JSON object in a HTTP response body shall be signalled by the content type "application/problem+json".

6.3.2.3 HTTP custom headers

6.3.2.3.1 General

In this release of this specification, no custom headers specific to the Namf_MT service are defined. For 3GPP specific HTTP custom headers used across all service based interfaces, see clause 5.2.3 of TS 29.500 [4].

6.3.3 Resources

6.3.3.1 Overview

//{apiRoot}/namf-mt/<apiVersion>

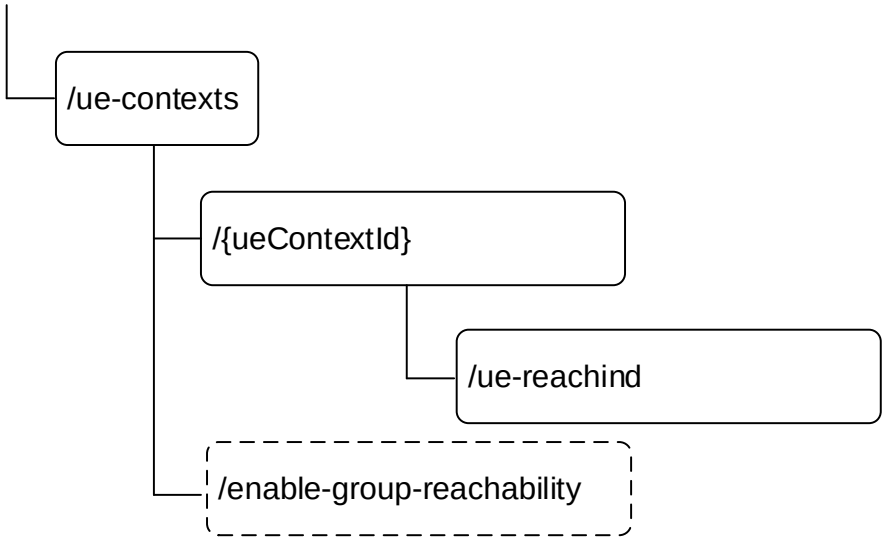


Figure 6.3.3.1-1: Resource URI structure of the Namf_MT Service API

Table 6.3.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 6.3.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method or custom operation	Description
ueReachInd	/ue-contexts/{ueContextId}/ue-reachind	PUT	Update the ueReachInd to UE Reachable
ueContext	/ue-contexts/{ueContextId}	GET	Map to following service operation: - ProvideDomainSelectionInfo
ueContexts collection	/ue-contexts/enable-group-reachability	enable-group-reachability (POST)	Update the state of the list of UEs to CM-CONNECTED state

6.3.3.2 Resource: ueReachInd

6.3.3.2.1 Description

This resource represents the ueReachInd for a SUPI.

This resource is modelled as the Document resource archetype (see clause C.1 of TS 29.501 [5]).

6.3.3.2.2 Resource Definition

Resource URI: {apiRoot}/namf-mt/<apiVersion>/ue-contexts/{ueContextId}/ue-reachind

This resource shall support the resource URI variables defined in table 6.3.3.2.2-1.

Table 6.3.3.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.3.1
apiVersion	string	See clause 6.3.1.
ueContextId	Supi	Represents the Subscription Permanent Identifier (see TS 23.501 [2] clause 5.9.2) pattern: see pattern of type Supi in TS 29.571 [6]

6.3.3.2.3 Resource Standard Methods

6.3.3.2.3.1 PUT

This method shall support the URI query parameters specified in table 6.3.3.2.3.1-1.

Table 6.3.3.2.3.1-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 6.3.3.2.3.1-2 and the response data structures and response codes specified in table 6.3.3.2.3.1-3.

Table 6.3.3.2.3.1-2: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
EnableUeReachabilityReqData	M	1	Contain the State of the UE, the value shall be set to UE Reachable.

Table 6.3.3.2.3.1-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
EnableUeReachabilityRspData	M	1	200 OK	Indicate the ueReachInd is updated to UE Reachable.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. When the related UE context is not fully available at the target NF Service Producer (e.g. AMF) during a planned maintenance case (e.g. AMF planned maintenance without UDSF case) the "cause" attribute may be used to include the following application error: - NF_CONSUMER_REDIRECT_ONE_TXN See table 6.3.7.3-1 for the description of these errors (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetailsEnableUeReachability	O	0..1	403 Forbidden	The "cause" attribute may be used to indicate one of the following application errors: - UNABLE_TO_PAGE_UE - UNSPECIFIED - UE_IN_NON_ALLOWED_AREA See table 6.3.7.3-1 for the description of this error.
ProblemDetails	O	0..1	404 Not Found	When the related UE is not found in the NF Service Producer (e.g. AMF) the "cause" attribute shall be set to: - CONTEXT_NOT_FOUND See table 6.3.7.3-1 for the description of these errors
ProblemDetails	O	0..1	409 Conflict	The "cause" attribute may be used to indicate the following application error: - REJECTION_DUE_TO_PAGING_RESTRICTION See table 6.3.7.3-1 for the description of this error.
ProblemDetails	O	0..1	503 Service Unavailable	The "cause" attribute may be used to indicate one of the errors defined in Table 5.2.7.2-1 of TS 29.500 [4]. The HTTP header field "Retry-After" shall not be included in this scenario.
ProblemDetailsEnableUeReachability	O	0..1	504 Gateway Timeout	The "cause" attribute may be used to indicate one of the following application errors: - UE_NOT_RESPONDING - UE_NOT_REACHABLE See table 6.3.7.3-1 for the description of this error.
NOTE 1: The mandatory HTTP error status code for the PUT method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.3.3.2.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	The URI of the resource located on an alternative service instance within the same AMF or AMF (service) set to which the request is redirected. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.3.3.2.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.3.3.2.4 Resource Custom Operations

There is no custom operation supported on this resource.

6.3.3.3 Resource: ueContext

6.3.3.3.1 Description

This resource represents the UeContext for a UE.

This resource is modelled as the Document resource archetype (see clause C.1 of TS 29.501 [5]).

6.3.3.3.2 Resource Definition

Resource URI: {apiRoot}/namf-mt/<apiVersion>/ue-contexts/{ueContextId}

This resource shall support the resource URI variables defined in table 6.3.3.3.2-1.

Table 6.3.3.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.3.1
apiVersion	string	See clause 6.3.1.
ueContextId	Supi	Represents the Subscription Permanent Identifier (see TS 23.501 [2] clause 5.9.2) pattern: see pattern of type Supi in TS 29.571 [6]

6.3.3.3.3 Resource Standard Methods

6.3.3.3.3.1 GET

This method shall support the URI query parameters specified in table 6.3.3.3.3.1-1.

Table 6.3.3.3.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
info-class	UeContextInfoClass	M	1	Indicates the class of the UE Context information elements to be fetched.
supported-features	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.3.8 is supported.
old-guami	Guami	C	0..1	This IE shall be present during an AMF planned removal procedure when the NF Service Consumer initiates a request towards the target AMF, for a UE associated to an AMF that is unavailable (see clause 5.21.2.2 of TS 23.501 [2]).

This method shall support the request data structures specified in table 6.3.3.3.3.1-2 and the response data structures and response codes specified in table 6.3.3.3.3.1-3.

Table 6.3.3.3.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 6.3.3.3.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
UeContextInfo	M	1	200 OK	This represents the operation is successful and request UE Context information is returned.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. When the related UE context is not fully available at the target NF Service Consumer (e.g. AMF) during a planned maintenance case (e.g. AMF planned maintenance without UDSF case) the "cause" attribute shall be set to: - NF_CONSUMER_REDIRECT_ONE_TXN See table 6.3.7.3-1 for the description of these errors (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	403 Forbidden	Indicates the operation has failed due to application error. The "cause" attribute may be used to indicate one of the following application errors: - UNABLE_TO_PAGE_UE - UE_DEREGISTERED - UNSPECIFIED See table 6.3.7.3-1 for the description of these errors.
ProblemDetails	O	0..1	404 Not Found	Indicates the operation has failed due to application error. The "cause" attribute may be used to indicate one of the following application errors: - CONTEXT_NOT_FOUND See table 6.3.7.3-1 for the description of these errors
ProblemDetails	O	0..1	409 Conflict	This indicates that the request could not be completed due to a temporary conflict with the current state of the target resource. The cause attribute of the ProblemDetails structure shall be set to: - TEMPORARY_REJECT_REGISTRATION_ONGOING, if there is an on-going registration procedure.

NOTE 1: The mandatory HTTP error status code for the GET method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]).
NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].

Table 6.3.3.3.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	The URI of the resource located on the target NF Service Consumer (e.g. AMF) to which the request is redirected. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.3.3.3.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.3.3.3.4 Resource Custom Operations

There is no custom operation supported on this resource.

6.3.3.4 Resource: ueContexts collection

6.3.3.4.1 Description

This resource represents the collection of the individual UeContexts created in the AMF.

This resource is modelled as the Collection resource archetype (see clause C.2 of TS 29.501 [5]).

6.3.3.4.2 Resource Definition

Resource URI: **{apiRoot}/namf-mt/<apiVersion>/ue-contexts**

This resource shall support the resource URI variables defined in table 6.3.3.4.2-1.

Table 6.3.3.4.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.3.1
apiVersion	string	See clause 6.3.1.

6.3.3.4.3 Resource Standard Methods

There is no standard operation supported on this resource.

6.3.3.4.4 Resource Custom Operations

6.3.3.4.4.1 Overview

Table 6.3.3.4.4.1-1: Custom operations

Operation Name	Custom operation URI	Mapped HTTP method	Description
enable-group-reachability	/ue-contexts/enable-group-reachability	POST	Enable Group Reachability service operation

6.3.3.4.4.2 Operation: enable-group-reachability

6.3.3.4.4.2.1 Description

6.3.3.4.4.2.2 Operation Definition

This custom operation updates the state of the list of UEs to CM-CONNECTED state.

This operation shall support the request data structures specified in table 6.3.3.4.4.2.2-1 and the response data structure and response codes specified in table 6.3.3.4.4.2.2-2.

Table 6.3.3.4.4.2.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
EnableGroupReachabilityReqData	M	1	Contain the list of UEs involved in the MBS Session identified by the related TMGI.

Table 6.3.3.4.4.2.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
EnableGroupReachabilityRspData	M	1	200 OK	Successful response indicating the list of UEs in CM-CONNECTED state if any, and indicating the supported features.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	404 Not Found	When none of the UEs in the list of UEs are found in the AMF, the "cause" attribute shall be set to: - CONTEXT_NOT_FOUND See table 6.3.7.3-1 for the description of these errors
ProblemDetails	O	0..1	503 Service Unavailable	The "cause" attribute may be used to indicate one of the errors defined in Table 5.2.7.2-1 of TS 29.500 [4].
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.3.3.4.4.2.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	The URI of the resource located on an alternative service instance within the same AMF or AMF (service) set to which the request is redirected. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.3.3.4.4.2.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.3.4 Custom Operations without associated resources

There are no custom operations without associated resources supported on Namf_MT service.

6.3.5 Notifications

6.3.5.1 General

This clause specifies the notifications provided by the Namf_MT service.

Table 6.3.5.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
UE Reachability Info Notify	{reachabilityNotifyUri}	POST	

6.3.5.2 UE Reachability Info Notify

If a NF service consumer has implicitly subscribed to the UE Reachability Info Notify supported by Namf_MT service, the AMF shall deliver the notification to the call-back URI for the UE(s) which are reachable or do not respond to paging, following Subscribe/Notify mechanism defined in TS 29.501 [5].

6.3.5.2.1 Notification Definition

Call-back URI: **{callbackUri}**

This callback URI shall be the "reachabilityNotifyUri" provided in the "EnableGroupReachabilityReqData" IE.

6.3.5.2.3 Notification Standard Methods

6.3.5.2.3.1 POST

This method shall support the request data structures specified in table 6.3.5.2.3.1-1 and the response data structures and response codes specified in table 6.3.5.2.3.1-2.

Table 6.3.5.2.3.1-2: Data structures supported by the POST Request Body

Data type	P	Cardinality	Description
ReachabilityNotification Data	M	1	Represents the notification to be delivered

Table 6.3.5.2.3.1-3: Data structures supported by the POST Response Body

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.3.5.2.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer to which the notification should be sent. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.3.5.2.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer to which the notification should be sent. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.3.6 Data Model

6.3.6.1 General

This clause specifies the application data model supported by the API.

Table 6.3.6.1-1 specifies the data types defined for the Namf_MT service based interface protocol.

Table 6.3.6.1-1: Namf_MT specific Data Types

Data type	Clause defined	Description
EnableUeReachabilityReqData	6.3.6.2.2	Data within the Enable UE Reachability Request
EnableUeReachabilityRspData	6.3.6.2.3	Data within the Enable UE Reachability Response
UeContextInfo	6.3.6.2.4	Contains the UE Context Information
ProblemDetailsEnableUeReachability	6.3.6.2.5	Enable UE Reachability Error Detail
AdditionInfoEnableUeReachability	6.3.6.2.6	Additional information to be returned in EnableUeReachability error response.
EnableGroupReachabilityReqData	6.3.6.2.7	Data within the Enable Group Reachability Request
EnableGroupReachabilityRspData	6.3.6.2.8	Data within the Enable Group Reachability Response
UeInfo	6.3.6.2.9	list of UEs requested to be made reachable for the MBS Session
ReachabilityNotificationData	6.3.6.2.10	Data within the UE Reachability Info Notify
ReachableUeInfo	6.3.6.2.11	Contains the reachable UE Information
QosFlowInfo	6.3.6.2.12	QoS Flow information
UeContextInfoClass	6.3.6.3.3	Indicates the UE Context information class

Table 6.3.6.1-2 specifies data types re-used by the Namf_MT service based interface protocol from other specifications and from other service APIs in current specification, including a reference to their respective specifications and when needed, a short description of their use within the Namf_MT service based interface.

Table 6.3.6.1-2: Namf_MT re-used Data Types

Data type	Reference	Comments
ProblemDetails	TS 29.571 [6]	Common data type used in response bodies
SupportedFeatures	TS 29.571 [6]	Supported Features
AccessType	TS 29.571 [6]	Access Type
RatType	TS 29.571 [6]	RAT Type
DurationSec	TS 29.571 [6]	
RedirectResponse	TS 29.571 [6]	Response body of the redirect response message.
Supi	TS 29.571 [6]	SUPI
Tmgi	TS 29.571 [6]	TMGI
PduSessionId	TS 29.571 [6]	PDU Session Id
Uri	TS 29.571 [6]	URI
UserLocation	TS 29.571 [6]	User Location Information
MbsServiceAreaInfo	TS 29.571 [6]	MBS Service Area Information for a Location dependent MBS session
Qfi	TS 29.571 [6]	QoS Flow Identifier
Uint16	TS 29.571 [6]	Unsigned 16-bit integer
MbsServiceArea	TS 29.571 [6]	MBS Service Area Information.
UeReachability	6.2.6.3.7	Describes the reachability of the UE
Ppi	6.1.6.3.2	Paging Policy

6.3.6.2 Structured data types

6.3.6.2.1 Introduction

Structured data types used in Namf_MT service are specified in this clause.

6.3.6.2.2 Type: EnableUeReachabilityReqData

Table 6.3.6.3.2-1: Definition of type EnableUeReachabilityReqData

Attribute name	Data type	P	Cardinality	Description
reachability	UeReachability	M	1	Indicates the desired reachability of the UE
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.3.8 is supported.
oldGuami	Guami	C	0..1	This IE shall be present during an AMF planned removal procedure when the NF Service Consumer initiates a request towards the target AMF, for a UE associated to an AMF that is unavailable (see clause 5.21.2.2 of TS 23.501 [2]).
extBufSupport	boolean	C	0..1	This IE shall be present and set to "true", if the extended buffering is supported(see clauses 4.24.2 and clause 4.25.5 of TS 23.502 [3]), When present, the IE shall be set as following: - true: the extended buffering is supported - false (default): the extended buffering is not supported
qosFlowInfoList	array(QosFlowInfo)	O	1..N	This IE may be included by the SMF during the Network Triggered Connection Resume in RRC Inactive with CN based MT communication handling. When present, it shall indicate the QoS flow information of the QoS flow(s) of the PDU session triggering the procedure, e.g., for which DL packets have been received by the UPF.
pduSessionId	PduSessionId	O	0..1	This IE may be included by the SMF during the Network Triggered Connection Resume in RRC Inactive with CN based MT communication handling. When present, it shall indicate the PDU Session ID of the PDU session triggering the procedure, e.g., for which DL packets have been received by the UPF.

6.3.6.2.3 Type: EnableUeReachabilityRspData

Table 6.3.6.2.3-1: Definition of type EnableUeReachabilityRspData

Attribute name	Data type	P	Cardinality	Description
reachability	UeReachability	M	1	Indicates the current reachability of the UE
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.3.8 is supported.

6.3.6.2.4 Type: UeContextInfo

Table 6.3.6.2.3-1: Definition of type UeContextInfo

Attribute name	Data type	P	Cardinality	Description
supportVoPS	boolean	C	0..1	This IE shall be present when following UE Context Information class are required: - "TADS" When present, this IE shall indicate whether or not IMS voice over PS Session is supported in the registration area (s) where the UE is currently registered in 3GPP access.
supportVoPSn3gpp	boolean	C	0..1	This IE shall be present when the UE is registered in WLAN non 3GPP access and the following UE Context Information class are required: - "TADS" When present, this IE shall indicate whether or not IMS voice over PS Session Supported Indication over non-3GPP access is supported in the WLAN where the UE is currently registered.
lastActTime	DateTime	C	0..1	This IE shall be present when following UE Context Information class are required: - "TADS" When present, this IE shall indicate the UTC time stamp of the last radio contact with the UE.
accessType	AccessType	C	0..1	This IE shall be present when following UE Context Information class are required: - "TADS" When present, this IE shall indicate the current access type of the UE.
ratType	RatType	C	0..1	This IE shall be present when following UE Context Information class are required: - "TADS" When present, this IE shall indicate the current RAT type of the UE.
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.3.8 is supported.

6.3.6.2.5 Type: ProblemDetailsEnableUeReachability

Table 6.3.6.2.5-1: Definition of type ProblemDetailsEnableUeReachability as a list of to be combined data

Data type	Cardinality	Description	Applicability
ProblemDetails	1	Detail information of the problem	
AdditionInfoEnableUeReachability	1	Additional information to be returned in error response.	

6.3.6.2.6 Type: AdditionInfoEnableUeReachability

Table 6.3.6.2.6-1: Definition of type AdditionInfoEnableUeReachability

Attribute name	Data type	P	Cardinality	Description
maxWaitingTime	DurationSec	C	0..1	This IE shall contain the estimated maximum wait time (see clauses 4.24.2 and 4.8.2.2b of 3GPP 23.502 [3]).

6.3.6.2.7 Type: EnableGroupReachabilityReqData

Table 6.3.6.2.7-1: Definition of type EnableGroupReachabilityReqData

Attribute name	Data type	P	Cardinality	Description
ueInfoList	array(UeInfo)	M	1..N	This IE shall indicate the list of UEs requested to be made reachable for the MBS Session and may indicate the PDU Session Id of the associated PDU Session for the UE(s).
tmgi	Tmgi	M	1	This IE shall Indicate the TMGI of the MBS session.
reachabilityNotifyUri	Uri	O	0..1	The callback URI on which UEReachabilityInfoNotify is reported.
mbsServiceAreaInfoList	array(MbsServiceAreaInfo)	O	1..N	List of MBS Service Area and related Area Session ID for location dependent content.
mbsServiceArea	MbsServiceArea	O	0..1	MBS Service Area for a local MBS session
arp	Arp	O	0..1	This IE when present shall indicate the most demanding Allocation and Retention Priority of all MBS QoS Flow within the MBS session. The AMF may use this IE for paging differentiation (see clause 6.12 of TS 23.247 [55]).
5qi	5Qi	O	0..1	This IE when present shall indicate the most demanding 5QI of all MBS QoS Flow within the MBS session. The AMF may use this IE for paging differentiation (see clause 6.12 of TS 23.247 [55]).
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.3.8 is supported.

6.3.6.2.8 Type: EnableGroupReachabilityRspData

Table 6.3.6.2.8-1: Definition of type EnableGroupReachabilityRspData

Attribute name	Data type	P	Cardinality	Description
ueConnectedList	array(Supi)	C	1..N	This IE shall be present if there is at least one UE in the list of UEs received in the request that is already in CM-CONNECTED state. When present, this IE shall indicate the list of UEs in CM-CONNECTED state.
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.3.8 is supported.

6.3.6.2.9 Type: UeInfo

Table 6.3.6.2.9-1: Definition of type UeInfo

Attribute name	Data type	P	Cardinality	Description
ueList	array(Supi)	M	1..N	This IE shall indicate the list of UEs requested to be made reachable for the MBS Session. (NOTE)
pduSessionId	PduSessionId	O	0..1	Represents the identifier of the associated PDU Session for the UEs in ueList IE. (NOTE)
NOTE X: When the pduSessionId is present, the ueList array shall contain only one element, i.e., a Supi.				

6.3.6.2.10 Type: ReachabilityNotificationData

Table 6.3.6.2.10-1: Definition of type ReachabilityNotificationData

Attribute name	Data type	P	Cardinality	Description
reachableUeList	array(ReachableUeInfo)	C	1..N	This IE shall indicate the list of reachable UEs.
unreachableUeList	array(Supi)	C	1..N	This IE shall Indicate the list of unreachable UEs.

6.3.6.2.11 Type: ReachableUeInfo

Table 6.3.6.2.11-1: Definition of type ReachableUeInfo

Attribute name	Data type	P	Cardinality	Description
ueList	array(Supi)	M	1..N	This IE shall indicate the list of reachable UEs.
userLocation	UserLocation	C	0..1	This IE shall Indicate the User Location of the reachable UEs.

6.3.6.2.12 Type: QosFlowInfo

Table 6.3.6.2.12-1: Definition of type QosFlowInfo

Attribute name	Data type	P	Cardinality	Description
qfi	Qfi	M	1	This IE shall indicate the QFI of the QoS flow of the PDU session triggering the procedure, e.g., for which DL packets have been received by the UPF.
ppi	Ppi	O	0..1	When present, this IE shall contain the Paging policy to be applied.
arp	Arp	O	0..1	When present, this IE shall contain the Allocation and Retention Priority of the QoS flow of the PDU session triggering the procedure, e.g., for which DL packets have been received by the UPF.
5qi	5Qi	O	0..1	When present, this IE shall indicate the 5QI of the QoS flow of the PDU session triggering the procedure, e.g., for which DL packets have been received by the UPF.
dlDataSize	Uint16	O	0..1	When present, this IE shall indicate the DL data size (expressed in number of octets) that the AMF shall signal to the NG-RAN (e.g. for QoS flows that have buffered data in the CN). See clause 4.8.2.2b of TS 23.502 [3].

6.3.6.3 Simple data types and enumerations

6.3.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

6.3.6.3.2 Simple data types

The simple data types defined in table 6.3.6.3.2-1 shall be supported.

Table 6.3.6.3.2-1: Simple data types

Type Name	Type Definition	Description

6.3.6.3.3 Enumeration: UeContextInfoClass

Table 6.3.6.3.3-1: Enumeration UeContextInfoClass

Enumeration value	Description
"TADS"	Defines the UE Context Information for Terminating Domain Selection for IMS Voice over PS.

6.3.6.4 Binary data

None.

6.3.7 Error Handling

6.3.7.1 General

HTTP error handling shall be supported as specified in clause 5.2.4 of TS 29.500 [4].

6.3.7.2 Protocol Errors

Protocol Error Handling shall be supported as specified in clause 5.2.7 of TS 29.500 [4].

6.3.7.3 Application Errors

The common application errors defined in the Table 5.2.7.2-1 in TS 29.500 [4] may also be used for the Namf_MT service, and the following application errors listed in Table 6.3.7.3-1 are specific for the Namf_MT service.

Table 6.3.7.3-1: Application errors

Application Error	HTTP status code	Description
NF_CONSUMER_REDIRECT_ONE_TXN	307 Temporary Redirect	The request has been asked to be redirected to a specified target.
UNABLE_TO_PAGE_UE	403 Forbidden	AMF is unable page the UE, temporarily.
UE_IN_NON_ALLOWED_AREA	403 Forbidden	UE is currently in a non-allowed area and the service request is not for a regulatory prioritized service.
UE_DEREGISTERED	403 Forbidden	The user is in RM-DEREGISTERED state in the AMF.
UNSPECIFIED	403 Forbidden	The request is rejected due to unspecified reasons.
CONTEXT_NOT_FOUND	404 Not Found	The related UE is not found in the NF Service Consumer.
TEMPORARY_REJECT_REGISTRATION_ONGOING	409 Conflict	The request fails due to an on-going registration procedure.
REJECTION_DUE_TO_PAGING_RESTRICTION	409 Conflict	If Paging Restriction Information restrict the EnableUEReachability request from causing paging as defined in TS 23.501 [2] clause 5.38.5 or if the UE rejects the paging as defined in TS 23.501 [2] clause 5.38.4.
UE_NOT_RESPONDING	504 Gateway Timeout	UE is not responding to the request initiated by the network, e.g. Paging.
UE_NOT_REACHABLE	504 Gateway Timeout	The UE is not reachable for paging, e.g., when UE is in MICO mode or the UE has entered the UE has entered Extended DRX in CM-IDLE or Extended DRX for RRC-INACTIVE state.

6.3.8 Feature Negotiation

The feature negotiation mechanism specified in clause 6.6 of TS 29.500 [4] shall be used to negotiate the features applicable between the AMF and the NF Service Consumer, for the Namf_MT service, if any.

The NF Service Consumer shall indicate the features it supports for the Namf_MT service, if any, by including the supportedFeatures attribute in content of the HTTP Request Message for following service operations:

- EnableUEReachability, as specified in clause 5.4.2.2;
- ProvideDomainSelectionInfo, as specified in clause 5.4.2.3;
- EnableGroupReachability, as specified in clause 5.4.2.4.

The AMF shall determine the supported features for the service operations as specified in clause 6.6 of TS 29.500 [4] and shall indicate the supported features by including the supportedFeatures attribute in content of the HTTP response for the service operation.

The syntax of the supportedFeatures attribute is defined in clause 5.2.2 of TS 29.571 [6].

The following features are defined for the Namf_MT service.

Table 6.3.8-1: Features of supportedFeatures attribute used by Namf_MT service

Feature Number	Feature	M/O	Description
1	ES3XX	M	Extended Support of HTTP 307/308 redirection An NF Service Consumer (e.g. SMSF) that supports this feature shall support handling of HTTP 307/308 redirection for any service operation of the Namf_MT service. An NF Service Consumer that does not support this feature does only support HTTP redirection as specified for 3GPP Release 15.
2	GRCAP	O	Group Reachability Capability An AMF and SMF that supports this feature shall support the EnableGroupReachability and UEReachabilityInfoNotify service operations, as specified in clause 5.4.2.4 and clause 5.4.2.5.
Feature number: The order number of the feature within the supportedFeatures attribute (starting with 1). Feature: A short name that can be used to refer to the bit and to the feature. M/O: Defines if the implementation of the feature is mandatory ("M") or optional ("O"). Description: A clear textual description of the feature.			

6.3.9 Security

As indicated in TS 33.501 [27], the access to the Namf_MT API may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [28]), using the "Client Credentials" authorization grant, where the NRF (see TS 29.510 [29]) plays the role of the authorization server.

If Oauth2 authorization is used, an NF Service Consumer, prior to consuming services offered by the Namf_MT API, shall obtain a "token" from the authorization server, by invoking the Access Token Request service, as described in TS 29.510 [29], clause 5.4.2.2.

NOTE: When multiple NRFs are deployed in a network, the NRF used as authorization server is the same NRF that the NF Service Consumer used for discovering the Namf_MT service.

The Namf_MT API defines the following scopes for OAuth2 authorization as specified in TS 33.501 [27].

Table 6.3.9-1: OAuth2 scopes defined in Namf_MT API

Scope	Description
"namf-mt"	Access to the Namf_MT API.
"namf-mt:ue-reachind"	Access to the EnableUeReachability service operation.
"namf-mt:enable-group-reachability"	Access to the EnableGroupReachability service operation.

6.3.10 HTTP redirection

An HTTP request may be redirected to a different AMF service instance, within the same AMF or a different AMF of an AMF set, e.g. when an AMF service instance is part of an AMF (service) set or when using indirect communications (see TS 29.500 [4]). See the ES3XX feature in clause 6.3.8.

An SCP that reselects a different AMF producer instance will return the NF Instance ID of the new AMF producer instance in the 3gpp-Sbi-Producer-Id header, as specified in clause 6.10.3.4 of TS 29.500 [4].

If an AMF within an AMF set redirects a service request to a different AMF of the set using an 307 Temporary Redirect or 308 Permanent Redirect status code, the identity of the new AMF towards which the service request is redirected shall be indicated in the 3gpp-Sbi-Target-Nf-Id header of the 307 Temporary Redirect or 308 Permanent Redirect response as specified in clause 6.10.9.1 of TS 29.500 [4].

6.4 Namf_Location Service API

6.4.1 API URI

The Namf_Location shall use the Namf_ Location API.

The API URI of the Namf_Location API shall be:

{apiRoot}/<apiName>/<apiVersion>/

The request URI used in HTTP requests from the NF service consumer towards the NF service producer shall have the Resource URI structure defined in clause 4.4.1 of TS 29.501 [5], i.e.:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>

with the following components:

- The {apiRoot} shall be set as described in TS 29.501 [5].
- The <apiName> shall be "namf-loc".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 6.4.3.

6.4.2 Usage of HTTP

6.4.2.1 General

HTTP/2, as defined in IETF RFC 9113 [19], shall be used as specified in clause 5 of TS 29.500 [4].

HTTP/2 shall be transported as specified in clause 5.3 of TS 29.500 [4].

HTTP messages and bodies for the Namf_Location service shall comply with the OpenAPI [23] specification contained in Annex A.

6.4.2.2 HTTP standard headers

6.4.2.2.1 General

The usage of HTTP standard headers shall be supported as specified in clause 5.2.2 of TS 29.500 [4].

6.4.2.2.2 Content type

The following content types shall be supported:

- JSON, as defined in IETF RFC 8259 [8], shall be used as content type of the HTTP bodies specified in the present specification as indicated in clause 5.4 of TS 29.500 [4].
- The Problem Details JSON Object (IETF RFC 9457 [36]). The use of the Problem Details JSON object in a HTTP response body shall be signalled by the content type "application/problem+json".

6.4.2.3 HTTP custom headers

6.4.2.3.1 General

In this release of this specification, no custom headers specific to the Namf_Location service are defined. For 3GPP specific HTTP custom headers used across all service based interfaces, see clause 5.2.3 of TS 29.500 [4].

6.4.3 Resources

6.4.3.1 Overview

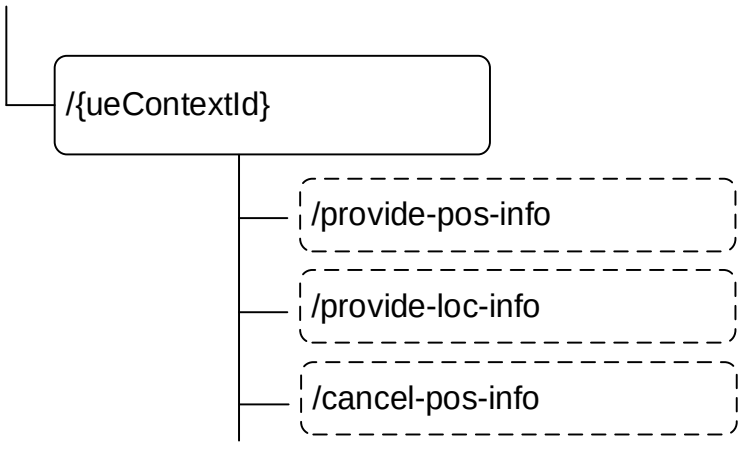


Figure 6.4.3.1-1: Resource URI structure of the Namf_Location Service API

Table 6.4.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 6.4.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method or custom operation	Description
Individual UE context	/provide-pos-info	provide-pos-info (POST)	ProvidePositioningInfo
	/provide-loc-info	provide-loc-info (POST)	ProvideLocationInfo
	/cancel-pos-info	cancel-pos-info (POST)	CancelLocation

6.4.3.2 Resource: Individual UE Context

6.4.3.2.1 Description

This resource represents an individual ueContextId.

This resource is modelled with the Document resource archetype (see clause C.1 of TS 29.501 [5]).

6.4.3.2.2 Resource Definition

Resource URI:{apiRoot}/namf-loc/<apiVersion>/{ueContextId}

This resource shall support the resource URI variables defined in table 6.4.3.2.2-1.

Table 6.4.3.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.4.1
apiVersion	string	See clause 6.4.1.
ueContextId	string	Represents the Subscription Permanent Identifier (see TS 23.501 [2] clause 5.9.2) pattern: see pattern of type Supi in TS 29.571 [6] Or represents the Permanent Equipment Identifier (see TS 23.501 [2] clause 5.9.3) pattern: "(imei-[0-9]{15}|imeisv-[0-9]{16}|.+)" Or represents the Generic Public Subscription Identifier (see TS 23.501 [2] clause 5.9.8) pattern: see pattern of type Gpsi in TS 29.571 [6]

6.4.3.2.3 Resource Standard Methods

There are no standard methods supported on this resource.

6.4.3.2.4 Resource Custom Operations

6.4.3.2.4.1 Overview

Table 6.4.3.2.4.1-1: Custom operations

Operation Name	Custom operaration URI	Mapped HTTP method	Description
provide-pos-info	/{ueContextId}/provide-pos-info	POST	Request the positioning information of the UE. It is used for the ProvidePositioningInfo service operation.
provide-loc-info	/{ueContextId}/provide-loc-info	POST	Request the Network Provided Location Information of the UE.
cancel-pos-info	/{ueContextId}/cancel-pos-info	POST	Cancels periodic or triggered location for the UE.

6.4.3.2.4.2 Operation: provide-pos-info (POST)

6.4.3.2.4.2.1 Description

This ueContextId identifies the individual ueContext resource is composed by UE's SUPI or PEI. If the AMF supporting the "POSGPSI" feature, the ueContextId identifies the individual ueContext resource may also be composed by UE's GPSI.

6.4.3.2.4.2.2 Operation Definition

This operation shall support the request data structures specified in table 6.4.3.2.4.2.2-1 and the response data structure and response codes specified in table 6.4.3.2.4.2.2-2.

Table 6.4.3.2.4.2.2-1: Data structures supported by (POST) the provide-pos-info operation Request Body

Data type	P	Cardinality	Description
RequestPosInfo	M	1	The information to request the positioning information of the UE.

Table 6.4.3.2.4.2.2-2: Data structures supported by the (POST) provide-pos-info operation Response Body

Data type	P	Cardinality	Response codes	Description
ProvidePosInfoExt	M	1	200 OK	This case represents a successful query of the UE positioning information, the AMF returns the related information in the response.
n/a			204 No Content	Shall return 204 if no information is to be returned
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	403 Forbidden	The "cause" attribute may be used to indicate one of the following application errors: - USER_UNKNOWN - DETACHED_USER - POSITIONING_DENIED - UNSPECIFIED - REQUESTED_LMF_NOT_AVAILABLE See table 6.4.7.3-1 for the description of these errors.
ProblemDetailsProvidePosInfo	O	0..1	409 Conflict	The request could not be completed due to a conflict with the current state of the resource. The "cause" attribute may be used to indicate - HO_TO_EPS See table 6.4.7.3-1 for the description of these errors. The response should contain the target MME name and realm, if available, and it may contain the location information available from the LMF.
ProblemDetails	O	0..1	500 Internal Server Error	The "cause" attribute may be used to indicate one of the following application errors: - POSITIONING_FAILED See table 6.4.7.3-1 for the description of these errors.
ProblemDetails	O	0..1	504 Gateway Timeout	The "cause" attribute may be used to indicate one of the following application errors: - UNREACHABLE_USER - PEER_NOT_RESPONDING See table 6.4.7.3-1 for the description of this error.
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.4.3.2.4.2.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.4.3.2.4.2.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.4.3.2.4.3 Operation: provide-loc-info (POST)

6.4.3.2.4.3.1 Description

This ueContextId identifies the individual ueContext resource is composed by UE's SUPI or PEI.

6.4.3.2.4.3.2 Operation Definition

This operation shall support the request data structures specified in table 6.4.3.2.4.3.2-1 and the response data structure and response codes specified in table 6.4.3.2.4.3.2-2.

Table 6.4.3.2.4.3.2-1: Data structures supported by the (POST) povideLocInfo operation Request Body

Data type	P	Cardinality	Description
RequestLocInfo	M	1	The information to request the NPLI of the UE.

Table 6.4.3.2.4.3.2-2: Data structures supported by the (POST) provide-loc-info operation Response Body

Data type	P	Cardinality	Response codes	Description
ProvideLocInfo	M	1	200 OK	This case represents a successful query of the NPLI of the target UE, the AMF returns the related information in the response.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	403 Forbidden	The "cause" attribute may be used to indicate one of the following application errors: - UNSPECIFIED See table 6.4.7.3-1 for the description of these errors.
ProblemDetails	O	0..1	404 Not Found	The "cause" attribute may be used to indicate one of the following application errors: - CONTEXT NOT_FOUND See table 6.4.7.3-1 for the description of these errors.
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP or SEPP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.4.3.2.4.3.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.4.3.2.4.3.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP or SEPP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.4.3.2.4.4 Operation: cancel-pos-info (POST)

6.4.3.2.4.4.1 Description

This ueContextId identifies the individual ueContext resource and is composed by UE's SUPI or PEI.

6.4.3.2.4.4.2 Operation Definition

This operation shall support the request data structures specified in table 6.4.3.2.4.4.2-1 and the response data structure and response codes specified in table 6.4.3.2.4.4.2-2.

Table 6.4.3.2.4.4.2-1: Data structures supported by the (POST) cancel-pos-info operation Request Body

Data type	P	Cardinality	Description
CancelPosInfo	M	1	The information to identify the location session to be cancelled.

Table 6.4.3.2.4.4.2-2: Data structures supported by the (POST) cancel-pos-info operation Response Body

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	This case represents successful cancellation of location.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	403 Forbidden	The "cause" attribute may be used to indicate one of the following application errors: - USER_UNKNOWN - LOCATION_SESSION_UNKNOWN - UNSPECIFIED See table 6.4.7.3-1 for the description of these errors.
ProblemDetails	O	0..1	504 Gateway Timeout	The "cause" attribute may be used to indicate one of the following application errors: - UNREACHABLE_USER - PEER_NOT_RESPONDING See table 6.4.7.3-1 for the description of this error.
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.4.3.2.4.4.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.4.3.2.4.4.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.4.4 Custom Operations without associated resources

There are no custom operations without associated resources supported on Namf_Location service.

6.4.5 Notifications

6.4.5.1 General

This clause provides the definition of the EventNotify notification of the Namf_Location service.

Table 6.4.5.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
Event Notify	{locationNotificationUri}	POST	

6.4.5.2 Event Notify

6.4.5.2.1 Description

This resource represents the callback reference of the NF Service Consumer (e.g. GMLC) to receive LCS event notify.

6.4.5.2.2 Notification Definition

Callback URI: {locationNotificationUri}

See clause 5.5.2.3.1 for the description of how the AMF obtains the Callback URI of the NF Service Consumer (e.g. GMLC).

6.4.5.2.3 Notification Standard Methods

6.4.5.2.3.1 POST

This method sends an LCS event notify to the NF Service Consumer.

This method shall support the request data structures specified in table 6.4.5.2.3.1-1 and the response data structures and response codes specified in table 6.4.5.2.3.1-2.

Table 6.4.5.2.3.1-1: Data structures supported by the POST Request Body

Data type	P	Cardinality	Description
NotifiedPosInfoExt	M	1	Representation of the LCS event(s) notify.

Table 6.4.5.2.3.1-2: Data structures supported by the POST Response Body

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	This case represents a successful notification of the LCS event.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.4.5.2.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer to which the notification should be sent. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.4.5.2.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer to which the notification should be sent. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.4.6 Data Model

6.4.6.1 General

This clause specifies the application data model supported by the API.

Table 6.4.6.1-1 specifies the data types defined for the Namf_Location service based interface protocol.

Table 6.4.6.1-1: Namf_Location specific Data Types

Data type	Clause defined	Description
RequestPosInfo	6.4.6.2.2	Data within Provide Positioning Information Request
ProvidePosInfo	6.4.6.2.3	Data within Provide Positioning Information Response
NotifiedPosInfo	6.4.6.2.4	Data within EventNotify notification
RequestLocInfo	6.4.6.2.5	Data within Provide Location Information Request
ProvideLocInfo	6.4.6.2.6	Data within Provide Location Information Response
CancelPosInfo	6.4.6.2.7	Data within a Cancel Location Request
ProblemDetailsProvidePosInfo	6.4.6.2.8	Detailed problems with positioning information in failure case
AddProvidePosInfos	6.4.6.2.9	Additional UE positioning information with more than one corresponding UEs
AddNotifiedPosInfos	6.4.6.2.10	Additional LCS event notify with more than one corresponding UEs.
ProvidePosInfoExt	6.4.6.2.11	Data within Provide Positioning Information Response in addition to ProvidePosInfo for the UE positioning information with more than one corresponding UEs
NotifiedPosInfoExt	6.4.6.2.12	Data within EventNotify notification in addition to NotifiedPosInfo for LCS event notify with more than one corresponding UEs.
LocationType	6.4.6.3.3	Type of location measurement requested
LocationEvent	6.4.6.3.4	Type of events initiating location procedures
LocationPrivacyVerResult	6.4.6.3.5	The result of location privacy verification by UE
LpHapType	6.4.6.3.6	Type of Low Power and/or High Accuracy Positioning

Table 6.4.6.1-2 specifies data types re-used by the Namf_Location service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the Namf_Location service based interface.

Table 6.4.6.1-2: Namf_Location re-used Data Types

Data type	Reference	Comments
Supi	TS 29.571 [6]	Subscription Permanent Identifier
Gpsi	TS 29.571 [6]	General Public Subscription Identifier
Pei	TS 29.571 [6]	Permanent Equipment Identifier
ExternalClientType	TS 29.572 [25]	LCS Client Type (Emergency, Lawful Interception …)
LocationQoS	TS 29.572 [25]	LCS QoS (accuracy, response time)
SupportedGADShapes	TS 29.572 [25]	LCS supported GAD shapes
GeographicArea	TS 29.572 [25]	Estimate of the location of the UE
AccuracyFulfilmentIndicator	TS 29.572 [25]	Requested accuracy was fulfilled or not
AgeOfLocationEstimate	TS 29.572 [25]	Age Of Location Estimate
PositioningMethodAndUsage	TS 29.572 [25]	Usage of each non-GANSS positioning method
VelocityEstimate	TS 29.572 [25]	Estimate of the velocity of the target UE
VelocityRequested	TS 29.572 [25]	Indication of the Velocity requirement
LcsPriority	TS 29.572 [25]	Priority of the LCS client
GnssPositioningMethodAndUsage	TS 29.572 [25]	Usage of each GANSS positioning method
CivicAddress	TS 29.572 [25]	Civic address
BarometricPressure	TS 29.572 [25]	Barometric Pressure
Altitude	TS 29.572 [25]	Altitude estimate of the UE
LocalArea	TS 29.572 [25]	Local area specified by different shape
MinorLocationQoS	TS 29.572 [25]	Minor Location QoS
Ecgi	TS 29.571 [6]	UE EUTRAN cell information
Ncgi	TS 29.571 [6]	UE NR cell information
SupportedFeatures	TS 29.571 [6]	Supported Features
RatType	TS 29.571 [6]	RAT type
TimeZone	TS 29.571 [6]	Time Zone
DateTime	TS 29.571 [6]	Date and Time
IpAddr	TS 29.571 [6]	IP Address
UserLocation	TS 29.571 [6]	User Location
LcsServiceType	TS 29.572 [25]	The LCS service type
LdrType	TS 29.572 [25]	The type of LDR for deferred location
Uri	TS 29.571 [6]	URI
LdrReference	TS 29.572 [25]	LDR Reference Number for deferred location
LirReference	TS 29.572 [25]	LIR Reference Number for immediate location
EpsLdrReference	TS 29.572 [25]	EPS LDR Reference Number for deferred location
PeriodicEventInfo	TS 29.572 [25]	Information for periodic event reporting
AreaEventInfo	TS 29.572 [25]	Information for area event reporting
MotionEventInfo	TS 29.572 [25]	Information for motion event reporting
ExternalClientIdentification	TS 29.515 [46]	External LCS client identification
NFInstanceId	TS 29.571 [6]	Identification of an NF or AF
CodeWord	TS 29.515 [46]	Codeword for a 5GC-MT-LR or deferred 5GC-MT-LR
LMFIdentification	TS 29.572 [25]	Identification of a serving LMF for periodic or triggered location
TerminationCause	TS 29.572 [25]	Termination cause for a deferred location
UePrivacyRequirements	TS 29.515 [46]	The location related privacy requirements on UE
DiameterIdentity	TS 29.571 [6]	Diameter Identity
ProblemDetails	TS 29.571 [6]	Detailed problems in failure case
RedirectResponse	TS 29.571 [6]	Response body of the redirect response message.
E164Number	TS 29.503 [35]	The E.164 number.
DurationSec	TS 29.571 [6]	Duration Second
ReportingArea	TS 29.572 [25]	Indicates an area for event reporting
ReportingInd	TS 29.515 [46]	Reporting Indication
RangingSlResult	TS 29.572 [25]	Indicates result type for ranging and sidelink positioning
RelatedUe	TS 29.572 [25]	Indicates information for related UE for ranging and sidelink positioning
LosNlosMeasureInd	TS 29.572 [25]	LOS/NLOS measurement indication

IndoorOutdoorInd	TS 29.572 [25]	Indicates Indoor Outdoor Indication
IntegrityRequirements	TS 29.515 [46]	Integrity Requirements
HighAccuracyGnssMetrics	TS 29.572 [25]	High Accuracy GNSS Metrics
UpLocRepInfoAf	TS 29.515 [46]	Information for the location reporting over user plane
MappedLocationQoSEps	TS 29.572 [25]	Mapped Location QoS for EPS
RangeDirection	TS 29.572 [25]	Represents the distance and direction between two points.
2DRelativeLocation	TS 29.572 [25]	Represents 2D local co-ordinates with origin corresponding to another known point.
3DRelativeLocation	TS 29.572 [25]	Represents 3D local co-ordinates with origin corresponding to another known point.
IntegrityResult	TS 29.515 [46]	Integrity Result

6.4.6.2 Structured data types

6.4.6.2.1 Introduction

Structured data types used in Namf_Location service are specified in this clause.

6.4.6.2.2 Type: RequestPosInfo

Table 6.4.6.2.2-1: Definition of type RequestPosInfo

Attribute name	Data type	P	Cardinality	Description
lcsClientType	ExternalClientType	M	1	This IE shall contain the type of LCS client (Emergency, Lawful Interception etc.,.) issuing the location request
lcsLocation	LocationType	M	1	This IE shall contain the type of location measurement requested, such as current location,current or last known location, deferred location, etc. (NOTE 2)
supi	Supi	C	0..1	If the SUPI is available, this IE shall be present.
gpsi	Gpsi	C	0..1	If the GPSI is available, this IE shall be present.
requestedRangingSlResult	array(RangingSlResult)	C	1..N	This IE shall contain the type of result requested for ranging and sidelink positioning, such as absolute locations, relative locations or distances and directions related to the UEs, etc.
relatedUes	array(RelatedUe)	C	1..N	This IE contains a list of the information for the related UEs for the ranging and sidelink positioning.
lmfId	LMFIdentification	O	0..1	LMF identification. If present, this IE shall indicate the LMF ID that should be used to select the LMF.
priority	LcsPriority	O	0..1	If present, this IE shall contain the priority of the LCS client issuing the positioning request.
lcsQoS	LocationQoS	O	0..1	If present, this IE shall contain the quality of service requested, such as the accuracy of the positioning measurement and the response time of the positioning operation. Multiple QoS Class (lcsQosClass sets to "MULTIPLE_QOS") shall only be used when AMF support MUTIQOS feature.
velocityRequested	VelocityRequested	O	0..1	If present, this IE shall contain an indication of whether or not the Velocity of the target UE is requested.
lcsSupportedGADShapes	SupportedGADShapes	O	0..1	If present, this IE shall contain one GAD shape supported by the LCS client.
additionalSuppGADShapes	array(SupportedGADShapes)	C	1..N	Shall be absent if lcsSupportedGADShapes is absent. Shall be present if the LCS client supports more than one GAD shape.
locationNotificationUri	Uri	C	0..1	The callback URI on which location change event notification is reported. This IE shall be present when lcsLocation is set to "DEFERRED_LOCATION" and the EventNotify service operation notifies the NF Service Consumer (i.e. GMLC) is required.
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.4.8 is supported.
oldGuami	Guami	C	0..1	This IE shall be present during an AMF planned removal procedure when the NF Service Consumer initiates a request towards the target AMF, for a UE associated to an AMF that is unavailable (see clause 5.21.2.2 of TS 23.501 [2]).
pei	Pei	C	0..1	This IE shall be present if supi and gpsi are not available.
lcsServiceType	LcsServiceType	O	0..1	This IE contains the LCS service type for an external client. (NOTE 1)
ldrType	LdrType	C	0..1	This IE contains the type of LDR for a deferred location request. This IE shall be present when lcsLocation is set to "DEFERRED_LOCATION".

hgmlcCallBackURI	Uri	C	0..1	This IE contains the callback URI of the H-GMLC. This IE shall be present when lcsLocation is set to "DEFERRED_LOCATION". This IE shall also be present for location service in PNI-NPN with signalling optimisation, as specified in TS 23.273 [42] clause 6.1.2.
hgmlcAddr	IpAddr	C	0..1	This IE shall be included if the hgmlcCallBackURI IE is present and if the UE is possibly moved to EPS. When present, this IE shall include the H-GMLC Address (i.e. the RLP Server Address) to be used for reporting for deferred location after the UE moved to EPS.
lirGmlcCallBackUri	Uri	C	0..1	This IE shall be present when the intermediateLocationInd IE is present with the value "true". When present, this IE shall contain callback URI of the GMLC to receive the intermediate location reports.
ldrReference	LdrReference	C	0..1	This IE contains the LDR Reference Number. This IE shall be present when lcsLocation is set to "DEFERRED_LOCATION". This IE shall be present for location service in PNI-NPN with signalling optimisation, as specified in TS 23.273 [42] clause 6.1.2.
epsLdrReference	EpsLdrReference	C	0..1	This IE shall be included if the ldrReference IE is present and if the UE is possibly moved to EPS. When present, this IE shall include the EPS LDR Reference to be used for reporting of deferred location after UE moved to EPS.
lirReference	LirReference	C	0..1	This IE shall be present when the intermediateLocationInd IE is present with the value "true". When present, this IE shall contain the LIR Reference Number for a multiple location request
periodicEventInfo	PeriodicEventInfo	C	0..1	This IE contains information for periodic event reporting for a deferred location request. This IE shall be present when ldrType is set to "PERIODIC".
areaEventInfo	AreaEventInfo	C	0..1	This IE contains information for area event reporting for a deferred location request. This IE shall be present when ldrType is set to "ENTERING_INTO_AREA", "LEAVING_FROM_AREA" or "BEING_INSIDE_AREA".
motionEventInfo	MotionEventInfo	C	0..1	This IE contains information for motion event reporting for a deferred location request. This IE shall be present when ldrType is set to "MOTION".
externalClientIdentification	ExternalClientIdentification	O	0..1	This IE provides the external LCS client identification (e.g. the name of the LCS client). (NOTE 1)
afID	NfInstanceId	O	0..1	This IE provides the identification of an AF that initiated the location request. (NOTE 1)
codeWord	CodeWord	O	0..1	This IE provides a codeword for a location request which is provided by an external Client or AF and is sent to and verified by a target UE as part of privacy verification. (NOTE 1)

uePrivacyRequirements	UePrivacyRequirements	O	0..1	If present, the IE provides the indication of location related notification or verification for the target UE, the indication of codeword check in UE
scheduledLocTime	DateTime	O	0..1	If present, the IE provides the scheduled UTC time that the UE needs to be located.
reliableLocReq	boolean	C	0..1	This IE shall be included with the value "true" to indicate that reliable UE location information is required, as specified in TS 33.256 [57] clause 5.3.2. When present, this IE shall be set as following: - true: the reliable UE location information is required - false (default): the reliable UE location information is not required
intermediateLocationInd	boolean	C	0..1	This IE shall be present with the value "true" to indicate the acceptance of intermediate location responses for the NF consumer (i.e., the GMLC), during a 5GC-MT-LR multiple location procedure for the regulatory location service (see clause 6.1.3 and clause 6.10.4 of TS 23.273 [42]). When present, this IE shall indicate the acceptance of intermediate location response at the NF consumer: - true: intermediate location response acceptable - false (default): intermediate location response not acceptable
maxRespTime	DurationSec	C	0..1	This IE shall be present when the intermediateLocationInd IE is present with the value "true". When present, this IE shall contain the maximum response time for the NF consumer to receive the FINAL location response. The AMF may overwrite the maximum response time when passing it to the LMF, e.g., to avoid timeout of the HTTP service request.
ueUnawareInd	boolean	C	0..1	This IE shall be included and set to "true", if the UE Unaware Positioning is required, as specified in clause 6.1.1 of TS 23.273 [42]. Presence of this IE with false value shall be prohibited.
lpHapType	LpHapType	C	0..1	This IE shall be included and set to "LOW_POW_HIGH_ACCU_POS" to request low power and high accuracy positioning, as specified in clause 6.1.2 of TS 23.273 [42].
evtRptAllowedAreas	array(ReportingArea)	O	1..250	If present, this IE shall contain the list of event report allowed areas, where UE is allowed to generate and send the event report to network during the deferred 5GC-MT-LR procedure for UE power saving purpose.
reportingInd	ReportingInd	O	0..1	This IE may be present if the evtRptAllowedAreas is present. When present, this IE shall indicate whether the UE is allowed to generate and send the reports inside or outside the event report allowed areas: - Inside reporting (default) - Outside reporting (see TS 23.273 [42] clause 5.14 and 6.3.1)
integrityRequirements	IntegrityRequirements	O	0..1	When present, this IE shall indicate the integrity requirements.

upLocRepInfoAf	UpLocRepInfoAf	C	0..1	This IE shall be present if the request is for the location reporting over user plane. When present, the IE may include additional information for the location reporting over user plane.
mappedQoSEps	MappedLocationQoSEps	C	0..1	This IE may only be present if the Multiple QoS Class is indicated in the locationQoS IE. When present, this IE shall indicate the mapped Location QoS applicable to EPS ("BEST_EFFORT" or "ASSURED") based on the Multiple Location QoS (see clause 6.19 of TS 23.273 [42]).
coordinateID	integer	O	0..1	This IE may be present when requestedRangingSlResult indicates "ABSOLUTE_LOCATION". When present, this IE represents a local coordinate (see clause 6.20.3 of TS 23.273 [42]).
NOTE 1: At least one of these IEs should be present when uePrivacyCallSessionUnrelatedClass indicates notification and/or verification for the target UE. NOTE 2: If the lcsLocation IE is set to value "NOTIFICATION_VERIFICATION_ONLY", then the lcsServiceAuthInfo attribute in the uePrivacyRequirements IE, if present, shall be set to either "NOTIFICATION_ONLY" or "NOTIFICATION_AND_VERIFICATION_ONLY".				

6.4.6.2.3 Type: ProvidePosInfo

Table 6.4.6.2.3-1: Definition of type ProvidePosInfo

Attribute name	Data type	P	Cardinality	Description	Applicability
locationEstimate	GeographicArea	O	0..1	If present, this IE shall contain an estimate of the location of the UE in universal coordinates and the accuracy of the estimate.	
localLocationEstimate	LocalArea	O	0..1	When present, this IE shall indicate a local area in renference system.	
accuracyFulfilmentIndicator	AccuracyFulfilmentIndicator	O	0..1	If present, this IE shall contain an indication of whether the requested accuracy (as indicated in the LcsQoS in the request message) was fulfilled or not.	
ageOfLocationEstimate	AgeOfLocationEstimate	O	0..1	If present, this IE shall contain an indication of how long ago the location estimate was obtained.	
timestampOfLocationEstimate	DateTime	O	0..1	When present, this IE shall indicate the estimated UTC time when the location estimate corresponded to the UE location (i.e. when the location estimate and the actual UE location was the same).	
velocityEstimate	VelocityEstimate	O	0..1	If present, this IE shall contain an estimate of the velocity of the target UE, composed by horizontal speed, vertical speed, and their respective uncertainty.	
positioningDataList	array(PositioningMethodAndUsage)	O	0..9	If present, this IE shall indicate the usage of each non- GANSS positioning method that was attempted to determine the location estimate, either successfully or unsuccessfully.	
gnssPositioningDataList	array(GnssPositioningMethodAndUsage)	O	0..9	If present, this IE shall indicate the usage of each GANSS positioning method that was attempted to determine the location estimate, either successfully or unsuccessfully.	
ecgi	Ecgi	O	0..1	If present, this IE shall contain the current EUTRAN cell location of the target UE as delivered by the 5G-AN.	
ncgi	Ncgi	O	0..1	If present, this IE shall contain the current NR cell location of the target UE, or the NR cell location of the relay UE if remoteUeInd IE is present with the value true, as delivered by the 5G-AN.	
remoteUeInd	boolean	C	0..1	This IE shall be present if received from LMF. Presence of this IE with the value false shall be prohibited.	
targetServingNode	NfInstanceId	O	0..1	If present, this IE shall contain the address of the target side serving node for intra-5GS handover of an IMS Emergency Call.	
targetMmeName	DiameterIdentity	C	0..1	This IE shall be present for handover of IMS emergency call to EPS, i.e. the target node is an MME. This IE may also be present for a handover from 5GS to EPS. When present, this IE shall indicate the Diameter host name of the target MME.	

targetMmeRealm	DiameterIdentity	C	0..1	This IE shall be present for handover of IMS emergency call to EPS, i.e. the target node is an MME. This IE may also be present for a handover from 5GS to EPS. When present, this IE shall indicate the Diameter realm of the target MME.	
utranSrvccInd	boolean	C	0..1	This IE shall be present with value "true" for 5G-SRVCC to 3GPP UTRAN of IMS emergency call, i.e. target node is an MSC. When present, this IE shall be set for the following value: - true: IMS emergency call handover to UTRAN - false: No IMS emergency call handover to UTRAN	
civicAddress	CivicAddress	O	0..1	If present, this IE contains a location estimate for the target UE expressed as a Civic address.	
barometricPressure	BarometricPressure	O	0..1	If present, this IE contains the barometric pressure measurement as reported by the target UE.	
altitude	Altitude	O	0..1	If present, this IE indicates the altitude of the positioning estimate.	
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.4.8 is supported.	
servingLMFIdentification	LMFIdentification	O	0..1	If present, this IE contains the identification of a serving LMF for periodic or triggered location	
locationPrivacyVerResult	LocationPrivacyVerResult	O	0..1	If present, this IE contains the result of location privacy verification by UE (NOTE)	
achievedQos	MinorLocationQoS	C	0..1	When present, this IE shall contain the achieved Location QoS Accuracy of the estimated location. This IE shall be present if received from LMF.	MUTIQOS
directReportInd	boolean	C	0..1	When present, this IE shall be set for the following value: - true: location determination will be sent by LMF to GMLC directly - false (default): location determination will not be sent by LMF to GMLC directly This IE shall be present if received from LMF.	
acceptedPeriodicEventInfo	PeriodicEventInfo	C	0..1	This IE shall be present if received from LMF. When present, this IE shall provide the accepted periodic event reporting information.	

haGnssMetrics	HighAccuracyGnssMetrics	C	0..1	This IE should be included when received from LMF. When present, this IE shall indicate the high accuracy GNSS metrics for the location estimate.	
indoorOutdoorInd	IndoorOutdoorInd	O	0..1	When present, this IE shall indicate whether the UE is indoor or outdoor.	
losNlosMeasureInd	LosNlosMeasureInd	O	0..1	When present, this IE shall indicate whether LOS measurement or NLOS measurement is used.	
losNlosMeasureInd	LosNlosMeasureInd	O	0..1	When present, this IE shall indicate whether LOS measurement or NLOS measurement is used.	
relatedApplicationlayerId	ApplicationlayerId	O	0..1	Identifies the application layer ID of the related UE for ranging and sidelink positioning, such as located UE, reference UE, etc.	Ranging_SL
distanceDirection	RangeDirection	O	0..1	When present, this IE identifies a distance and direction from a point A to a point B, comprising a distance from point A to point B, an azimuth direction from point A to point B and an elevation direction from point A to point B.	Ranging_SL
2dRelativeLocation	2DRelativeLocation	O	0..1	When present, this IE identifies a relative 2D location with uncertainty ellipse, characterised by a point described in 2D local co-ordinates with origin corresponding to another known point, distances r1 and r2 and an angle of orientation A.	Ranging_SL
3dRelativeLocation	3DRelativeLocation	O	0..1	When present, this IE identifies a relative 3D location with uncertainty ellipsoid, characterised by a point described in 3D local co-ordinates with origin corresponding to another known point, distances r1 (the "semi-major uncertainty"), r2 (the "semi-minor uncertainty") and r3 (the "vertical uncertainty") and an angle of orientation A (the "angle of the major axis").	Ranging_SL
relativeVelocity	VelocityEstimate	O	0..1	When present, this IE identifies UE velocity relative to the UE identified with relatedApplicationlayerId.	Ranging_SL
integrityResult	IntegrityResult	O	0..1	This IE should be present when the integrity requirements are present in the request. When present, this IE shall indicate the integrity result.	
NOTE: The IE may be included to indicate the result of location privacy verification by UE to (H)GMLC when a location request with notification and privacy verification only indication is sent to the serving AMF by (H)GMLC during location request procedure.					

6.4.6.2.4 Type: NotifiedPosInfo

Table 6.4.6.2.4-1: Definition of type NotifiedPosInfo

Attribute name	Data type	P	Cardinality	Description	Applicability
locationEvent	LocationEvent	M	1	This IE shall contain the type of event that caused the location procedure to be initiated.	
supi	Supi	C	0..1	This IE shall contain the SUPI if available (see NOTE 1).	
gpsi	Gpsi	C	0..1	This IE shall contain the GPSI if available (see NOTE 1).	
pei	Pei	C	0..1	This IE shall contain the PEI if available (see NOTE 1).	
locationEstimate	GeographicArea	O	0..1	If present, this IE shall contain an estimate of the location of the UE in universal coordinates and the accuracy of the estimate.	
localLocationEstimate	LocalArea	O	0..1	When present, this IE shall indicate a local area in renference system.	
ageOfLocationEstimate	AgeOfLocationEstimate	O	0..1	If present, this IE shall contain an indication of how long ago the location estimate was obtained.	
timestampOfLocationEstimate	DateTime	O	0..1	When present, this IE shall indicate the estimated UTC time when the location estimate corresponded to the UE location (i.e. when the location estimate and the actual UE location was the same).	
velocityEstimate	VelocityEstimate	O	0..1	If present, this IE shall contain an estimate of the velocity of the target UE, composed by horizontal speed, vertical speed, and their respective uncertainty.	
positioningDataList	array(PositioningMethodAndUsage)	O	0..9	If present, this IE shall indicate the usage of each non-GANSS positioning method that was attempted to determine the location estimate, either successfully or unsuccessfully.	
gnssPositioningDataList	array(GnssPositioningMethodAndUsage)	O	0..9	If present, this IE shall indicate the usage of each GANSS positioning method that was attempted to determine the location estimate, either successfully or unsuccessfully.	
ecgi	Ecgi	O	0..1	If present, this IE shall contain the current EUTRAN cell location of the target UE as delivered by the 5G-AN.	
ncgi	Ncgi	O	0..1	If present, this IE shall contain the current NR cell location of the target UE, or the NR cell location of the relay UE if remoteUeInd IE is present with the value true, as delivered by the 5G-AN.	
remoteUeInd	boolean	C	0..1	This IE shall be present if received from LMF. Presence of this IE with the value false shall be prohibited.	
servingNode	NfInstanceId	O	0..1	If present, this IE shall contain the address of the serving node. For intra-5GS handover of an IMS Emergency Call, this IE shall contain the address of the target side serving node. For mobility of a UE with periodic or triggered location, this IE shall contain the address of the new serving node, if available.	
targetMmeName	DiameterIdentity	C	0..1	This IE shall be present for handover of IMS emergency call to EPS, i.e. the target node is an MME. When present, this IE shall indicate the Diameter host name of the target MME.	

targetMmeRealm	DiameterIdentity	C	0..1	This IE shall be present for handover of IMS emergency call to EPS, i.e. the target node is an MME. When present, this IE shall indicate the Diameter realm of the target MME.	
utranSrvccInd	boolean	C	0..1	This IE shall be present with value "true" for 5G-SRVCC to 3GPP UTRAN of IMS emergency call, i.e. target node is an MSC. When present, this IE shall be set for the following value: true: IMS emergency call handover to UTRAN false: No IMS emergency call handover to UTRAN	
civicAddress	CivicAddress	O	0..1	If present, this IE contains a location estimate for the target UE expressed as a Civic address.	
barometricPressure	BarometricPressure	O	0..1	If present, this IE contains the barometric pressure measurement as reported by the target UE.	
altitude	Altitude	O	0..1	If present, this IE indicates the altitude of the positioning estimate.	
hgmlcCallBackURI	Uri	C	0..1	This IE contains the callback URI of the H-GMLC This IE shall be included for a locationEvent related to deferred location when the consumer NF is not the H-GMLC.	
ldrReference	LdrReference	C	0..1	This IE contains an LDR Reference. This IE shall be included for a locationEvent related to deferred location.	
servingLMFIdentification	LMFIdentification	C	0..1	This IE contains the identification of a serving LMF and shall be included for a locationEvent related to deferred location with periodic or triggered location if a serving LMF is used.	
terminationCause	TerminationCause	C	0..1	This IE indicates a reason for termination and shall be included for a locationEvent related to deferred location if deferred location has been terminated.	
achievedQos	MinorLocationQoS	O	0..1	When present, this IE shall contain the achieved Location QoS Accuracy of the estimated location. This IE shall be present if received from LMF.	MUTIQOS
mscServerId	E164Number	O	0..1	This IE may be sent from AMF to GMLC, during a 5G-SRVCC handover from NG-RAN to UTRAN procedure. When present, it shall contain the international E.164 number of the MSC Server selected by the MME_SRVCC.	
haGnssMetrics	HighAccuracyGnssMetrics	O	0..1	This IE should be included when received from LMF. When present, this IE shall indicate the high accuracy GNSS metrics for the location estimate.	
indoorOutdoorInd	IndoorOutdoorInd	O	0..1	When present, this IE shall indicate whether the UE is indoor or outdoor.	
relatedApplicationlayerId	ApplicationlayerId	O	0..1	Identifies the application layer ID of the related UE for ranging and sidelink positioning, such as located UE, reference UE, etc.	Ranging_SL

distanceDirection	RangeDirection	O	0..1	When present, this IE identifies a distance and direction from a point A to a point B, comprising a distance from point A to point B, an azimuth direction from point A to point B and an elevation direction from point A to point B.	Ranging_SL
2dRelativeLocation	2DRelativeLocation	O	0..1	When present, this IE identifies a relative 2D location with uncertainty ellipse, characterised by a point described in 2D local co-ordinates with origin corresponding to another known point, distances r1 and r2 and an angle of orientation A.	Ranging_SL
3dRelativeLocation	3DRelativeLocation	O	0..1	When present, this IE identifies a relative 3D location with uncertainty ellipsoid, characterised by a point described in 3D local co-ordinates with origin corresponding to another known point, distances r1 (the "semi-major uncertainty"), r2 (the "semi-minor uncertainty") and r3 (the "vertical uncertainty") and an angle of orientation A (the "angle of the major axis").	Ranging_SL
relativeVelocity	VelocityEstimate	O	0..1	When present, this IE identifies UE velocity relative to the UE identified with relatedApplicationlayerId.	Ranging_SL
integrityResult	IntegrityResult	O	0..1	This IE should be present when the integrity requirements are present in the request. When present, this IE shall indicate the integrity result.	
nrppaPeriodicInd	boolean	C	0..1	This IE shall be present with the value true to indicate that the Periodic Location Estimates are generated based on NRPPa Periodic Measurement. Presence of this IE with the value false shall be prohibited.	
NOTE 1: At least one of these IEs shall be present in the message.					

6.4.6.2.5 Type: RequestLocInfo

Table 6.4.6.2.5-1: Definition of type RequestLocInfo

Attribute name	Data type	P	Cardinality	Description
req5gsLoc	boolean	C	0..1	This IE shall be present and set to "true", if 5GS location information is requested in NPLI. When present, the IE shall be set as following: - true: the location of the UE is requested - false (default): the location of the UE is not requested
reqCurrentLoc	boolean	C	0..1	This IE may be present if 5GS location information is requested in NPLI. When present, the IE shall be set as following: - true: the current location of the UE is requested - false (default): the current location of the UE is not requested
reqRatType	boolean	C	0..1	This IE shall be present and set to "true", if the RAT Type of the UE is requested in NPLI. When present, the IE shall be set as following: - true: the RAT type of the UE is requested - false (default): the RAT type of the UE is not requested
reqTimeZone	boolean	C	0..1	This IE shall be present and set to "true, if the local timezone of the UE is requested in NPLI. When present, the IE shall be set as following: - true: the local timezone of the UE is requested - false (default): the local timezone of the UE is not requested.
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.4.8 is supported.
oldGuami	Guami	C	0..1	This IE shall be present during an AMF planned removal procedure when the NF Service Consumer initiates a request towards the target AMF, for a UE associated to an AMF that is unavailable (see clause 5.21.2.2 of TS 23.501 [2]).

6.4.6.2.6 Type: ProvideLocInfo

Table 6.4.6.2.6-1: Definition of type ProvideLocInfo

Attribute name	Data type	P	Cardinality	Description
currentLoc	boolean	C	0..1	This IE shall be present, if the 5GS location information is requested by the NF Service consumer. When present, this IE shall be set as following: - true: the current location of the UE is returned - false: the last known location of the UE is returned.
location	UserLocation	O	0..1	If present, this IE shall contain the location information of the UE. This IE shall convey exactly one of the following: - E-UTRA user location - NR user location - Non-3GPP access user location. If the additionalLocation IE is present, this IE shall contain either an E-UTRA user location or NR user location.
additionalLocation	UserLocation	O	0..1	This IE shall be present if the "location IE" is present and the AMF reports both a 3GPP user location and a non-3GPP access user location. When present, this IE shall convey the non-3GPP access user location.
geoInfo	GeographicArea	O	0..1	If present, this IE shall contain the geographical information of the UE (see NOTE 1).
locationAge	AgeOfLocationEstimate	O	0..1	If present, this IE shall contain the age of the location information (see NOTE 2).
ratType	RatType	O	0..1	If present, this IE shall contain the current RAT type of the UE.
timezone	TimeZone	O	0..1	If present, this IE shall contain the local time zone of the UE.
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.4.8 is supported.
NOTE 1: If geographical information is returned by the AMF, it shall be encoded in the "geoInfo" attribute and the "geographicalInformation" attribute within the "location" attribute shall not be used. NOTE 2: If age of location estimate is returned by the AMF, it may be provided either in the "locationAge" attribute or in the "ageOfLocationInformation" attribute within the "location" attribute.				

6.4.6.2.7 Type: CancelPosInfo

Table 6.4.6.2.7-1: Definition of type CancelPosInfo

Attribute name	Data type	P	Cardinality	Description
supi	Supi	M	1	SUPI
hgmlcCallBackURI	Uri	M	1	Callback URI of the H-GMLC
ldrReference	LdrReference	M	1	LDR Reference
servingLMFIdentification	LMFIdentification	C	0..1	Serving LMF identification. This IE shall be included if available.
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.4.8 is supported.
nrppaPeriodicInd	boolean	C	0..1	This IE shall be present with the value true if the LMF has indicated that the Periodic Location Estimates are generated based on NRPPa Periodic Measurement. Presence of this IE with the value false shall be prohibited.
hgmlcAddr	IpAddr	C	0..1	This IE shall be included when the H-GMLC Callback URI is not available in the UE for the Deferred Location to be cancelled, i.e. the Deferred Location was initiated in EPS and the UE moved to 5GS later. When present, this IE shall include the H-GMLC Address (i.e. the RLP Server Address) previously provided to the UE when initiating the deferred location (to be cancelled) in EPS.
epsLdrReference	EpsLdrReference	C	0..1	This IE shall be included when the LDR Reference is not available in the UE for the Deferred Location to be cancelled, i.e. the Deferred Location was initiated in EPS and the UE moved to 5GS later. When present, this IE shall include the EPS LDR Reference previously provided to the UE when initiating the deferred location in EPS.
NOTE: When the hgmlcAddr IE and the epsLdrReference IE are present, the hgmlcCallbackURI IE and the ldrReference IE shall be to dummy values and shall be ignored.				

6.4.6.2.8 Type: ProblemDetailsProvidePosInfo

Table 6.4.6.2.8-1: Definition of type ProblemDetailsProvidePosInfo as a list of to be combined data types

Data type	Cardinality	Description	Applicability
ProblemDetails	1	Detail information of the problem	
ProvidePosInfo	1	Additional information to be returned in error response. (See clause 6.19.1 of 3GPP 23.273 [42]).	

6.4.6.2.9 Type: AddProvidePosInfos

Table 6.1.6.2.9-1: Definition of type AddProvidePosInfos

Attribute name	Data type	P	Cardinality	Description	Applicability
addProvidePosInfos	array(ProvidePosInfo)	O	1..N	Contains a set of ProvidePosInfo.	

6.4.6.2.10 Type: AddNotifiedPosInfos

Table 6.1.6.2.10-1: Definition of type AddNotifiedPosInfos

Attribute name	Data type	P	Cardinality	Description	Applicability
addNotifiedPosInfos	array(NotifiedPosInfo)	O	1..N	Contains a set of NotifiedPosInfo.	

6.4.6.2.11 Type: ProvidePosInfoExt

Table 6.4.6.2.11-1: Definition of type ProvidePosInfoExt as a list of data types to be combined

Data type	Cardinality	Description	Applicability
ProvidePosInfo	1	Positioning information	
AddProvidePosInfos	1	Additional positioning information	

6.4.6.2.12 Type: NotifiedPosInfoExt

Table 6.4.6.2.12-1: Definition of type NotifiedPosInfoExt as a list of data types to be combined data

Data type	Cardinality	Description	Applicability
NotifiedPosInfo	1	Positioning event notify	
AddNotifiedPosInfos	1	Additional positioning event(s) notify	

6.4.6.3 Simple data types and enumerations

6.4.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

6.4.6.3.2 Simple data types

The simple data types defined in table 6.4.6.3.2-1 shall be supported.

Table 6.4.6.3.2-1: Simple data types

Type Name	Type Definition	Description

6.4.6.3.3 Enumeration: LocationType

The enumeration LocationType represents the type of location measurement requested.

Table 6.4.6.3.3-1: Enumeration LocationType

Enumeration value	Description
"CURRENT_LOCATION"	This value indicates that the current location of the target UE is required.
"CURRENT_OR_LAST_KNOWN_LOCATION"	This value indicates that the current location or last known location of the target UE is required.
"NOTIFICATION_VERIFICATION_ONLY"	This value indicates that notification or verification of location by the target UE is required but a location estimate shall not be obtained.
"DEFERRED_LOCATION"	Deferred Location Request

6.4.6.3.4 Enumeration: LocationEvent

The enumeration LocationEvent represents the type of events initiating location procedures.

Table 6.4.6.3.4-1: Enumeration LocationEvent

Enumeration value	Description
"EMERGENCY_CALL_ORIGINATION"	Emergency session initiation
"EMERGENCY_CALL_RELEASE"	Emergency session termination
"EMERGENCY_CALL_HANDOVER"	Handover of an Emergency session
"ACTIVATION_OF_DEFERRED_LOCATION"	Confirmation of activation of periodic or triggered location in the target UE
"UE_MOBILITY_FOR_DEFERRED_LOCATION"	Mobility of the target UE to a different NF
"CANCELLATION_OF_DEFERRED_LOCATION"	Cancellation of a deferred location request

6.4.6.3.5 Enumeration: LocationPrivacyVerResult

The enumeration LocationPrivacyVerResult represents the type of the result of location privacy verification or represents the type of the result of ranging and sidelink positioning privacy verification by UE.

Table 6.4.6.3.5-1: Enumeration LocationPrivacyVerResult

Enumeration value	Description
"LOCATION_ALLOWED"	Location is allowed by UE
"LOCATION_NOT_ALLOWED"	Location is not allowed by UE
"RESPONSE_TIME_OUT"	UE response times out
"RANGING_ALLOWED"	Ranging and sidelink positioning is allowed by UE
"RANGING_NOT_ALLOWED"	Ranging and sidelink positioning is not allowed by UE

6.4.6.3.6 Enumeration: LpHapType

The enumeration LpHapType represents the type of the Low Power and/or High Accuracy Positioning.

Table 6.4.6.3.6-1: Enumeration LpHapType

Enumeration value	Description
"LOW_POW_HIGH_ACCU_POS"	Low Power and High Accuracy Positioning

6.4.7 Error Handling

6.4.7.1 General

HTTP error handling shall be supported as specified in clause 5.2.4 of TS 29.500 [4].

6.4.7.2 Protocol Errors

Protocol Error Handling shall be supported as specified in clause 5.2.7 of TS 29.500 [4].

6.4.7.3 Application Errors

The common application errors defined in the Table 5.2.7.2-1 in TS 29.501 [5] may also be used for the Namf_Location service, and the following application errors listed in Table 6.4.7.3-1 are specific for the Namf_Location service.

Table 6.4.7.3-1: Application errors

Application Error	HTTP status code	Description
USER_UNKNOWN	403 Forbidden	The user is unknown.
DETACHED_USER	403 Forbidden	The user is detached (i.e. it is in RM-DEREGISTERED state) in the AMF.
POSITIONING_DENIED	403 Forbidden	The positioning procedure was denied.
UNSPECIFIED	403 Forbidden	The request is rejected due to unspecified reasons.
LOCATION_SESSION_UNKNOWN	403 Forbidden	The location session is unknown.
REQUESTED_LMF_NOT_AVAILABLE	403 Forbidden	The request is rejected due to the AMF not being able to access the requested LMF.
CONTEXT_NOT_FOUND	404 Not Found	The requested UE Context does not exist in the AMF.
HO_TO_EPS	409 Conflict	The request is rejected due to a handover from 5GS to EPS.
POSITIONING_FAILED	500 Internal Server Error	The positioning procedure failed.
UNREACHABLE_USER	504 Gateway Timeout	The user could not be reached in order to perform positioning procedure.
PEER_NOT_RESPONDING	504 Gateway Timeout	No response is received from a remote peer, e.g. from the LMF.

6.4.8 Feature Negotiation

The feature negotiation mechanism specified in clause 6.6 of TS 29.500 [4] shall be used to negotiate the features applicable between the AMF and the NF Service Consumer, for the Namf_Location service, if any.

The NF Service Consumer shall indicate the features it supports for the Namf_Location service, if any, by including the supportedFeatures attribute in content of the HTTP Request Message for following service operations:

- ProvidePositioningInfo, as specified in clause 5.5.2.2;
- ProvideLocationInfo, as specified in clause 5.5.2.4;
- CancelLocation, as specified in clause 5.5.2.5

The AMF shall determine the supported features for the service operations as specified in clause 6.6 of TS 29.500 [4] and shall indicate the supported features by including the supportedFeatures attribute in content of the HTTP response for the service operation.

The syntax of the supportedFeatures attribute is defined in clause 5.2.2 of TS 29.571 [6].

The following features are defined for the Namf_Location service.

Table 6.4.8-1: Features of supportedFeatures attribute used by Namf_Location service

Feature Number	Feature	M/O	Description
1	ES3XX	M	Extended Support of HTTP 307/308 redirection An NF Service Consumer (e.g. GMLC) that supports this feature shall support handling of HTTP 307/308 redirection for any service operation of the Namf_Location service. An NF Service Consumer that does not support this feature does only support HTTP redirection as specified for 3GPP Release 15.
2	MUTIQOS	O	Support of Multiple Location QoSes. This feature bit indicates the support of more than one Location QoSes during consuming location service.
3	Ranging_ SL	O	Support of Ranging and Sidelink Positioning This feature indicates the support of Ranging and Sidelink Positioning.
4	POSGPSI	M	Provided Positioning Information for GPSI An AMF supporting this feature shall allow the NF Service Consumer (e.g. GMLC) to retrieve the UE positioning information using the GPSI of the UE.
Feature number: The order number of the feature within the supportedFeatures attribute (starting with 1). Feature: A short name that can be used to refer to the bit and to the feature. M/O: Defines if the implementation of the feature is mandatory ("M") or optional ("O"). Description: A clear textual description of the feature.			

6.4.9 Security

As indicated in TS 33.501 [27], the access to the Namf_Location API may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [28]), using the "Client Credentials" authorization grant, where the NRF (see TS 29.510 [29]) plays the role of the authorization server.

If Oauth2 authorization is used, an NF Service Consumer, prior to consuming services offered by the Namf_Location API, shall obtain a "token" from the authorization server, by invoking the Access Token Request service, as described in TS 29.510 [29], clause 5.4.2.2.

NOTE: When multiple NRFs are deployed in a network, the NRF used as authorization server is the same NRF that the NF Service Consumer used for discovering the Namf_Location service.

The Namf_Location API defines scopes for OAuth2 authorization as specified in TS 33.501 [27]; it defines a single scope consisting on the name of the service (i.e., "namf-loc"), and it does not define any additional scopes at resource or operation level.

6.4.10 HTTP redirection

An HTTP request may be redirected to a different AMF service instance, within the same AMF or a different AMF of an AMF set, e.g. when an AMF service instance is part of an AMF (service) set or when using indirect communications (see TS 29.500 [4]). See the ES3XX feature in clause 6.4.8.

An SCP that reselects a different AMF producer instance will return the NF Instance ID of the new AMF producer instance in the 3gpp-Sbi-Producer-Id header, as specified in clause 6.10.3.4 of TS 29.500 [4].

If an AMF within an AMF set redirects a service request to a different AMF of the set using an 307 Temporary Redirect or 308 Permanent Redirect status code, the identity of the new AMF towards which the service request is redirected shall be indicated in the 3gpp-Sbi-Target-Nf-Id header of the 307 Temporary Redirect or 308 Permanent Redirect response as specified in clause 6.10.9.1 of TS 29.500 [4].

6.5 Namf_MBSBroadcast Service API

6.5.1 API URI

The Namf_MBSBroadcast service shall use the Namf_MBSBroadcast API.

The API URI of the Namf_MBSBroadcast API shall be:

{apiRoot}/<apiName>/<apiVersion>

The request URI used in HTTP requests from the NF service consumer towards the NF service producer shall have the Resource URI structure defined in clause 4.4.1 of TS 29.501 [5], i.e.:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>

with the following components:

- The {apiRoot} shall be set as described in TS 29.501 [5].
- The <apiName> shall be "namf-mbs-bc".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 6.5.3.

6.5.2 Usage of HTTP

6.5.2.1 General

HTTP/2, as defined in IETF RFC 9113 [19], shall be used as specified in clause 5 of TS 29.500 [4].

HTTP/2 shall be transported as specified in clause 5.3 of TS 29.500 [4].

HTTP messages and bodies for the Namf_MBSBroadcast service shall comply with the OpenAPI [23] specification contained in Annex A.

6.5.2.2 HTTP standard headers

6.5.2.2.1 General

The usage of HTTP standard headers shall be supported as specified in clause 5.2.2 of TS 29.500 [4].

6.5.2.2.2 Content type

The following content types shall be supported:

- JSON, as defined in IETF RFC 8259 [8], shall be used as content type of the HTTP bodies specified in the present specification as indicated in clause 5.4 of TS 29.500 [4].
- The Problem Details JSON Object (IETF RFC 9457 [36]). The use of the Problem Details JSON object in a HTTP response body shall be signalled by the content type "application/problem+json".

Multipart messages shall also be supported (see clause 6.5.2.4) using the content type "multipart/related", comprising:

- one JSON body part with the "application/json" content type; and
- one or more binary body parts with 3gpp vendor specific content subtypes.

The 3gpp vendor specific content subtypes defined in Table 6.5.2.2.2-1 shall be supported.

Table 6.5.2.2.2-1: 3GPP vendor specific content subtypes

content subtype	Description
vnd.3gpp.ngap	Binary encoded content, encoding NG Application Protocol (NGAP) IEs, as specified in clause 9.3 of TS 38.413 [9] (ASN.1 encoded).
NOTE: Using 3GPP vendor content subtypes allows to describe the nature of the opaque content (i.e. NGAP information) without having to rely on metadata in the JSON content.	

See clause 6.5.2.4 for the binary contents supported in the binary body part of multipart messages.

6.5.2.3 HTTP custom headers

6.5.2.3.1 General

In this release of this specification, no custom headers specific to the Namf_MBSBroadcast service are defined. For 3GPP specific HTTP custom headers used across all service-based interfaces, see clause 5.2.3 of TS 29.500 [4].

6.5.2.4 HTTP multipart messages

HTTP multipart messages shall be supported, to transfer opaque N2 Information in the following service operations (and HTTP messages):

- ContextCreate Request and Response (POST);
- ContextUpdate Request and Response (POST);
- ContextStatusNotify service operation (POST).

HTTP multipart messages shall include one JSON body part and one or more binary body parts comprising:

- N2 payload (see clause 6.5.6.4).

The JSON body part shall be the "root" body part of the multipart message. It shall be encoded as the first body part of the multipart message. The "Start" parameter does not need to be included.

The multipart message shall include a "type" parameter (see IETF RFC 2387 [9]) specifying the media type of the root body part, i.e. "application/json".

NOTE: The "root" body part (or "root" object) is the first body part the application processes when receiving a multipart/related message, see IETF RFC 2387 [9]. The default root is the first body within the multipart/related message. The "Start" parameter indicates the root body part, e.g. when this is not the first body part in the message.

For each binary body part in a HTTP multipart message, the binary body part shall include a Content-ID header (see IETF RFC 2045 [10]), and the JSON body part shall include an attribute, defined with the RefToBinaryData type, that contains the value of the Content-ID header field of the referenced binary body part.

6.5.3 Resources

6.5.3.1 Overview

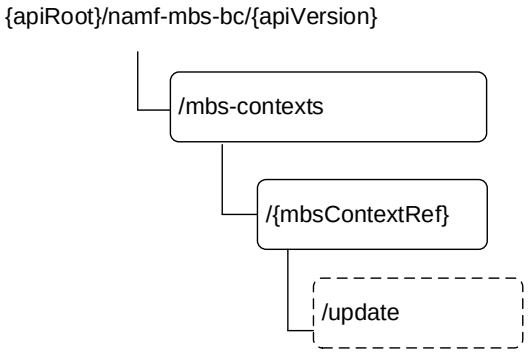


Figure 6.5.3.1-1: Resource URI structure of the Namf_MBSBroadcast Service API

Table 6.5.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 6.5.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method or custom operation	Description (service operation)
Broadcast MBS session contexts collection	/mbs-contexts	POST	ContextCreate
Individual broadcast MBS session context	/mbs-contexts/{mbsContextRef}/update	update (POST)	ContextUpdate
	/mbs-contexts/{mbsContextRef}	DELETE	ContextRelease

6.5.3.2 Resource: Broadcast MBS session contexts collection

6.5.3.2.1 Description

This resource represents a collection of Broadcast MBS session contexts created by NF service consumers of the Namf_MBSBroadcast service.

This resource is modelled as the Collection resource archetype (see clause C.2 of TS 29.501 [5]).

6.5.3.2.2 Resource Definition

Resource URI: **{apiRoot}/namf-mbs-bc/<apiVersion>/mbs-contexts**

This resource shall support the resource URI variables defined in table 6.5.3.2.2-1.

Table 6.5.3.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.5.1
apiVersion	string	See clause 6.5.1.

6.5.3.2.3 Resource Standard Methods

6.5.3.2.3.1 POST

This method shall support the URI query parameters specified in table 6.5.3.2.3.1-1.

Table 6.5.3.2.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 6.5.3.2.3.1-2 and the response data structures and response codes specified in table 6.5.3.2.3.1-3.

Table 6.5.3.2.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
ContextCreateReqData	M	1	Data within ContextCreate Request

Table 6.5.3.2.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
ContextCreateRspData	M	1	201 Created	Successful creation of a broadcast MBS context
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.5.3.2.3.1-4: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/namf-mbs-bc/<apiVersion>/mbs-contexts/{mbsContextRef}

Table 6.5.3.2.3.1-5: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.5.3.2.3.1-6: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.5.3.2.4 Resource Custom Operations

None.

6.5.3.3 Resource: Individual broadcast MBS session context

6.5.3.3.1 Description

This resource represents an Individual broadcast MBS session context created by an NF service consumer of the Namf_MBSBroadcast service.

This resource is modelled as the Document resource archetype (see clause C.2 of TS 29.501 [5]).

6.5.3.3.2 Resource Definition

Resource URI: **{apiRoot}/namf-mbs-bc/<apiVersion>/mbs-contexts/{mbsContextRef}**

This resource shall support the resource URI variables defined in table 6.5.3.3.2-1.

Table 6.5.3.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.5.1
apiVersion	string	See clause 6.5.1
mbsContextRef	string	String identifying an individual broadcast MBS session context

6.5.3.3.3 Resource Standard Methods

6.5.3.3.3.1 DELETE

This method shall support the URI query parameters specified in table 6.5.3.3.3.1-1.

Table 6.5.3.3.3.1-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 6.5.3.3.3.1-2 and the response data structures and response codes specified in table 6.5.3.3.3.1-3.

Table 6.5.3.3.3.1-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 6.5.3.3.3.1-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful deletion of a broadcast MBS context
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.5.3.3.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.5.3.3.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.5.3.3.4 Resource Custom Operations

6.5.3.3.4.1 Overview

Table 6.5.3.3.4.1-1: Custom operations

Operation Name	Custom operaration URI	Mapped HTTP method	Description
update	/mbscontexts/{mbsContextRef}/update	POST	ContextUpdate service operation

6.5.3.3.4.2 Operation: update (POST)

6.5.3.3.4.2.1 Description

This {mbsContextRef} identifies the individual broadcast MBS session context to be updated.

6.5.3.3.4.2.2 Operation Definition

This operation shall support the request data structures specified in table 6.5.3.3.4.2.2-1 and the response data structure and response codes specified in table 6.5.3.3.4.2.2-2.

Table 6.5.3.3.4.2.2-1: Data structures supported by (POST) the update operation Request Body

Data type	P	Cardinality	Description
ContextUpdateReqData	M	1	Data within the ContextUpdate Request

Table 6.5.3.3.4.2.2-2: Data structures supported by the (POST) update operation Response Body

Data type	P	Cardinality	Response codes	Description
ContextUpdateRspData	M	1	200 OK	Successful update of the broadcast MBS session context, with content in the response
n/a			204 No Content	Successful update of the broadcast MBS session context, without content in the response
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.5.3.3.4.2.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.5.3.3.4.2.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.5.4 Custom Operations without associated resources

There are no custom operations without associated resources supported by the Namf_MBSBroadcast Service in this release of the specification.

6.5.5 Notifications

6.5.5.1 General

This clause specifies the notifications provided by the Namf_MBSBroadcast service.

Table 6.5.5.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
Broadcast MBS Session Context Status Notification	{notifyUri}	POST	ContextStatusNotify

6.5.5.2 Broadcast MBS Session Context Status Notification

6.5.5.2.1 Description

The Broadcast MBS session context notification is used by the AMF to report one or several status changes of a Broadcast MBS session context to a NF service consumer.

6.5.5.2.2 Target URI

The Callback URI **"{notifyUri}"** shall be used with the callback URI variables defined in table 6.5.5.2.2-1.

Table 6.5.5.2.2-1: Callback URI variables

Name	Definition
notifyUri	String formatted as URI with the Callback URI

6.5.5.2.3 Notification Standard Methods

6.5.5.2.3.1 POST

This method shall support the request data structures specified in table 6.5.5.2.3.1-1 and the response data structures and response codes specified in table 6.5.5.2.3.1-2.

Table 6.5.5.2.3.1-2: Data structures supported by the POST Request Body

Data type	P	Cardinality	Description
ContextStatusNotification	M	1	Represents the notification to be delivered

Table 6.5.5.2.3.1-3: Data structures supported by the POST Response Body

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful response without content
ContextStatusNotificationResponse	M	1	200 OK	Successful response with content
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.5.5.2.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer to which the notification should be sent
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.5.5.2.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer to which the notification should be sent
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.5.6 Data Model

6.5.6.1 General

This clause specifies the application data model supported by the API.

Table 6.5.6.1-1 specifies the data types defined for the Namf_MBSBroadcast service based interface protocol.

Table 6.5.6.1-1: Namf_MBSBroadcast specific Data Types

Data type	Clause defined	Description
ContextCreateReqData	6.5.6.2.2	Data within ContextCreate Request
ContextCreateRspData	6.5.6.2.3	Data within ContextCreate Response
ContextStatusNotification	6.5.6.2.4	Data within ContextStatusNotify Request
ContextUpdateReqData	6.5.6.2.5	Data within ContextUpdate Request
ContextUpdateRspData	6.5.6.2.6	Data within ContextUpdate Response
N2MbsSmInfo	6.5.6.2.7	N2 MBS Session Management Information
OperationEvent	6.5.6.2.8	Operation Event
NgranFailureEvent	6.5.6.2.9	NG-RAN failure event
ContextStatusNotificationResponse	6.5.6.2.10	Data within ContextStatusNotify Response
OperationStatus	6.5.6.3.3	Operation Status
NgapIeType	6.5.6.3.4	NGAP Information Element Type
OpEventType	6.5.6.3.5	Operation Event Type
NgranFailureIndication	6.5.6.3.6	Indication of a NG-RAN failure event

Table 6.5.6.1-2 specifies data types re-used by the Namf service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the Namf_MBSBroadcast service based interface.

Table 6.5.6.1-2: Namf_MBSBroadcast re-used Data Types

Data type	Reference	Comments
MbsSessionId	TS 29.571 [6]	MBS Session Id
AreaSessionId	TS 29.571 [6]	Area Session Id
MbsServiceArea	TS 29.571 [6]	MBS Service Area
RefToBinaryData	TS 29.571 [6]	Reference to binary body part
Uri	TS 29.571 [6]	URI
DurationSec	TS 29.571 [6]	Duration in seconds
MbsServiceAreaInfo	TS 29.571 [6]	MBS Service Area Information for a Location dependent MBS session
GlobalRanNodeId	TS 29.571 [6]	Global RAN Node Identifier
AssociatedSessionId	TS 29.571 [6]	Associated Session ID

6.5.6.2 Structured data types

6.5.6.2.1 Introduction

Structured data types used in Namf_MBSBroadcast service are specified in this clause.

6.5.6.2.2 Type: ContextCreateReqData

Table 6.5.6.2.2-1: Definition of type ContextCreateReqData

Attribute name	Data type	P	Cardinality	Description
mbsSessionId	MbsSessionId	M	1	MBS Session ID
mbsServiceArea	MbsServiceArea	C	0..1	MBS Service Area This IE shall be present if this is a Local broadcast MBS session. (NOTE 1)
mbsServiceAreaInfoList	array(MbsServiceAreaInfo)	C	1..N	List of MBS service areas and their related Area Session IDs. This IE shall be present if this is a Location dependent broadcast MBS service. (NOTE 1)
n2MbsSmInfo	N2MbsSmInfo	M	1	This IE shall be present and shall contain N2 MBS Session Management related information.(see clause 6.5.6.4).
notifyUri	Uri	M	1	This IE shall contain the notification URI where to be notified about the status change of the broadcast MBS session context.
maxResponseTime	DurationSec	O	0..1	Maximum response time (in seconds) to receive information about the completion of the Broadcast MBS session establishment.
snssai	Snssai	M	1	This IE shall be included to indicate the S-NSSAI of the MBS session. (NOTE 2).
mbsmfId	NfInstanceId	O	0..1	This IE may be present to contain the NF Instance ID of the MB-SMF.
mbsmfServiceInstId	string	O	0..1	This IE may be present to contain the NF Service Instance ID within the NF Instance of the MB-SMF.
associatedSessionId	AssociatedSessionId	O	0..1	Associated Session ID to enable NG-RAN to identify the multiple MBS sessions delivering the same content when AF creates multiple broadcast MBS Sessions via different Core Networks to deliver the same content.
NOTE 1: Either the mbsServiceAreaInfoList IE or the mbsServiceArea IE shall be present. NOTE 2: If an MB-SMF does not receive the S-NSSAI from the NEF/MBSF, the MB-SMF shall include a pre-configured default SNSSAI.				

6.5.6.2.3 Type: ContextCreateRspData

Table 6.5.6.2.3-1: Definition of type ContextCreateRspData

Attribute name	Data type	P	Cardinality	Description
mbsSessionId	MbsSessionId	M	1	MBS session identifier.
n2MbsSmInfoList	array(N2MbsSmInfo)	O	1..10	When present, this IE shall contain N2 MBS Session Management related information.(see clause 6.5.6.4).
operationStatus	OperationStatus	C	0..1	This IE shall be present and indicate the completion of the MBS session start operation, if the AMF received the NG-RAN responses from all involved NG-RAN(s). (NOTE)
NOTE: If this IE is not present, it indicates either of the following conditions (a) not all response are received from NG-RANs, while the maximum response timer is still running, or (b) the AMF has not received the maximum response timer in the request from the MB-SMF and not all response are received from NG-RANs.				

6.5.6.2.4 Type: ContextStatusNotification

Table 6.5.6.2.4-1: Definition of type ContextStatusNotification

Attribute name	Data type	P	Cardinality	Description
mbsSessionId	MbsSessionId	M	1	MBS Session ID
areaSessionId	AreaSessionId	C	0..1	Area Session ID This IE shall be present if this is a Location dependent broadcast MBS service.
n2MbsSmInfoList	array(N2MbsSmInfo)	O	1..10	When present, this IE shall contain N2 MBS Session Management related information.(see clause 6.5.6.4).
operationStatus	OperationStatus	C	0..1	This IE shall be present and indicate the completion of the MBS session start or update operation, if the NF Service Consumer has requested to establish or update the Broadcast MBS session context and a response has been received from all NG-RANs. This IE shall be present and indicate the incompletion of the MBS session start or update operation, if the NF Service Consumer has requested to establish or update the Broadcast MBS session context within a maximum response time and the AMF has not received responses from all NG-RANs before the maximum response time elapses. (NOTE)
operationEvents	array(OperationEvent)	O	1..N	This IE may be present to report a list of operation events related to the Broadcast MBS Session, e.g., when the Broadcast MBS Session is released in one of NG-RANs as required by the NG-RAN, a failure of a NG-RAN.
releasedInd	boolean	C	0..1	This shall be present and set to "true" if all NG-RANs serving the Broadcast MBS session requested the AMF to release the Broadcast MBS session and the Broadcast MBS session (context) has been released in the AMF.

NOTE: If this IE is not present, it indicates either of the following conditions (a) not all response are received from NG-RANs, while the maximum response timer is still running, or (b) the AMF has not received the maximum response timer in the request from the MB-SMF and not all response are received from NG-RANs.

6.5.6.2.5 Type: ContextUpdateReqData

Table 6.5.6.2.5-1: Definition of type ContextUpdateReqData

Attribute name	Data type	P	Cardinality	Description
mbsServiceArea	MbsServiceArea	O	0..1	MBS Service Area This IE may be present for a Location independent broadcast MBS session. (NOTE)
mbsServiceAreaInfoList	array(MbsServiceAreaInfo)	O	1..N	List of MBS service areas and their related Area Session IDs. This IE may be present for a Local broadcast MBS service. (NOTE)
n2MbsSmInfo	N2MbsSmInfo	O	0..1	When present, this IE shall contain N2 MBS Session Management related information.(see clause 6.5.6.4).
ranIdList	array(GlobalRanNodeId)	O	1..N	This IE may be included when the MBS session update is to be performed only in a list of specific NG-RAN(s) as specified in clause 8.3.2.3 of TS 23.527 [33]).
noNgapSignallingInd	boolean	O	0..1	This IE may be present during the restoration procedure to select an alternative AMF for a Broadcast MBS Session at AMF failure as specified in clause 8.3.2.4 of TS 23.527 [33]). When present, this IE shall be set as following: - true: the AMF may consider to not trigger a NGAP signaling message to any NG-RAN.
notifyUri	Uri	O	0..1	When present, this IE shall contain the notification URI where to be notified about the status change of the broadcast MBS session context.
maxResponseTime	DurationSec	O	0..1	Maximum response time (in seconds) to receive information about the completion of the Broadcast MBS session update.
n2MbsInfoChangeInd	boolean	O	0..1	When present, this IE shall indicate whether the information within the N2 MBS Session Management container has changed or not, as follows: - true: the information has changed; - false: the information has not changed.
NOTE: Either the mbsServiceAreaInfoList IE or the mbsServiceArea IE may be present.				

6.5.6.2.6 Type: ContextUpdateRspData

Table 6.5.6.2.6-1: Definition of type ContextUpdateRspData

Attribute name	Data type	P	Cardinality	Description
n2MbsSmInfoList	array(N2MbsSmInfo)	O	1..10	When present, this IE shall contain N2 MBS Session Management related information.(see clause 6.5.6.4).
operationStatus	OperationStatus	C	0..1	This IE shall be present and indicate the completion of the MBS session start operation, if the AMF received the NG-RAN responses from all involved NG-RAN(s). (NOTE)
NOTE: If this IE is not present, it indicates either of the following conditions (a) not all response are received from NG-RANs, while the maximum response timer is still running, or (b) the AMF has not received the maximum response timer in the request from the MB-SMF and not all response are received from NG-RANs.				

6.5.6.2.7 Type: N2MbsSmInfo

Table 6.5.6.2.7-1: Definition of type N2MbsSmInfo

Attribute name	Data type	P	Cardinality	Description
ngapIeType	NgapIeType	M	1	This IE shall indicate the NGAP IE type of the ngapData as specified in clause 6.5.6.3.4.
ngapData	RefToBinaryData	M	1	This IE shall contain the reference to the binary data part carrying the NGAP data.
ranId	GlobalRanNodeId	M	1	This IE shall indicate the Global RAN ID of the gNB that generated the N2 MBS Session Management related information, or of the gNB towards which the N2 MBS Session Management related information is to be sent. The IE shall be present when the N2MbsSmInfo is included in the ContextCreate Response, ContextUpdate Response, or ContextStatusNotify Request messages which are sent from the AMF to the NF service consumer (e.g., MB-SMF). The IE shall be present when the N2MbsSmInfo is included in the ContextStatusNotify Response messages which are sent from the NF service consumer (e.g., MB-SMF) to the AMF.

6.5.6.2.8 Type: OperationEvent

Table 6.5.6.2.8-1: Definition of type OperationEvent

Attribute name	Data type	P	Cardinality	Description
opEventType	OpEventType	M	1	Indicates the event type of an operation event related to the Broadcast MBS Session.
amfId	NfInstanceId	C	0..1	This IE shall be present to contain the NF Instance ID of the AMF sending the Context Status Notify Request message if the operation event type indicates an AMF change event.
ngranFailureEventList	array(NgranFailureEvent)	C	1..N	This IE shall be present if the event type is related to a NG-RAN.

6.5.6.2.9 Type: NgranFailureEvent

Table 6.5.6.2.9-1: Definition of type NgranFailureEvent

Attribute name	Data type	P	Cardinality	Description
ngranId	GlobalRanNodeId	M	1	Indicates the identity of the RAN node. The IE shall contain the gNB ID.
ngranFailureIndication	NgranFailureIndication	M	1	This IE shall contain the information related to the NG-RAN failure.

6.5.6.2.10 Type: ContextStatusNotificationResponse

Table 6.5.6.2.10-1: Definition of type ContextStatusNotificationResponse

Attribute name	Data type	P	Cardinality	Description
mbsSessionId	MbsSessionId	M	1	MBS Session ID
areaSessionId	AreaSessionId	C	0..1	Area Session ID This IE shall be present if this is a Location dependent broadcast MBS service.
n2MbsSmInfoList	array(N2MbsSmInfo)	O	1..10	When present, this IE shall contain N2 MBS Session Management related information.(see clause 6.5.6.4).

6.5.6.3 Simple data types and enumerations

6.5.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

6.5.6.3.2 Simple data types

The simple data types defined in table 6.5.6.3.2-1 shall be supported.

Table 6.5.6.3.2-1: Simple data types

Type Name	Type Definition	Description

6.5.6.3.3 Enumeration: OperationStatus

The enumeration OperationStatus represents the status of a Broadcast MBS session start or update operation.

Table 6.5.6.3.3-1: Enumeration OperationStatus

Enumeration value	Description
"MBS_SESSION_START_COMPLETE"	This value indicates the completion of the Broadcast MBS session establishment, i.e. that the AMF has received a response from all NG-RANs.
" MBS_SESSION_START_INCOMPLETE"	This value indicates the incompletion of the Broadcast MBS session establishment because the AMF has not received responses from all NG-RANs before the maximum response time that was indicated in the request elapses.
"MBS_SESSION_UPDATE_COMPLETE"	This value indicates the completion of the Broadcast MBS session update, i.e. that the AMF has received a response from all NG-RANs.
" MBS_SESSION_UPDATE_INCOMPLETE"	This value indicates incompletion of the Broadcast MBS session update because the AMF has not received responses from all NG-RANs before the maximum response time that was indicated in the request elapses.

6.5.6.3.4 Enumeration: NgapIeType

Table 6.5.6.3.4-1: Enumeration NgapIeType

Enumeration value	Description
"MBS_SES_REQ"	MBS Session Setup or Modification Request Transfer
"MBS_SES_RSP"	MBS Session Setup or Modification Response Transfer
"MBS_SES_FAIL"	MBS Session Setup or Modification Failure Transfer
"MBS_SES_REL_RSP"	MBS Session Release Response Transfer
"BC_TRA_REQ"	Broadcast Transport Request Transfer
"BC_TRA_RSP"	Broadcast Transport Response Transfer
"BC_TRA_FAIL"	Broadcast Transport Failure Transfer

6.5.6.3.5 Enumeration: OpEventType

Table 6.5.6.3.5-1: Enumeration: OpEventType

Enumeration value	Description
"AMF_CHANGE"	This value indicates that the AMF has taken over of the Broadcast MBS Session.
"NG_RAN_EVENT"	This value indicates that an event related to a NG-RAN for the Broadcast MBS Session has taken place.

6.5.6.3.6 Enumeration: NgranFailureIndication

The enumeration NgranFailureIndication indicates a NG-RAN failure event.

Table 6.5.6.3.6-1: Enumeration NgranFailureIndication

Enumeration value	Description
"NG_RAN_RESTART_OR_START"	This value indicates that the AMF has detected a (re)start of a NG-RAN.
"NG_RAN_FAILURE_WITHOUT_RESTART"	This value indicates that the AMF has detected a NG-RAN failure without a restart.
"NG_RAN_NOT_REACHABLE"	This value indicates that the AMF has failed to reach the NG-RAN when sending a NGAP MBS Session Setup/Modification/Release Request message.
"NG_RAN_REQUIRED_RELEASE"	This value indicates that the NG-RAN has requested to release the Broadcast MBS Session in the NG-RAN.

6.5.6.4 Binary data

6.5.6.4.1 Introduction

This clause defines the binary data that shall be supported in a binary body part in an HTTP multipart message (see clauses 6.5.2.2.2 and 6.5.2.4).

Table 6.5.6.4.1-1: Binary Data Types

Name	Clause defined	Content type
N2 MBS Session Management Information	6.5.6.4.2	vnd.3gpp.ngap

6.5.6.4.2 N2 Information

6.5.6.4.2.1 Introduction

N2 Information shall encode NG Application Protocol (NGAP) IEs, as specified in clause 9.3.5 of TS 38.413 [12] (ASN.1 encoded), using the vnd.3gpp.ngap content-type.

6.5.6.4.2.2 NGAP IEs

N2 Information may encode following NGAP MB-SMF related IE specified in clause 9.3.5 of TS 38.413 [12], as summarized in Table 6.5.6.4.2.2-1.

Table 6.5.6.4.2.2-1: N2 Information content for class MBS-SM

NGAP IE	Reference (TS 38.413 [12])	Related NGAP message
MBS Session Setup or Modification Request Transfer	9.3.5.3	BROADCAST SESSION SETUP REQUEST BROADCAST SESSION MODIFICATION REQUEST
MBS Session Setup or Modification Response Transfer	9.3.5.5	BROADCAST SESSION SETUP RESPONSE BROADCAST SESSION MODIFICATION RESPONSE
MBS Session Setup or Modification Failure Transfer	9.3.5.6	BROADCAST SESSION SETUP FAILURE BROADCAST SESSION MODIFICATION FAILURE
MBS Session Release Response Transfer	9.3.5.14	BROADCAST SESSION RELEASE RESPONSE (NOTE)
Broadcast Transport Request Transfer	9.3.5.15	BROADCAST SESSION TRANSPORT REQUEST
Broadcast Transport Response Transfer	9.3.5.16	BROADCAST SESSION TRANSPORT RESPONSE
Broadcast Transport Failure Transfer	9.3.5.17	BROADCAST SESSION TRANSPORT FAILURE
NOTE: An MBS Session Release Response Transfer IE shall only be sent to the MB-SMF during a Broadcast MBS Session Release Require procedure (see clause 7.3.6 of TS 23.247 [55]), when unicast transport applies over N3mb, to transfer the DL F-TEID of the NG-RAN node in which the MBS session has been released and towards which the delivery of MBS data shall be stopped.		

6.5.7 Error Handling

6.5.7.1 General

HTTP error handling shall be supported as specified in clause 5.2.4 of TS 29.500 [4].

6.5.7.2 Protocol Errors

Protocol Error Handling shall be supported as specified in clause 5.2.7 of TS 29.500 [4].

6.5.7.3 Application Errors

The common application errors defined in the Table 5.2.7.2-1 in TS 29.500 [4] may also be used for the Namf_MBSBroadcast service, and the following application errors listed in Table 6.5.7.3-1 are specific for the Namf_MBSBroadcast service.

Table 6.5.7.3-1: Application errors

Application Error	HTTP status code	Description

6.5.8 Feature Negotiation

The optional features in table 6.5.8-1 are defined for the Namf_MBSBroadcast API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of TS 29.500 [4].

Table 6.5.8-1: Supported Features

Feature number	Feature Name	Description

6.5.9 Security

As indicated in TS 33.501 [8] and TS 29.500 [4], the access to the Namf_MBSBroadcast API may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [9]), based on local configuration, using the "Client Credentials" authorization grant, where the NRF (see TS 29.510 [10]) plays the role of the authorization server.

If OAuth2 is used, an NF Service Consumer, prior to consuming services offered by the Namf_MBSBroadcast API, shall obtain a "token" from the authorization server, by invoking the Access Token Request service, as described in TS 29.510 [10], clause 5.4.2.2.

NOTE: When multiple NRFs are deployed in a network, the NRF used as authorization server is the same NRF that the NF Service Consumer used for discovering the Namf_MBSBroadcast service.

The Namf_MBSBroadcast API defines a single scope "namf-mbs-bc" for the entire service, and it does not define any additional scopes at resource or operation level.

6.5.10 HTTP redirection

An HTTP request may be redirected to a different AMF service instance, within the same AMF or a different AMF of an AMF set, e.g. when an AMF service instance is part of an AMF (service) set or when using indirect communications (see TS 29.500 [4]).

An SCP that reselects a different AMF producer instance will return the NF Instance ID of the new AMF producer instance in the 3gpp-Sbi-Producer-Id header, as specified in clause 6.10.3.4 of TS 29.500 [4].

If an AMF within an AMF set redirects a service request to a different AMF of the set using an 307 Temporary Redirect or 308 Permanent Redirect status code, the identity of the new AMF towards which the service request is redirected shall be indicated in the 3gpp-Sbi-Target-Nf-Id header of the 307 Temporary Redirect or 308 Permanent Redirect response as specified in clause 6.10.9.1 of TS 29.500 [4].

6.6 Namf_MBSCommunication Service API

6.6.1 API URI

The Namf_MBSCommunication service shall use the Namf_MBSCommunication API.

The API URI of the Namf_ MBSCommunication API shall be:

{apiRoot}/<apiName>/<apiVersion>

The request URI used in HTTP requests from the NF service consumer towards the NF service producer shall have the Resource URI structure defined in clause 4.4.1 of TS 29.501 [5], i.e.:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>

with the following components:

- The {apiRoot} shall be set as described in TS 29.501 [5].
- The <apiName> shall be "namf-mbs-comm".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 6.6.3.

6.6.2 Usage of HTTP

6.6.2.1 General

HTTP/2, as defined in IETF RFC 9113 [19], shall be used as specified in clause 5 of TS 29.500 [4].

HTTP/2 shall be transported as specified in clause 5.3 of TS 29.500 [4].

HTTP messages and bodies for the Namf_MBSCommunication service shall comply with the OpenAPI [23] specification contained in Annex A.

6.6.2.2 HTTP standard headers

6.6.2.2.1 General

The usage of HTTP standard headers shall be supported as specified in clause 5.2.2 of TS 29.500 [4].

6.6.2.2.2 Content type

The following content types shall be supported:

- JSON, as defined in IETF RFC 8259 [8], shall be used as content type of the HTTP bodies specified in the present specification as indicated in clause 5.4 of TS 29.500 [4].
- The Problem Details JSON Object (IETF RFC 9457 [36]). The use of the Problem Details JSON object in a HTTP response body shall be signalled by the content type "application/problem+json".

Multipart messages shall also be supported (see clause 6.6.2.4) using the content type "multipart/related", comprising:

- one JSON body part with the "application/json" content type; and
- one binary body part with 3gpp vendor specific content subtypes.

The 3gpp vendor specific content subtypes defined in Table 6.6.2.2.2-1 shall be supported.

Table 6.6.2.2.2-1: 3GPP vendor specific content subtypes

content subtype	Description
vnd.3gpp.ngap	Binary encoded content, encoding NG Application Protocol (NGAP) IEs, as specified in clause 9.3 of TS 38.413 [9] (ASN.1 encoded).
NOTE: Using 3GPP vendor content subtypes allows to describe the nature of the opaque content (i.e. NGAP information) without having to rely on metadata in the JSON content.	

See clause 6.6.2.4 for the binary contents supported in the binary body part of multipart messages.

6.6.2.3 HTTP custom headers

6.6.2.3.1 General

In this release of this specification, no custom headers specific to the Namf_MBSCommunication service are defined. For 3GPP specific HTTP custom headers used across all service-based interfaces, see clause 5.2.3 of TS 29.500 [4].

6.6.2.4 HTTP multipart messages

HTTP multipart messages shall be supported, to transfer opaque N2 Information MBS, in the following service operations (and HTTP messages):

- N2MessageTransfer Request and Response (POST).

HTTP multipart messages shall include one JSON body part and one binary body part comprising:

- N2 payload (see clause 6.1.6.4).

The JSON body part shall be the "root" body part of the multipart message. It shall be encoded as the first body part of the multipart message. The "Start" parameter does not need to be included.

The multipart message shall include a "type" parameter (see IETF RFC 2387 [9]) specifying the media type of the root body part, i.e. "application/json".

NOTE: The "root" body part (or "root" object) is the first body part the application processes when receiving a multipart/related message, see IETF RFC 2387 [9]. The default root is the first body within the multipart/related message. The "Start" parameter indicates the root body part, e.g. when this is not the first body part in the message.

For each binary body part in a HTTP multipart message, the binary body part shall include a Content-ID header (see IETF RFC 2045 [10]), and the JSON body part shall include an attribute, defined with the RefToBinaryData type, that contains the value of the Content-ID header field of the referenced binary body part.

6.6.3 Resources

6.6.3.1 Overview

Figure 6.6.3.1-1 describes the resource URI structure of the Namf_MBSCommunication API.

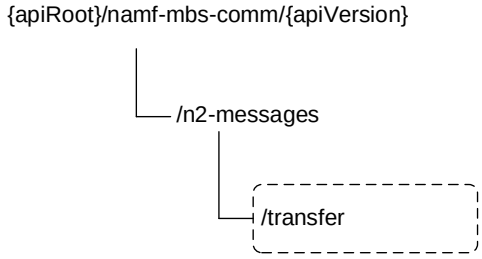


Figure 6.6.3.1-1: Resource URI structure of the Namf_MBSCommunication API

Table 6.6.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 6.6.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method or custom operation	Description (service operation)
N2 Message Handler (Custom Operation)	/n2-messages/transfer	transfer (POST)	N2MessageTransfer

6.6.3.1 Resource: N2 Message Handler (Custom Operation)

6.6.3.1.1 Description

This resource represents the N2 Message Handler used to transfer a N2 message related to support a Multicast MBS session towards NG-RANs.

6.6.3.1.2 Resource Definition

Resource URI: **{apiRoot}/namf-comm/<apiVersion>/n2-messages**

This resource shall support the resource URI variables defined in table 6.6.3.1.2-1.

Table 6.6.3.1.2-1: Resource URI variables for this resource

Name	Data Type	Definition
apiRoot	string	See clause 6.6.1
apiVersion	string	See clause 6.6.1.

6.6.3.1.3 Resource Standard Methods

There are no resource standard methods for the N2 Message Handler resource in this release of this specification

6.6.3.1.4 Resource Custom Operations

6.6.3.1.4.1 Overview

Table 6.6.3.1.4.1-1: Custom operations

Operation Name	Custom operaration URI	Mapped HTTP method	Description (service operation)
transfer	/n2-messages/transfer	POST	N2MessageTransfer

6.6.3.1.4.2 Operation: transfer

6.6.3.1.4.2.1 Description

The /n2-messages/transfer custom operation is used to initiate the transfer of N2 MBS Session Management information to the NG-RAN nodes serving a multicast MBS session. This custom operation uses the HTTP POST method.

6.6.3.1.4.2.2 Operation Definition

This operation shall support the request data structures specified in table 6.6.3.1.4.2-1 and the response data structure and response codes specified in table 6.6.3.1.4.2-2.

Table 6.6.3.1.4.2.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
MbsN2MessageTransferReqData	M	1	Representation of the data related to a multicast MBS session to be sent to the NG-RAN node(s) by the AMF.

Table 6.6.3.1.4.2.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MbsN2MessageTransferRspData	M	1	200 OK	Indicates that the AMF has successfully initiated the transfer of N2 Information to the AN.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	404 Not Found	When the MBS Session ID is not found in the NF Service Producer (i.e. AMF) the "cause" attribute shall be set to: - MBS_SESSION_NOT_FOUND See table 6.6.7.3-1 for the description of these errors
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.6.3.1.4.2.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.6.3.1.4.2.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same AMF or AMF (service) set. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.6.4 Custom Operations without associated resources

There are no custom operations without associated resources supported by the Namf_MBSCommunication Service in this release of the specification.

6.6.5 Notifications

6.6.5.1 General

The notifications provided by the Namf_MBSCommunication service are specified in this clause.

Table 6.6.5.1-1: Callback overview

Notification	Resource URI	HTTP method or custom operation	Description (service operation)
Notification	{notifyUri}	POST	Notify

6.6.5.2 Notification

6.6.5.2.1 Description

The notification is used by the AMF to report the failure of an MBS related N2 procedure with an NG-RAN node to a NF service consumer.

6.6.5.2.2 Notification Definitionn

The Callback URI **"{notifyUri}"** shall be used with the callback URI variables defined in table 6.6.5.2.2-1.

Table 6.6.5.2.2-1: Callback URI variables

Name	Definition
notifyUri	String formatted as URI with the Callback URI

6.6.5.2.3 Notification Standard Methods

6.6.5.2.3.1 POST

This method shall support the request data structures specified in table 6.6.5.2.3.1-1 and the response data structures and response codes specified in table 6.6.5.2.3.1-2.

Table 6.6.5.2.3.1-2: Data structures supported by the POST Request Body

Data type	P	Cardinality	Description
Notification	M	1	Represents the notification to be delivered

Table 6.6.5.2.3.1-3: Data structures supported by the POST Response Body

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply, with response body containing an object of ProblemDetails data type (see clause 5.2.7 of TS 29.500 [4]). NOTE 2: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of TS 29.500 [4].				

Table 6.6.5.2.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer to which the notification should be sent. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.6.5.2.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of the NF service consumer to which the notification should be sent. For the case when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.6.6 Data Model

6.6.6.1 General

This clause specifies the application data model supported by the API.

Table 6.6.6.1-1 specifies the data types defined for the Namf_MBSCommunication service based interface protocol.

Table 6.6.6.1-1: Namf_MBSCommunication specific Data Types

Data type	Clause defined	Description
MbsN2MessageTransferReqData	6.6.6.2.2	Data within MBS N2 Message Transfer Request
MbsN2MessageTransferRspData	6.6.6.2.3	Data within MBS N2 Message Transfer Response
N2MbsSmInfo	6.6.6.2.4	N2 MBS Session Management Information
Notification	6.6.6.2.5	Data within Notify Request
RanFailure	6.6.6.2.6	Description of an NG RAN failure
MbsNgapIeType	6.6.6.3.3	NGAP Information Element Type for MBS
RanFailureIndication	6.6.6.3.4	NG RAN failure indication

Table 6.6.6.1-2 specifies data types re-used by the Namf_MBSCommunication service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the Namf_MBSCommunication service based interface.

Table 6.6.6.1-2: Namf_MBSCommunication re-used Data Types

Data type	Reference	Comments
ProblemDetails	TS 29.571 [6]	Common data type used in response bodies
supportedFeatures	TS 29.571 [6]	Supported Features
RedirectResponse	TS 29.571 [6]	Response body of the redirect response message
MbsSessionId	TS 29.571 [6]	MBS Session Identifier
NgApCause	TS 29.571 [6]	NGAP Cause
RefToBinaryData	TS 29.571 [6]	Referenced binary body data
N2InformationTransferResult	6.1.6.3.8	Enumeration N2 Message Transfer Result

6.6.6.2 Structured data types

6.6.6.2.1 Introduction

Structured data types used in Namf_MBSCommunication service are specified in this clause.

6.6.6.2.2 Type: MbsN2MessageTransferReqData

Table 6.6.6.2.2-1: Definition of type MbsN2MessageTransferReqData

Attribute name	Data type	P	Cardinality	Description	Applicability
mbsSessionId	MbsSessionId	M	1	This IE shall be included to identify the MBS session to which the N2 information to be transferred is related.	
areaSessionId	AreaSessionId	O	0..1	Area Session ID This IE may be present, if this is a Location dependent multicast MBS session.	
n2MbsSmInfo	N2MbsSmInfo	M	1	This IE shall contain the N2 MBS Session Information to be transferred to the NG-RAN nodes serving the MBS session and additional information required for the processing of the message by the AMF.	
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one optional feature defined in clause 6.6.8 is supported.	
ranNodeIdList	array(GlobalRanNodeId)	O	1..N	When present, this IE shall contain the list of NG RAN Node IDs towards which the MBS related N2 message is requested to be distributed.	RAN-ID-LIST
notifyUri	Uri	O	0..1	When present, this IE shall contain the notification URI to be used for receiving notifications about possible failures of the MBS related N2 procedure with an NG RAN node in the ranNodeIdList.	RAN-ID-LIST
notifyCorrelationId	string	O	0..1	When present, this IE shall contain the notification correlation ID to be sent within notifications.	RAN-ID-LIST

6.6.6.2.3 Type: MbsN2MessageTransferRspData

Table 6.6.6.2.3-1: Definition of type MbsN2MessageTransferRspData

Attribute name	Data type	P	Cardinality	Description
result	N2InformationTransferResult	M	1	This IE shall provide the result of the MBS N2 information transfer processing at the AMF.
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one optional feature defined in clause 6.6.8 is supported.
failureList	array(RanFailure)	O	1..N	List of MBS related N2 procedure failures

6.6.6.2.4 Type: N2MbsSmInfo

Table 6.6.6.2.4-1: Definition of type N2MbsSmInfo

Attribute name	Data type	P	Cardinality	Description
ngapIeType	MbsNgapIeType	M	1	This IE shall indicate the NGAP IE type of the ngapData as specified in clause 6.6.6.4.2.2.
ngapData	RefToBinaryData	M	1	This IE shall contain the reference the binary data part carrying the NGAP data.

6.6.6.2.5 Type: Notification

Table 6.6.6.2.5-1: Definition of type Notification

Attribute name	Data type	P	Cardinality	Description
mbsSessionId	MbsSessionId	M	1	MBS Session ID
areaSessionId	AreaSessionId	C	0..1	Area Session ID This IE shall be present, if present in the N2Message Transfer request.
failureList	array(RanFailure)	M	1..N	List of MBS related N2 procedure failures
notifyCorrelationId	string	C	0..1	This IE shall be present if the same IE is present in the N2Message Transfer request. When present, it shall contain the same value as received in the request.

6.6.6.2.6 Type: RanFailure

Table 6.6.6.2.6-1: Definition of type RanFailure

Attribute name	Data type	P	Cardinality	Description
ranId	GlobalRanNodeId	M	1	Indicates the identity of the NG RAN node.
ranFailureCause	NgApCause	C	0..1	When present, this IE shall contain the NGAP failure cause received from the NG-RAN. (NOTE)
ranFailureIndication	RanFailureIndication	C	0..1	This IE shall be present if the AMF cannot deliver the MBS related N2 message to the NG-RAN node. (NOTE)
NOTE: Either the ranFailureCause IE or the ranFailureIndication IE shall be present.				

6.6.6.3 Simple data types and enumerations

6.6.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

6.6.6.3.2 Simple data types

The simple data types defined in Table 6.6.6.3.2-1 shall be supported.

6.6.6.3.3 Enumeration: MbsNgapIeType

Table 6.6.6.3.3-1: Enumeration MbsNgapIeType

Enumeration value	Description
"MBS_SES_ACT_REQ"	Multicast Session Activation Request Transfer
"MBS_SES_DEACT_REQ"	Multicast Session Deactivation Request Transfer
"MBS_SES_UPD_REQ"	Multicast Session Update Request Transfer

6.6.6.3.4 Enumeration: RanFailureIndication

The enumeration RanFailureIndication indicates a NG-RAN failure event.

Table 6.5.6.3.4-1: Enumeration RanFailureIndication

Enumeration value	Description
"NG_RAN_FAILURE_WITHOUT_RESTART"	The NG-RAN node failed without restart.
"NG_RAN_NOT_REACHABLE"	The AMF cannot reach the NG RAN node when sending the MBS related N2 message.

6.6.6.4 Binary data

6.6.6.4.1 Introduction

This clause defines the binary data that shall be supported in a binary body part in an HTTP multipart message (see clauses 6.6.2.2.2 and 6.6.2.4).

Table 6.6.6.4.1-1: Binary Data Types

Name	Clause defined	Content type
N2 MBS Session Management Information	6.6.6.4.2	vnd.3gpp.ngap

6.6.6.4.2 N2 Information

6.6.6.4.2.1 Introduction

N2 Information shall encode NG Application Protocol (NGAP) IEs, as specified in clause 9.3.5 of TS 38.413 [12] (ASN.1 encoded), using the vnd.3gpp.ngap content-type.

6.6.6.4.2.2 NGAP IEs

N2 Information may encode following NGAP MB-SMF related IE specified in in clause 9.3.5 of TS 38.413 [12], as summarized in Table 6.6.6.4.2.2-1.

Table 6.6.6.4.2.2-1: N2 Information content for class MBS-SM

NGAP IE	Reference (TS 38.413 [12])	Related NGAP message
Multicast Session Activation Request Transfer	9.3.5.11	MULTICAST SESSION ACTIVATION REQUEST
Multicast Session Deactivation Request Transfer	9.3.5.12	MULTICAST SESSION DEACTIVATION REQUEST
Multicast Session Update Request Transfer	9.3.5.13	MULTICAST SESSION UPDATE REQUEST

6.6.7 Error Handling

6.6.7.1 General

HTTP error handling shall be supported as specified in clause 5.2.4 of TS 29.500 [4].

6.6.7.2 Protocol Errors

Protocol Error Handling shall be supported as specified in clause 5.2.7 of TS 29.500 [4].

6.6.7.3 Application Errors

The common application errors defined in the Table 5.2.7.2-1 in TS 29.500 [4] may also be used for the Namf_MBSCommunication service, and the following application errors listed in Table 6.6.7.3-1 are specific for the Namf_MBSCommunication service.

Table 6.6.7.3-1: Application errors

Application Error	HTTP status code	Description
MBS_SESSION_NOT_FOUND	404 Not Found	Indicates the MBS related N2 Message transfer has failed due to the MBS Session ID being unknown to the AMF.

6.6.8 Feature Negotiation

The optional features in table 6.6.8-1 are defined for the Namf_MBSCommunication API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of TS 29.500 [4].

The NF Service Consumer shall indicate the optional features it supports for the Namf_MBSCommunication service, if any, by including the supportedFeatures attribute in content of the HTTP Request Message for following service operations:

- N2MessageTransfer, as specified in clause 5.7.2.2.

The AMF shall determine the supported features for the service operations as specified in clause 6.6 of TS 29.500 [4] and shall indicate the supported features by including the supportedFeatures attribute in content of the HTTP response for the service operation.

The syntax of the supportedFeatures attribute is defined in clause 5.2.2 of TS 29.571 [6].

The following features are defined for the Namf_MBSCommunication service.

Table 6.6.8-1: Features of supportedFeatures attribute used by Namf_MBSCommunication service

Feature Number	Feature	M/O	Description
1	RAN-ID-LIST	O	N2 MBS session request distribution with list of NG RAN Node IDs provided by NF Service Consumer to AMF An NF Service Consumer (e.g. MB-SMF) and an AMF that support this feature shall support: - Namf_MBSCommunication_N2MessageTransfer Request including the list of NG RAN node IDs towards which the MBS related N2 message is requested to be distributed; and - the AMF notifying an MBS related N2 procedure failure with an NG RAN node in this list, detected by the AMF or reported by the NG-RAN node. See clause 8.4.1.2 of TS 23.527 [33] and clauses 5.7.2.2 and 5.7.2.3.
Feature number: The order number of the feature within the supportedFeatures attribute (starting with 1). Feature: A short name that can be used to refer to the bit and to the feature. M/O: Defines if the implementation of the feature is mandatory ("M") or optional ("O"). Description: A clear textual description of the feature.			

6.6.9 Security

As indicated in TS 33.501 [27], the access to the Namf_MBSCommunication API may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [28]), using the "Client Credentials" authorization grant, where the NRF (see TS 29.510 [29]) plays the role of the authorization server.

If Oauth2 authorization is used, an NF Service Consumer, prior to consuming services offered by the Namf_ MBSCommunication API, shall obtain a "token" from the authorization server, by invoking the Access Token Request service, as described in TS 29.510 [29], clause 5.4.2.2.

NOTE: When multiple NRFs are deployed in a network, the NRF used as authorization server is the same NRF that the NF Service Consumer used for discovering the Namf_MBSCommunication service.

The Namf_ MBSCommunication API defines scopes for OAuth2 authorization as specified in TS 33.501 [27]; it defines a single scope consisting on the name of the service (i.e., "namf-mbs-comm"), and it does not define any additional scopes at resource or operation level.

6.6.10 HTTP redirection

An HTTP request may be redirected to a different AMF service instance, within the same AMF or a different AMF of an AMF set, e.g. when an AMF service instance is part of an AMF (service) set or when using indirect communications (see TS 29.500 [4]).

An SCP that reselects a different AMF producer instance will return the NF Instance ID of the new AMF producer instance in the 3gpp-Sbi-Producer-Id header, as specified in clause 6.10.3.4 of TS 29.500 [4].

If an AMF within an AMF set redirects a service request to a different AMF of the set using an 307 Temporary Redirect or 308 Permanent Redirect status code, the identity of the new AMF towards which the service request is redirected shall be indicated in the 3gpp-Sbi-Target-Nf-Id header of the 307 Temporary Redirect or 308 Permanent Redirect response as specified in clause 6.10.9.1 of TS 29.500 [4].

6.7 Namf_AIoT Service API

6.7.1 Introduction

The Namf_AIoT shall use the Namf_AIoT API.

The API URI of the Namf_AIoT API shall be:

{apiRoot}/<apiName>/<apiVersion>

The request URIs used in HTTP requests from the NF service consumer towards the NF service producer shall have the Resource URI structure defined in clause 4.4.1 of TS 29.501 [5], i.e.:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>

with the following components:

- The {apiRoot} shall be set as described in TS 29.501 [5].
- The <apiName> shall be "namf-aiot".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 6.7.3 and 6.7.4.

6.7.2 Usage of HTTP

6.7.2.1 General

HTTP/2 (see IETF RFC 9113 [19] shall be used as specified in clause 5 of TS 29.500 [4].

HTTP/2 shall be transported as specified in clause 5.3 of TS 29.500 [4].

The OpenAPI [23] specification of HTTP messages and content bodies for the Namf_AIoT API is contained in Annex A.8.

6.7.2.2 HTTP standard headers

6.7.2.2.1 General

See clause 5.2.2 of TS 29.500 [4] for the usage of HTTP standard headers.

6.7.2.2.2 Content type

JSON (see IETF RFC 8259 [8]) shall be used as content type of the HTTP bodies specified in the present specification as specified in clause 5.4 of TS 29.500 [4]. The use of the JSON format shall be signalled by the content type "application/json".

"Problem Details" JSON object shall be used to indicate additional details of the error in a HTTP response body and shall be signalled by the content type "application/problem+json", as defined in IETF RFC 9457 [36].

Multipart messages shall be supported (see clause 6.7.2.4) using the content type "multipart/related", comprising:

- one JSON body part with the "application/json" content type; and
- one binary body part with 3gpp vendor specific content subtypes.

The 3gpp vendor specific content subtypes defined in Table 6.7.2.2.2-1 shall be supported.

Table 6.7.2.2.2-1: 3GPP vendor specific content subtypes

content subtype	Description
vnd.3gpp.ngap	Binary encoded content, encoding NG Application Protocol (NGAP) IEs, as specified in clause 9.4 of TS 38.413 [12] (ASN.1 encoded).
NOTE: Using 3GPP vendor content subtypes allows to describe the nature of the opaque content (e.g. NGAP or 5GS NAS information) without having to rely on metadata in the JSON content.	

See clause 6.7.2.4 for the binary contents supported in the binary body part of multipart messages.

6.7.2.3 HTTP custom headers

The mandatory HTTP custom header fields specified in clause 5.2.3.2 of TS 29.500 [4] shall be supported, and the optional HTTP custom header fields specified in clause 5.2.3.3 of TS 29.500 [4] may be supported.

6.7.2.4 HTTP multipart messages

HTTP multipart messages shall be supported, to transfer opaque N2 Information in the following service operations (and HTTP messages):

- MessageDelivery Request and Response (POST);
- Notify (POST).

HTTP multipart messages shall include one JSON body part and one binary body parts comprising:

- N2 payload (see clause 6.7.6.5.2).

The JSON body part shall be the "root" body part of the multipart message. It shall be encoded as the first body part of the multipart message. The "Start" parameter does not need to be included.

The multipart message shall include a "type" parameter (see IETF RFC 2387 [9]) specifying the media type of the root body part, i.e. "application/json".

NOTE: The "root" body part (or "root" object) is the first body part the application processes when receiving a multipart/related message, see IETF RFC 2387 [9]. The default root is the first body within the multipart/related message. The "Start" parameter indicates the root body part, e.g. when this is not the first body part in the message.

For the binary body part in a HTTP multipart message, it shall include a Content-ID header (see IETF RFC 2045 [10]), and the JSON body part shall include an attribute, defined with the RefToBinaryData type, that contains the value of the Content-ID header field of the referenced binary body part.

6.7.3 Resources

6.7.3.1 Overview

There are no resources defined for this API in this release of the specification.

6.7.4 Custom Operations without associated resources

6.7.4.1 Overview

The URI structure for custom operations without associated resources is shown in Figure 6.7.4.1-1.

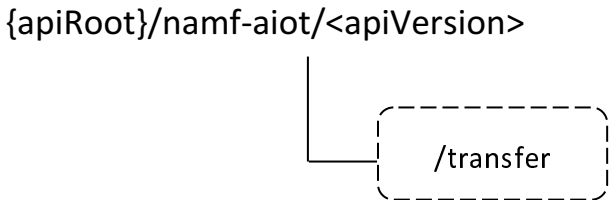


Figure 6.7.4.1-1: Custom operation URI structure of the Namf_AIoT API

Table 6.7.4.1-1 provides an overview of the custom operations and applicable HTTP methods defined for the Namf_AIoT API.

Table 6.7.4.1-1: Custom operations without associated resources

Custom operation name	Custom operation URI	Mapped HTTP method	Description
MessageDelivery	/transfer	POST	Enables to request to transfer AIoT data towards NG-RAN or AIoT devices.

6.7.4.2 Operation: MessageDelivery

6.7.4.2.1 Description

The custom operation enables to request to transfer AIoT data towards NG-RAN or AIoT devices.

6.7.4.2.2 Operation Definition

This operation shall support the response data structures and response codes specified in tables 6.7.4.2.2-1 and 6.7.4.2.2-2.

Table 6.7.4.2.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
AiotMessageReq	M	1	Contains the parameters for requesting to transfer AIoT data towards NG-RAN or AIoT devices

Table 6.7.4.2.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful case. The AIoT message delivery request is successfully received and processed.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	504 Gateway Timeout	This response shall be returned if there is no NG-RAN connection between the AMF and NG-RAN identified by the ranNodeId included in AiotMessageReq, "cause" attribute shall be set to: - TARGET_NF_NOT_REACHABLE See clause 5.2.7 of TS 29.500 [4].
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply. NOTE 2: The RedirectResponse data structure may be provided by an SCP (see clause 6.10.9.1 of TS 29.500 [4]).				

Table 6.7.4.2.2-3: Headers supported by the 307 Response Code on this custom operation

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative target URI located in an alternative AMF (service) instance towards which the request is redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target AMF (service) instance towards which the request is redirected.

Table 6.7.4.2.2-4: Headers supported by the 308 Response Code on this custom operation

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative target URI located in an alternative AMF (service) instance towards which the request is redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target AMF (service) instance towards which the request is redirected.

6.7.5 Notifications

6.7.5.1 General

Notifications shall comply to clause 6.2 of TS 29.500 [4] and clause 4.6.2.3 of TS 29.501 [5].

Table 6.7.5.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
AIoT Notification	{notifUri}	POST	Enables the AMF to notify a subscribed NF service consumer on the AIoT data from NG-RAN or AIoT devices.

6.7.5.2 AIoT Notification

6.7.5.2.1 Description

The AIoT Notification is used by the AMF to report the AIoT data from NG-RAN or AIoT devices to a NF service consumer that has subscribed to such notifications.

6.7.5.2.2 Target URI

The Callback URI **"{**notifUri**}"** shall be used with the callback URI variables defined in table 6.7.5.2.2-1.

Table 6.7.5.2.2-1: Callback URI variables

Name	Definition
notifUri	String formatted as URI with the Callback URI.

6.7.5.2.3 Standard Methods

6.7.5.2.3.1 POST

This method shall support the request data structures specified in table 6.7.5.2.3.1-1 and the response data structures and response codes specified in table 6.7.5.2.3.1-2.

Table 6.7.5.2.3.1-1: Data structures supported by the POST Request Body

Data type	P	Cardinality	Description
AiotInfoNotification	M	1	AIoT message from NG-RAN

Table 6.7.5.2.3.1-2: Data structures supported by the POST Response Body

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful case. The AIoT Notification is successfully received and acknowledged.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the POST method listed in Table 5.2.7.1-1 of TS 29.500 [4] also apply. NOTE 2: The RedirectResponse data structure may be provided by an SCP (cf. clause 6.10.9.1 of TS 29.500 [4]).				

Table 6.7.5.2.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI representing the end point of an alternative NF consumer (service) instance towards which the notification should be redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF service consumer (service) instance towards which the notification request is redirected.

Table 6.7.5.2.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI representing the end point of an alternative NF consumer (service) instance towards which the notification should be redirected. For the case where the request is redirected to the same target via a different SCP, refer to clause 6.10.9.1 of TS 29.500 [4].
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF service consumer (service) instance towards which the notification request is redirected.

6.7.6 Data Model

6.7.6.1 General

This clause specifies the application data model supported by the API.

Table 6.7.6.1-1 specifies the data types defined for the Namf_AIoT service based interface protocol.

Table 6.7.6.1-1: Namf_AIoT specific Data Types

Data type	Clause defined	Description	Applicability
AiotMessageReq	6.7.6.2.2	AIoT message delivery request	
AiotInfoNotification	6.7.6.2.3	AIoT information notification	
AiotMessage	6.7.6.2.4	AIoT message from or to NG-RAN	
AiotMessageType	6.7.6.3.3	Aiot Message Type	

Table 6.7.6.1-2 specifies data types re-used by the Namf_AIoT service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the Namf_AIoT service based interface.

Table 6.7.6.1-2: Namf_AIoT re-used Data Types

Data type	Reference	Comments	Applicability
GlobalRanNodeId	TS 29.571 [6]	RAN Node ID	
RefToBinaryData	TS 29.571 [6]	Referenced binary body data	
SupportedFeatures	TS 29.571 [6]	Supported Features	
Uint16	TS 29.571 [6]	Unsigned 16-bit integer	
Uinteger	TS 29.571 [6]	Unsigned Integer	
Uri	TS 29.571 [6]	URI	

6.7.6.2 Structured data types

6.7.6.2.1 Introduction

This clause defines the structures to be used in resource representations.

6.7.6.2.2 Type: AiotMessageReq

Table 6.7.6.2.2-1: Definition of type AiotMessageReq

Attribute name	Data type	P	Cardinality	Description	Applicability
ranNodeId	GlobalRanNodeId	M	1	Contains the ID of NG-RAN node to which the message is requested to be delivered.	
aiotMessage	AiotMessage	M	1	Contains the AIoT message to be delivered to the NG-RAN node identified by the "ranNodeId" attribute.	
aiotMessageType	AiotMessageType	M	1	This IE shall contain the AIoT NGAP Message Type of the AIOTF, as specified in Table 6.7.6.3.3-1.	
notifUri	Uri	M	1	Contains the URI via which the AIoT related notifications shall be delivered.	
ranAiotDeviceNgapId	Uinteger	O	0..1	When present, it shall contain the RAN A-IoT Device NGAP ID as specified in TS 38.413 [12].	
aiotfId	NfInstanceId	M	1	Contains the identity of the AIOTF.	
correlationId	Uint16	M	1	Contains the Correlation Identifier. The value of this IE is generated by the AIOTF for an AF service operation request and it shall be unique within an AIOTF as specified in clause 5.7.3 of TS 23.369 [63].	
suppFeat	SupportedFeatures	C	0..1	Contains the list of supported features. This attribute shall be present only when feature negotiation is required.	

6.7.6.2.3 Type: AiotInfoNotification

Table 6.7.6.2.3-1: Definition of type AiotInfoNotification

Attribute name	Data type	P	Cardinality	Description	Applicability
aiotMessage	AiotMessage	M	1	This IE shall be present when available. When present, the IE contains the AIoT message received from the NG-RAN.	
aiotMessageType	AiotMessageType	M	1	This IE shall contain the AIoT NGAP Message Type, as specified in Table 6.7.6.3.3-1.	

6.7.6.2.4 Type: AiotMessage

Table 6.7.6.2.4-1: Definition of type AiotMessage

Attribute name	Data type	P	Cardinality	Description
ngapMessageType	Uinteger	M	1	When present, it shall indicate the AIoT NGAP Message type of the aiotNgapData as specified in clause 6.7.6.5.2. Its value equals the value of the Procedure Code defined in ASN.1 in clause 9.4.7 in TS 38.413 [12].
aiotNgapData	RefToBinaryData	M	1	This attribute reference the N2 Information binary data corresponding to the N2 information class. See clause 6.7.6.5.2.

6.7.6.3 Simple data types and enumerations

6.7.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

6.7.6.3.2 Simple data types

The simple data types defined in table 6.7.6.3.2-1 shall be supported.

Table 6.7.6.3.2-1: Simple data types

Type Name	Type Definition	Description	Applicability
n/a			

6.7.6.3.3 Enumeration: AiotMessageType

The enumeration AiotMessageType represents AIoT NGAP Message Type. It shall comply with the provisions defined in table 6.7.6.3.3-1.

Table 6.7.6.3.3-1: Enumeration AiotMessageType

Enumeration value	Description	Applicability
"INVENTORY_REQUEST"	AIoT NGAP Message is an inventory request message. (NOTE 1)	
"COMMAND_REQUEST"	AIoT NGAP Message is a command request message. (NOTE 1)	
"AIOT_SESSION_RELEASE_COMMAND"	AIoT NGAP Message is an AIoT session release command. (NOTE 1)	
"INVENTORY_REPONSE"	AIoT NGAP Message is an inventory response. (NOTE 2)	
"INVENTORY_FAILURE"	AIoT NGAP Message is an inventory failure. (NOTE 2)	
"INVENTORY_REPORT"	AIoT NGAP Message is an inventory report. (NOTE 2)	
"COMMAND_RESPONSE"	AIoT NGAP Message is a command response. (NOTE 2)	
"COMMAND_FAILURE"	AIoT NGAP Message is a command failure. (NOTE 2)	
"AIOT_SESSION_RELEASE_COMPLETE"	AIoT NGAP Message is an AIoT session release complete. (NOTE 2)	
“AIOT_SESSION_RELEASE_REQUEST"	AIoT NGAP Message is an AIoT session release request. (NOTE 2)	
NOTE 1: The Enumeration value may be used in "AiotMessageReq". NOTE 2: The Enumeration value may be used in "AiotInfoNotification".		

6.7.6.4 Data types describing alternative data types or combinations of data types

There are no data types describing alternative data types or combinations of data types defined for this API in this release of the specification.

6.7.6.5 Binary data

6.7.6.5.1 Introduction

This clause defines the binary data that shall be supported in a binary body part in an HTTP multipart message (see clauses 6.7.2.2.2 and 6.7.2.4).

6.7.6.5.2 AIoT N2 Information

N2 Information shall encode NG Application Protocol (NGAP) IEs, as specified in clause 9.4 of TS 38.413 [12] (ASN.1 encoded), using the "vnd.3gpp.ngap" content-type.

Table 6.7.6.5.2-1: N2 Information content for AMF AIoT services

NGAP IE	Reference (TS 38.413 [12])	Related NGAP message
Inventory Request Transfer	9.3.6.1	INVENTORY REQUEST
Inventory Response Transfer	9.3.6.2	INVENTORY RESPONSE
Inventory Failure Transfer	9.3.6.3	INVENTORY FAILURE
Inventory Report Transfer	9.3.6.4	INVENTORY REPORT
Command Request Transfer	9.3.6.5	COMMAND REQUEST
Command Response Transfer	9.3.6.6	COMMAND RESPONSE
Command Failure Transfer	9.3.6.7	COMMAND FAILURE
AIOT Session Release Command Transfer	9.3.6.8	AIOT SESSION RELEASE COMMAND
AIOT Session Release Complete Transfer	9.3.6.9	AIOT SESSION RELEASE COMPLETE
AIOT Session Release Request Transfer	9.3.6.10	AIOT SESSION RELEASE REQUEST

6.7.7 Error Handling

6.7.7.1 General

For the Namf_AIoT API, HTTP error responses shall be supported as specified in clause 4.8 of TS 29.501 [5]. Protocol errors and application errors specified in table 5.2.7.2-1 of TS 29.500 [4] shall be supported for an HTTP method if the corresponding HTTP status codes are specified as mandatory for that HTTP method in table 5.2.7.1-1 of TS 29.500 [4].

In addition, the requirements in the following clauses are applicable for the Namf_AIoT API.

6.7.7.2 Protocol Errors

No specific procedures for the Namf_AIoT service are specified.

6.7.7.3 Application Errors

The application errors defined for the Namf_AIoT service are listed in Table 6.7.7.3-1.

Table 6.7.7.3-1: Application errors

Application Error	HTTP status code	Description
n/a		

6.7.8 Feature negotiation

The optional features in table 6.7.8-1 are defined for the Namf_AIoT API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of TS 29.500 [4].

Table 6.7.8-1: Supported Features

Feature number	Feature Name	Description

6.7.9 Security

As indicated in TS 33.501 [27] and TS 29.500 [4], the access to the Namf_AIoT API may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [28]), based on local configuration, using the "Client Credentials" authorization grant, where the NRF (see TS 29.510 [10]) plays the role of the authorization server.

If OAuth2 is used, an NF Service Consumer, prior to consuming services offered by the Namf_AIoT API, shall obtain a "token" from the authorization server, by invoking the Access Token Request service, as described in TS 29.510 [10], clause 5.4.2.2.

NOTE: When multiple NRFs are deployed in a network, the NRF used as authorization server is the same NRF that the NF Service Consumer used for discovering the Namf_AIoT service.

The Namf_AIoT API defines a single scope "namf-aiot" for the entire service, and it does not define any additional scopes at resource or operation level.

6.7.10 HTTP redirection

An HTTP request may be redirected to a different AMF service instance when using direct or indirect communications (see TS 29.500 [4]).

An SCP that reselects a different AMF producer instance will return the NF Instance ID of the new AMF producer instance in the 3gpp-Sbi-Producer-Id header, as specified in clause 6.10.3.4 of TS 29.500 [4].

If an AMF redirects a service request to a different AMF using an 307 Temporary Redirect or 308 Permanent Redirect status code, the identity of the new AMF towards which the service request is redirected shall be indicated in the 3gpp-Sbi-Target-Nf-Id header of the 307 Temporary Redirect or 308 Permanent Redirect response as specified in clause 6.10.9.1 of TS 29.500 [4].

Annex A (normative): OpenAPI specification

A.1 General

This Annex specifies the API definition of the service provided by AMF in this document. The APIs are defined by OpenAPI 3.0.0 specifications in YAML format, following guidelines in TS 29.501 [5].

The APIs are specified for following services:

- Namf_Communication Service
- Namf_EventExposure Service
- Namf_MT Service
- Namf_Location Service
- Namf_MBSBroadcast Service
- Namf_MBSCommunication Service
- Namf_AIoT Service

This Annex takes precedence when being discrepant to other parts of the specification with respect to the encoding of information elements and methods within the API(s).

NOTE : The semantics and procedures, as well as conditions, e.g. for the applicability and allowed combinations of attributes or values, not expressed in the OpenAPI definitions but defined in other parts of the specification also apply.

Informative copies of the OpenAPI specification files contained in this 3GPP Technical Specification are available on a Git-based repository, that uses the GitLab software version control system (see TS 29.501 [5] clause 5.3.1 and TR 21.900 [37] clause 5B).

A.2 Namf_Communication API

```
openapi: 3.0.0

info:
  version: 1.4.3
  title: Namf_Communication
  description: |
    AMF Communication Service.
    © 2026, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

security:
  - {}
  - oAuth2ClientCredentials:
      - namf-comm

externalDocs:
  description: 3GPP TS 29.518 V19.8.0; 5G System; Access and Mobility Management Services
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.518/'

servers:
  - url: '{apiRoot}/namf-comm/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501

paths:
  /ue-contexts/{ueContextId}:
```

```
    put:
      summary: Namf_Communication CreateUEContext service Operation
      tags:
        - Individual ueContext (Document)
      operationId: CreateUEContext
      security:
        - {}
        - oAuth2ClientCredentials:
          - namf-comm
        - oAuth2ClientCredentials:
          - namf-comm
          - namf-comm:ue-contexts:mobility
      parameters:
        - name: ueContextId
          in: path
          description: UE Context Identifier
          required: true
          schema:
            type: string
            pattern: '^(5g-guti-[0-9]{5,6}[0-9a-fA-F]{14}|imsi-[0-9]{5,15}|nai-.+|gli-.+|gci-
.+|imei-[0-9]{15}|imeisv-[0-9]{16}|.+)$'
      requestBody:
        content:
          multipart/related:  # message with binary body part(s)
            schema:
              type: object
              properties: # Request parts
                jsonData:
                  $ref: '#/components/schemas/UeContextCreateData'
                binaryDataN2Information:
                  type: string
                  format: binary
                binaryDataN2InformationExt1:
                  type: string
                  format: binary
                binaryDataN2InformationExt2:
                  type: string
                  format: binary
                binaryDataN2InformationExt3:
                  type: string
                  format: binary
                binaryDataN2InformationExt4:
                  type: string
                  format: binary
                binaryDataN2InformationExt5:
                  type: string
                  format: binary
                binaryDataN2InformationExt6:
                  type: string
                  format: binary
                binaryDataN2InformationExt7:
                  type: string
                  format: binary
                binaryDataN2InformationExt8:
                  type: string
                  format: binary
                binaryDataN2InformationExt9:
                  type: string
                  format: binary
                binaryDataN2InformationExt10:
                  type: string
                  format: binary
                binaryDataN2InformationExt11:
                  type: string
                  format: binary
                binaryDataN2InformationExt12:
                  type: string
                  format: binary
                binaryDataN2InformationExt13:
                  type: string
                  format: binary
                binaryDataN2InformationExt14:
                  type: string
                  format: binary
                binaryDataN2InformationExt15:
                  type: string
                  format: binary
                binaryDataN2InformationExt16:
```

```
        type: string
        format: binary
      binaryDataN2InformationExt17:
        type: string
        format: binary
encoding:
  jsonData:
    contentType:  application/json
  binaryDataN2Information:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
        schema:
          type: string
  binaryDataN2InformationExt1:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
        schema:
          type: string
  binaryDataN2InformationExt2:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
        schema:
          type: string
  binaryDataN2InformationExt3:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
        schema:
          type: string
  binaryDataN2InformationExt4:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
        schema:
          type: string
  binaryDataN2InformationExt5:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
        schema:
          type: string
  binaryDataN2InformationExt6:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
        schema:
          type: string
  binaryDataN2InformationExt7:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
        schema:
          type: string
  binaryDataN2InformationExt8:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
        schema:
          type: string
  binaryDataN2InformationExt9:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
        schema:
          type: string
  binaryDataN2InformationExt10:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
        schema:
          type: string
  binaryDataN2InformationExt11:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
```

```
                schema:
                  type: string
            binaryDataN2InformationExt12:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
                    type: string
            binaryDataN2InformationExt13:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
                    type: string
            binaryDataN2InformationExt14:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
                    type: string
            binaryDataN2InformationExt15:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
                    type: string
            binaryDataN2InformationExt16:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
                    type: string
            binaryDataN2InformationExt17:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
                    type: string
    required: true
  callbacks:
    onN2MessageNotify:
      '{$request.body#/n2NotifyUri}':
        post:
          summary: Namf_Communication N2 Info Notify (UE Specific) service Operation
          tags:
            - N2 Info Notify
          operationId: N2InfoNotifyHandoverComplete
          requestBody:
            description: UE Specific N2 Information Notification
            content:
              application/json:
                schema:
                  $ref: '#/components/schemas/N2InformationNotification'
          responses:
            '200':
              description: N2 Information Notification Response.
              content:
                application/json:
                  schema:
                    $ref: '#/components/schemas/N2InfoNotificationRspData'
                multipart/related:  # message with binary body part(s)
                  schema:
                    type: object
                    properties:
                      jsonData:
                        $ref: '#/components/schemas/N2InfoNotificationRspData'
                      binaryDataN2InformationExt1:
                        type: string
                        format: binary
                      binaryDataN2InformationExt2:
                        type: string
                        format: binary
                      binaryDataN2InformationExt3:
                        type: string
                        format: binary
                      binaryDataN2InformationExt4:
                        type: string
                        format: binary
```

```
        binaryDataN2InformationExt5:
          type: string
          format: binary
        binaryDataN2InformationExt6:
          type: string
          format: binary
        binaryDataN2InformationExt7:
          type: string
          format: binary
        binaryDataN2InformationExt8:
          type: string
          format: binary
        binaryDataN2InformationExt9:
          type: string
          format: binary
        binaryDataN2InformationExt10:
          type: string
          format: binary
        binaryDataN2InformationExt11:
          type: string
          format: binary
        binaryDataN2InformationExt12:
          type: string
          format: binary
        binaryDataN2InformationExt13:
          type: string
          format: binary
        binaryDataN2InformationExt14:
          type: string
          format: binary
        binaryDataN2InformationExt15:
          type: string
          format: binary
        binaryDataN2InformationExt16:
          type: string
          format: binary
    encoding:
      jsonData:
        contentType:  application/json
      binaryDataN2InformationExt1:
        contentType:  application/vnd.3gpp.ngap
        headers:
          Content-Id:
            schema:
              type: string
      binaryDataN2InformationExt2:
        contentType:  application/vnd.3gpp.ngap
        headers:
          Content-Id:
            schema:
              type: string
      binaryDataN2InformationExt3:
        contentType:  application/vnd.3gpp.ngap
        headers:
          Content-Id:
            schema:
              type: string
      binaryDataN2InformationExt4:
        contentType:  application/vnd.3gpp.ngap
        headers:
          Content-Id:
            schema:
              type: string
      binaryDataN2InformationExt5:
        contentType:  application/vnd.3gpp.ngap
        headers:
          Content-Id:
            schema:
              type: string
      binaryDataN2InformationExt6:
        contentType:  application/vnd.3gpp.ngap
        headers:
          Content-Id:
            schema:
              type: string
      binaryDataN2InformationExt7:
        contentType:  application/vnd.3gpp.ngap
        headers:
```

```
            Content-Id:
              schema:
                type: string
          binaryDataN2InformationExt8:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
          binaryDataN2InformationExt9:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
          binaryDataN2InformationExt10:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
          binaryDataN2InformationExt11:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
          binaryDataN2InformationExt12:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
          binaryDataN2InformationExt13:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
          binaryDataN2InformationExt14:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
          binaryDataN2InformationExt15:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
          binaryDataN2InformationExt16:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
      '204':
        description: Expected response to a successful callback processing
      '307':
        $ref: 'TS29571_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29571_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29571_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29571_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29571_CommonData.yaml#/components/responses/415'
      '429':
```

```
            $ref: 'TS29571_CommonData.yaml#/components/responses/429'
          '500':
            $ref: 'TS29571_CommonData.yaml#/components/responses/500'
          '502':
            $ref: 'TS29571_CommonData.yaml#/components/responses/502'
          '503':
            $ref: 'TS29571_CommonData.yaml#/components/responses/503'
responses:
  '201':
    description: UE context successfully created.
    headers:
      Location:
        description: >
          Contains the URI of the newly created resource, according to the structure:
          {apiRoot}/namf-comm/<apiVersion>/ue-contexts/{ueContextId}
        required: true
        schema:
          type: string
      3gpp-Sbi-Producer-Id:
        description: >
          Indicating the AMF serving the UE Context. This header shall be included when the
          UE Context is created in a target AMF other than the initial AMF sending the
          response.
        schema:
          type: string
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/UeContextCreatedData'
      multipart/related:  # message with binary body part(s)
        schema:
          type: object
          properties: # Request parts
            jsonData:
              $ref: '#/components/schemas/UeContextCreatedData'
            binaryDataN2Information:
              type: string
              format: binary
            binaryDataN2InformationExt1:
              type: string
              format: binary
            binaryDataN2InformationExt2:
              type: string
              format: binary
            binaryDataN2InformationExt3:
              type: string
              format: binary
            binaryDataN2InformationExt4:
              type: string
              format: binary
            binaryDataN2InformationExt5:
              type: string
              format: binary
            binaryDataN2InformationExt6:
              type: string
              format: binary
            binaryDataN2InformationExt7:
              type: string
              format: binary
            binaryDataN2InformationExt8:
              type: string
              format: binary
            binaryDataN2InformationExt9:
              type: string
              format: binary
            binaryDataN2InformationExt10:
              type: string
              format: binary
            binaryDataN2InformationExt11:
              type: string
              format: binary
            binaryDataN2InformationExt12:
              type: string
              format: binary
            binaryDataN2InformationExt13:
              type: string
              format: binary
            binaryDataN2InformationExt14:
```

```
        type: string
        format: binary
      binaryDataN2InformationExt15:
        type: string
        format: binary
encoding:
  jsonData:
    contentType:  application/json
  binaryDataN2Information:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
        schema:
          type: string
  binaryDataN2InformationExt1:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
        schema:
          type: string
  binaryDataN2InformationExt2:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
        schema:
          type: string
  binaryDataN2InformationExt3:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
        schema:
          type: string
  binaryDataN2InformationExt4:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
        schema:
          type: string
  binaryDataN2InformationExt5:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
        schema:
          type: string
  binaryDataN2InformationExt6:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
        schema:
          type: string
  binaryDataN2InformationExt7:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
        schema:
          type: string
  binaryDataN2InformationExt8:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
        schema:
          type: string
  binaryDataN2InformationExt9:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
        schema:
          type: string
  binaryDataN2InformationExt10:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
        schema:
          type: string
  binaryDataN2InformationExt11:
    contentType:  application/vnd.3gpp.ngap
    headers:
      Content-Id:
```

```
              schema:
                type: string
        binaryDataN2InformationExt12:
          contentType:  application/vnd.3gpp.ngap
          headers:
            Content-Id:
              schema:
                type: string
        binaryDataN2InformationExt13:
          contentType:  application/vnd.3gpp.ngap
          headers:
            Content-Id:
              schema:
                type: string
        binaryDataN2InformationExt14:
          contentType:  application/vnd.3gpp.ngap
          headers:
            Content-Id:
              schema:
                type: string
        binaryDataN2InformationExt15:
          contentType:  application/vnd.3gpp.ngap
          headers:
            Content-Id:
              schema:
                type: string
'307':
  $ref: 'TS29571_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29571_CommonData.yaml#/components/responses/308'
'400':
  description: Bad Request
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/UeContextCreateError'
    application/problem+json: # error originated by an SCP or SEPP
      schema:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
'401':
  $ref: 'TS29571_CommonData.yaml#/components/responses/401'
'403':
  description: Forbidden
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/UeContextCreateError'
    application/problem+json: # error originated by an SCP or SEPP
      schema:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
    multipart/related:  # message with binary body part(s)
      schema:
        type: object
        properties: # Response parts
          jsonData:
            $ref: '#/components/schemas/UeContextCreateError'
          binaryDataN2Information:
            type: string
            format: binary
      encoding:
        jsonData:
          contentType:  application/json
        binaryDataN2Information:
          contentType:  application/vnd.3gpp.ngap
          headers:
            Content-Id:
              schema:
                type: string
'404':
  $ref: 'TS29571_CommonData.yaml#/components/responses/404'
'411':
  $ref: 'TS29571_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29571_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29571_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
```

```
        '500':
          description: Internal Server Error
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/UeContextCreateError'
        '502':
          $ref: 'TS29571_CommonData.yaml#/components/responses/502'
        '503':
          $ref: 'TS29571_CommonData.yaml#/components/responses/503'
        default:
          description: Unexpected error
  /ue-contexts/{ueContextId}/release:
    post:
      summary: Namf_Communication ReleaseUEContext service Operation
      tags:
        - Individual ueContext (Document)
      operationId: ReleaseUEContext
      security:
        - {}
        - oAuth2ClientCredentials:
          - namf-comm
        - oAuth2ClientCredentials:
          - namf-comm
          - namf-comm:ue-contexts:mobility
      parameters:
        - name: ueContextId
          in: path
          description: UE Context Identifier
          required: true
          schema:
            type: string
            pattern: '^(5g-guti-[0-9]{5,6}[0-9a-fA-F]{14}|imsi-[0-9]{5,15}|nai-.+|gli-.+|gci-
.+|imei-[0-9]{15}|imeisv-[0-9]{16}|.+)$'
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/UEContextRelease'
        required: true
      responses:
        '204':
          description: UE Context successfully released
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29571_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29571_CommonData.yaml#/components/responses/500'
        '502':
          $ref: 'TS29571_CommonData.yaml#/components/responses/502'
        '503':
          $ref: 'TS29571_CommonData.yaml#/components/responses/503'
        default:
          description: Unexpected error
  /ue-contexts/{ueContextId}/assign-ebi:
    post:
      summary: Namf_Communication EBI Assignment service Operation
      tags:
        - Individual ueContext (Document)
      operationId: EBIAssignment
      security:
```

```
        - {}
        - oAuth2ClientCredentials:
          - namf-comm
        - oAuth2ClientCredentials:
          - namf-comm
          - namf-comm:ue-contexts:assign-ebi
      parameters:
        - name: ueContextId
          in: path
          description: UE Context Identifier
          required: true
          schema:
            type: string
            pattern: '^(5g-guti-[0-9]{5,6}[0-9a-fA-F]{14}|imsi-[0-9]{5,15}|nai-.+|gli-.+|gci-
.+|imei-[0-9]{15}|imeisv-[0-9]{16}|.+)$'
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/AssignEbiData'
        required: true
      responses:
        '200':
          description: EBI Assignment successfully performed.
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/AssignedEbiData'
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          description: Bad Request
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/AssignEbiError'
            application/problem+json: # error originated by an SCP
              schema:
                $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          description: Forbidden
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/AssignEbiError'
            application/problem+json: # error originated by an SCP
              schema:
                $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '409':
          description: Conflict
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/AssignEbiError'
        '411':
          $ref: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29571_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
          description: Internal Server Error
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/AssignEbiError'
            application/problem+json: # error originated by an SCP
              schema:
                $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
        '502':
```

```
        $ref: 'TS29571_CommonData.yaml#/components/responses/502'
      '503':
        $ref: 'TS29571_CommonData.yaml#/components/responses/503'
      default:
        description: Unexpected error
  /ue-contexts/{ueContextId}/transfer:
    post:
      summary: Namf_Communication UEContextTransfer service Operation
      tags:
        - Individual ueContext (Document)
      operationId: UEContextTransfer
      security:
        - {}
        - oAuth2ClientCredentials:
          - namf-comm
        - oAuth2ClientCredentials:
          - namf-comm
          - namf-comm:ue-contexts:mobility
      parameters:
        - name: ueContextId
          in: path
          description: UE Context Identifier
          required: true
          schema:
            type: string
            pattern: '^(5g-guti-[0-9]{5,6}[0-9a-fA-F]{14}|imsi-[0-9]{5,15}|nai-.+|gli-.+|gci-
.+|imei-[0-9]{15}|imeisv-[0-9]{16}|.+)$'
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/UeContextTransferReqData'
          multipart/related:  # message with binary body part(s)
            schema:
              type: object
              properties: # Request parts
                jsonData:
                  $ref: '#/components/schemas/UeContextTransferReqData'
                binaryDataN1Message:
                  type: string
                  format: binary
            encoding:
              jsonData:
                contentType:  application/json
              binaryDataN1Message:
                contentType:  application/vnd.3gpp.5gnas
                headers:
                  Content-Id:
                    schema:
                      type: string
        required: true
      responses:
        '200':
          description: UE context transfer successfully initiated.
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/UeContextTransferRspData'
            multipart/related:  # message with binary body part(s)
              schema:
                type: object
                properties: # Request parts
                  jsonData:
                    $ref: '#/components/schemas/UeContextTransferRspData'
                  binaryDataN2Information:
                    type: string
                    format: binary
                  binaryDataN2InformationExt1:
                    type: string
                    format: binary
                  binaryDataN2InformationExt2:
                    type: string
                    format: binary
              encoding:
                jsonData:
                  contentType:  application/json
                binaryDataN2Information:
                  contentType:  application/vnd.3gpp.ngap
```

```
                headers:
                  Content-Id:
                    schema:
                      type: string
                binaryDataN2InformationExt1:
                  contentType:  application/vnd.3gpp.ngap
                  headers:
                    Content-Id:
                      schema:
                        type: string
                binaryDataN2InformationExt2:
                  contentType:  application/vnd.3gpp.ngap
                  headers:
                    Content-Id:
                      schema:
                        type: string
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29571_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29571_CommonData.yaml#/components/responses/500'
        '502':
          $ref: 'TS29571_CommonData.yaml#/components/responses/502'
        '503':
          $ref: 'TS29571_CommonData.yaml#/components/responses/503'
        default:
          description: Unexpected error
  /ue-contexts/{ueContextId}/transfer-update:
    post:
      summary: Namf_Communication RegistrationStatusUpdate service Operation
      tags:
        - Individual ueContext (Document)
      operationId: RegistrationStatusUpdate
      security:
        - {}
        - oAuth2ClientCredentials:
          - namf-comm
        - oAuth2ClientCredentials:
          - namf-comm
          - namf-comm:ue-contexts:mobility
      parameters:
        - name: ueContextId
          in: path
          description: UE Context Identifier
          required: true
          schema:
            type: string
            pattern: '^(5g-guti-[0-9]{5,6}[0-9a-fA-F]{14}|imsi-[0-9]{5,15}|nai-.+|gli-.+|gci-
.+|imei-[0-9]{15}|imeisv-[0-9]{16}|.+)$'
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/UeRegStatusUpdateReqData'
        required: true
      responses:
        '200':
          description: UE context transfer status successfully updated.
          content:
            application/json:
              schema:
```

```
                $ref: '#/components/schemas/UeRegStatusUpdateRspData'
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29571_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29571_CommonData.yaml#/components/responses/500'
        '502':
          $ref: 'TS29571_CommonData.yaml#/components/responses/502'
        '503':
          $ref: 'TS29571_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29571_CommonData.yaml#/components/responses/default'
  /ue-contexts/{ueContextId}/relocate:
    post:
      summary: Namf_Communication RelocateUEContext service Operation
      tags:
        - Individual ueContext (Document)
      operationId: RelocateUEContext
      security:
        - {}
        - oAuth2ClientCredentials:
          - namf-comm
        - oAuth2ClientCredentials:
          - namf-comm
          - namf-comm:ue-contexts:mobility
      parameters:
        - name: ueContextId
          in: path
          description: UE Context Identifier
          required: true
          schema:
            type: string
            pattern: '^(5g-guti-[0-9]{5,6}[0-9a-fA-F]{14}|imsi-[0-9]{5,15}|nai-.+|gli-.+|gci-
.+|imei-[0-9]{15}|imeisv-[0-9]{16}|.+)$'
      requestBody:
        content:
          multipart/related:  # message with binary body part(s)
            schema:
              type: object
              properties: # Request parts
                jsonData:
                  $ref: '#/components/schemas/UeContextRelocateData'
                binaryDataForwardRelocationRequest:
                  type: string
                  format: binary
                binaryDataN2Information:
                  type: string
                  format: binary
                binaryDataN2InformationExt1:
                  type: string
                  format: binary
                binaryDataN2InformationExt2:
                  type: string
                  format: binary
                binaryDataN2InformationExt3:
                  type: string
                  format: binary
                binaryDataN2InformationExt4:
                  type: string
                  format: binary
                binaryDataN2InformationExt5:
```

```
        type: string
        format: binary
      binaryDataN2InformationExt6:
        type: string
        format: binary
      binaryDataN2InformationExt7:
        type: string
        format: binary
      binaryDataN2InformationExt8:
        type: string
        format: binary
      binaryDataN2InformationExt9:
        type: string
        format: binary
      binaryDataN2InformationExt10:
        type: string
        format: binary
      binaryDataN2InformationExt11:
        type: string
        format: binary
      binaryDataN2InformationExt12:
        type: string
        format: binary
      binaryDataN2InformationExt13:
        type: string
        format: binary
      binaryDataN2InformationExt14:
        type: string
        format: binary
      binaryDataN2InformationExt15:
        type: string
        format: binary
      binaryDataN2InformationExt16:
        type: string
        format: binary
  encoding:
    jsonData:
      contentType:  application/json
    binaryDataForwardRelocationRequest:
      contentType:  application/vnd.3gpp.gtpc
      headers:
        Content-Id:
          schema:
            type: string
    binaryDataN2Information:
      contentType:  application/vnd.3gpp.ngap
      headers:
        Content-Id:
          schema:
            type: string
    binaryDataN2InformationExt1:
      contentType:  application/vnd.3gpp.ngap
      headers:
        Content-Id:
          schema:
            type: string
    binaryDataN2InformationExt2:
      contentType:  application/vnd.3gpp.ngap
      headers:
        Content-Id:
          schema:
            type: string
    binaryDataN2InformationExt3:
      contentType:  application/vnd.3gpp.ngap
      headers:
        Content-Id:
          schema:
            type: string
    binaryDataN2InformationExt4:
      contentType:  application/vnd.3gpp.ngap
      headers:
        Content-Id:
          schema:
            type: string
    binaryDataN2InformationExt5:
      contentType:  application/vnd.3gpp.ngap
      headers:
        Content-Id:
```

```
                  schema:
                    type: string
              binaryDataN2InformationExt6:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
              binaryDataN2InformationExt7:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
              binaryDataN2InformationExt8:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
              binaryDataN2InformationExt9:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
              binaryDataN2InformationExt10:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
              binaryDataN2InformationExt11:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
              binaryDataN2InformationExt12:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
              binaryDataN2InformationExt13:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
              binaryDataN2InformationExt14:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
              binaryDataN2InformationExt15:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
              binaryDataN2InformationExt16:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
        required: true
      responses:
        '201':
          description: UE context successfully relocated.
          headers:
            Location:
              description: 'Contains the URI of the newly created resource, according to the
structure: {apiRoot}/namf-comm/<apiVersion>/ue-contexts/{ueContextId}/relocate'
              required: true
              schema:
```

```
              type: string
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/UeContextRelocatedData'
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29571_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29571_CommonData.yaml#/components/responses/500'
        '502':
          $ref: 'TS29571_CommonData.yaml#/components/responses/502'
        '503':
          $ref: 'TS29571_CommonData.yaml#/components/responses/503'
        default:
          description: Unexpected error
  /ue-contexts/{ueContextId}/cancel-relocate:
    post:
      summary: Namf_Communication CancelRelocateUEContext service Operation
      tags:
        - Individual ueContext (Document)
      operationId: CancelRelocateUEContext
      security:
        - {}
        - oAuth2ClientCredentials:
          - namf-comm
        - oAuth2ClientCredentials:
          - namf-comm
          - namf-comm:ue-contexts:mobility
      parameters:
        - name: ueContextId
          in: path
          description: UE Context Identifier
          required: true
          schema:
            type: string
            pattern: '^(5g-guti-[0-9]{5,6}[0-9a-fA-F]{14}|imsi-[0-9]{5,15}|nai-.+|gli-.+|gci-
.+|imei-[0-9]{15}|imeisv-[0-9]{16}|.+)$'
      requestBody:
        content:
          multipart/related:  # message with binary body part(s)
            schema:
              type: object
              properties: # Request parts
                jsonData:
                  $ref: '#/components/schemas/UeContextCancelRelocateData'
                binaryDataGtpcMessage:
                  type: string
                  format: binary
            encoding:
              jsonData:
                contentType:  application/json
              binaryDataGtpcMessage:
                contentType:  application/vnd.3gpp.gtpc
                headers:
                  Content-Id:
                    schema:
                      type: string
        required: true
      responses:
        '204':
```

```
          description: UE Context successfully released
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29571_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29571_CommonData.yaml#/components/responses/500'
        '502':
          $ref: 'TS29571_CommonData.yaml#/components/responses/502'
        '503':
          $ref: 'TS29571_CommonData.yaml#/components/responses/503'
        default:
          description: Unexpected error
  /ue-contexts/{ueContextId}/n1-n2-messages:
    post:
      summary: Namf_Communication N1N2 Message Transfer (UE Specific) service Operation
      tags:
        - n1N2Message collection (Collection)
      operationId: N1N2MessageTransfer
      security:
        - {}
        - oAuth2ClientCredentials:
          - namf-comm
        - oAuth2ClientCredentials:
          - namf-comm
          - namf-comm:n1-n2-messages
      parameters:
        - name: ueContextId
          in: path
          description: UE Context Identifier
          required: true
          schema:
            type: string
            pattern: '^(imsi-[0-9]{5,15}|nai-.+|gli-.+|gci-.+|imei-[0-9]{15}|imeisv-[0-9]{16}|cid-
.{1,255}|.+)$'
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/N1N2MessageTransferReqData'
          multipart/related:  # message with binary body part(s)
            schema:
              type: object
              properties: # Request parts
                jsonData:
                  $ref: '#/components/schemas/N1N2MessageTransferReqData'
                binaryDataN1Message:
                  type: string
                  format: binary
                binaryDataN2Information:
                  type: string
                  format: binary
                binaryMtData:
                  type: string
                  format: binary
            encoding:
              jsonData:
                contentType:  application/json
              binaryDataN1Message:
                contentType:  application/vnd.3gpp.5gnas
                headers:
                  Content-Id:
```

```
              schema:
                type: string
        binaryDataN2Information:
          contentType:  application/vnd.3gpp.ngap
          headers:
            Content-Id:
              schema:
                type: string
        binaryMtData:
          contentType:  application/vnd.3gpp.5gnas
          headers:
            Content-Id:
              schema:
                type: string
  required: true
responses:
  '202':
    description: N1N2 Message Transfer accepted.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/N1N2MessageTransferRspData'
    headers:
      Location:
        description: >
          The URI of the resource located on the AMF In this release, the URI shall only be
          used by NF Service Consumer to correlate the possible N1/N2 Message Transfer Failure
          Notification With the related N1/N2 Message Transfer Operation. The NF service
          consumer shall not send any service requests towards the URI received in the
          Location header.
        required: true
        schema:
          type: string
  '200':
    description: N1N2 Message Transfer successfully initiated.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/N1N2MessageTransferRspData'
  '307':
    $ref: 'TS29571_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29571_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '409':
    description: Conflicts
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/N1N2MessageTransferError'
  '411':
    $ref: 'TS29571_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29571_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29571_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '502':
    $ref: 'TS29571_CommonData.yaml#/components/responses/502'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  '504':
    description: Gateway Timeout
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/N1N2MessageTransferError'
      application/problem+json: # error originated by an SCP or SEPP
```

```
            schema:
              $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
      default:
        description: Unexpected error
    callbacks:
      onN1N2TransferFailure:
        '{$request.body#/n1n2FailureTxfNotifURI}':
          post:
            summary: Namf_Communication N1N2Transfer Failure Notification service Operation
            tags:
              - N1N2 Transfer Failure Notification
            operationId: N1N2TransferFailureNotification
            requestBody:
              description: N1N2Transfer Failure Notification
              content:
                application/json:
                  schema:
                    $ref: '#/components/schemas/N1N2MsgTxfrFailureNotification'
            responses:
              '204':
                description: Expected response to a successful callback processing
              '307':
                $ref: 'TS29571_CommonData.yaml#/components/responses/307'
              '308':
                $ref: 'TS29571_CommonData.yaml#/components/responses/308'
              '400':
                $ref: 'TS29571_CommonData.yaml#/components/responses/400'
              '401':
                $ref: 'TS29571_CommonData.yaml#/components/responses/401'
              '403':
                $ref: 'TS29571_CommonData.yaml#/components/responses/403'
              '404':
                $ref: 'TS29571_CommonData.yaml#/components/responses/404'
              '411':
                $ref: 'TS29571_CommonData.yaml#/components/responses/411'
              '413':
                $ref: 'TS29571_CommonData.yaml#/components/responses/413'
              '415':
                $ref: 'TS29571_CommonData.yaml#/components/responses/415'
              '429':
                $ref: 'TS29571_CommonData.yaml#/components/responses/429'
              '500':
                $ref: 'TS29571_CommonData.yaml#/components/responses/500'
              '502':
                $ref: 'TS29571_CommonData.yaml#/components/responses/502'
              '503':
                $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  /ue-contexts/{ueContextId}/n1-n2-messages/subscriptions:
    post:
      summary: Namf_Communication N1N2 Message Subscribe (UE Specific) service Operation
      tags:
        - N1N2 Subscriptions Collection for Individual UE Contexts (Collection)
      operationId: N1N2MessageSubscribe
      security:
        - {}
        - oAuth2ClientCredentials:
          - namf-comm
        - oAuth2ClientCredentials:
          - namf-comm
          - namf-comm:n1-n2-messages
      parameters:
        - name: ueContextId
          in: path
          description: UE Context Identifier
          required: true
          schema:
            type: string
            pattern: '^(imsi-[0-9]{5,15}|nai-.+|gli-.+|gci-.+|imei-[0-9]{15}|imeisv-[0-9]{16}|.+)$'
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/UeN1N2InfoSubscriptionCreateData'
        required: true
      responses:
        '201':
          description: N1N2 Message Subscription successfully created.
          headers:
```

```
            Location:
              description: 'Contains the URI of the newly created resource, according to the
structure: {apiRoot}/namf-comm/<apiVersion>/ue-contexts/{ueContextId}/n1-n2-
messages/subscriptions/{subscriptionId}'
              required: true
              schema:
                type: string
            content:
              application/json:
                schema:
                  $ref: '#/components/schemas/UeN1N2InfoSubscriptionCreatedData'
          '307':
            $ref: 'TS29571_CommonData.yaml#/components/responses/307'
          '308':
            $ref: 'TS29571_CommonData.yaml#/components/responses/308'
          '400':
            $ref: 'TS29571_CommonData.yaml#/components/responses/400'
          '401':
            $ref: 'TS29571_CommonData.yaml#/components/responses/401'
          '403':
            $ref: 'TS29571_CommonData.yaml#/components/responses/403'
          '404':
            $ref: 'TS29571_CommonData.yaml#/components/responses/404'
          '411':
            $ref: 'TS29571_CommonData.yaml#/components/responses/411'
          '413':
            $ref: 'TS29571_CommonData.yaml#/components/responses/413'
          '415':
            $ref: 'TS29571_CommonData.yaml#/components/responses/415'
          '429':
            $ref: 'TS29571_CommonData.yaml#/components/responses/429'
          '500':
            $ref: 'TS29571_CommonData.yaml#/components/responses/500'
          '502':
            $ref: 'TS29571_CommonData.yaml#/components/responses/502'
          '503':
            $ref: 'TS29571_CommonData.yaml#/components/responses/503'
          default:
            description: Unexpected error
        callbacks:
          onN1N2MessageNotify:
            '{$request.body#/n1NotifyCallbackUri}':
              post:
                summary: Namf_Communication N1 Message Notify service Operation
                tags:
                  - N1 Message Notify
                operationId: N1MessageNotify
                requestBody:
                  description: N1 Message Notification
                  content:
                    multipart/related:  # message with binary body part(s)
                      schema:
                        type: object
                        properties: # Request parts
                          jsonData:
                            $ref: '#/components/schemas/N1MessageNotification'
                          binaryDataN1Message:
                            type: string
                            format: binary
                      encoding:
                        jsonData:
                          contentType:  application/json
                        binaryDataN1Message:
                          contentType:  application/vnd.3gpp.5gnas
                          headers:
                            Content-Id:
                              schema:
                                type: string
                responses:
                  '204':
                    description: Expected response to a successful callback processing
                  '307':
                    $ref: 'TS29571_CommonData.yaml#/components/responses/307'
                  '308':
                    $ref: 'TS29571_CommonData.yaml#/components/responses/308'
                  '400':
                    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
                  '401':
```

```
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29571_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29571_CommonData.yaml#/components/responses/500'
        '502':
          $ref: 'TS29571_CommonData.yaml#/components/responses/502'
        '503':
          $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  '{$request.body#/n2NotifyCallbackUri}':
    post:
      summary: Namf_Communication N2 Info Notify (UE Specific) service Operation
      tags:
        - N2 Info Notify
      operationId: N2InfoNotify
      requestBody:
        description: UE Specific N2 Information Notification
        content:
          multipart/related:  # message with binary body part(s)
            schema:
              type: object
              properties: # Request parts
                jsonData:
                  $ref: '#/components/schemas/N2InformationNotification'
                binaryDataN1Message:
                  type: string
                  format: binary
                binaryDataN2Information:
                  type: string
                  format: binary
            encoding:
              jsonData:
                contentType:  application/json
              binaryDataN1Message:
                contentType:  application/vnd.3gpp.5gnas
                headers:
                  Content-Id:
                    schema:
                      type: string
              binaryDataN2Information:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
      responses:
        '204':
          description: Expected response to a successful callback processing
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29571_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
```

```
              '500':
                $ref: 'TS29571_CommonData.yaml#/components/responses/500'
              '502':
                $ref: 'TS29571_CommonData.yaml#/components/responses/502'
              '503':
                $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  /ue-contexts/{ueContextId}/n1-n2-messages/subscriptions/{subscriptionId}:
    delete:
      summary: Namf_Communication N1N2 Message UnSubscribe (UE Specific) service Operation
      tags:
        - N1N2 Individual Subscription (Document)
      operationId: N1N2MessageUnSubscribe
      security:
        - {}
        - oAuth2ClientCredentials:
          - namf-comm
        - oAuth2ClientCredentials:
          - namf-comm
          - namf-comm:n1-n2-messages
      parameters:
        - name: ueContextId
          in: path
          description: UE Context Identifier
          required: true
          schema:
            type: string
            pattern: '^(imsi-[0-9]{5,15}|nai-.+|gli-.+|gci-.+|imei-[0-9]{15}|imeisv-[0-9]{16}|.+)$'
        - name: subscriptionId
          in: path
          description: Subscription Identifier
          required: true
          schema:
            type: string
      responses:
        '204':
          description: N1N2 Message Subscription successfully removed.
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29571_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29571_CommonData.yaml#/components/responses/500'
        '502':
          $ref: 'TS29571_CommonData.yaml#/components/responses/502'
        '503':
          $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  /non-ue-n2-messages/transfer:
    post:
      summary: Namf_Communication Non UE N2 Message Transfer service Operation
      tags:
        - Non UE N2Messages collection (Collection)
      operationId: NonUeN2MessageTransfer
      security:
        - {}
        - oAuth2ClientCredentials:
          - namf-comm
        - oAuth2ClientCredentials:
          - namf-comm
          - namf-comm:non-ue-n2-messages
      requestBody:
        content:
          application/json:
```

```
        schema:
          $ref: '#/components/schemas/N2InformationTransferReqData'
      multipart/related:  # message with binary body part(s)
        schema:
          type: object
          properties: # Request parts
            jsonData:
              $ref: '#/components/schemas/N2InformationTransferReqData'
            binaryDataN2Information:
              type: string
              format: binary
        encoding:
          jsonData:
            contentType:  application/json
          binaryDataN2Information:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
    required: true
  responses:
    '200':
      description: Non UE N2 Message Transfer successfully initiated.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/N2InformationTransferRspData'
        multipart/related:  # response with binary body part(s)
          schema:
            type: object
            properties:
              jsonData:
                $ref: '#/components/schemas/N2InformationTransferRspData'
              binaryDataN2Information1:
                type: string
                format: binary
              binaryDataN2Information2:
                type: string
                format: binary
              binaryDataN2Information3:
                type: string
                format: binary
              binaryDataN2Information4:
                type: string
                format: binary
              binaryDataN2Information5:
                type: string
                format: binary
              binaryDataN2Information6:
                type: string
                format: binary
              binaryDataN2Information7:
                type: string
                format: binary
              binaryDataN2Information8:
                type: string
                format: binary
              binaryDataN2Information9:
                type: string
                format: binary
              binaryDataN2Information10:
                type: string
                format: binary
          encoding:
            jsonData:
              contentType:  application/json
            binaryDataN2Information1:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
                    type: string
            binaryDataN2Information2:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
```

```
              type: string
          binaryDataN2Information3:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
          binaryDataN2Information4:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
          binaryDataN2Information5:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
          binaryDataN2Information6:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
          binaryDataN2Information7:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
          binaryDataN2Information8:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
          binaryDataN2Information9:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
          binaryDataN2Information10:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
'307':
  $ref: 'TS29571_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29571_CommonData.yaml#/components/responses/308'
'400':
  description: Bad Request
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/N2InformationTransferError'
    application/problem+json: # error originated by an SCP or SEPP
      schema:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
'401':
  $ref: 'TS29571_CommonData.yaml#/components/responses/401'
'403':
  description: Forbidden
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/N2InformationTransferError'
    application/problem+json: # error originated by an SCP or SEPP
      schema:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
'404':
  description: Not Found
  content:
    application/json:
      schema:
```

```
              $ref: '#/components/schemas/N2InformationTransferError'
        '411':
          $ref: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29571_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
          description: Internal Server Error
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/N2InformationTransferError'
            application/problem+json: # error originated by an SCP or SEPP
              schema:
                $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
        '502':
          $ref: 'TS29571_CommonData.yaml#/components/responses/502'
        '503':
          description: Service Unavailable
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/N2InformationTransferError'
            application/problem+json: # error originated by an SCP or SEPP
              schema:
                $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
        default:
          description: Unexpected error
  /non-ue-n2-messages/subscriptions:
    post:
      summary: Namf_Communication Non UE N2 Info Subscribe service Operation
      tags:
        - Non UE N2Messages Subscriptions collection (Collection)
      operationId: NonUeN2InfoSubscribe
      security:
        - {}
        - oAuth2ClientCredentials:
          - namf-comm
        - oAuth2ClientCredentials:
          - namf-comm
          - namf-comm:non-ue-n2-messages
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/NonUeN2InfoSubscriptionCreateData'
        required: true
      responses:
        '201':
          description: Non UE N2 Info Subscription successfully created.
          headers:
            Location:
              description: 'Contains the URI of the newly created resource, according to the
structure: {apiRoot}/namf-comm/<apiVersion>/non-ue-n2-
messages/subscriptions/{n2NotifySubscriptionId}'
              required: true
              schema:
                type: string
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/NonUeN2InfoSubscriptionCreatedData'
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '411':
```

```
      $ref: 'TS29571_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29571_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29571_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '502':
      $ref: 'TS29571_CommonData.yaml#/components/responses/502'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
      description: Unexpected error
  callbacks:
    onN2InfoNotify:
      '{$request.body#/n2NotifyCallbackUri}':
        post:
          summary: Namf_Communication Non UE N2 Info Notify service Operation
          tags:
            - Non UE N2 Info Notify
          operationId: NonUeN2InfoNotify
          requestBody:
            description: Non UE N2 Information Notification
            content:
              application/json:
                schema:
                  $ref: '#/components/schemas/N2InformationNotification'
              multipart/related:  # message with binary body part(s)
                schema:
                  type: object
                  properties: # Request parts
                    jsonData:
                      $ref: '#/components/schemas/N2InformationNotification'
                    binaryDataN2Information1:
                      type: string
                      format: binary
                    binaryDataN2Information2:
                      type: string
                      format: binary
                    binaryDataN2Information3:
                      type: string
                      format: binary
                    binaryDataN2Information4:
                      type: string
                      format: binary
                    binaryDataN2Information5:
                      type: string
                      format: binary
                    binaryDataN2Information6:
                      type: string
                      format: binary
                    binaryDataN2Information7:
                      type: string
                      format: binary
                    binaryDataN2Information8:
                      type: string
                      format: binary
                    binaryDataN2Information9:
                      type: string
                      format: binary
                    binaryDataN2Information10:
                      type: string
                      format: binary
                encoding:
                  jsonData:
                    contentType:  application/json
                  binaryDataN2Information1:
                    contentType:  application/vnd.3gpp.ngap
                    headers:
                      Content-Id:
                        schema:
                          type: string
                  binaryDataN2Information2:
                    contentType:  application/vnd.3gpp.ngap
                    headers:
                      Content-Id:
```

```
                schema:
                  type: string
          binaryDataN2Information3:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
          binaryDataN2Information4:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
          binaryDataN2Information5:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
          binaryDataN2Information6:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
          binaryDataN2Information7:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
          binaryDataN2Information8:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
          binaryDataN2Information9:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
          binaryDataN2Information10:
            contentType:  application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
responses:
  '204':
    description: Expected response to a successful callback processing
  '307':
    $ref: 'TS29571_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29571_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29571_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29571_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29571_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '502':
    $ref: 'TS29571_CommonData.yaml#/components/responses/502'
  '503':
```

```
                $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  /non-ue-n2-messages/subscriptions/{n2NotifySubscriptionId}:
    delete:
      summary: Namf_Communication Non UE N2 Info UnSubscribe service Operation
      tags:
        - Non UE N2 Message Notification Individual Subscription (Document)
      operationId: NonUeN2InfoUnSubscribe
      security:
        - {}
        - oAuth2ClientCredentials:
          - namf-comm
        - oAuth2ClientCredentials:
          - namf-comm
          - namf-comm:non-ue-n2-messages
      parameters:
        - name: n2NotifySubscriptionId
          in: path
          description: N2 info Subscription Identifier
          required: true
          schema:
            type: string
      responses:
        '204':
          description: Non UE N2 INfo Subscription successfully removed.
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '429':
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29571_CommonData.yaml#/components/responses/500'
        '502':
          $ref: 'TS29571_CommonData.yaml#/components/responses/502'
        '503':
          $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  /subscriptions:
    post:
      summary: Namf_Communication AMF Status Change Subscribe service Operation
      tags:
        - subscriptions collection (Collection)
      operationId: AMFStatusChangeSubscribe
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/SubscriptionData'
        required: true
      responses:
        '201':
          description: N1N2 Message Subscription successfully created.
          headers:
            Location:
              description: 'Contains the URI of the newly created resource, according to the
structure: {apiRoot}/namf-comm/<apiVersion>/subscriptions/{subscriptionId}'
              required: true
              schema:
                type: string
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/SubscriptionData'
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
```

```
      '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29571_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29571_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29571_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29571_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29571_CommonData.yaml#/components/responses/500'
      '502':
        $ref: 'TS29571_CommonData.yaml#/components/responses/502'
      '503':
        $ref: 'TS29571_CommonData.yaml#/components/responses/503'
      default:
        description: Unexpected error
    callbacks:
      onAmfStatusChange:
        '{$request.body#/amfStatusUri}':
          post:
            summary: Amf Status Change Notify service Operation
            tags:
              - Amf Status Change Notify
            operationId: AmfStatusChangeNotify
            requestBody:
              description: Amf Status Change Notification
              content:
                application/json:
                  schema:
                    $ref: '#/components/schemas/AmfStatusChangeNotification'
            responses:
              '204':
                description: Expected response to a successful callback processing
              '307':
                $ref: 'TS29571_CommonData.yaml#/components/responses/307'
              '308':
                $ref: 'TS29571_CommonData.yaml#/components/responses/308'
              '400':
                $ref: 'TS29571_CommonData.yaml#/components/responses/400'
              '401':
                $ref: 'TS29571_CommonData.yaml#/components/responses/401'
              '403':
                $ref: 'TS29571_CommonData.yaml#/components/responses/403'
              '404':
                $ref: 'TS29571_CommonData.yaml#/components/responses/404'
              '411':
                $ref: 'TS29571_CommonData.yaml#/components/responses/411'
              '413':
                $ref: 'TS29571_CommonData.yaml#/components/responses/413'
              '415':
                $ref: 'TS29571_CommonData.yaml#/components/responses/415'
              '429':
                $ref: 'TS29571_CommonData.yaml#/components/responses/429'
              '500':
                $ref: 'TS29571_CommonData.yaml#/components/responses/500'
              '502':
                $ref: 'TS29571_CommonData.yaml#/components/responses/502'
              '503':
                $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  /subscriptions/{subscriptionId}:
    delete:
      summary: Namf_Communication AMF Status Change UnSubscribe service Operation
      tags:
        - individual subscription (Document)
      operationId: AMFStatusChangeUnSubscribe
      parameters:
        - name: subscriptionId
          in: path
          description: AMF Status Change Subscription Identifier
          required: true
          schema:
            type: string
      responses:
        '204':
```

```
        description: N1N2 Message Subscription successfully removed.
      '307':
        $ref: 'TS29571_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29571_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
      '429':
        $ref: 'TS29571_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29571_CommonData.yaml#/components/responses/500'
      '502':
        $ref: 'TS29571_CommonData.yaml#/components/responses/502'
      '503':
        $ref: 'TS29571_CommonData.yaml#/components/responses/503'
      default:
        description: Unexpected error
  put:
    summary: Namf_Communication AMF Status Change Subscribe Modify service Operation
    tags:
      - individual subscription (Document)
    operationId: AMFStatusChangeSubscribeModfy
    parameters:
      - name: subscriptionId
        in: path
        description: AMF Status Change Subscription Identifier
        required: true
        schema:
          type: string
    requestBody:
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/SubscriptionData'
      required: true
    responses:
      '200':
        description: Subscription modified successfully
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/SubscriptionData'
      '204':
        description: Events subscription modification is accepted entirely
      '307':
        $ref: 'TS29571_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29571_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29571_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29571_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29571_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29571_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29571_CommonData.yaml#/components/responses/500'
      '502':
        $ref: 'TS29571_CommonData.yaml#/components/responses/502'
      '503':
        $ref: 'TS29571_CommonData.yaml#/components/responses/503'
      default:
        description: Unexpected error
```

```
      callbacks:
        OnAmfStatusChange:
          '{$request.body#/amfStatusUri}':
            post:
              summary: Amf Status Change Notify service Operation
              tags:
                - Amf Status Change Notify
              operationId: AmfStatusChangeNOtify
              requestBody:
                description: Amf Status Change Notification
                content:
                  application/json:
                    schema:
                      $ref: '#/components/schemas/AmfStatusChangeNotification'
              responses:
                '204':
                  description: Expected response to a successful callback processing
                '307':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/307'
                '308':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/308'
                '400':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/400'
                '401':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/401'
                '403':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/403'
                '404':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/404'
                '411':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/411'
                '413':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/413'
                '415':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/415'
                '429':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
                '500':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
                '502':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/502'
                '503':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{nrfApiRoot}/oauth2/token'
          scopes:
            namf-comm: Access to the Namf_Communication API
            namf-comm:ue-contexts:mobility: >
              Access to service operations applying to UE context resources, i.e.,
              UEContextTransfer, RegistrationStatusUpdate, CreateUEContext, ReleaseUEContext,
              RelocateUEContext, and CancelRelocateUEContext.
            namf-comm:ue-contexts:assign-ebi: >
              Access to service operations applying to UE context resources for EBI assignment,
              i.e., EBIAssignment.
            namf-comm:n1-n2-messages: >
              Access to service operations applying to n1-n2-messages resources, i.e.,
              N1N2MessageSubscribe, N1N2MessageUnSubscribe, N1N2MessageTransfer, N1MessageNotify and
              N2InfoNotify
            namf-comm:non-ue-n2-messages: >
              Access to service operations applying to the non-ue-n2-messages resources, i.e.,
              NonUeN2MessageTransfer, NonUeN2InfoSubscribe, NonUeN2InfoUnSubscribe, and
              NonUeN2InfoNotify
  schemas:
#
# STRUCTURED DATA TYPES
#
    SubscriptionData:
      description: Data within an AMF Status Change Subscription request and response
      type: object
      properties:
        amfStatusUri:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        guamiList:
```

```
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Guami'
        minItems: 1
    required:
      - amfStatusUri
  AmfStatusChangeNotification:
    description: Data within an AMF Status Change Notification request
    type: object
    properties:
      amfStatusInfoList:
        type: array
        items:
          $ref: '#/components/schemas/AmfStatusInfo'
        minItems: 1
    required:
      - amfStatusInfoList
  AmfStatusInfo:
    description: AMF Status Information
    type: object
    properties:
      guamiList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Guami'
        minItems: 1
      statusChange:
        $ref: '#/components/schemas/StatusChange'
      targetAmfRemoval:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/AmfName'
      targetAmfFailure:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/AmfName'
    required:
      - guamiList
      - statusChange
  AssignEbiData:
    description: Data within an EBI assignment request
    type: object
    properties:
      pduSessionId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSessionId'
      arpList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Arp'
        minItems: 1
      releasedEbiList:
        type: array
        items:
          $ref: '#/components/schemas/EpsBearerId'
        minItems: 1
      oldGuami:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Guami'
      modifiedEbiList:
        type: array
        items:
          $ref: 'TS29502_Nsmf_PDUSession.yaml#/components/schemas/EbiArpMapping'
        minItems: 1
    required:
      - pduSessionId
  AssignedEbiData:
    description: Data within a successful response to an EBI assignment request
    type: object
    properties:
      pduSessionId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSessionId'
      assignedEbiList:
        type: array
        items:
          $ref: 'TS29502_Nsmf_PDUSession.yaml#/components/schemas/EbiArpMapping'
        minItems: 0
      failedArpList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Arp'
        minItems: 1
      releasedEbiList:
        type: array
```

```
          items:
            $ref: '#/components/schemas/EpsBearerId'
          minItems: 1
        modifiedEbiList:
          type: array
          items:
            $ref: '#/components/schemas/EpsBearerId'
          minItems: 1
      required:
        - pduSessionId
        - assignedEbiList
    AssignEbiFailed:
      description: Represents failed assignment of EBI(s)
      type: object
      properties:
        pduSessionId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSessionId'
        failedArpList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/Arp'
          minItems: 1
      required:
        - pduSessionId
    UEContextRelease:
      description: Data within a Release UE Context request
      type: object
      properties:
        supi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
        unauthenticatedSupi:
          type: boolean
          default: false
        ngapCause:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/NgApCause'
      required:
        - ngapCause
    N2InformationTransferReqData:
      description: Data within a N2 Information Transfer request containing the N2 information
requested to be transferred to 5G AN
      type: object
      properties:
        taiList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/Tai'
          minItems: 1
        ratSelector:
          $ref: '#/components/schemas/RatSelector'
        globalRanNodeList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/GlobalRanNodeId'
          minItems: 1
        n2Information:
          $ref: '#/components/schemas/N2InfoContainer'
        supportedFeatures:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      required:
        - n2Information
    NonUeN2InfoSubscriptionCreateData:
      description: Data within a create subscription request for non-UE specific N2 information
notification
      type: object
      properties:
        globalRanNodeList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/GlobalRanNodeId'
          minItems: 1
        anTypeList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/AccessType'
          minItems: 1
        n2InformationClass:
          $ref: '#/components/schemas/N2InformationClass'
        n2NotifyCallbackUri:
```

```
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        nfId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
        supportedFeatures:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
        notifCorrelationId:
          type: string
      required:
        - n2InformationClass
        - n2NotifyCallbackUri
    NonUeN2InfoSubscriptionCreatedData:
      description: Data for the created subscription for non-UE specific N2 information notification
      type: object
      properties:
        n2NotifySubscriptionId:
          type: string
        supportedFeatures:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
        n2InformationClass:
          $ref: '#/components/schemas/N2InformationClass'
      required:
        - n2NotifySubscriptionId
    UeN1N2InfoSubscriptionCreateData:
      description: Data within a create subscription request for UE specific N1 and/or N2
information notification
      type: object
      properties:
        n2InformationClass:
          $ref: '#/components/schemas/N2InformationClass'
        n2NotifyCallbackUri:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        n1MessageClass:
          $ref: '#/components/schemas/N1MessageClass'
        n1NotifyCallbackUri:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        nfId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
        supportedFeatures:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
        oldGuami:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Guami'
    UeN1N2InfoSubscriptionCreatedData:
      description: Data for the created subscription for UE specific N1 and/or N2 information
notification
      type: object
      properties:
        n1n2NotifySubscriptionId:
          type: string
        supportedFeatures:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      required:
        - n1n2NotifySubscriptionId
    N2InformationNotification:
      description: Data within a N2 information notification request
      type: object
      properties:
        n2NotifySubscriptionId:
          type: string
        n2InfoContainer:
          $ref: '#/components/schemas/N2InfoContainer'
        toReleaseSessionList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSessionId'
          minItems: 1
        lcsCorrelationId:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/CorrelationID'
        notifyReason:
          $ref: '#/components/schemas/N2InfoNotifyReason'
        smfChangeInfoList:
          type: array
          items:
            $ref: '#/components/schemas/SmfChangeInfo'
          minItems: 1
        ranNodeId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/GlobalRanNodeId'
        initialAmfName:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/AmfName'
```

```
      anN2IPv4Addr:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Ipv4Addr'
      anN2IPv6Addr:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Ipv6Addr'
      guami:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Guami'
      notifySourceNgRan:
        type: boolean
        default: false
      notifCorrelationId:
        type: string
      toReleaseSessionInfo:
        type: array
        items:
          $ref: '#/components/schemas/ReleaseSessionInfo'
        minItems: 1
    required:
      - n2NotifySubscriptionId

  N2InfoContainer:
    description: N2 information container
    type: object
    properties:
      n2InformationClass:
        $ref: '#/components/schemas/N2InformationClass'
      smInfo:
        $ref: '#/components/schemas/N2SmInformation'
      ranInfo:
        $ref: '#/components/schemas/N2RanInformation'
      nrppaInfo:
        $ref: '#/components/schemas/NrppaInformation'
      pwsInfo:
        $ref: '#/components/schemas/PwsInformation'
      v2xInfo:
        $ref: '#/components/schemas/V2xInformation'
      proseInfo:
        $ref: '#/components/schemas/ProSeInformation'
      tssInfo:
        $ref: '#/components/schemas/TssInformation'
      rslpInfo:
        $ref: '#/components/schemas/RslpInformation'
      a2xInfo:
        $ref: '#/components/schemas/A2xInformation'
    required:
      - n2InformationClass
  N1MessageNotification:
    description: Data within a N1 message notification request
    type: object
    properties:
      n1NotifySubscriptionId:
        type: string
      n1MessageContainer:
        $ref: '#/components/schemas/N1MessageContainer'
      lcsCorrelationId:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/CorrelationID'
      registrationCtxtContainer:
        $ref: '#/components/schemas/RegistrationContextContainer'
      newLmfIdentification:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/LMFIdentification'
      guami:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Guami'
      cIoT5GSOptimisation:
        type: boolean
        default: false
      ecgi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Ecgi'
      ncgi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Ncgi'
      tai:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Tai'
      supi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
      pruInd:
        $ref: 'TS29503_Nudm_SDM.yaml#/components/schemas/PruInd'
    required:
      - n1MessageContainer
  N1MessageContainer:
    description: N1 Message container
```

```
    type: object
    properties:
      n1MessageClass:
        $ref: '#/components/schemas/N1MessageClass'
      n1MessageContent:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/RefToBinaryData'
      nfId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
      serviceInstanceId:
        type: string
    required:
      - n1MessageClass
      - n1MessageContent
  N1N2MessageTransferReqData:
    description: Data within a N1/N2 message transfer request
    type: object
    properties:
      n1MessageContainer:
        $ref: '#/components/schemas/N1MessageContainer'
      n2InfoContainer:
        $ref: '#/components/schemas/N2InfoContainer'
      mtData:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/RefToBinaryData'
      skipInd:
        type: boolean
        default: false
      lastMsgIndication:
        type: boolean
      pduSessionId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSessionId'
      lcsCorrelationId:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/CorrelationID'
      servingLMFIdentification:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/LMFIdentification'
      ppi:
        $ref: '#/components/schemas/Ppi'
      arp:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Arp'
      5qi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/5Qi'
      n1n2FailureTxfNotifURI:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      smfReallocationInd:
        type: boolean
        default: false
      areaOfValidity:
        $ref: '#/components/schemas/AreaOfValidity'
      supportedFeatures:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      oldGuami:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Guami'
      maAcceptedInd:
        type: boolean
        default: false
      extBufSupport:
        type: boolean
        default: false
      targetAccess:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/AccessType'
      nfId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
      pruInd:
        type: boolean
        enum:
          - true
      pduSessionPrio:
        $ref: 'TS29502_Nsmf_PDUSession.yaml#/components/schemas/PduSessionPriority'


  N1N2MessageTransferRspData:
    description: Data within a N1/N2 message transfer response
    type: object
    properties:
      cause:
        $ref: '#/components/schemas/N1N2MessageTransferCause'
      supportedFeatures:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
```

```
      required:
        - cause
    RegistrationContextContainer:
      description: Registration Context Container used to send the UE context information, N1
message from UE, AN address etc during Registration with AMF re-allocation procedure
      type: object
      properties:
        ueContext:
          $ref: '#/components/schemas/UeContext'
        localTimeZone:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/TimeZone'
        anType:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/AccessType'
        anN2ApId:
          type: integer
        ranNodeId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/GlobalRanNodeId'
        initialAmfName:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/AmfName'
        userLocation:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/UserLocation'
        rrcEstCause:
          type: string
          pattern: '^[0-9a-fA-F]+$'
        ueContextRequest:
          type: boolean
          default: false
        initialAmfN2ApId:
          type: integer
        anN2IPv4Addr:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Ipv4Addr'
        anN2IPv6Addr:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Ipv6Addr'
        allowedNssai:
          $ref: 'TS29531_Nnssf_NSSelection.yaml#/components/schemas/AllowedNssai'
        configuredNssai:
          type: array
          items:
            $ref: 'TS29531_Nnssf_NSSelection.yaml#/components/schemas/ConfiguredSnssai'
          minItems: 1
        rejectedNssaiInPlmn:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
          minItems: 1
        rejectedNssaiInTa:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
          minItems: 1
        selectedPlmnId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/PlmnId'
        iabNodeInd:
          type: boolean
          default: false
        mbsrNodeInd:
          type: boolean
          default: false
        ceModeBInd:
          $ref: '#/components/schemas/CeModeBInd'
        lteMInd:
          $ref: '#/components/schemas/LteMInd'
        authenticatedInd:
          type: boolean
          default: false
        npnAccessInfo:
          $ref: '#/components/schemas/NpnAccessInfo'
      required:
        - ueContext
        - anType
        - anN2ApId
        - ranNodeId
        - initialAmfName
        - userLocation

    AreaOfValidity:
      description: Area of validity information for N2 information transfer
      type: object
```

```
      properties:
        taiList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/Tai'
          minItems: 0
        taiRangeList:
          type: array
          items:
            $ref: 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/TaiRange'
          minItems: 1
      required:
        - taiList
    UeContextTransferReqData:
      description: Data within a UE Context Transfer Request to start transferring of an individual
ueContext resource from old AMF to new AMF
      type: object
      properties:
        reason:
          $ref: '#/components/schemas/TransferReason'
        accessType:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/AccessType'
        plmnId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/PlmnIdNid'
        regRequest:
          $ref: '#/components/schemas/N1MessageContainer'
        supportedFeatures:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      required:
        - reason
        - accessType
    UeContextTransferRspData:
      description: Data within a successful response to the UE Context Transfer request
      type: object
      properties:
        ueContext:
          $ref: '#/components/schemas/UeContext'
        ueRadioCapability:
          $ref: '#/components/schemas/N2InfoContent'
        ueRadioCapabilityForPaging:
          $ref: '#/components/schemas/N2InfoContent'
        ueNbiotRadioCapability:
          $ref: '#/components/schemas/N2InfoContent'
        supportedFeatures:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
        xrDeviceWith2Rx:
          $ref: '#/components/schemas/XrDeviceWith2Rx'
      required:
        - ueContext

    UeContext:
      description: Represents an individual ueContext resource
      type: object
      properties:
        supi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
        supiUnauthInd:
          type: boolean
        gpsiList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
          minItems: 1
        pei:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Pei'
        udmGroupId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/NfGroupId'
        ausfGroupId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/NfGroupId'
        pcfGroupId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/NfGroupId'
        routingIndicator:
          type: string
        hNwPubKeyId:
          type: integer
        groupList:
          type: array
          items:
```

```
      $ref: 'TS29571_CommonData.yaml#/components/schemas/GroupId'
    minItems: 1
  drxParameter:
    $ref: '#/components/schemas/DrxParameter'
  subRfsp:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/RfspIndex'
  pcfRfsp:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/RfspIndex'
  chfGroupId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/NfGroupId'
  usedRfsp:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/RfspIndex'
  subUeAmbr:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Ambr'
  pcfUeAmbr:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Ambr'
  subUeSliceMbrList:
    type: object
    additionalProperties:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SliceMbr'
    minProperties: 1
    description: A map(list of key-value pairs) where Snssai serves as key.
  smsfId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
  seafData:
    $ref: '#/components/schemas/SeafData'
  5gMmCapability:
    $ref: '#/components/schemas/5GMmCapability'
  pcfId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
  pcfSetId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/NfSetId'
  pcfAmpServiceSetId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/NfServiceSetId'
  pcfUepServiceSetId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/NfServiceSetId'
  pcfBinding:
    $ref: '#/components/schemas/SbiBindingLevel'
  pcfAmPolicyUri:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
  amPolicyReqTriggerList:
    type: array
    items:
      $ref: '#/components/schemas/PolicyReqTrigger'
    minItems: 1
  pcfUePolicyUri:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
  uePolicyReqTriggerList:
    type: array
    items:
      $ref: '#/components/schemas/PolicyReqTrigger'
    minItems: 1
  hpcfId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
  hpcfSetId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/NfSetId'
  restrictedRatList:
    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/RatType'
    minItems: 1
  forbiddenAreaList:
    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Area'
    minItems: 1
  serviceAreaRestriction:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/ServiceAreaRestriction'
  restrictedCoreNwTypeList:
    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/CoreNetworkType'
    minItems: 1
  eventSubscriptionList:
    type: array
    items:
      $ref: '#/components/schemas/ExtAmfEventSubscription'
    minItems: 1
```

```
        mmContextList:
          type: array
          items:
            $ref: '#/components/schemas/MmContext'
          minItems: 1
          maxItems: 2
        sessionContextList:
          type: array
          items:
            $ref: '#/components/schemas/PduSessionContext'
          minItems: 1
        epsInterworkingInfo:
          $ref: 'TS29503_Nudm_UECM.yaml#/components/schemas/EpsInterworkingInfo'
        traceData:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/TraceData'
        serviceGapExpiryTime:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
        stnSr:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/StnSr'
        cMsisdn:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/CMsisdn'
        msClassmark2:
          $ref: '#/components/schemas/MSClassmark2'
        supportedCodecList:
          type: array
          items:
            $ref: '#/components/schemas/SupportedCodec'
          minItems: 1
        smallDataRateStatusInfos:
          type: array
          items:
            $ref: '#/components/schemas/SmallDataRateStatusInfo'
          minItems: 1
        restrictedPrimaryRatList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/RatType'
          minItems: 1
        restrictedSecondaryRatList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/RatType'
          minItems: 1
        v2xContext:
          $ref: '#/components/schemas/V2xContext'
        lteCatMInd:
          type: boolean
          default: false
        redCapInd:
          type: boolean
          default: false
        eRedCapInd:
          type: boolean
          default: false
        moExpDataCounter:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/MoExpDataCounter'
        cagData:
          $ref: 'TS29503_Nudm_SDM.yaml#/components/schemas/CagData'
        managementMdtInd:
          type: boolean
          default: false
        adjacenPlmnMngtMdtInds:
          description: A map (list of key-value pairs where PlmnId serves as key) of Booleans
          type: object
          additionalProperties:
            type: boolean
          minProperties: 1
        immediateMdtConf:
          $ref: '#/components/schemas/ImmediateMdtConf'
        ecRestrictionDataWb:
          $ref: '#/components/schemas/EcRestrictionDataWb'
        ecRestrictionDataNb:
          type: boolean
          default: false
        iabOperationAllowed:
          type: boolean
        proseContext:
          $ref: '#/components/schemas/ProseContext'
```

```
        analyticsSubscriptionList:
          type: array
          items:
            $ref: '#/components/schemas/AnalyticsSubscription'
          minItems: 1
        pcfAmpBindingInfo:
          type: string
        pcfUepBindingInfo:
          type: string
        usedServiceAreaRestriction:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/ServiceAreaRestriction'
        praInAmPolicy:
          type: object
          additionalProperties:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/PresenceInfo'
          minProperties: 1
          description: A map(list of key-value pairs) where praId serves as key.
        praInUePolicy:
          type: object
          additionalProperties:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/PresenceInfo'
          minProperties: 1
          description: A map(list of key-value pairs) where praId serves as key.
        updpSubscriptionData:
          $ref: '#/components/schemas/UpdpSubscriptionData'
        smPolicyNotifyPduList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSessionInfo'
          minItems: 1
        pcfUeCallbackInfo:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/PcfUeCallbackInfo'
        uePositioningCap:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/UePositioningCapabilities'
        astiDistributionIndication:
          type: boolean
          default: false
        tsErrorBudget:
          type: integer
        snpnOnboardInd:
          type: boolean
          default: false
        smfSelInfo:
          $ref: 'TS29507_Npcf_AMPolicyControl.yaml#/components/schemas/SmfSelectionData'
        pcfUeSliceMbrList:
          type: object
          additionalProperties:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/SliceMbr'
          minProperties: 1
          description: A map(list of key-value pairs) where Snssai serves as key.
        smsfSetId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/NfSetId'
        smsfServiceSetId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/NfServiceSetId'
        smsfBindingInfo:
          type: string
        disasterRoamingInd:
          type: boolean
          default: false
        disasterPlmn:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/PlmnId'
        satelliteBackhaulCat:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SatelliteBackhaulCategory'
        wlServAreaRes:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/WirelineServiceAreaRestriction'
        asTimeDisParam:
          $ref: 'TS29507_Npcf_AMPolicyControl.yaml#/components/schemas/AsTimeDistributionParam'
        amPolicyInfoContainer:
          $ref: '#/components/schemas/AmPolicyInfoContainer'
        a2xContext:
          $ref: '#/components/schemas/A2xContext'
        mbsrOperationAllowed:
          $ref: 'TS29503_Nudm_SDM.yaml#/components/schemas/MbsrOperationAllowed'
        lcsUpContext:
          $ref: '#/components/schemas/LcsUpContext'
        lcsUpContextList:
          type: array
          items:
```

```
        $ref: '#/components/schemas/LcsUpContext'
      minItems: 1
    reconnectInd:
      type: boolean
      default: false
    uePolicyContainer:
      $ref: '#/components/schemas/UePolicyContainer'
    amPolicyInd:
      type: boolean
    uePolicyInd:
      type: boolean
    energySavingInd:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/EnergySavingIndicator'



N2SmInformation:
  description: Represents the session management SMF related N2 information data part
  type: object
  properties:
    pduSessionId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSessionId'
    n2InfoContent:
      $ref: '#/components/schemas/N2InfoContent'
    sNssai:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
    homePlmnSnssai:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
    iwkSnssai:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
    subjectToHo:
      type: boolean
  required:
    - pduSessionId
N2InfoContent:
  description: Represents a transparent N2 information content to be relayed by AMF
  type: object
  properties:
    ngapMessageType:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
    ngapIeType:
      $ref: '#/components/schemas/NgapIeType'
    ngapData:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/RefToBinaryData'
  required:
    - ngapData
NrppaInformation:
  description: Represents a NRPPa related N2 information data part
  type: object
  properties:
    nfId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
    nrppaPdu:
      $ref: '#/components/schemas/N2InfoContent'
    serviceInstanceId:
      type: string
  required:
    - nfId
    - nrppaPdu
PwsInformation:
  description: Represents a PWS related information data part
  type: object
  properties:
    messageIdentifier:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uint16'
    serialNumber:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uint16'
    pwsContainer:
      $ref: '#/components/schemas/N2InfoContent'
    bcEmptyAreaList:
      type: array
      items:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/GlobalRanNodeId'
      minItems: 1
    sendRanResponse:
      type: boolean
      default: false
```

```
        omcId:
          $ref: '#/components/schemas/OmcIdentifier'
        nfId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
      required:
        - messageIdentifier
        - serialNumber
        - pwsContainer
    N1N2MsgTxfrFailureNotification:
      description: Data within a N1/N2 Message Transfer Failure Notification request
      type: object
      properties:
        cause:
          $ref: '#/components/schemas/N1N2MessageTransferCause'
        n1n2MsgDataUri:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        retryAfter:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
        maxWaitingTime:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'

      required:
        - cause
        - n1n2MsgDataUri
    N1N2MessageTransferError:
      description: Data within a N1/N2 Message Transfer Error response
      type: object
      properties:
        error:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
        errInfo:
          $ref: '#/components/schemas/N1N2MsgTxfrErrDetail'
      required:
        - error
    N1N2MsgTxfrErrDetail:
      description: N1/N2 Message Transfer Error Details
      type: object
      properties:
        retryAfter:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
        highestPrioArp:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Arp'
        maxWaitingTime:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
    N2InformationTransferRspData:
      description: Data within a successful response to the N2 Information Transfer request to
transfer N2 Information to the AN
      type: object
      properties:
        result:
          $ref: '#/components/schemas/N2InformationTransferResult'
        nrppaRspPerNgranList:
          type: array
          items:
            $ref: '#/components/schemas/NrppaRspPerNgran'
          minItems: 1
        pwsRspData:
          $ref: '#/components/schemas/PWSResponseData'
        supportedFeatures:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
        tssRspPerNgranList:
          type: array
          items:
            $ref: '#/components/schemas/TssRspPerNgran'
          minItems: 1
          maxItems: 10
      required:
        - result
    MmContext:
      description: Represents a Mobility Management Context in UE Context
      type: object
      properties:
        accessType:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/AccessType'
        nasSecurityMode:
          $ref: '#/components/schemas/NasSecurityMode'
        epsNasSecurityMode:
          $ref: '#/components/schemas/EpsNasSecurityMode'
```

```
      nasDownlinkCount:
        $ref: '#/components/schemas/NasCount'
      nasUplinkCount:
        $ref: '#/components/schemas/NasCount'
      ueSecurityCapability:
        $ref: '#/components/schemas/UeSecurityCapability'
      s1UeNetworkCapability:
        $ref: '#/components/schemas/S1UeNetworkCapability'
      allowedNssai:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
        minItems: 1
      nssaiMappingList:
        type: array
        items:
          $ref: '#/components/schemas/NssaiMapping'
        minItems: 1
      allowedHomeNssai:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
        minItems: 1
      partiallyAllowedNssai:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/PartiallyAllowedSnssai'
        minItems: 1
      replacedSnssaiMappingList:
        type: array
        items:
          $ref: '#/components/schemas/SliceReplacementMapping'
        minItems: 1
      nsInstanceList:
        type: array
        items:
          $ref: 'TS29531_Nnssf_NSSelection.yaml#/components/schemas/NsiId'
        minItems: 1
      expectedUEbehavior:
        $ref: '#/components/schemas/ExpectedUeBehavior'
      ueDifferentiationInfo:
        $ref: '#/components/schemas/UeDifferentiationInfo'
      plmnAssiUeRadioCapId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/PlmnAssiUeRadioCapId'
      manAssiUeRadioCapId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/ManAssiUeRadioCapId'
      ucmfDicEntryId:
        type: string
      n3IwfId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/GlobalRanNodeId'
      wagfId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/GlobalRanNodeId'
      tngfId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/GlobalRanNodeId'
      anN2ApId:
        type: integer
      nssaaStatusList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/NssaaStatus'
        minItems: 1
      pendingNssaiMappingList:
        type: array
        items:
          $ref: '#/components/schemas/NssaiMapping'
        minItems: 1
      uuaaMmStatus:
        $ref: '#/components/schemas/UuaaMmStatus'
      deregInactTimerList:
        description: The S-NSSAI shall be used as the key of the map.
        type: object
        additionalProperties:
          $ref: '#/components/schemas/DeregInactTimerInfo'
      voSupportMatchInd:
        type: boolean
    required:
      - accessType
  SeafData:
```

```
    description: Represents SEAF data derived from data received from AUSF
    type: object
    properties:
      ngKsi:
        $ref: '#/components/schemas/NgKsi'
      keyAmf:
        $ref: '#/components/schemas/KeyAmf'
      nh:
        type: string
        pattern: '^[A-Fa-f0-9]+$'
      ncc:
        type: integer
        minimum: 0
        maximum: 7
      keyAmfChangeInd:
        type: boolean
      keyAmfHDerivationInd:
        type: boolean
    required:
      - ngKsi
      - keyAmf
  NasSecurityMode:
    description: Indicates the NAS Security Mode
    type: object
    properties:
      integrityAlgorithm:
        $ref: '#/components/schemas/IntegrityAlgorithm'
      cipheringAlgorithm:
        $ref: '#/components/schemas/CipheringAlgorithm'
    required:
      - integrityAlgorithm
      - cipheringAlgorithm
  PduSessionContext:
    description: Represents a PDU Session Context in UE Context
    type: object
    properties:
      pduSessionId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSessionId'
      smContextRef:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      sNssai:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
      altSnssai:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
      dnn:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
      selectedDnn:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
      accessType:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/AccessType'
      additionalAccessType:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/AccessType'
      allocatedEbiList:
        type: array
        items:
          $ref: 'TS29502_Nsmf_PDUSession.yaml#/components/schemas/EbiArpMapping'
        minItems: 1
      hsmfId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
      hsmfSetId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/NfSetId'
      hsmfServiceSetId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/NfServiceSetId'
      smfBinding:
        $ref: '#/components/schemas/SbiBindingLevel'
      vsmfId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
      vsmfSetId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/NfSetId'
      vsmfServiceSetId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/NfServiceSetId'
      vsmfBinding:
        $ref: '#/components/schemas/SbiBindingLevel'
      ismfId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
      ismfSetId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/NfSetId'
      ismfServiceSetId:
```

```
          $ref: 'TS29571_CommonData.yaml#/components/schemas/NfServiceSetId'
        ismfBinding:
          $ref: '#/components/schemas/SbiBindingLevel'
        nsInstance:
          $ref: 'TS29531_Nnssf_NSSelection.yaml#/components/schemas/NsiId'
        smfServiceInstanceId:
          type: string
        maPduSession:
          type: boolean
          default: false
        cnAssistedRanPara:
          $ref: 'TS29502_Nsmf_PDUSession.yaml#/components/schemas/CnAssistedRanPara'
        nrfManagementUri:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        nrfDiscoveryUri:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        nrfAccessTokenUri:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        smfBindingInfo:
          type: string
        vsmfBindingInfo:
          type: string
        ismfBindingInfo:
          type: string
        additionalSnssai:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
        altAdditionalSnssai:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
        interPlmnApiRoot:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        pgwFqdn:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Fqdn'
        pgwIpAddr:
          $ref: 'TS29503_Nudm_SDM.yaml#/components/schemas/IpAddress'
        plmnId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/PlmnId'
        anchorSmfSupportedFeatures:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
        anchorSmfOauth2Required:
          type: boolean
        hrsboAllowedInd:
          type: boolean
        localOffloadingMgtAllowedInd:
          type: boolean
        pduSessionPrio:
          $ref: 'TS29502_Nsmf_PDUSession.yaml#/components/schemas/PduSessionPriority'
      required:
        - pduSessionId
        - smContextRef
        - sNssai
        - dnn
        - accessType
    NssaiMapping:
      description: Represents the mapping between a S-NSSAI in serving PLMN to a S-NSSAI in home
PLMN
      type: object
      properties:
        mappedSnssai:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
        hSnssai:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
      required:
        - mappedSnssai
        - hSnssai
    UeRegStatusUpdateReqData:
      description: Data within a UE registration status update request to indicate a completion of
transferring at a target AMF
      type: object
      properties:
        transferStatus:
          $ref: '#/components/schemas/UeContextTransferStatus'
        toReleaseSessionList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSessionId'
          minItems: 1
        pcfReselectedInd:
          type: boolean
```

```
        smfChangeInfoList:
          type: array
          items:
            $ref: '#/components/schemas/SmfChangeInfo'
          minItems: 1
        analyticsNotUsedList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
          minItems: 1
        toReleaseSessionInfo:
          type: array
          items:
            $ref: '#/components/schemas/ReleaseSessionInfo'
          minItems: 1
      required:
        - transferStatus
    UeRegStatusUpdateRspData:
      description: Data within a UE registration status update response to provide the status of UE
context transfer status update at a source AMF
      type: object
      properties:
        regStatusTransferComplete:
          type: boolean
      required:
        - regStatusTransferComplete
    AssignEbiError:
      description: Data within a failure response to the EBI assignment request
      type: object
      properties:
        error:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
        failureDetails:
          $ref: '#/components/schemas/AssignEbiFailed'
      required:
        - error
        - failureDetails

    UeContextCreateData:
      description: Data within a request to create an individual ueContext resource
      type: object
      properties:
        ueContext:
          $ref: '#/components/schemas/UeContext'
        targetId:
          $ref: '#/components/schemas/NgRanTargetId'
        sourceToTargetData:
          $ref: '#/components/schemas/N2InfoContent'
        pduSessionList:
          type: array
          items:
            $ref: '#/components/schemas/N2SmInformation'
          minItems: 1
        n2NotifyUri:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        ueRadioCapability:
          $ref: '#/components/schemas/N2InfoContent'
        ueRadioCapabilityForPaging:
          $ref: '#/components/schemas/N2InfoContent'
        ngapCause:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/NgApCause'
        supportedFeatures:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
        servingNetwork:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/PlmnIdNid'
        xrDeviceWith2Rx:
          $ref: '#/components/schemas/XrDeviceWith2Rx'
      required:
        - ueContext
        - targetId
        - sourceToTargetData
        - pduSessionList

    UeContextCreatedData:
      description: Data within a successful response for creating an individual ueContext resource
      type: object
      properties:
        ueContext:
```

```
        $ref: '#/components/schemas/UeContext'
      targetToSourceData:
        $ref: '#/components/schemas/N2InfoContent'
      pduSessionList:
        type: array
        items:
          $ref: '#/components/schemas/N2SmInformation'
        minItems: 1
      failedSessionList:
        type: array
        items:
          $ref: '#/components/schemas/N2SmInformation'
        minItems: 1
      supportedFeatures:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      pcfReselectedInd:
        type: boolean
      analyticsNotUsedList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        minItems: 1
    required:
      - ueContext
      - targetToSourceData
      - pduSessionList
  UeContextCreateError:
    description: Data within a failure response for creating a UE context
    type: object
    properties:
      error:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
      ngapCause:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/NgApCause'
      targetToSourceFailureData:
        $ref: '#/components/schemas/N2InfoContent'
    required:
      - error
  UeContextRelocateData:
    description: Data within a Relocate UE Context request
    type: object
    properties:
      ueContext:
        $ref: '#/components/schemas/UeContext'
      targetId:
        $ref: '#/components/schemas/NgRanTargetId'
      sourceToTargetData:
        $ref: '#/components/schemas/N2InfoContent'
      forwardRelocationRequest:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/RefToBinaryData'
      pduSessionList:
        type: array
        items:
          $ref: '#/components/schemas/N2SmInformation'
        minItems: 1
      ueRadioCapability:
        $ref: '#/components/schemas/N2InfoContent'
      ngapCause:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/NgApCause'
      supportedFeatures:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      xrDeviceWith2Rx:
        $ref: '#/components/schemas/XrDeviceWith2Rx'
    required:
      - ueContext
      - targetId
      - sourceToTargetData
      - forwardRelocationRequest
  UeContextRelocatedData:
    description: Data within a Relocate UE Context response
    type: object
    properties:
      ueContext:
        $ref: '#/components/schemas/UeContext'
    required:
      - ueContext

  UeContextCancelRelocateData:
```

```
    description: Data structure used for cancellation of UE Context Relocation
    type: object
    properties:
      supi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
      relocationCancelRequest:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/RefToBinaryData'
    required:
      - relocationCancelRequest
  NgRanTargetId:
    description: Indicates a NG RAN as target of the handover
    type: object
    properties:
      ranNodeId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/GlobalRanNodeId'
      tai:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Tai'
    required:
      - ranNodeId
      - tai
  PWSResponseData:
    description: Data related PWS included in a N2 Information Transfer response
    type: object
    properties:
      ngapMessageType:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
      serialNumber:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uint16'
      messageIdentifier:
        type: integer
      unknownTaiList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Tai'
        minItems: 1
      n2PwsSubMissInd:
        type: boolean
        enum:
          - true
    required:
      - ngapMessageType
      - serialNumber
      - messageIdentifier
  PWSErrorData:
    description: Data related to PWS error included in a N2 Information Transfer failure response
    type: object
    properties:
      namfCause:
        type: integer
    required:
      - namfCause
  N2InformationTransferError:
    description: Data within a failure response for a non-UE related N2 Information Transfer
    type: object
    properties:
      error:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
      pwsErrorInfo:
        $ref: '#/components/schemas/PWSErrorData'
      nrppaErrorInfo:
        type: array
        items:
          $ref: '#/components/schemas/NrppaRspPerNgran'
        minItems: 1
    required:
      - error
  NgKsi:
    description: Represents the ngKSI
    type: object
    properties:
      tsc:
        $ref: '#/components/schemas/ScType'
      ksi:
        type: integer
        minimum: 0
        maximum: 6
    required:
      - tsc
```

```
        - ksi
    KeyAmf:
      description: Represents the Kamf or K'amf
      type: object
      properties:
        keyType:
          $ref: '#/components/schemas/KeyAmfType'
        keyVal:
          type: string
      required:
        - keyType
        - keyVal
    ExpectedUeBehavior:
      description: Represents the expected UE behavior (e.g. UE moving trajectory) and its validity
period
      type: object
      properties:
        expMoveTrajectory:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/UserLocation'
          minItems: 1
        validityTime:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
      required:
        - expMoveTrajectory
        - validityTime
    N2RanInformation:
      description: Represents the RAN related N2 information data part
      type: object
      properties:
        n2InfoContent:
          $ref: '#/components/schemas/N2InfoContent'
      required:
        - n2InfoContent
    N2InfoNotificationRspData:
      description: Data within a N2 information notification response
      type: object
      properties:
        secRatDataUsageList:
          type: array
          items:
            $ref: '#/components/schemas/N2SmInformation'
          minItems: 1
    SmallDataRateStatusInfo:
      description: Represents the small data rate status
      type: object
      properties:
        Snssai:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
        Dnn:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
        SmallDataRateStatus:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SmallDataRateStatus'
      required:
        - Snssai
        - Dnn
        - SmallDataRateStatus
    SmfChangeInfo:
      description: SMF change information for PDU session(s)
      type: object
      properties:
        pduSessionIdList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSessionId'
          minItems: 1
        smfChangeInd:
          $ref: '#/components/schemas/SmfChangeIndication'
      required:
        - pduSessionIdList
        - smfChangeInd

    V2xContext:
      description: Represents the V2X services related parameters
      type: object
      properties:
        nrV2xServicesAuth:
```

```
        $ref: 'TS29571_CommonData.yaml#/components/schemas/NrV2xAuth'
      lteV2xServicesAuth:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/LteV2xAuth'
      nrUeSidelinkAmbr:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRate'
      lteUeSidelinkAmbr:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRate'
      pc5QoSPara:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Pc5QoSPara'

  V2xInformation:
    description: V2X related N2 information
    type: object
    properties:
      n2Pc5Pol:
        $ref: '#/components/schemas/N2InfoContent'

  ProSeInformation:
    description: Represents 5G ProSe related N2 information.
    type: object
    properties:
      n2Pc5ProSePol:
        $ref: '#/components/schemas/N2InfoContent'

  ImmediateMdtConf:
    description: Immediate MDT Configuration
    type: object
    properties:
      jobType:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/JobType'
      measurementLteList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/MeasurementLteForMdt'
        minItems: 1
      measurementNrList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/MeasurementNrForMdt'
        minItems: 1
      reportingTriggerList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/ReportingTrigger'
        minItems: 1
      reportInterval:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/ReportIntervalMdt'
      reportIntervalNr:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/ReportIntervalNrMdt'
      reportAmount:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/ReportAmountMdt'
      eventThresholdRsrp:
        type: integer
        minimum: 0
        maximum: 97
      eventThresholdRsrq:
        type: integer
        minimum: 0
        maximum: 34
      eventThresholdRsrpNr:
        type: integer
        minimum: 0
        maximum: 127
      eventThresholdRsrqNr:
        type: integer
        minimum: 0
        maximum: 127
      collectionPeriodRmmLte:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/CollectionPeriodRmmLteMdt'
      collectionPeriodRmmNr:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/CollectionPeriodRmmNrMdt'
      measurementPeriodLte:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/MeasurementPeriodLteMdt'
      areaScope:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/AreaScope'
      positioningMethod:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/PositioningMethodMdt'
      addPositioningMethodList:
```

```
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/PositioningMethodMdt'
          minItems: 1
        mdtAllowedPlmnIdList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/PlmnId'
          minItems: 1
          maxItems: 16
        sensorMeasurementList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/SensorMeasurement'
          minItems: 1
        sensorMeasurementLteList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/SensorMeasurement'
          minItems: 1
        eventThresholdSinrNr:
          type: integer
          minimum: 0
          maximum: 127
        bluetoothMeasurementNr:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/BluetoothMeasurement'
        bluetoothMeasurementLte:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/BluetoothMeasurement'
        wlanMeasurementNr:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/WlanMeasurement'
        wlanMeasurementLte:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/WlanMeasurement'
      required:
        - jobType

    EpsNasSecurityMode:
      description: Indicates the EPS NAS Security Mode
      type: object
      properties:
        integrityAlgorithm:
          $ref: '#/components/schemas/EpsNasIntegrityAlgorithm'
        cipheringAlgorithm:
          $ref: '#/components/schemas/EpsNasCipheringAlgorithm'
      required:
        - integrityAlgorithm
        - cipheringAlgorithm

    EcRestrictionDataWb:
      description: Enhanced Coverage Restriction Data for WB-N1 mode
      type: object
      properties:
        ecModeARestricted:
          type: boolean
          default: false
        ecModeBRestricted:
          type: boolean
      required:
        - ecModeBRestricted

    ExtAmfEventSubscription:
      description: AMF event subscription extended with additional information received for the
subscription
      allOf:
      - $ref: 'TS29518_Namf_EventExposure.yaml#/components/schemas/AmfEventSubscription'
      - $ref: '#/components/schemas/AmfEventSubscriptionAddInfo'

    AmfEventSubscriptionAddInfo:
      description: >
        Additional information received for an AMF event subscription, e.g. binding indications,
        statistical information for UE access behavior trends report or UE location trends report.
      type: object
      properties:
        bindingInfo:
          type: array
          items:
            type: string
          minItems: 1
          maxItems: 2
```

```
      subscribingNfType:
        $ref: 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/NFType'
      eventSyncInd:
        type: boolean
      nfConsumerInfo:
        type: array
        items:
          type: string
        minItems: 1
      aoiStateList:
        type: object
        description: >
          Map of subscribed Area of Interest (AoI) Event State in the old AMF. The JSON pointer to
          an AmfEventArea element in the areaList IE (or a PresenceInfo element in
          presenceInfoList IE) of the AmfEvent data type shall be the key of the map.
        additionalProperties:
          $ref: '#/components/schemas/AreaOfInterestEventState'
      accessToken:
        type: string
        description: >
          JWS Compact Serialized representation of JWS signed JSON object (AccessTokenClaims
          defined in 3GPP TS 29.510)
      amfSetLevelBulkSubs:
        type: boolean
        enum:
          - true
      ueAccessBehaviorTrends:
        type: array
        items:
          $ref: 'TS29518_Namf_EventExposure.yaml#/components/schemas/UeAccessBehaviorReportItem'
        minItems: 1
      ueLocationTrends:
        type: array
        items:
          $ref: 'TS29518_Namf_EventExposure.yaml#/components/schemas/UeLocationTrendsReportItem'
        minItems: 1



    UeDifferentiationInfo:
      description: Represents the UE Differentiation Information and its validity time
      type: object
      properties:
        periodicComInd:
          $ref: '#/components/schemas/PeriodicCommunicationIndicator'
        periodicTime:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
        scheduledComTime:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/ScheduledCommunicationTime'
        stationaryInd:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/StationaryIndication'
        trafficProfile:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/TrafficProfile'
        batteryInd:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/BatteryIndication'
        validityTime:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'

    CeModeBInd:
      description: CE-mode-B Support Indicator.
      type: object
      properties:
        ceModeBSupportInd:
          type: boolean
      required:
        - ceModeBSupportInd

    LteMInd:
      description: LTE-M Indication.
      type: object
      properties:
        lteCatMInd:
          type: boolean
      required:
        - lteCatMInd

    NpnAccessInfo:
      description: NPN Access Information.
```

```
      type: object
      properties:
        cellCagInfo:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/CagId'
          minItems: 1

    ProseContext:
      description: Represents the ProSe services related parameters.
      type: object
      properties:
        directDiscovery:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/UeAuth'
        directComm:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/UeAuth'
        l2Relay:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/UeAuth'
        l3Relay:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/UeAuth'
        l2Remote:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/UeAuth'
        l3Remote:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/UeAuth'
        l2UeRelay:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/UeAuth'
        l3UeRelay:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/UeAuth'
        l2End:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/UeAuth'
        l3End:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/UeAuth'
        multiPathComm:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/UeAuth'
        nrUePc5Ambr:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRate'
        pc5QoSPara:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Pc5QoSPara'
        l3IntermRelay:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/UeAuth'
        l3MultihopRemote:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/UeAuth'
        l3NetMultihopRelay:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/UeAuth'
        l3UeMultihopRelay:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/UeAuth'
        l3EndMultihopRelay:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/UeAuth'
        l2IntermRelay:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/UeAuth'
        l2MultihopRemote:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/UeAuth'
        l2NetMultihopRelay:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/UeAuth'


    AnalyticsSubscription:
      description: Analytics subscriptions created in the NWDAF.
      type: object
      properties:
        nwdafId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
        nwdafSetId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/NfSetId'
        nwdafSubscriptionList:
          type: array
          items:
            $ref: '#/components/schemas/NwdafSubscription'
          minItems: 1
      required:
        - nwdafSubscriptionList

    NwdafSubscription:
      description: Individual NWDAF subscription identified by the subscription Id.
      type: object
      properties:
        nwdafEvtSubsServiceUri:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
```

```
        nwdafEventsSubscription:
          $ref:
'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/NnwdafEventsSubscription'
      required:
        - nwdafEvtSubsServiceUri
        - nwdafEventsSubscription

    UpdpSubscriptionData:
      description: UE policy delivery related N1 message notification subscription data.
      type: object
      properties:
        updpNotifySubscriptionId:
          type: string
        updpNotifyCallbackUri:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        supportedFeatures:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
        updpCallbackBinding:
          type: string
      required:
        - updpNotifySubscriptionId
        - updpNotifyCallbackUri

    ReleaseSessionInfo:
      description: PDU session Id(s) and the cause for triggering the release.
      type: object
      properties:
        releaseSessionList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSessionId'
          minItems: 1
        releaseCause:
          $ref: '#/components/schemas/ReleaseCause'
      required:
        - releaseSessionList
        - releaseCause

    AreaOfInterestEventState:
      description: Event State of AoI event in old AMF
      type: object
      required:
        - presence
      properties:
        presence:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/PresenceState'
        individualPraIdList:
          type: array
          items:
            type: string
          minItems: 1

    TssInformation:
      description: Represents a Tss related N2 information data part
      type: object
      properties:
        nfId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
        tssContainer:
          type: array
          items:
            $ref: '#/components/schemas/N2InfoContent'
          minItems: 1
          maxItems: 10
        tssRspPerNgranList:
          type: array
          items:
            $ref: '#/components/schemas/TssRspPerNgran'
          minItems: 1
          maxItems: 10
      required:
        - tssContainer

    RslpInformation:
      description: Represents Ranging/SL positioning related N2 information.
      type: object
      properties:
        n2Pc5RslpPol:
```

```
      $ref: '#/components/schemas/N2InfoContent'

A2xContext:
  description: Represents the A2X services related parameters
  type: object
  properties:
    nrA2xServicesAuth:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/NrA2xAuth'
    lteA2xServicesAuth:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/LteA2xAuth'
    nrUeSidelinkAmbr:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRate'
    lteUeSidelinkAmbr:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRate'
    pc5QoSPara:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Pc5QoSPara'

A2xInformation:
  description: A2X related N2 information
  type: object
  properties:
    n2Pc5Pol:
      $ref: '#/components/schemas/N2InfoContent'

AmPolicyInfoContainer:
  description: AM Policy Information Container
  type: object
  properties:
    sliceUsgCtrlInfoSets:
      type: object
      description: A map(list of key-value pairs) where Snssai serves as key.
      additionalProperties:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SliceUsageControlInfo'
      minProperties: 1

LcsUpContext:
  description: Represents the LCS UP related parameters
  type: object
  properties:
    upConnectionStatus:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/UpConnectionStatus'
    servingLMFIdentification:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/LMFIdentification'

DeregInactTimerInfo:
  description: Network Slice Deregistration Inactivity Timer Information
  type: object
  required:
    - deregInactExpiryTime
  properties:
    deregInactExpiryTime:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'

TssRspPerNgran:
  description: Represents a TSS related N2 information data part
  type: object
  properties:
    ngranId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/GlobalRanNodeId'
    ngranFailureInfo:
      $ref: '#/components/schemas/NgranFailureInfo'
    tssContainer:
      $ref: '#/components/schemas/N2InfoContent'
  required:
    - ngranId

SliceReplacementMapping:
  description: >
    Represents the mapping between a replaced S-NSSAI in serving PLMN to its alternative S-NSSAI
  type: object
  properties:
    replacedSnssai:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
    altSnssai:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
  required:
    - replacedSnssai
    - altSnssai
```

```
    NrppaRspPerNgran:
      description: NRPPA Information related to failed NG-RAN
      type: object
      properties:
        ngranId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/GlobalRanNodeId'
        cause:
          $ref: '#/components/schemas/NrppaTransFailure'
      required:
        - ngranId

#
# SIMPLE DATA TYPES
#
    EpsBearerId:
      description: EPS Bearer Identifier
      type: integer
      minimum: 0
      maximum: 15
    Ppi:
      description: Paging Policy Indicator
      type: integer
      minimum: 0
      maximum: 7
    NasCount:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
    5GMmCapability:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Bytes'
    UeSecurityCapability:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Bytes'
    S1UeNetworkCapability:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Bytes'
    DrxParameter:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Bytes'
    OmcIdentifier:
      description: Represents the OMC Identifier
      type: string
    MSClassmark2:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Bytes'
    SupportedCodec:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Bytes'
    UePolicyContainer:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Bytes'


#
# ENUMERATIONS
#
    StatusChange:
      description: Enumeration for AMF status
      anyOf:
      - type: string
        enum:
          - AMF_UNAVAILABLE
          - AMF_AVAILABLE
      - type: string
    N2InformationClass:
      description: Enumeration for N2 Information Class
      anyOf:
      - type: string
        enum:
          - SM
          - NRPPa
          - PWS
          - PWS-BCAL
          - PWS-RF
          - RAN
          - V2X
          - PROSE
          - TSS
          - RSPP
          - A2X
      - type: string
    N1MessageClass:
      description: Enumeration for N1 Message Class
      anyOf:
      - type: string
```

```
        enum:
          - 5GMM
          - SM
          - LPP
          - SMS
          - UPDP
          - LCS
          - UPP-CM
      - type: string
    N1N2MessageTransferCause:
      description: Enumeration for N1N2Message Transfer Cause
      anyOf:
      - type: string
        enum:
          - ATTEMPTING_TO_REACH_UE
          - N1_N2_TRANSFER_INITIATED
          - WAITING_FOR_ASYNCHRONOUS_TRANSFER
          - UE_NOT_RESPONDING
          - N1_MSG_NOT_TRANSFERRED
          - N2_MSG_NOT_TRANSFERRED
          - UE_NOT_REACHABLE_FOR_SESSION
          - TEMPORARY_REJECT_REGISTRATION_ONGOING
          - TEMPORARY_REJECT_HANDOVER_ONGOING
          - REJECTION_DUE_TO_PAGING_RESTRICTION
          - AN_NOT_RESPONDING
          - FAILURE_CAUSE_UNSPECIFIED
      - type: string
    UeContextTransferStatus:
      description: Describes the status of an individual ueContext resource in UE Context Transfer
procedures
      anyOf:
      - type: string
        enum:
          - TRANSFERRED
          - NOT_TRANSFERRED
      - type: string
    N2InformationTransferResult:
      description: Describes the result of N2 information transfer by AMF to the AN
      anyOf:
      - type: string
        enum:
          - N2_INFO_TRANSFER_INITIATED
          - PARTIAL_N2_INFO_TRANSFER
      - type: string
    CipheringAlgorithm:
      description: Indicates the supported Ciphering Algorithm
      anyOf:
      - type: string
        enum:
          - NEA0
          - NEA1
          - NEA2
          - NEA3
      - type: string
    IntegrityAlgorithm:
      description: Indicates the supported Integrity Algorithm
      anyOf:
      - type: string
        enum:
          - NIA0
          - NIA1
          - NIA2
          - NIA3
      - type: string
    ScType:
      description: Indicates the security context type
      anyOf:
      - type: string
        enum:
          - NATIVE
          - MAPPED
      - type: string
    KeyAmfType:
      description: Indicates the K_amf type
      anyOf:
      - type: string
        enum:
          - KAMF
```

```
        - KPRIMEAMF
    - type: string
  TransferReason:
    description: Indicates UE Context Transfer Reason
    anyOf:
    - type: string
      enum:
        - INIT_REG
        - MOBI_REG
        - MOBI_REG_UE_VALIDATED
    - type: string
  PolicyReqTrigger:
    description: Policy Request Triggers
    anyOf:
    - type: string
      enum:
        - LOCATION_CHANGE
        - PRA_CHANGE
        - ALLOWED_NSSAI_CHANGE
        - NWDAF_DATA_CHANGE
        - PLMN_CHANGE
        - CON_STATE_CHANGE
        - SMF_SELECT_CHANGE
        - ACCESS_TYPE_CHANGE
        - SAT_BACKHAUL_CHANGE
        - CONF_NSSAI_CHANGE
        - LBO_INFO_CHANGE
    - type: string
  RatSelector:
    description: Indicates the RAT type for the transfer of N2 information
    anyOf:
    - type: string
      enum:
        - E-UTRA
        - NR
    - type: string
  NgapIeType:
    description: Indicates the supported NGAP IE types
    anyOf:
    - type: string
      enum:
        - PDU_RES_SETUP_REQ
        - PDU_RES_REL_CMD
        - PDU_RES_MOD_REQ
        - HANDOVER_CMD
        - HANDOVER_REQUIRED
        - HANDOVER_PREP_FAIL
        - SRC_TO_TAR_CONTAINER
        - TAR_TO_SRC_CONTAINER
        - TAR_TO_SRC_FAIL_CONTAINER
        - RAN_STATUS_TRANS_CONTAINER
        - SON_CONFIG_TRANSFER
        - NRPPA_PDU
        - UE_RADIO_CAPABILITY
        - RIM_INFO_TRANSFER
        - SECONDARY_RAT_USAGE
        - PC5_QOS_PARA
        - EARLY_STATUS_TRANS_CONTAINER
        - UE_RADIO_CAPABILITY_FOR_PAGING
    - type: string
  N2InfoNotifyReason:
    description: N2 Information Notify Reason
    anyOf:
    - type: string
      enum:
        - HANDOVER_COMPLETED
    - type: string
  SmfChangeIndication:
    description: Indicates the I-SMF or V-SMF change or removal
    anyOf:
    - type: string
      enum:
        - CHANGED
        - REMOVED
    - type: string
  SbiBindingLevel:
    description: SBI Binding Level
    anyOf:
```

```
      - type: string
        enum:
          - NF_INSTANCE_BINDING
          - NF_SET_BINDING
          - NF_SERVICE_SET_BINDING
          - NF_SERVICE_INSTANCE_BINDING
      - type: string

    EpsNasCipheringAlgorithm:
      description: Indicates the supported EPS NAS Ciphering Algorithm
      anyOf:
      - type: string
        enum:
          - EEA0
          - EEA1
          - EEA2
          - EEA3
      - type: string

    EpsNasIntegrityAlgorithm:
      description: Indicates the supported EPS NAS Integrity Algorithm
      anyOf:
      - type: string
        enum:
          - EIA0
          - EIA1
          - EIA2
          - EIA3
      - type: string

    PeriodicCommunicationIndicator:
      description: Indicates the Periodic Communication Indicator
      anyOf:
      - type: string
        enum:
          - PIORIODICALLY
          - ON_DEMAND
      - type: string

    UuaaMmStatus:
      description: Indicates the UUAA-MM status
      anyOf:
      - type: string
        enum:
          - SUCCESS
          - PENDING
          - FAILED
      - type: string

    ReleaseCause:
      description: The cause for triggering the release.
      anyOf:
      - type: string
        enum:
          - SNPN_SNPN_MOBILITY
          - NO_HR_AGREEMENT
          - UNSPECIFIED
      - type: string


    NgranFailureInfo:
      description: Indicates a NG-RAN failure event.
      anyOf:
      - type: string
        enum:
          - NG_RAN_NOT_REACHABLE
          - NG_RAN_FAILURE_WITH_RESTART
          - NG_RAN_FAILURE_WITHOUT_RESTART
      - type: string


    XrDeviceWith2Rx:
      description: Information of the XR Device with 2Rx
      anyOf:
      - type: string
        enum:
          - "TRUE"
      - type: string
```

```
    NrppaTransFailure:
      description: Cause for NRPPa transfer failure
      anyOf:
      - type: string
        enum:
          - NG_RAN_NODE_NOT_REACHABLE
          - NG_RAN_NODE_UNKNOWN
      - type: string
```

A.3 Namf_EventExposure API

```
openapi: 3.0.0

info:
  version: 1.4.2
  title: Namf_EventExposure
  description: |
    AMF Event Exposure Service.
    © 2026, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

security:
  - {}
  - oAuth2ClientCredentials:
      - namf-evts

externalDocs:
  description: 3GPP TS 29.518 V19.7.0; 5G System; Access and Mobility Management Services
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.518/'

servers:
  - url: '{apiRoot}/namf-evts/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501

paths:
  /subscriptions:
    post:
      summary: Namf_EventExposure Subscribe service Operation
      tags:
        - Subscriptions collection (Collection)
      operationId: CreateSubscription
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/AmfCreateEventSubscription'
        required: true
      responses:
        '201':
          description: Subsription Created
          headers:
            Location:
              description: 'Contains the URI of the newly created resource, according to the
structure: {apiRoot}/namf-evts/<apiVersion>/subscriptions/{subscriptionId}'
              required: true
              schema:
                type: string
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/AmfCreatedEventSubscription'
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
```

```
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29571_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29571_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29571_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29571_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29571_CommonData.yaml#/components/responses/500'
      '501':
        $ref: 'TS29571_CommonData.yaml#/components/responses/501'
      '502':
        $ref: 'TS29571_CommonData.yaml#/components/responses/502'
      '503':
        $ref: 'TS29571_CommonData.yaml#/components/responses/503'
      default:
        description: Unexpected error
  callbacks:
    onEventReport:
      '{$request.body#/subscription/eventNotifyUri}':
        post:
          summary: Event Notificaiton Delivery
          requestBody:
            content:
              application/json:
                schema:
                  $ref: '#/components/schemas/AmfEventNotification'
            required: true
          responses:
            '204':
              description: Successful acknowledgement
            '307':
              $ref: 'TS29571_CommonData.yaml#/components/responses/307'
            '308':
              $ref: 'TS29571_CommonData.yaml#/components/responses/308'
            '400':
              $ref: 'TS29571_CommonData.yaml#/components/responses/400'
            '401':
              $ref: 'TS29571_CommonData.yaml#/components/responses/401'
            '403':
              $ref: 'TS29571_CommonData.yaml#/components/responses/403'
            '404':
              $ref: 'TS29571_CommonData.yaml#/components/responses/404'
            '411':
              $ref: 'TS29571_CommonData.yaml#/components/responses/411'
            '413':
              $ref: 'TS29571_CommonData.yaml#/components/responses/413'
            '415':
              $ref: 'TS29571_CommonData.yaml#/components/responses/415'
            '429':
              $ref: 'TS29571_CommonData.yaml#/components/responses/429'
            '500':
              $ref: 'TS29571_CommonData.yaml#/components/responses/500'
            '502':
              $ref: 'TS29571_CommonData.yaml#/components/responses/502'
            '503':
              $ref: 'TS29571_CommonData.yaml#/components/responses/503'
            default:
              description: Unexpected error
    onSubscriptionIdChangeEvtReport:
      '{$request.body#/subscription/subsChangeNotifyUri}':
        post:
          summary: Event Notificaiton Delivery For Subscription Id Change
          requestBody:
            content:
              application/json:
                schema:
                  $ref: '#/components/schemas/AmfEventNotification'
            required: true
          responses:
            '204':
              description: Successful acknowledgement
            '307':
              $ref: 'TS29571_CommonData.yaml#/components/responses/307'
            '308':
              $ref: 'TS29571_CommonData.yaml#/components/responses/308'
```

```
              '400':
                $ref: 'TS29571_CommonData.yaml#/components/responses/400'
              '401':
                $ref: 'TS29571_CommonData.yaml#/components/responses/401'
              '403':
                $ref: 'TS29571_CommonData.yaml#/components/responses/403'
              '404':
                $ref: 'TS29571_CommonData.yaml#/components/responses/404'
              '411':
                $ref: 'TS29571_CommonData.yaml#/components/responses/411'
              '413':
                $ref: 'TS29571_CommonData.yaml#/components/responses/413'
              '415':
                $ref: 'TS29571_CommonData.yaml#/components/responses/415'
              '429':
                $ref: 'TS29571_CommonData.yaml#/components/responses/429'
              '500':
                $ref: 'TS29571_CommonData.yaml#/components/responses/500'
              '502':
                $ref: 'TS29571_CommonData.yaml#/components/responses/502'
              '503':
                $ref: 'TS29571_CommonData.yaml#/components/responses/503'
              default:
                description: Unexpected error
  /subscriptions/{subscriptionId}:
    patch:
      summary: Namf_EventExposure Subscribe Modify service Operation
      tags:
        - Individual subscription (Document)
      operationId: ModifySubscription
      parameters:
        - name: subscriptionId
          in: path
          required: true
          description: Unique ID of the subscription to be modified
          schema:
            type: string
      requestBody:
        content:
          application/json-patch+json:
            schema:
              oneOf:
                - type: array
                  items:
                   $ref: '#/components/schemas/AmfUpdateEventSubscriptionItem'
                  minItems: 1
                - type: array
                  items:
                   $ref: '#/components/schemas/AmfUpdateEventOptionItem'
                  minItems: 1
                  maxItems: 1
        required: true
      responses:
        '200':
          description: Subsription modified successfully
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/AmfUpdatedEventSubscription'
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29571_CommonData.yaml#/components/responses/415'
        '429':
```

```
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29571_CommonData.yaml#/components/responses/500'
        '501':
          $ref: 'TS29571_CommonData.yaml#/components/responses/501'
        '502':
          $ref: 'TS29571_CommonData.yaml#/components/responses/502'
        '503':
          $ref: 'TS29571_CommonData.yaml#/components/responses/503'
        default:
          description: Unexpected error
    delete:
      summary: Namf_EventExposure Unsubscribe service Operation
      tags:
        - Individual subscription (Document)
      operationId: DeleteSubscription
      parameters:
        - name: subscriptionId
          in: path
          required: true
          description: Unique ID of the subscription to be deleted
          schema:
            type: string
      responses:
        '204':
          description: Subsription deleted successfully
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29571_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29571_CommonData.yaml#/components/responses/500'
        '502':
          $ref: 'TS29571_CommonData.yaml#/components/responses/502'
        '503':
          $ref: 'TS29571_CommonData.yaml#/components/responses/503'
        default:
          description: Unexpected error

  /set-subscriptions:
    post:
      summary: Namf_EventExposure Subscribe service Operation
      tags:
        - AMF Set level Bulk Subscriptions collection (Collection)
      operationId: CreateAMFSetLevelBulkSubscription
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/AmfCreateEventSubscription'
        required: true
      responses:
        '201':
          description: Subsription Created
          headers:
            Location:
              description: 'Contains the URI of the newly created resource, according to the
structure: {apiRoot}/namf-evts/<apiVersion>/set-subscriptions/{subscriptionId}'
              required: true
              schema:
                type: string
          content:
```

```
        application/json:
          schema:
            $ref: '#/components/schemas/AmfCreatedEventSubscription'
    '307':
      $ref: 'TS29571_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29571_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29571_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29571_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29571_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '501':
      $ref: 'TS29571_CommonData.yaml#/components/responses/501'
    '502':
      $ref: 'TS29571_CommonData.yaml#/components/responses/502'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
      description: Unexpected error
  callbacks:
    onEventReport:
      '{$request.body#/subscription/eventNotifyUri}':
        post:
          summary: Event Notification Delivery
          requestBody:
            content:
              application/json:
                schema:
                  $ref: '#/components/schemas/AmfEventNotification'
            required: true
          responses:
            '204':
              description: Successful acknowledgement
            '307':
              $ref: 'TS29571_CommonData.yaml#/components/responses/307'
            '308':
              $ref: 'TS29571_CommonData.yaml#/components/responses/308'
            '400':
              $ref: 'TS29571_CommonData.yaml#/components/responses/400'
            '401':
              $ref: 'TS29571_CommonData.yaml#/components/responses/401'
            '403':
              $ref: 'TS29571_CommonData.yaml#/components/responses/403'
            '404':
              $ref: 'TS29571_CommonData.yaml#/components/responses/404'
            '411':
              $ref: 'TS29571_CommonData.yaml#/components/responses/411'
            '413':
              $ref: 'TS29571_CommonData.yaml#/components/responses/413'
            '415':
              $ref: 'TS29571_CommonData.yaml#/components/responses/415'
            '429':
              $ref: 'TS29571_CommonData.yaml#/components/responses/429'
            '500':
              $ref: 'TS29571_CommonData.yaml#/components/responses/500'
            '502':
              $ref: 'TS29571_CommonData.yaml#/components/responses/502'
            '503':
              $ref: 'TS29571_CommonData.yaml#/components/responses/503'
            default:
              description: Unexpected error
    onSubscriptionIdChangeEvtReport:
      '{$request.body#/subscription/subsChangeNotifyUri}':
        post:
```

```
            summary: Event Notificaiton Delivery For Subscription Id Change
            requestBody:
              content:
                application/json:
                  schema:
                    $ref: '#/components/schemas/AmfEventNotification'
              required: true
            responses:
              '204':
                description: Successful acknowledgement
              '307':
                $ref: 'TS29571_CommonData.yaml#/components/responses/307'
              '308':
                $ref: 'TS29571_CommonData.yaml#/components/responses/308'
              '400':
                $ref: 'TS29571_CommonData.yaml#/components/responses/400'
              '401':
                $ref: 'TS29571_CommonData.yaml#/components/responses/401'
              '403':
                $ref: 'TS29571_CommonData.yaml#/components/responses/403'
              '404':
                $ref: 'TS29571_CommonData.yaml#/components/responses/404'
              '411':
                $ref: 'TS29571_CommonData.yaml#/components/responses/411'
              '413':
                $ref: 'TS29571_CommonData.yaml#/components/responses/413'
              '415':
                $ref: 'TS29571_CommonData.yaml#/components/responses/415'
              '429':
                $ref: 'TS29571_CommonData.yaml#/components/responses/429'
              '500':
                $ref: 'TS29571_CommonData.yaml#/components/responses/500'
              '502':
                $ref: 'TS29571_CommonData.yaml#/components/responses/502'
              '503':
                $ref: 'TS29571_CommonData.yaml#/components/responses/503'
              default:
                description: Unexpected error
  /set-subscriptions/{subscriptionId}:
    patch:
      summary: Namf_EventExposure Subscribe Modify service Operation
      tags:
        - Individual subscription (Document)
      operationId: ModifyAMFSetLevelBulkSubscription
      parameters:
        - name: subscriptionId
          in: path
          required: true
          description: Unique ID of the subscription to be modified
          schema:
            type: string
      requestBody:
        content:
          application/json-patch+json:
            schema:
              oneOf:
                - type: array
                  items:
                   $ref: '#/components/schemas/AmfUpdateEventSubscriptionItem'
                  minItems: 1
                - type: array
                  items:
                   $ref: '#/components/schemas/AmfUpdateEventOptionItem'
                  minItems: 1
                  maxItems: 1
        required: true
      responses:
        '200':
          description: Subsription modified successfully
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/AmfUpdatedEventSubscription'
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
```

```
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29571_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29571_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29571_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29571_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29571_CommonData.yaml#/components/responses/500'
      '501':
        $ref: 'TS29571_CommonData.yaml#/components/responses/501'
      '502':
        $ref: 'TS29571_CommonData.yaml#/components/responses/502'
      '503':
        $ref: 'TS29571_CommonData.yaml#/components/responses/503'
      default:
        description: Unexpected error
  delete:
    summary: Namf_EventExposure Unsubscribe service Operation
    tags:
      - Individual subscription (Document)
    operationId: DeleteAMFSetLevelBulkSubscription
    parameters:
      - name: subscriptionId
        in: path
        required: true
        description: Unique ID of the subscription to be deleted
        schema:
          type: string
    responses:
      '204':
        description: Subsription deleted successfully
      '307':
        $ref: 'TS29571_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29571_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29571_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29571_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29571_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29571_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29571_CommonData.yaml#/components/responses/500'
      '502':
        $ref: 'TS29571_CommonData.yaml#/components/responses/502'
      '503':
        $ref: 'TS29571_CommonData.yaml#/components/responses/503'
      default:
        description: Unexpected error


components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{nrfApiRoot}/oauth2/token'
```

```
        scopes:
          namf-evts: Access to the Namf_EventExposure API
  schemas:
    AmfEventSubscription:
      description: Represents an individual event subscription resource on AMF
      type: object
      properties:
        eventList:
          type: array
          items:
            $ref: '#/components/schemas/AmfEvent'
          minItems: 1
        eventNotifyUri:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        notifyCorrelationId:
          type: string
        nfId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
        subsChangeNotifyUri:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        subsChangeNotifyCorrelationId:
          type: string
        supi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
        groupId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/GroupId'
        excludeSupiList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
          minItems: 1
        excludeGpsiList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
          minItems: 1
        includeSupiList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
          minItems: 1
        includeGpsiList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
          minItems: 1
        gpsi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
        pei:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Pei'
        anyUE:
          type: boolean
        options:
          $ref: '#/components/schemas/AmfEventMode'
        sourceNfType:
          $ref: 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/NFType'
        termNotifyInd:
          type: boolean
      required:
        - eventList
        - eventNotifyUri
        - notifyCorrelationId
        - nfId

    AmfEvent:
      description: Describes an event to be subscribed
      type: object
      properties:
        type:
          $ref: '#/components/schemas/AmfEventType'
        immediateFlag:
          type: boolean
          default: false
        areaList:
          type: array
          items:
            $ref: '#/components/schemas/AmfEventArea'
          minItems: 1
```

```
    locationFilterList:
      type: array
      items:
        $ref: '#/components/schemas/LocationFilter'
      minItems: 1
    locationTrendsFilterList:
      type: array
      items:
        $ref: '#/components/schemas/LocationFilter'
      minItems: 1
    refId:
      $ref: 'TS29503_Nudm_EE.yaml#/components/schemas/ReferenceId'
    trafficDescriptorList:
      type: array
      items:
        $ref: '#/components/schemas/TrafficDescriptor'
      minItems: 1
    reportUeReachable:
      type: boolean
      default: false
    reachabilityFilter:
      $ref: '#/components/schemas/ReachabilityFilter'
    udmDetectInd:
      type: boolean
      default: false
    maxReports:
      type: integer
    presenceInfoList:
      type: object
      additionalProperties:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/PresenceInfo'
      minProperties: 1
      description: A map(list of key-value pairs) where praId serves as key.
    maxResponseTime:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
    targetArea:
      $ref: '#/components/schemas/TargetArea'
    snssaiFilter:
      type: array
      items:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/ExtSnssai'
      minItems: 1
    ueInAreaFilter:
      $ref: '#/components/schemas/UeInAreaFilter'
    minInterval:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
    nextReport:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
    idleStatusInd:
      type: boolean
      default: false
    dispersionArea:
      $ref: '#/components/schemas/DispersionArea'
    nextPeriodicReportTime:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
    adjustAoIOnRa:
      type: boolean
      default: false
    ranTimingSynchroStatusChange:
      type: boolean
      default: false
    notifyForSupiList:
      type: array
      items:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
      minItems: 1
    notifyForGroupList:
      type: array
      items:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/GroupId'
      minItems: 1
    notifyForSnssaiDnnList:
      type: array
      items:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SnssaiDnnItem'
      minItems: 1
    reportingThreshold:
      type: integer
```

```
      assignTrajectory:
        $ref: '#/components/schemas/Trajectory'
      smCommFailureFilter:
        $ref: '#/components/schemas/SmCommFailureFilter'
      uePosCapRequestedInd:
        type: boolean
        enum:
          - true
      twList:
        type: array
        items:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/TimeWindow'
        minItems: 1
      uavAltitudeReportingConfig:
        $ref: '#/components/schemas/UavAltitudeReportingConfig'
    required:
      - type

  AmfEventNotification:
    description: Data within a AMF Event Notification request
    type: object
    properties:
      notifyCorrelationId:
        type: string
      subsChangeNotifyCorrelationId:
        type: string
      reportList:
        type: array
        items:
          $ref: '#/components/schemas/AmfEventReport'
        minItems: 1
      eventSubsSyncInfo:
        $ref: '#/components/schemas/AmfEventSubsSyncInfo'
      amfId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'


  AmfEventReport:
    description: Represents a report triggered by a subscribed event type
    type: object
    properties:
      type:
        $ref: '#/components/schemas/AmfEventType'
      state:
        $ref: '#/components/schemas/AmfEventState'
      timeStamp:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
      subscriptionId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      anyUe:
        type: boolean
      supi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
      areaList:
        type: array
        items:
          $ref: '#/components/schemas/AmfEventArea'
        minItems: 1
      refId:
        $ref: 'TS29503_Nudm_EE.yaml#/components/schemas/ReferenceId'
      gpsi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
      pei:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Pei'
      location:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/UserLocation'
      additionalLocation:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/UserLocation'
      timezone:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/TimeZone'
      accessTypeList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/AccessType'
        minItems: 1
      rmInfoList:
        type: array
        items:
```

```
      $ref: '#/components/schemas/RmInfo'
    minItems: 1
  cmInfoList:
    type: array
    items:
      $ref: '#/components/schemas/CmInfo'
    minItems: 1
  reachability:
    $ref: '#/components/schemas/UeReachability'
  commFailure:
    $ref: '#/components/schemas/CommunicationFailure'
  lossOfConnectReason:
    $ref: '#/components/schemas/LossOfConnectivityReason'
  numberOfUes:
    type: integer
  5gsUserStateList:
    type: array
    items:
      $ref: '#/components/schemas/5GsUserStateInfo'
    minItems: 1
  typeCode:
    type: string
    pattern: '^imeitac-[0-9]{8}$'
  registrationNumber:
    type: integer
  maxAvailabilityTime:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
  ueIdExt:
    type: array
    items:
      $ref: '#/components/schemas/UEIdExt'
    minItems: 1
  snssaiTaiList:
    type: array
    items:
      $ref: '#/components/schemas/SnssaiTaiMapping'
    minItems: 1
  idleStatusIndication:
    $ref: '#/components/schemas/IdleStatusIndication'
  ueAccessBehaviorTrends:
    type: array
    items:
      $ref: '#/components/schemas/UeAccessBehaviorReportItem'
    minItems: 1
  ueLocationTrends:
    type: array
    items:
      $ref: '#/components/schemas/UeLocationTrendsReportItem'
    minItems: 1
  mmTransLocationReportList:
    type: array
    items:
      $ref: '#/components/schemas/MmTransactionLocationReportItem'
    minItems: 1
  mmTransSliceReportList:
    type: array
    items:
      $ref: '#/components/schemas/MmTransactionSliceReportItem'
    minItems: 1
  termReason:
    $ref: '#/components/schemas/SubTerminationReason'
  unavailabilityPeriod:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
  trajRepReason:
    $ref: '#/components/schemas/TrajectoryReportReason'
  tai:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Tai'
  altitude:
    $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/Altitude'
  uePosCap:
    $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/UePositioningCapabilities'
  ueUpPosCap:
    type: array
    items:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/UeUpPositioningCapabilities'
    minItems: 1
  signallingMeasurementInfo:
    $ref: '#/components/schemas/SignallingMeasurementInfo'
```

```
      uavAltRptFailureInd:
        $ref: '#/components/schemas/UavAltRptFailureCause'
      signallingMeasurementUeRelatedInfo:
        $ref: '#/components/schemas/SignallingMeasurementUeRelatedInfo'
      expiry:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
    required:
      - type
      - state
      - timeStamp
  AmfEventMode:
    description: Describes how the reports shall be generated by a subscribed event
    type: object
    properties:
      trigger:
        $ref: '#/components/schemas/AmfEventTrigger'
      maxReports:
        type: integer
      expiry:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
      repPeriod:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
      sampRatio:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SamplingRatio'
      partitioningCriteria:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/PartitioningCriteria'
        minItems: 1
      notifFlag:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/NotificationFlag'
      mutingExcInstructions:
        writeOnly: true
        allOf:
          - $ref: 'TS29571_CommonData.yaml#/components/schemas/MutingExceptionInstructions'
      mutingNotSettings:
        readOnly: true
        allOf:
          - $ref: 'TS29571_CommonData.yaml#/components/schemas/MutingNotificationsSettings'
      varRepPeriodInfo:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/VarRepPeriod'
        minItems: 1
    required:
      - trigger
  AmfEventState:
    description: Represents the state of a subscribed event
    type: object
    properties:
      active:
        type: boolean
      remainReports:
        type: integer
      remainDuration:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
    required:
      - active
  RmInfo:
    description: Represents the registration state of a UE for an access type
    type: object
    properties:
      rmState:
        $ref: '#/components/schemas/RmState'
      accessType:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/AccessType'
    required:
      - rmState
      - accessType
  CmInfo:
    description: Represents the connection management state of a UE for an access type
    type: object
    properties:
      cmState:
        $ref: '#/components/schemas/CmState'
      accessType:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/AccessType'
    required:
```

```
        - cmState
        - accessType
    CommunicationFailure:
      description: Describes a communication failure detected by AMF
      type: object
      properties:
        nasReleaseCode:
          type: string
        ranReleaseCode:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/NgApCause'
    AmfCreateEventSubscription:
      description: Data within a create AMF event subscription request
      type: object
      properties:
        subscription:
          $ref: '#/components/schemas/AmfEventSubscription'
        supportedFeatures:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
        oldGuami:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Guami'
        udrRestartInd:
          type: boolean
          default: false
      required:
        - subscription
    AmfCreatedEventSubscription:
      description: Data within a create AMF event subscription response
      type: object
      properties:
        subscription:
          $ref: '#/components/schemas/AmfEventSubscription'
        subscriptionId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        reportList:
          type: array
          items:
            $ref: '#/components/schemas/AmfEventReport'
          minItems: 1
        supportedFeatures:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      required:
        - subscription
        - subscriptionId
    AmfUpdateEventSubscriptionItem:
      description: Document describing the modification(s) to an AMF Event Subscription
      type: object
      properties:
        op:
          type: string
          enum:
            - add
            - remove
            - replace
        path:
          type: string
          pattern: '^\/eventList\/-|(\/eventList\/0|\/eventList\/[1-9][0-
9]*){1}(\/presenceInfoList\/0|\/presenceInfoList\/[1-9][0-9]*
|\/notifyForSupiList|\/notifyForGroupList|\/notifyForSnssaiDnnList)?|\/excludeSupiList|\/excludeGpsi
List|\/includeSupiList|\/includeGpsiList$'
        value: {}
      required:
        - op
        - path

    AmfUpdateEventOptionItem:
      description: Document describing the modifications to AMF event subscription options
      type: object
      properties:
        op:
          type: string
          enum:
            - replace
        path:
          type: string
          pattern: '^(\/options\/expiry|\/options\/notifFlag|\/options\/mutingExcInstructions)$'
        value: {}
      required:
        - op
```

```
      - path
      - value
    AmfUpdatedEventSubscription:
      description: Represents a successful update on an AMF Event Subscription
      type: object
      properties:
        subscription:
          $ref: '#/components/schemas/AmfEventSubscription'
        reportList:
          type: array
          items:
            $ref: '#/components/schemas/AmfEventReport'
          minItems: 1
      required:
        - subscription
    AmfEventArea:
      description: Represents an area to be monitored by an AMF event
      type: object
      properties:
        presenceInfo:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/PresenceInfo'
        ladnInfo:
          $ref: '#/components/schemas/LadnInfo'
        sliceAreaRestrictionInfo:
          $ref: '#/components/schemas/SliceAreaRestrictionInfo'
        sNssai:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
        nsiId:
          $ref: 'TS29531_Nnssf_NSSelection.yaml#/components/schemas/NsiId'
    LadnInfo:
      description: LADN Information
      type: object
      properties:
        ladn:
          type: string
        presence:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/PresenceState'
      required:
        - ladn
    5GsUserStateInfo:
      description: Represents the 5GS User state of the UE for an access type
      type: object
      properties:
        5gsUserState:
          $ref: '#/components/schemas/5GsUserState'
        accessType:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/AccessType'
      required:
        - 5gsUserState
        - accessType
    TrafficDescriptor:
      description: Represents the Traffic Descriptor
      type: object
      properties:
        dnn:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
        sNssai:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
        dddTrafficDescriptorList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/DddTrafficDescriptor'
          minItems: 1
    UEIdExt:
      description: UE Identity
      type: object
      properties:
        supi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
        gpsi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
        uePosCap:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/UePositioningCapabilities'
        ueUpPosCap:
          type: array
          items:
            $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/UeUpPositioningCapabilities'
          minItems: 1
```

```
    AmfEventSubsSyncInfo:
      description: AMF Event Subscriptions Information for synchronization
      type: object
      properties:
        subscriptionList:
          type: array
          items:
            $ref: '#/components/schemas/AmfEventSubscriptionInfo'
          minItems: 1
      required:
        - subscriptionList

    AmfEventSubscriptionInfo:
      description: Individual AMF Event Subscription Information
      type: object
      properties:
        subId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        notifyCorrelationId:
          type: string
        refIdList:
          type: array
          items:
            $ref: 'TS29503_Nudm_EE.yaml#/components/schemas/ReferenceId'
          minItems: 1
        oldSubId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      required:
        - subId
        - refIdList

    TargetArea:
      description: TA list or TAI range list or any TA
      type: object
      properties:
        taList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/Tai'
          minItems: 1
        taiRangeList:
          type: array
          items:
            $ref: 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/TaiRange'
          minItems: 1
        anyTa:
          type: boolean
          default: false

    SnssaiTaiMapping:
      description: List of restricted or unrestricted S-NSSAIs per TAI(s)
      type: object
      properties:
        reportingArea:
          $ref: '#/components/schemas/TargetArea'
        accessTypeList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/AccessType'
          minItems: 1
        supportedSnssaiList:
          type: array
          items:
            $ref: '#/components/schemas/SupportedSnssai'
          minItems: 1
      required:
        - reportingArea

    UeAccessBehaviorReportItem:
      description: Report Item for UE Access Behavior Trends event.
      type: object
      properties:
        stateTransitionType:
          $ref: '#/components/schemas/AccessStateTransitionType'
        spacing:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
```

```
      spacingVar:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Float'
      duration:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
      durationVar:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Float'
      occurrences:
        type: integer
      timestamp:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
    required:
      - stateTransitionType
      - spacing
      - duration

  IdleStatusIndication:
    description: Represents the idle status indication.
    type: object
    properties:
      timeStamp:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
      activeTime:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
      subsRegTimer:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
      edrxCycleLength:
        type: integer
      suggestedNumOfDlPackets:
        type: integer

  UeInAreaFilter:
    description: Additional filters for UE in Area Report event
    type: object
    properties:
      ueType:
        $ref: '#/components/schemas/UeType'
      aerialSrvDnnInd:
        type: boolean
        default: false
      ueIdOmitInd:
        type: boolean
        default: false
      lcsBroadcastingAssistanceDataType:
        $ref: 'TS29503_Nudm_SDM.yaml#/components/schemas/LcsBroadcastAssistanceTypesData'

  SupportedSnssai:
    description: Supported S-NSSAIs
    type: object
    properties:
      sNssai:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/ExtSnssai'
      restrictionInd:
        type: boolean
        default: false
    required:
      - sNssai

  UeLocationTrendsReportItem:
    description: Report Item for UE Location Trends event.
    type: object
    properties:
      tai:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Tai'
      ranNodeId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/GlobalRanNodeId'
      ncgi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Ncgi'
      ecgi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Ecgi'
      n3gaLocation:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/N3gaLocation'
      spacing:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
      spacingVar:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Float'
      duration:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
      durationVar:
```

```
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Float'
      occurrences:
        type: integer
      timestamp:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
    required:
      - spacing
      - duration
      - timestamp

  DispersionArea:
    description: Dispersion Area
    type: object
    properties:
      taiList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Tai'
        minItems: 1
      ranNodeIdList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/GlobalRanNodeId'
        minItems: 1
      ncgiList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Ncgi'
        minItems: 1
      ecgiList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Ecgi'
        minItems: 1
      n3gaInd:
        type: boolean
        default: false

  MmTransactionLocationReportItem:
    description: UE MM Transaction Report Item per Location
    type: object
    properties:
      tai:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Tai'
      ncgi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Ncgi'
      ecgi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Ecgi'
      n3gaLocation:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/N3gaLocation'
      timestamp:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
      transactions:
        type: integer
    required:
      - timestamp
      - transactions

  MmTransactionSliceReportItem:
    description: UE MM Transaction Report Item per Slice
    type: object
    properties:
      snssai:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
      timestamp:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
      transactions:
        type: integer
    required:
      - timestamp
      - transactions

  SliceAreaRestrictionInfo:
    description: Slice Area Restriction Information
    type: object
    properties:
      sNssai:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
```

```
      presence:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/PresenceState'
    required:
      - sNssai

  ScheduledArea:
    description: A scheduled area in the trajectory
    type: object
    properties:
      taiList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Tai'
        minItems: 1
      enterTime:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
      leaveTime:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
      altitudeLow:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/Altitude'
      altitudeHigh:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/Altitude'
      ranNodeIdList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/GlobalRanNodeId'
        minItems: 1
      ncgiList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Ncgi'
        minItems: 1
      ecgiList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Ecgi'
        minItems: 1
    anyOf:
      - required: [ taiList ]
      - required: [ ranNodeIdList ]
      - required: [ ncgiList ]
      - required: [ ecgiList ]

  TrajectorySegment:
    description: Trajectory segment
    type: object
    properties:
      scheduledAreaList:
        type: array
        items:
          $ref: '#/components/schemas/ScheduledArea'
        minItems: 1
    required:
      - scheduledAreaList

  Trajectory:
    description: Trajectory
    type: object
    properties:
      scheduledAreaList:
        type: array
        items:
          $ref: '#/components/schemas/ScheduledArea'
        minItems: 1
      segmentList:
        type: array
        items:
          $ref: '#/components/schemas/TrajectorySegment'
        minItems: 1
      acceptableDeviationTime:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
    oneOf:
      - required: [ scheduledAreaList ]
      - required: [ segmentList ]


  SmCommFailureFilter:
    description: Filter for Session Management Communication Failure
```

```
      type: object
      properties:
        dnn:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
        snssai:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
      required:
        - dnn
        - snssai

    SignallingMeasurementInfo:
      description: AMF Signalling Measurement Information
      type: object
      properties:
        nfSignallingInfo:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/NfSignallingInfo'

    SignallingMeasurementUeRelatedInfo:
      description: AMF Signalling Measurement for UE-related information
      type: object
      properties:
        ueRelatedInfoList:
          type: array
          items:
            $ref: '#/components/schemas/UeRelatedInfo'
          minItems: 1


    UeRelatedInfo:
      description: UE related signalling information
      type: object
      properties:
        supi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
        gpsi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
        pei:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Pei'
        ueSignallingInfoList:
          type: array
          items:
            $ref: '#/components/schemas/UeSignallingInfo'
          minItems: 1
        ueStateInfoList:
          type: array
          items:
            $ref: '#/components/schemas/UeStateInfo'
          minItems: 1
        timerInfoList:
          type: array
          items:
            $ref: '#/components/schemas/AmfTimerInfo'
          minItems: 1
        dnns:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
          minItems: 1
        snssais:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
          minItems: 1

    UeSignallingInfo:
      description: statistics related to signalling messages received from the UE or RAN
      type: object
      properties:
        ueSignallingType:
          $ref: '#/components/schemas/UeSignallingType'
        numOfReq:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
        avgRespTime:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
        numOfReqUnresp:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
        numOfReqReject:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
```

```
      numOfPosteriorReq:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
      reasonOfFailure:
        $ref: '#/components/schemas/FailureReason'

  UeStateInfo:
    description: statistics related to UE state information.
    type: object
    properties:
      stateChangeType:
        $ref: '#/components/schemas/StateChangeType'
      count:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'

  AmfTimerInfo:
    description: UE timer information.
    type: object
    properties:
      amfTimerType:
        type: string
      timerDuration:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
      dnn:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
      snssai:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'



  UavAltitudeReportingConfig:
    description: altitude reporting
    type: object
    properties:
      rptThresholdMin:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/Altitude'
      rptThresholdMax:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/Altitude'
      altReportPeriod:
        type: integer
        minimum: 120
        maximum: 1800000
      altReportEventTrigger:
        type: array
        items:
          $ref: '#/components/schemas/AltReportEventTrigger'
        minItems: 1
    required:
      - rptThresholdMin
      - rptThresholdMax

  AmfEventType:
    description: Describes the supported event types of Namf_EventExposure Service
    anyOf:
    - type: string
      enum:
        - LOCATION_REPORT
        - PRESENCE_IN_AOI_REPORT
        - TIMEZONE_REPORT
        - ACCESS_TYPE_REPORT
        - REGISTRATION_STATE_REPORT
        - CONNECTIVITY_STATE_REPORT
        - REACHABILITY_REPORT
        - COMMUNICATION_FAILURE_REPORT
        - UES_IN_AREA_REPORT
        - SUBSCRIPTION_ID_CHANGE
        - SUBSCRIPTION_ID_ADDITION
        - SUBSCRIPTION_TERMINATION
        - LOSS_OF_CONNECTIVITY
        - 5GS_USER_STATE_REPORT
        - AVAILABILITY_AFTER_DDN_FAILURE
        - TYPE_ALLOCATION_CODE_REPORT
        - FREQUENT_MOBILITY_REGISTRATION_REPORT
        - SNSSAI_TA_MAPPING_REPORT
        - UE_LOCATION_TRENDS
        - UE_ACCESS_BEHAVIOR_TRENDS
        - UE_MM_TRANSACTION_REPORT
        - TRAJECTORY_TRACKING_REPORT
        - SIGNALLING_MEASUREMENT_REPORT
```

```
        - SIGNALLING_MEASUREMENT_UE_RELATED_REPORT
        - ALTITUDE_REPORT
    - type: string


  AmfEventTrigger:
    description: Describes how AMF should generate the report for the event
    anyOf:
    - type: string
      enum:
        - ONE_TIME
        - CONTINUOUS
        - PERIODIC
    - type: string
  LocationFilter :
    description: Describes the supported filters of LOCATION_REPORT event type
    anyOf:
    - type: string
      enum:
        - TAI
        - CELL_ID
        - RAN_NODE
        - N3IWF
        - UE_IP
        - UDP_PORT
        - TNAP_ID
        - GLI
        - TWAP_ID
    - type: string
  UeReachability:
    description: Describes the reachability of the UE
    anyOf:
    - type: string
      enum:
        - UNREACHABLE
        - REACHABLE
        - REGULATORY_ONLY
    - type: string
  RmState:
    description: Describes the registration management state of a UE
    anyOf:
    - type: string
      enum:
        - REGISTERED
        - DEREGISTERED
    - type: string
  CmState:
    description: Describes the connection management state of a UE
    anyOf:
    - type: string
      enum:
        - IDLE
        - CONNECTED
    - type: string
  5GsUserState:
    description: Describes the 5GS User State of a UE
    anyOf:
    - type: string
      enum:
        - DEREGISTERED
        - CONNECTED_NOT_REACHABLE_FOR_PAGING
        - CONNECTED_REACHABLE_FOR_PAGING
        - NOT_PROVIDED_FROM_AMF
    - type: string
  LossOfConnectivityReason:
    description: Describes the reason for loss of connectivity
    anyOf:
    - type: string
      enum:
        - DEREGISTERED
        - MAX_DETECTION_TIME_EXPIRED
        - PURGED
        - UNAVAILABLE_PERIOD
    - type: string

  ReachabilityFilter:
    description: Event filter for REACHABILITY_REPORT event type
    anyOf:
```

```
      - type: string
        enum:
          - UE_REACHABILITY_STATUS_CHANGE
          - UE_REACHABLE_DL_TRAFFIC
      - type: string

    UeType:
      description: Describes the type of UEs
      anyOf:
      - type: string
        enum:
          - AERIAL_UE
      - type: string

    AccessStateTransitionType:
      description: Access State Transition Type.
      anyOf:
      - type: string
        enum:
          - ACCESS_TYPE_CHANGE_3GPP
          - ACCESS_TYPE_CHANGE_N3GPP
          - RM_STATE_CHANGE_DEREGISTERED
          - RM_STATE_CHANGE_REGISTERED
          - CM_STATE_CHANGE_IDLE
          - CM_STATE_CHANGE_CONNECTED
          - HANDOVER
          - MOBILITY_REGISTRATION_UPDATE
      - type: string

    SubTerminationReason:
      description: Subscription Termination Reason.
      anyOf:
      - type: string
        enum:
          - INVALID_SUBSCRIPTION
          - SUBSCRIPTION_NOT_AUTHORIZED
          - CONFLICT_SUBSCRIPTION
      - type: string

    TrajectoryReportReason:
      description: Trajectory Tracking Event Report Reason.
      anyOf:
      - type: string
        enum:
          - TRAJECTORY_DEVIATED
          - TRAJECTORY_SEGMENT_CHANGE
      - type: string

    AltReportEventTrigger:
      description: the event-based altitude reporting requirement reason.
      anyOf:
      - type: string
        enum:
          - TA_CHANGE
          - RAN_NODE
      - type: string

    UavAltRptFailureCause:
      description: Indicates when the UAV Flight information reporting request failed.
      anyOf:
      - type: string
        enum:
          - AERIAL_UE_FLIGHT_INFORMATION_REPORTING_FAILED
          - AERIAL_UE_FLIGHT_INFORMATION_REPORTING_STOPPED
      - type: string


    FailureReason:
      description: Reason of failed responses of UE/RAN.
      anyOf:
      - type: string
        enum:
          - SUBSCRIPTION_REJECT
          - AUTHENTICATION_FAILURE
          - SECURITY_MODE_REJECT"
          - MISSING_OR_INVALID_INFORMATION
          - CONGESTION_REJECT
          - POLICY_REJECT
```

```
          - RESOURCES_EXHAUSTED
          - INTERNAL_ERROR
          - UNSPECIFIED
      - type: string

    UeSignallingType:
      description: >
        The UE signalling type(e.g. Registration Request, Mobility and Periodic Registration
         Request, Service Request).
      anyOf:
      - type: string
        enum:
          - INITIAL_REGISTRATION
          - PERIODIC_REGISTRATION
          - MOBILITY_REGISTRATION
          - SERVICE_REQUEST
          - UL_NAS_TRANSPORT
      - type: string

    StateChangeType:
      description: The state change type.
      anyOf:
      - type: string
        enum:
          - ACCESS_TYPE_CHANGE_TO_3GPP_ACCESS
          - ACCESS_TYPE_CHANGE_TO_NON3GPP_ACCESS
          - RM_STATE_CHANGE_TO_RM_DEREGISTERED
          - RM_STATE_CHANGE_TO_RM_REGISTERED
          - CM_STATE_CHANGE_TO_CM_IDLE
          - CM_STATE_CHANGE_TO_CM_CONNECTED
          - HANDOVER
          - MOBILITY_REGISTRATION_UPDATE
      - type: string
```

A.4 Namf_MT

```
openapi: 3.0.0

info:
  version: 1.4.1
  title: Namf_MT
  description: |
    AMF Mobile Terminated Service.
    © 2025, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

security:
  - {}
  - oAuth2ClientCredentials:
      - namf-mt

externalDocs:
  description: 3GPP TS 29.518 V19.7.0; 5G System; Access and Mobility Management Services
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.518/'

servers:
  - url: '{apiRoot}/namf-mt/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501

paths:
  '/ue-contexts/{ueContextId}':
    get:
      summary: Namf_MT Provide Domain Selection Info service Operation
      tags:
        - ueContext (Document)
      operationId: Provide Domain Selection Info
      parameters:
        - name: ueContextId
          in: path
          description: UE Context Identifier
          required: true
          schema:
            type: string
```

```
          pattern: '^(imsi-[0-9]{5,15}|nai-.+|gli-.+|gci-.+|.+)$'
        - name: info-class
          in: query
          description: UE Context Information Class
          schema:
            $ref: '#/components/schemas/UeContextInfoClass'
        - name: supported-features
          in: query
          description: Supported Features
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
        - name: old-guami
          in: query
          description: Old GUAMI
          content:
            application/json:
              schema:
                $ref: 'TS29571_CommonData.yaml#/components/schemas/Guami'
      responses:
        '200':
          description: Requested UE Context Information returned
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/UeContextInfo'
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '409':
          $ref: 'TS29571_CommonData.yaml#/components/responses/409'
        '414':
          $ref: 'TS29571_CommonData.yaml#/components/responses/414'
        '429':
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29571_CommonData.yaml#/components/responses/500'
        '502':
          $ref: 'TS29571_CommonData.yaml#/components/responses/502'
        '503':
          $ref: 'TS29571_CommonData.yaml#/components/responses/503'
        default:
          description: Unexpected error
  /ue-contexts/{ueContextId}/ue-reachind:
    put:
      summary: Namf_MT EnableUEReachability service Operation
      tags:
        - ueReachInd (Document)
      operationId: EnableUeReachability
      security:
        - {}
        - oAuth2ClientCredentials:
            - namf-mt
        - oAuth2ClientCredentials:
            - namf-mt
            - namf-mt:ue-reachind
      parameters:
        - name: ueContextId
          in: path
          description: UE Context Identifier
          required: true
          schema:
            type: string
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/EnableUeReachabilityReqData'
        required: true
      responses:
```

```
        '200':
          description: UE has become reachable as desired
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/EnableUeReachabilityRspData'
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          description: Forbidden
          content:
            application/problem+json:
              schema:
                $ref: '#/components/schemas/ProblemDetailsEnableUeReachability'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '409':
          $ref: 'TS29571_CommonData.yaml#/components/responses/409'
        '411':
          $ref: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29571_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29571_CommonData.yaml#/components/responses/500'
        '502':
          $ref: 'TS29571_CommonData.yaml#/components/responses/502'
        '503':
          $ref: 'TS29571_CommonData.yaml#/components/responses/503'
        '504':
          description: Gateway Timeout
          content:
            application/problem+json:
              schema:
                $ref: '#/components/schemas/ProblemDetailsEnableUeReachability'
        default:
          description: Unexpected error

  /ue-contexts/enable-group-reachability:
    post:
      summary: Namf_MT EnableGroupReachability service Operation
      tags:
        - ueContexts (collection)
      operationId: EnableGroupReachability
      security:
        - {}
        - oAuth2ClientCredentials:
            - namf-mt
        - oAuth2ClientCredentials:
            - namf-mt
            - namf-mt:enable-group-reachability
      requestBody:
        description: list of UEs requested to be made reachable for the related TMGI
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/EnableGroupReachabilityReqData'
        required: true
      responses:
        '200':
          description: Successful response.
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/EnableGroupReachabilityRspData'
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
```

```
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29571_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29571_CommonData.yaml#/components/responses/500'
        '502':
          $ref: 'TS29571_CommonData.yaml#/components/responses/502'
        '503':
          $ref: 'TS29571_CommonData.yaml#/components/responses/503'
        '504':
          $ref: 'TS29571_CommonData.yaml#/components/responses/504'
        default:
          description: Unexpected error
      callbacks:
        reachabilityNotification:
          '{$request.body#/reachabilityNotifyUri}':
            post:
              requestBody:
                required: true
                content:
                  application/json:
                    schema:
                      $ref: '#/components/schemas/ReachabilityNotificationData'
              responses:
                '204':
                  description: UE reachability notification response
                '307':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/307'
                '308':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/308'
                '400':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/400'
                '401':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/401'
                '403':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/403'
                '404':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/404'
                '411':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/411'
                '413':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/413'
                '415':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/415'
                '429':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
                '500':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
                '502':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/502'
                '503':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
                default:
                  description: Unexpected error

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{nrfApiRoot}/oauth2/token'
          scopes:
            namf-mt: Access to the Namf_MT API
            namf-mt:ue-reachind: >
```

```
            Access to the EnableUeReachability service operation
          namf-mt:enable-group-reachability: >
            Access to the EnableGroupReachability service operation

schemas:
  EnableUeReachabilityReqData:
    description: Data within the Enable UE Reachability Request
    type: object
    properties:
      reachability:
        $ref: 'TS29518_Namf_EventExposure.yaml#/components/schemas/UeReachability'
      supportedFeatures:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      oldGuami:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Guami'
      extBufSupport:
        type: boolean
        default: false
      qosFlowInfoList:
        type: array
        items:
          $ref: '#/components/schemas/QosFlowInfo'
        minItems: 1
      pduSessionId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSessionId'
    required:
      - reachability
  EnableUeReachabilityRspData:
    description: Data within the Enable UE Reachability Response
    type: object
    properties:
      reachability:
        $ref: 'TS29518_Namf_EventExposure.yaml#/components/schemas/UeReachability'
      supportedFeatures:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
    required:
      - reachability
  UeContextInfo:
    description: UE Context Information
    type: object
    properties:
      supportVoPS:
        type: boolean
      supportVoPSn3gpp:
        type: boolean
      lastActTime:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
      accessType:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/AccessType'
      ratType:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/RatType'
      supportedFeatures:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
  ProblemDetailsEnableUeReachability:
    description: Enable UE Reachability Error Detail
    allOf:
    - $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
    - $ref: '#/components/schemas/AdditionInfoEnableUeReachability'
  AdditionInfoEnableUeReachability:
    description: Additional information to be returned in EnableUeReachability error response
    type: object
    properties:
      maxWaitingTime:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
  EnableGroupReachabilityReqData:
    description: Data within the Enable Group Reachability Request
    type: object
    properties:
      ueInfoList:
        type: array
        items:
          $ref: '#/components/schemas/UeInfo'
        minItems: 1
      tmgi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Tmgi'
      reachabilityNotifyUri:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      mbsServiceArea:
```

```
        $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsServiceArea'
      mbsServiceAreaInfoList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsServiceAreaInfo'
        minItems: 1
      arp:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Arp'
      5qi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/5Qi'
      supportedFeatures:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
    required:
      - ueInfoList
      - tmgi
  EnableGroupReachabilityRspData:
    description: Data within the Enable Group Reachability Response
    type: object
    properties:
      ueConnectedList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
        minItems: 1
      supportedFeatures:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'

  UeInfo:
    description: list of UEs requested to be made reachable for the MBS Session
    type: object
    properties:
      ueList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
        minItems: 1
      pduSessionId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSessionId'
    required:
      - ueList

  ReachabilityNotificationData:
    description: Data within the UE Reachability Info Notify
    type: object
    properties:
      reachableUeList:
        type: array
        items:
          $ref: '#/components/schemas/ReachableUeInfo'
        minItems: 1
      unreachableUeList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
        minItems: 1
  ReachableUeInfo:
    description: Contains the reachable UE Information
    type: object
    properties:
      ueList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
        minItems: 1
      userLocation:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/UserLocation'
    required:
      - ueList

  QosFlowInfo:
    description: QOS Flow information
    type: object
    properties:
      qfi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Qfi'
      ppi:
        $ref: 'TS29518_Namf_Communication.yaml#/components/schemas/Ppi'
      arp:
```

```
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Arp'
        5qi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/5Qi'
        dlDataSize:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uint16'
      required:
        - qfi

    UeContextInfoClass:
      description: Indicates the UE Context information class
      anyOf:
      - type: string
        enum:
          - TADS
      - type: string
```

A.5 Namf_Location

```
openapi: 3.0.0

info:
  version: 1.4.2
  title: Namf_Location
  description: |
    AMF Location Service.
    © 2025, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

security:
  - {}
  - oAuth2ClientCredentials:
      - namf-loc

externalDocs:
  description: 3GPP TS 29.518 V19.8.0; 5G System; Access and Mobility Management Services
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.518/'

servers:
  - url: '{apiRoot}/namf-loc/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501

paths:
  /{ueContextId}/provide-pos-info:
    post:
      summary: Namf_Location ProvidePositioningInfo service Operation
      tags:
        - Individual UE context (Document)
      operationId: ProvidePositioningInfo
      parameters:
        - name: ueContextId
          in: path
          description: UE Context Identifier
          required: true
          schema:
            type: string
            pattern: '^(imsi-[0-9]{5,15}|nai-.+|gli-.+|gci-.+|imei-[0-9]{15}|imeisv-[0-
9]{16}|msisdn-[0-9]{5,15}|extid-.+@.+|.+)$'
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/RequestPosInfo'
        required: true
      responses:
        '200':
          description: Expected response to a valid request
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/ProvidePosInfoExt'
        '204':
           description: Successful accept of location request with no information returned.
        '307':
```

```
        $ref: 'TS29571_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29571_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
      '409':
        description: Conflict
        content:
          application/problem+json:
            schema:
              $ref: '#/components/schemas/ProblemDetailsProvidePosInfo'
      '411':
        $ref: 'TS29571_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29571_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29571_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29571_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29571_CommonData.yaml#/components/responses/500'
      '502':
        $ref: 'TS29571_CommonData.yaml#/components/responses/502'
      '503':
        $ref: 'TS29571_CommonData.yaml#/components/responses/503'
      '504':
        $ref: 'TS29571_CommonData.yaml#/components/responses/504'
      default:
        description: Unexpected error
    callbacks:
      onUELocationNotification:
        '{$request.body#/locationNotificationUri}':
          post:
            requestBody:
              description: UE Location Event Notification
              content:
                application/json:
                  schema:
                    $ref: '#/components/schemas/NotifiedPosInfoExt'
            responses:
              '204':
                description: Expected response to a successful callback processing
              '307':
                $ref: 'TS29571_CommonData.yaml#/components/responses/307'
              '308':
                $ref: 'TS29571_CommonData.yaml#/components/responses/308'
              '400':
                $ref: 'TS29571_CommonData.yaml#/components/responses/400'
              '401':
                $ref: 'TS29571_CommonData.yaml#/components/responses/401'
              '403':
                $ref: 'TS29571_CommonData.yaml#/components/responses/403'
              '404':
                $ref: 'TS29571_CommonData.yaml#/components/responses/404'
              '411':
                $ref: 'TS29571_CommonData.yaml#/components/responses/411'
              '413':
                $ref: 'TS29571_CommonData.yaml#/components/responses/413'
              '415':
                $ref: 'TS29571_CommonData.yaml#/components/responses/415'
              '429':
                $ref: 'TS29571_CommonData.yaml#/components/responses/429'
              '500':
                $ref: 'TS29571_CommonData.yaml#/components/responses/500'
              '502':
                $ref: 'TS29571_CommonData.yaml#/components/responses/502'
              '503':
                $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  /{ueContextId}/provide-loc-info:
    post:
      summary: Namf_Location ProvideLocationInfo service Operation
      tags:
```

```
      - Individual UE context (Document)
    operationId: ProvideLocationInfo
    parameters:
      - name: ueContextId
        in: path
        description: UE Context Identifier
        required: true
        schema:
          type: string
          pattern: '^(imsi-[0-9]{5,15}|nai-.+|gli-.+|gci-.+|imei-[0-9]{15}|imeisv-[0-9]{16}|.+)$'
    requestBody:
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/RequestLocInfo'
      required: true
    responses:
      '200':
        description: Expected response to a valid request
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/ProvideLocInfo'
      '307':
        $ref: 'TS29571_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29571_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29571_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29571_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29571_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29571_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29571_CommonData.yaml#/components/responses/500'
      '502':
        $ref: 'TS29571_CommonData.yaml#/components/responses/502'
      '503':
        $ref: 'TS29571_CommonData.yaml#/components/responses/503'
      default:
        description: Unexpected error

  /{ueContextId}/cancel-pos-info:
    post:
      summary: Namf_Location CancelLocation service operation
      tags:
        - Individual UE context (Document)
      operationId: CancelLocation
      parameters:
        - name: ueContextId
          in: path
          description: UE Context Identifier
          required: true
          schema:
            type: string
            pattern: '^(imsi-[0-9]{5,15}|nai-.+|gli-.+|gci-.+|imei-[0-9]{15}|imeisv-[0-9]{16}|.+)$'
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/CancelPosInfo'
        required: true
      responses:
        '204':
          description: Expected response to a successful cancellation
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
```

```
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29571_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29571_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29571_CommonData.yaml#/components/responses/503'
        '502':
          $ref: 'TS29571_CommonData.yaml#/components/responses/502'
        '504':
          $ref: 'TS29571_CommonData.yaml#/components/responses/504'
        default:
          $ref: 'TS29571_CommonData.yaml#/components/responses/default'


components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{nrfApiRoot}/oauth2/token'
          scopes:
            namf-loc: Access to the Namf_Location API
  schemas:
    RequestPosInfo:
      description: Data within Provide Positioning Information Request
      type: object
      properties:
        lcsClientType:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/ExternalClientType'
        lcsLocation:
          $ref: '#/components/schemas/LocationType'
        supi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
        gpsi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
        requestedRangingSlResult:
          type: array
          items:
            $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/RangingSlResult'
          minItems: 1
        relatedUes:
          type: array
          items:
            $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/RelatedUe'
          minItems: 1
        lmfId:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/LMFIdentification'
        priority:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/LcsPriority'
        lcsQoS:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/LocationQoS'
        velocityRequested:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/VelocityRequested'
        lcsSupportedGADShapes:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/SupportedGADShapes'
        additionalLcsSuppGADShapes:
          type: array
          items:
            $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/SupportedGADShapes'
          minItems: 1
        locationNotificationUri:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
```

```
      supportedFeatures:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      oldGuami:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Guami'
      pei:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Pei'
      lcsServiceType:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/LcsServiceType'
      ldrType:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/LdrType'
      hgmlcCallBackURI:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      hgmlcAddr:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/IpAddr'
      lirGmlcCallBackUri:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      ldrReference:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/LdrReference'
      epsLdrReference:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/EpsLdrReference'
      lirReference:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/LirReference'
      periodicEventInfo:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/PeriodicEventInfo'
      areaEventInfo:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/AreaEventInfo'
      motionEventInfo:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/MotionEventInfo'
      externalClientIdentification:
        $ref: 'TS29515_Ngmlc_Location.yaml#/components/schemas/ExternalClientIdentification'
      afID:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
      codeWord:
        $ref: 'TS29515_Ngmlc_Location.yaml#/components/schemas/CodeWord'
      uePrivacyRequirements:
        $ref: 'TS29515_Ngmlc_Location.yaml#/components/schemas/UePrivacyRequirements'
      scheduledLocTime:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
      reliableLocReq:
        type: boolean
        default: false
      intermediateLocationInd:
        type: boolean
        default: false
      maxRespTime:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
      ueUnawareInd:
        type: boolean
        enum:
          - true
      lpHapType:
        $ref: '#/components/schemas/LpHapType'
      evtRptAllowedAreas:
        type: array
        items:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/ReportingArea'
        minItems: 1
        maxItems: 250
      reportingInd:
        allOf:
          - $ref: 'TS29515_Ngmlc_Location.yaml#/components/schemas/ReportingInd'
        default: INSIDE_REPORTING
      integrityRequirements:
        $ref: 'TS29515_Ngmlc_Location.yaml#/components/schemas/IntegrityRequirements'
      upLocRepInfoAf:
        $ref: 'TS29515_Ngmlc_Location.yaml#/components/schemas/UpLocRepInfoAf'
      mappedQoSEps:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/MappedLocationQoSEps'
      coordinateID:
        type: integer
    required:
      - lcsClientType
      - lcsLocation


  ProvidePosInfoExt:
    description: Extended provided positioning information for UEs
    allOf:
```

```
      - $ref: '#/components/schemas/ProvidePosInfo'
      - $ref: '#/components/schemas/AddProvidePosInfos'

    ProvidePosInfo:
      description: Data within Provide Positioning Information Response
      type: object
      properties:
        locationEstimate:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/GeographicArea'
        localLocationEstimate:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/LocalArea'
        accuracyFulfilmentIndicator:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/AccuracyFulfilmentIndicator'
        ageOfLocationEstimate:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/AgeOfLocationEstimate'
        timestampOfLocationEstimate:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
        velocityEstimate:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/VelocityEstimate'
        positioningDataList:
          type: array
          items:
            $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/PositioningMethodAndUsage'
          minItems: 0
          maxItems: 9
        gnssPositioningDataList:
          type: array
          items:
            $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/GnssPositioningMethodAndUsage'
          minItems: 0
          maxItems: 9
        ecgi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Ecgi'
        ncgi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Ncgi'
        remoteUeInd:
          type: boolean
          enum:
            - true
        targetServingNode:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
        targetMmeName:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/DiameterIdentity'
        targetMmeRealm:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/DiameterIdentity'
        utranSrvccInd:
          type: boolean
        civicAddress:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/CivicAddress'
        barometricPressure:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/BarometricPressure'
        altitude:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/Altitude'
        supportedFeatures:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
        servingLMFIdentification:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/LMFIdentification'
        locationPrivacyVerResult:
          $ref: '#/components/schemas/LocationPrivacyVerResult'
        achievedQos:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/MinorLocationQoS'
        directReportInd:
          type: boolean
          default: false
        acceptedPeriodicEventInfo:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/PeriodicEventInfo'
        haGnssMetrics:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/HighAccuracyGnssMetrics'
        indoorOutdoorInd:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/IndoorOutdoorInd'
        losNlosMeasureInd:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/LosNlosMeasureInd'
        relatedApplicationlayerId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/ApplicationlayerId'
        distanceDirection:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/RangeDirection'
        2dRelativeLocation:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/2DRelativeLocation'
```

```
      3dRelativeLocation:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/3DRelativeLocation'
      relativeVelocity:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/VelocityEstimate'
      integrityResult:
        $ref: 'TS29515_Ngmlc_Location.yaml#/components/schemas/IntegrityResult'


    NotifiedPosInfoExt:
      description: Extended notified positioning information for UEs
      allOf:
        - $ref: '#/components/schemas/NotifiedPosInfo'
        - $ref: '#/components/schemas/AddNotifiedPosInfos'

    NotifiedPosInfo:
      description: Data within EventNotify notification
      type: object
      properties:
        locationEvent:
          $ref: '#/components/schemas/LocationEvent'
        supi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
        gpsi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
        pei:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Pei'
        locationEstimate:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/GeographicArea'
        localLocationEstimate:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/LocalArea'
        ageOfLocationEstimate:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/AgeOfLocationEstimate'
        timestampOfLocationEstimate:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
        velocityEstimate:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/VelocityEstimate'
        positioningDataList:
          type: array
          items:
            $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/PositioningMethodAndUsage'
          minItems: 0
          maxItems: 9
        gnssPositioningDataList:
          type: array
          items:
            $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/GnssPositioningMethodAndUsage'
          minItems: 0
          maxItems: 9
        ecgi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Ecgi'
        ncgi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Ncgi'
        remoteUeInd:
          type: boolean
          enum:
            - true
        servingNode:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
        targetMmeName:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/DiameterIdentity'
        targetMmeRealm:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/DiameterIdentity'
        utranSrvccInd:
          type: boolean
        civicAddress:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/CivicAddress'
        barometricPressure:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/BarometricPressure'
        altitude:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/Altitude'
        hgmlcCallBackURI:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        ldrReference:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/LdrReference'
        servingLMFIdentification:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/LMFIdentification'
        terminationCause:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/TerminationCause'
```

```
    achievedQos:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/MinorLocationQoS'
    mscServerId:
      $ref: 'TS29503_Nudm_UECM.yaml#/components/schemas/E164Number'
    haGnssMetrics:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/HighAccuracyGnssMetrics'
    indoorOutdoorInd:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/IndoorOutdoorInd'
    losNlosMeasureInd:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/LosNlosMeasureInd'
    relatedApplicationlayerId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/ApplicationlayerId'
    distanceDirection:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/RangeDirection'
    2dRelativeLocation:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/2DRelativeLocation'
    3dRelativeLocation:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/3DRelativeLocation'
    relativeVelocity:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/VelocityEstimate'
    integrityResult:
      $ref: 'TS29515_Ngmlc_Location.yaml#/components/schemas/IntegrityResult'
    nrppaPeriodicInd:
      type: boolean
      enum:
        - true
  required:
    - locationEvent


RequestLocInfo:
  description: Data within Provide Location Information Request
  type: object
  properties:
    req5gsLoc:
      type: boolean
      default: false
    reqCurrentLoc:
      type: boolean
      default: false
    reqRatType:
      type: boolean
      default: false
    reqTimeZone:
      type: boolean
      default: false
    supportedFeatures:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'

ProvideLocInfo:
  description: Data within Provide Location Information Response
  type: object
  properties:
    currentLoc:
      type: boolean
    location:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/UserLocation'
    additionalLocation:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/UserLocation'
    geoInfo:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/GeographicArea'
    locationAge:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/AgeOfLocationEstimate'
    ratType:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/RatType'
    timezone:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/TimeZone'
    supportedFeatures:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
    oldGuami:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Guami'

CancelPosInfo:
  description: Data within a Cancel Location Request
  type: object
  properties:
    supi:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
```

```
      hgmlcCallBackURI:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      ldrReference:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/LdrReference'
      servingLMFIdentification:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/LMFIdentification'
      supportedFeatures:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      nrppaPeriodicInd:
        type: boolean
        enum:
          - true
      hgmlcAddr:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/IpAddr'
      epsLdrReference:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/EpsLdrReference'
    required:
      - supi
      - hgmlcCallBackURI
      - ldrReference

  ProblemDetailsProvidePosInfo:
    description: Handover from 5GS to EPS Error Details.
    allOf:
    - $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
    - $ref: '#/components/schemas/ProvidePosInfo'

  AddNotifiedPosInfos:
    description: >
      Additional LCS event notify with more than one corresponding UEs.
    type: object
    properties:
      addProvidePosInfos:
        type: array
        items:
          $ref: '#/components/schemas/NotifiedPosInfo'
        minItems: 1

  AddProvidePosInfos:
    description: >
      Additional UE positioning information with more than one corresponding UEs.
    type: object
    properties:
      addProvidePosInfos:
        type: array
        items:
          $ref: '#/components/schemas/ProvidePosInfo'
        minItems: 1


  LocationType:
    description: Type of location measurement requested
    anyOf:
    - type: string
      enum:
        - CURRENT_LOCATION
        - CURRENT_OR_LAST_KNOWN_LOCATION
        - NOTIFICATION_VERIFICATION_ONLY
        - DEFERRED_LOCATION
    - type: string

  LocationEvent:
    description: Type of events initiating location procedures
    anyOf:
    - type: string
      enum:
        - EMERGENCY_CALL_ORIGINATION
        - EMERGENCY_CALL_RELEASE
        - EMERGENCY_CALL_HANDOVER
        - ACTIVATION_OF_DEFERRED_LOCATION
        - UE_MOBILITY_FOR_DEFERRED_LOCATION
        - CANCELLATION_OF_DEFERRED_LOCATION
    - type: string

  LocationPrivacyVerResult:
    description: >
      The result of location privacy verification or ranging and sidelink positioning privacy
      verification by UE
```

```
      anyOf:
      - type: string
        enum:
          - LOCATION_ALLOWED
          - LOCATION_NOT_ALLOWED
          - RESPONSE_TIME_OUT
          - RANGING_ALLOWED
          - RANGING_NOT_ALLOWED
      - type: string


    LpHapType:
      description: Type of Low Power and/or High Accuracy Positioning
      anyOf:
      - type: string
        enum:
          - LOW_POW_HIGH_ACCU_POS
      - type: string
```

A.6 Namf_MBSBroadcast API

```
openapi: 3.0.0

info:
  version: 1.2.0
  title: Namf_MBSBroadcast
  description: |
    AMF MBSBroadcast Service.
    © 2025, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

externalDocs:
  description: 3GPP TS 29.518 V19.5.0; 5G System; Access and Mobility Management Services
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.518/'

servers:
  - url: '{apiRoot}/namf-mbs-bc/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501

security:
  - {}
  - oAuth2ClientCredentials:
      - namf-mbs-bc

paths:
  /mbs-contexts:
    post:
      summary: Namf_MBSBroadcast ContextCreate service Operation
      tags:
        - Broadcast MBS session contexts collection (Collection)
      operationId: ContextCreate
      requestBody:
        content:
          multipart/related:  # message with binary body part(s)
            schema:
              type: object
              properties: # Request parts
                jsonData:
                  $ref: '#/components/schemas/ContextCreateReqData'
                binaryDataN2Information:
                  type: string
                  format: binary
            encoding:
              jsonData:
                contentType:  application/json
              binaryDataN2Information:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
        required: true
      callbacks:
```

```
contextStatusNotification:
  '{$request.body#/notifyUri}':
    post:
      requestBody:  # notification request without binary body part
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/ContextStatusNotification'
          multipart/related:  # notification request with binary body part(s)
            schema:
              type: object
              properties: # Request parts
                jsonData:
                  $ref: '#/components/schemas/ContextStatusNotification'
                binaryDataN2Information1:
                  type: string
                  format: binary
                binaryDataN2Information2:
                  type: string
                  format: binary
                binaryDataN2Information3:
                  type: string
                  format: binary
                binaryDataN2Information4:
                  type: string
                  format: binary
                binaryDataN2Information5:
                  type: string
                  format: binary
                binaryDataN2Information6:
                  type: string
                  format: binary
                binaryDataN2Information7:
                  type: string
                  format: binary
                binaryDataN2Information8:
                  type: string
                  format: binary
                binaryDataN2Information9:
                  type: string
                  format: binary
                binaryDataN2Information10:
                  type: string
                  format: binary
            encoding:
              jsonData:
                contentType:  application/json
              binaryDataN2Information1:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
              binaryDataN2Information2:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
              binaryDataN2Information3:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
              binaryDataN2Information4:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
              binaryDataN2Information5:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
```

```
            binaryDataN2Information6:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
                    type: string
            binaryDataN2Information7:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
                    type: string
            binaryDataN2Information8:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
                    type: string
            binaryDataN2Information9:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
                    type: string
            binaryDataN2Information10:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
                    type: string
      responses:
        '200':
          description: successful notification response with content
          content:
            multipart/related:  # notification response with binary body part(s)
              schema:
                type: object
                properties:
                  jsonData:
                    $ref: '#/components/schemas/ContextStatusNotificationResponse'
                  binaryDataN2Information1:
                    type: string
                    format: binary
                  binaryDataN2Information2:
                    type: string
                    format: binary
                  binaryDataN2Information3:
                    type: string
                    format: binary
                  binaryDataN2Information4:
                    type: string
                    format: binary
                  binaryDataN2Information5:
                    type: string
                    format: binary
                  binaryDataN2Information6:
                    type: string
                    format: binary
                  binaryDataN2Information7:
                    type: string
                    format: binary
                  binaryDataN2Information8:
                    type: string
                    format: binary
                  binaryDataN2Information9:
                    type: string
                    format: binary
                  binaryDataN2Information10:
                    type: string
                    format: binary
              encoding:
                jsonData:
                  contentType:  application/json
                binaryDataN2Information1:
                  contentType:  application/vnd.3gpp.ngap
                  headers:
                    Content-Id:
                      schema:
```

```
                type: string
            binaryDataN2Information2:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
                    type: string
            binaryDataN2Information3:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
                    type: string
            binaryDataN2Information4:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
                    type: string
            binaryDataN2Information5:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
                    type: string
            binaryDataN2Information6:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
                    type: string
            binaryDataN2Information7:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
                    type: string
            binaryDataN2Information8:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
                    type: string
            binaryDataN2Information9:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
                    type: string
            binaryDataN2Information10:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
                    type: string
        '204':
          description: successful notification
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
           $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29571_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
```

```
                $ref: 'TS29571_CommonData.yaml#/components/responses/500'
              '502':
                $ref: 'TS29571_CommonData.yaml#/components/responses/502'
              '503':
                $ref: 'TS29571_CommonData.yaml#/components/responses/503'
      responses:
        '201':
          description: MBS Broadcast context created successfully
          headers:
            Location:
              description: 'Contains the URI of the newly created resource, according to the
structure: {apiRoot}/namf-mbs-bc/<apiVersion>/mbs-contexts/{mbsContextRef}'
              required: true
              schema:
                type: string
          content:
            application/json:  # message without binary body part(s)
              schema:
                $ref: '#/components/schemas/ContextCreateRspData'
            multipart/related:   # message with binary body part(s)
              schema:
                type: object
                properties: # Response parts
                  jsonData:
                    $ref: '#/components/schemas/ContextCreateRspData'
                  binaryDataN2Information1:
                    type: string
                    format: binary
                  binaryDataN2Information2:
                    type: string
                    format: binary
                  binaryDataN2Information3:
                    type: string
                    format: binary
                  binaryDataN2Information4:
                    type: string
                    format: binary
                  binaryDataN2Information5:
                    type: string
                    format: binary
                  binaryDataN2Information6:
                    type: string
                    format: binary
                  binaryDataN2Information7:
                    type: string
                    format: binary
                  binaryDataN2Information8:
                    type: string
                    format: binary
                  binaryDataN2Information9:
                    type: string
                    format: binary
                  binaryDataN2Information10:
                    type: string
                    format: binary
              encoding:
                jsonData:
                  contentType:  application/json
                binaryDataN2Information1:
                  contentType:  application/vnd.3gpp.ngap
                  headers:
                    Content-Id:
                      schema:
                        type: string
                binaryDataN2Information2:
                  contentType:  application/vnd.3gpp.ngap
                  headers:
                    Content-Id:
                      schema:
                        type: string
                binaryDataN2Information3:
                  contentType:  application/vnd.3gpp.ngap
                  headers:
                    Content-Id:
                      schema:
                        type: string
                binaryDataN2Information4:
                  contentType:  application/vnd.3gpp.ngap
```

```
                headers:
                  Content-Id:
                    schema:
                      type: string
              binaryDataN2Information5:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
              binaryDataN2Information6:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
              binaryDataN2Information7:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
              binaryDataN2Information8:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
              binaryDataN2Information9:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
              binaryDataN2Information10:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
      '307':
        $ref: 'TS29571_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29571_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29571_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29571_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29571_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29571_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29571_CommonData.yaml#/components/responses/500'
      '502':
        $ref: 'TS29571_CommonData.yaml#/components/responses/502'
      '503':
        $ref: 'TS29571_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29571_CommonData.yaml#/components/responses/default'

/mbs-contexts/{mbsContextRef}:
  delete:
    summary: Namf_MBSBroadcast ContextDelete service Operation
    tags:
      - Individual broadcast MBS session context (Document)
    operationId: ContextDelete
    parameters:
      - name: mbsContextRef
        in: path
```

```
        required: true
        description: Unique ID of the broadcast MSB session context to be deleted
        schema:
          type: string
    responses:
      '204':
        description: successful deletion
      '307':
        $ref: 'TS29571_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29571_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
      '429':
        $ref: 'TS29571_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29571_CommonData.yaml#/components/responses/500'
      '502':
        $ref: 'TS29571_CommonData.yaml#/components/responses/502'
      '503':
        $ref: 'TS29571_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29571_CommonData.yaml#/components/responses/default'

/mbs-contexts/{mbsContextRef}/update:
  post:
    summary: Namf_MBSBroadcast ContextUpdate service Operation
    tags:
      - Individual broadcast MBS session context (Document)
    operationId: ContextUpdate
    parameters:
      - name: mbsContextRef
        in: path
        description: Unique ID of the broadcast MSB session context to be updated
        required: true
        schema:
          type: string
    requestBody:
      content:
        multipart/related:  # message with binary body part(s)
          schema:
            type: object
            properties: # Request parts
              jsonData:
                $ref: '#/components/schemas/ContextUpdateReqData'
              binaryDataN2Information:
                type: string
                format: binary
          encoding:
            jsonData:
              contentType:  application/json
            binaryDataN2Information:
              contentType:  application/vnd.3gpp.ngap
              headers:
                Content-Id:
                  schema:
                    type: string
      required: true
    responses:
      '200':
        description: MBS Broadcast context updated successfully
        content:
          application/json:  # message without binary body part(s)
            schema:
              $ref: '#/components/schemas/ContextUpdateRspData'
          multipart/related:   # message with binary body part(s)
            schema:
              type: object
              properties: # Response parts
                jsonData:
                  $ref: '#/components/schemas/ContextUpdateRspData'
                binaryDataN2Information1:
```

```
        type: string
        format: binary
      binaryDataN2Information2:
        type: string
        format: binary
      binaryDataN2Information3:
        type: string
        format: binary
      binaryDataN2Information4:
        type: string
        format: binary
      binaryDataN2Information5:
        type: string
        format: binary
      binaryDataN2Information6:
        type: string
        format: binary
      binaryDataN2Information7:
        type: string
        format: binary
      binaryDataN2Information8:
        type: string
        format: binary
      binaryDataN2Information9:
        type: string
        format: binary
      binaryDataN2Information10:
        type: string
        format: binary
  encoding:
    jsonData:
      contentType:  application/json
    binaryDataN2Information1:
      contentType:  application/vnd.3gpp.ngap
      headers:
        Content-Id:
          schema:
            type: string
    binaryDataN2Information2:
      contentType:  application/vnd.3gpp.ngap
      headers:
        Content-Id:
          schema:
            type: string
    binaryDataN2Information3:
      contentType:  application/vnd.3gpp.ngap
      headers:
        Content-Id:
          schema:
            type: string
    binaryDataN2Information4:
      contentType:  application/vnd.3gpp.ngap
      headers:
        Content-Id:
          schema:
            type: string
    binaryDataN2Information5:
      contentType:  application/vnd.3gpp.ngap
      headers:
        Content-Id:
          schema:
            type: string
    binaryDataN2Information6:
      contentType:  application/vnd.3gpp.ngap
      headers:
        Content-Id:
          schema:
            type: string
    binaryDataN2Information7:
      contentType:  application/vnd.3gpp.ngap
      headers:
        Content-Id:
          schema:
            type: string
    binaryDataN2Information8:
      contentType:  application/vnd.3gpp.ngap
      headers:
        Content-Id:
```

```
                    schema:
                      type: string
                binaryDataN2Information9:
                  contentType:  application/vnd.3gpp.ngap
                  headers:
                    Content-Id:
                      schema:
                        type: string
                binaryDataN2Information10:
                  contentType:  application/vnd.3gpp.ngap
                  headers:
                    Content-Id:
                      schema:
                        type: string
        '204':
          description: MBS Broadcast context updated successfully. No Content.
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29571_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29571_CommonData.yaml#/components/responses/500'
        '502':
          $ref: 'TS29571_CommonData.yaml#/components/responses/502'
        '503':
          $ref: 'TS29571_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29571_CommonData.yaml#/components/responses/default'

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{nrfApiRoot}/oauth2/token'
          scopes:
            namf-mbs-bc: Access to the Namf_MBSBroadcast API

  schemas:

#
# STRUCTURED DATA TYPES
#
    ContextCreateReqData:
      description: Data within ContextCreate Request
      type: object
      properties:
        mbsSessionId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsSessionId'
        mbsServiceAreaInfoList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsServiceAreaInfo'
          minItems: 1
        mbsServiceArea:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsServiceArea'
        n2MbsSmInfo:
          $ref: '#/components/schemas/N2MbsSmInfo'
        notifyUri:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        maxResponseTime:
```

```
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
      snssai:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
      mbsmfId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
      mbsmfServiceInstId:
        type: string
      associatedSessionId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/AssociatedSessionId'
    required:
      - mbsSessionId
      - n2MbsSmInfo
      - notifyUri
      - snssai
    oneOf:
      - required: [ mbsServiceArea ]
      - required: [ mbsServiceAreaInfoList ]

  ContextCreateRspData:
    description: Data within ContextCreate Response
    type: object
    properties:
      mbsSessionId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsSessionId'
      n2MbsSmInfoList:
        type: array
        items:
          $ref: '#/components/schemas/N2MbsSmInfo'
        minItems: 1
        maxItems: 10
      operationStatus:
        $ref: '#/components/schemas/OperationStatus'
    required:
      - mbsSessionId


  ContextUpdateReqData:
    description: Data within ContextUpdate Request
    type: object
    properties:
      mbsServiceArea:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsServiceArea'
      mbsServiceAreaInfoList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsServiceAreaInfo'
        minItems: 1
      n2MbsSmInfo:
        $ref: '#/components/schemas/N2MbsSmInfo'
      ranIdList:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/GlobalRanNodeId'
        minItems: 1
      noNgapSignallingInd:
        type: boolean
        enum:
          - true
      notifyUri:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      maxResponseTime:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
      n2MbsInfoChangeInd:
        type: boolean
    not:
      required: [ mbsServiceArea, mbsServiceAreaInfoList ]

  ContextStatusNotification:
    description: Data within ContextStatusNotify Request
    type: object
    properties:
      mbsSessionId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsSessionId'
      areaSessionId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/AreaSessionId'
      n2MbsSmInfoList:
        type: array
        items:
```

```
          $ref: '#/components/schemas/N2MbsSmInfo'
        minItems: 1
        maxItems: 10
      operationEvents:
        type: array
        items:
          $ref: '#/components/schemas/OperationEvent'
        minItems: 1
      operationStatus:
        $ref: '#/components/schemas/OperationStatus'
      releasedInd:
        type: boolean
        enum:
         - true
    required:
      - mbsSessionId

  ContextStatusNotificationResponse:
    description: Data within ContextStatusNotify Response
    type: object
    properties:
      mbsSessionId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsSessionId'
      areaSessionId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/AreaSessionId'
      n2MbsSmInfoList:
        type: array
        items:
          $ref: '#/components/schemas/N2MbsSmInfo'
        minItems: 1
        maxItems: 10
    required:
      - mbsSessionId


  ContextUpdateRspData:
    description: Data within ContextUpdate Response
    type: object
    properties:
      n2MbsSmInfoList:
        type: array
        items:
          $ref: '#/components/schemas/N2MbsSmInfo'
        minItems: 1
        maxItems: 10
      operationStatus:
        $ref: '#/components/schemas/OperationStatus'

  N2MbsSmInfo:
    description: N2 MBS Session Management information
    type: object
    properties:
      ngapIeType:
        $ref: '#/components/schemas/NgapIeType'
      ngapData:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/RefToBinaryData'
      ranId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/GlobalRanNodeId'
    required:
      - ngapIeType
      - ngapData

  OperationEvent:
    description: Operation Event for a Broadcast MBS Session.
    type: object
    properties:
      opEventType:
        $ref: '#/components/schemas/OpEventType'
      amfId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
      ngranFailureEventList:
        type: array
        items:
          $ref: '#/components/schemas/NgranFailureEvent'
        minItems: 1
    required:
      - opEventType
```

```
    NgranFailureEvent:
      description: NG-RAN failure event for a NG-RAN
      type: object
      properties:
        ngranId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/GlobalRanNodeId'
        ngranFailureIndication:
          $ref: '#/components/schemas/NgranFailureIndication'
      required:
        - ngranId
        - ngranFailureIndication


#
# SIMPLE DATA TYPES
#


#
# ENUMERATIONS
#

    OperationStatus:
      description: Status of a Broadcast MBS session start or update operation.
      anyOf:
      - type: string
        enum:
          - MBS_SESSION_START_COMPLETE
          - MBS_SESSION_START_INCOMPLETE
          - MBS_SESSION_UPDATE_COMPLETE
          - MBS_SESSION_UPDATE_INCOMPLETE
      - type: string

    NgapIeType:
      description: NGAP Information Element Type
      anyOf:
      - type: string
        enum:
          - MBS_SES_REQ
          - MBS_SES_RSP
          - MBS_SES_FAIL
          - MBS_SES_REL_RSP
          - BC_TRA_REQ
          - BC_TRA_RSP
          - BC_TRA_FAIL
      - type: string

    OpEventType:
      description: Operation Event Type.
      anyOf:
      - type: string
        enum:
          - AMF_CHANGE
          - NG_RAN_EVENT
      - type: string

    NgranFailureIndication:
      description: Indicates a NG-RAN failure event.
      anyOf:
      - type: string
        enum:
          - NG_RAN_RESTART_OR_START
          - NG_RAN_FAILURE_WITHOUT_RESTART
          - NG_RAN_NOT_REACHABLE
          - NG_RAN_REQUIRED_RELEASE
      - type: string
```

A.7 Namf_MBSCommunication API

```
openapi: 3.0.0

info:
  version: 1.2.0
  title: Namf_MBSCommunication
```

```
  description: |
    AMF Communication Service for MBS.
    © 2025, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

externalDocs:
  description: 3GPP TS 29.518 V19.5.0; 5G System; Access and Mobility Management Services
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.518/'

servers:
  - url: '{apiRoot}/namf-mbs-comm/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501

security:
  - {}
  - oAuth2ClientCredentials:
    - namf-mbs-comm

paths:
  /n2-messages/transfer:
    post:
      summary: Namf_MBSCommunication N2 Message Transfer service Operation
      tags:
        - N2Messages Handler (custom operation)
      operationId: N2MessageTransfer
      requestBody:
        content:
          multipart/related:  # message with binary body part(s)
            schema:
              type: object
              properties: # Request parts
                jsonData:
                  $ref: '#/components/schemas/MbsN2MessageTransferReqData'
                binaryDataN2Information:
                  type: string
                  format: binary
            encoding:
              jsonData:
                contentType:  application/json
              binaryDataN2Information:
                contentType:  application/vnd.3gpp.ngap
                headers:
                  Content-Id:
                    schema:
                      type: string
        required: true
      callbacks:
        notification:
          '{$request.body#/notifyUri}':
            post:
              requestBody:
                required: true
                content:
                  application/json:
                    schema:
                      $ref: '#/components/schemas/Notification'
              responses:
                '204':
                  description: successful notification
                '307':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/307'
                '308':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/308'
                '400':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/400'
                '403':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/403'
                '404':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/404'
                '411':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/411'
                '413':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/413'
                '415':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/415'
```

```
                '429':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
                '500':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
                '502':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/502'
                '503':
                  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
      responses:
        '200':
          description: MBS N2 Message Transfer successfully initiated
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/MbsN2MessageTransferRspData'
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          description: Not Found
          content:
            application/problem+json:
              schema:
                $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
        '411':
          $ref: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29571_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29571_CommonData.yaml#/components/responses/500'
        '502':
          $ref: 'TS29571_CommonData.yaml#/components/responses/502'
        '503':
          $ref: 'TS29571_CommonData.yaml#/components/responses/503'
        default:
          description: Unexpected error

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{nrfApiRoot}/oauth2/token'
          scopes:
            namf-mbs-comm: Access to the Namf_MBSCommunication API

  schemas:

#
# STRUCTURED DATA TYPES
#

    MbsN2MessageTransferReqData:
      description: Data within MBS N2 Message Transfer Request
      type: object
      properties:
        mbsSessionId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsSessionId'
        areaSessionId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/AreaSessionId'
        n2MbsSmInfo:
          $ref: '#/components/schemas/N2MbsSmInfo'
        supportedFeatures:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
        ranNodeIdList:
          type: array
```

```
      items:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/GlobalRanNodeId'
      minItems: 1
    notifyUri:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
    notifyCorrelationId:
      type: string
  required:
    - mbsSessionId
    - n2MbsSmInfo


MbsN2MessageTransferRspData:
  description: Data within MBS N2 Message Transfer Response
  type: object
  properties:
    result:
      $ref: 'TS29518_Namf_Communication.yaml#/components/schemas/N2InformationTransferResult'
    supportedFeatures:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
    failureList:
      type: array
      items:
        $ref: '#/components/schemas/RanFailure'
      minItems: 1
  required:
    - result



N2MbsSmInfo:
  description: N2 MBS Session Management information
  type: object
  properties:
    ngapIeType:
      $ref: '#/components/schemas/MbsNgapIeType'
    ngapData:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/RefToBinaryData'
  required:
    - ngapIeType
    - ngapData

Notification:
  description: Data within Notify Request
  type: object
  properties:
    mbsSessionId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsSessionId'
    areaSessionId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/AreaSessionId'
    failureList:
      type: array
      items:
        $ref: '#/components/schemas/RanFailure'
      minItems: 1
    notifyCorrelationId:
      type: string
  required:
    - mbsSessionId
    - failureList

RanFailure:
  description: Description of an MBS related N2 procedure failure
  type: object
  properties:
    ranId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/GlobalRanNodeId'
    ranFailureCause:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/NgApCause'
    ranFailureIndication:
      $ref: '#/components/schemas/RanFailureIndication'
  required:
    - ranId
  oneOf:
    - required: [ ranFailureCause ]
    - required: [ ranFailureIndication ]
```

```
#
# SIMPLE DATA TYPES
#


#
# ENUMERATIONS
#

    MbsNgapIeType:
      description: NGAP Information Element Type
      anyOf:
      - type: string
        enum:
          - MBS_SES_ACT_REQ
          - MBS_SES_DEACT_REQ
          - MBS_SES_UPD_REQ
      - type: string

    RanFailureIndication:
      description: Indicates a NG-RAN failure event
      anyOf:
      - type: string
        enum:
          - NG_RAN_FAILURE_WITHOUT_RESTART
          - NG_RAN_NOT_REACHABLE
      - type: string
```

A.8 Namf_AIoT API

```
openapi: 3.0.0
info:
  title: Namf_AIoT
  version: 1.0.0
  description: |
    AMF AIoT Service.
    © 2025, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

externalDocs:
  description: 3GPP TS 29.518 V19.5.0; 5G System; Access and Mobility Management Services
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.518/'

servers:
  - url: '{apiRoot}/namf-aiot/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501

security:
  - {}
  - oAuth2ClientCredentials:
    - namf-aiot

paths:
  /transfer:
    post:
      summary: Request to transfer AIoT data towards NG-RAN or AIoT devices.
      operationId: MessageDelivery
      tags:
        - AIoT Message Delivery Request (custom operation without associated resources)
      requestBody:
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/AiotMessageReq'
          multipart/related:  # message with binary body part(s)
            schema:
              type: object
              properties: # Request parts
                jsonData:
                  $ref: '#/components/schemas/AiotMessageReq'
```

```
            binaryDataN2Information:
              type: string
              format: binary
        encoding:
          jsonData:
            contentType: application/json
          binaryDataN2Information:
            contentType: application/vnd.3gpp.ngap
            headers:
              Content-Id:
                schema:
                  type: string
responses:
  '204':
    description: >
      No Content. The message is successfully received and processed.
  '307':
    $ref: 'TS29571_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29571_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29571_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29571_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29571_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '502':
    $ref: 'TS29571_CommonData.yaml#/components/responses/502'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
callbacks:
  AIoTInformationNotif:
    '{$request.body#/notifUri}':
      post:
        requestBody:
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/AiotInfoNotification'
            multipart/related:  # message with binary body part(s)
                schema:
                  type: object
                  properties:
                    jsonData:
                      $ref: '#/components/schemas/AiotInfoNotification'
                    binaryDataN2Information:
                      type: string
                      format: binary
                encoding:
                  jsonData:
                    contentType: application/json
                  binaryDataN2Information:
                    contentType: application/vnd.3gpp.ngap
                    headers:
                      Content-Id:
                        schema:
                          type: string
        responses:
          '204':
            description: >
              No Content. The AIoT Information Notification is successfully received and
              acknowledged.
          '307':
```

```
                $ref: 'TS29571_CommonData.yaml#/components/responses/307'
              '308':
                $ref: 'TS29571_CommonData.yaml#/components/responses/308'
              '400':
                $ref: 'TS29571_CommonData.yaml#/components/responses/400'
              '401':
                $ref: 'TS29571_CommonData.yaml#/components/responses/401'
              '403':
                $ref: 'TS29571_CommonData.yaml#/components/responses/403'
              '404':
                $ref: 'TS29571_CommonData.yaml#/components/responses/404'
              '411':
                $ref: 'TS29571_CommonData.yaml#/components/responses/411'
              '413':
                $ref: 'TS29571_CommonData.yaml#/components/responses/413'
              '415':
                $ref: 'TS29571_CommonData.yaml#/components/responses/415'
              '429':
                $ref: 'TS29571_CommonData.yaml#/components/responses/429'
              '500':
                $ref: 'TS29571_CommonData.yaml#/components/responses/500'
              '502':
                $ref: 'TS29571_CommonData.yaml#/components/responses/502'
              '503':
                $ref: 'TS29571_CommonData.yaml#/components/responses/503'
              default:
                $ref: 'TS29571_CommonData.yaml#/components/responses/default'

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{nrfApiRoot}/oauth2/token'
          scopes:
            namf-aiot: Access to the Namf_AIoT API.

  schemas:

#
# STRUCTURED DATA TYPES
#

    AiotMessageReq:
      description: Represents the AIoT message delivery request.
      type: object
      properties:
        ranNodeId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/GlobalRanNodeId'
        aiotMessage:
          $ref: '#/components/schemas/AiotMessage'
        aiotMessageType:
          $ref: '#/components/schemas/AiotMessageType'
        notifUri:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/Uri'
        ranAiotDeviceNgapId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
        aiotfId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
        correlationId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uint16'
        suppFeat:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      required:
        - ranNodeId
        - aiotMessage
        - notifUri
        - aiotMessageType
        - aiotfId
        - correlationId


    AiotInfoNotification:
      description: Represents the AIoT information notification.
      type: object
      properties:
        aiotMessage:
```

```
          $ref: '#/components/schemas/AiotMessage'
        aiotMessageType:
          $ref: '#/components/schemas/AiotMessageType'
      required:
        - aiotMessage
        - aiotMessageType



    AiotMessage:
      description: Represents the AIoT message from or to NG-RAN.
      type: object
      properties:
        ngapMessageType:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
        aiotNgapData:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/RefToBinaryData'
      required:
        - aiotNgapData
        - ngapMessageType

#
# SIMPLE DATA TYPES
#



#
# ENUMERATIONS


    AiotMessageType:
      description: AIoT NGAP Message Type
      anyOf:
      - type: string
        enum:
          - INVENTORY_REQUEST
          - COMMAND_REQUEST
          - AIOT_SESSION_RELEASE_COMMAND
          - INVENTORY_REPONSE
          - INVENTORY_FAILURE
          - INVENTORY_REPORT
          - COMMAND_RESPONSE
          - COMMAND_FAILURE
          - AIOT_SESSION_RELEASE_COMPLETE
          - AIOT_SESSION_RELEASE_REQUEST
      - type: string
```

Annex B (Informative): HTTP Multipart Messages

B.1 Example of HTTP multipart message

B.1.1 General

This clause provides a (partial) example of HTTP multipart message. The example does not aim to be a complete representation of the HTTP message, e.g. additional information or headers can be included.

This Annex is informative and the normative descriptions in this specification prevail over the description in this Annex if there is any difference.

B.1.2 Example HTTP multipart message with N2 Information binary data

```
POST /example.com/namf-comm/v1/ue-contexts/{ueContextId}/n1-n2-messages HTTP/2
Content-Type: multipart/related; boundary=----Boundary
Content-Length: xyz

------Boundary
Content-Type: application/json

{
    "n2InfoContainer": {
      "n2InformationClass": "SM",
      "smInfo": {
        "pduSessionId": 5,
        "n2InfoContent": {
          "ngapIeType": "PDU_RES_SETUP_REQ",
          "ngapData": {
            "contentId": "n2msg"
          }
        }
      }
    },
    "pduSessionId": 5
}
------Boundary
Content-Type: application/vnd.3gpp.ngap
Content-Id: n2msg

{ … N2 Information binary data …}
------Boundary
```

Annex C (informative): Change history

Change history							
Date	**Meeting**	**TDoc**	**CR**	**Rev**	**Cat**	**Subject/Comment**	**New version**
2017-10	CT4#80	C4-175297				TS Skeleton	0.1.0
2017-10	CT4#80	C4-175397				Implementation of pCRs agreed at CT4#80.	0.2.0
2017-12	CT4#81	C4-176441				Implementation of pCRs agreed at CT4#81, including C4-176285, C4-176290, C4-176291, C4-176292, C4-176293, C4-176375, C4-176376, C4-176378, C4-176379, C4-176380 and C4-176404.	0.3.0
2018-01	CT4#82	C4-181393				Implementation of pCRs agreed at CT4#82, including C4-181090, C4-181091, C4-181258, C4-181259, C4-181260, C4-181269, C4-181270, C4-181311, C4-181312, C4-181313, C4-181314, C4-181352, C4-181353 and C4-181354	0.4.0
2018-03	CT4#83	C4-182437				Implementation of pCRs agreed at CT4#83, including C4-182287, C4-182288, C4-182290, C4-182292, C4-182293, C4-182350, C4-182353, C4-182355, C4-182358, C4-182367, C4-182385, C4-182403, C4-182414, C4-182415	0.5.0
2018-03	CT#79	CP-180033				Presented for information	1.0.0
2018-04	CT4#84	C4-183518				Implementation of pCRs agreed at CT4#84, including C4-183048, C4-183054, C4-183055, C4-183064, C4-183073, C4-183074, C4-183161, C4-183166, C4-183171, C4-183345, C4-183347, C4-183351, C4-183354, C4-183356, C4-183357, C4-183359, C4-183360, C4-183361, C4-183362, C4-183406, C4-183407, C4-183408, C4-183409, C4-183410, C4-183411, C4-183412, C4-183413, C4-183414, C4-183415, C4-183417, C4-183434, C4-183435, C4-183436, C4-183437, C4-183439, C4-183445, C4-183460, C4-183461, C4-183462, C4-183463, C4-183464, C4-183493, C4-183494, C4-183495, C4-183502	1.1.0
2018-05	CT4#85	C4-184629				Implementation of pCRs agreed at CT4#85, including: C4-184390, C4-184391, C4-184562, C4-184393, C4-184561, C4-184395, C4-194052, C4-184396, C4-184399, C4-184404, C4-184405, C4-184407, C4-184102, C4-184408, C4-184104, C4-184410, C4-184412, C4-184413, C4-184569, C4-184563, C4-184124, C4-184418, C4-184565, C4-184127, C4-184566, C4-184129, C4-184421, C4-184131, C4-184426, C4-184427, C4-184428, C4-184429, C4-184430, C4-184431, C4-184432, C4-184433, C4-184434, C4-184435, C4-184436, C4-184437, C4-184151, C4-184481, C4-184154, C4-184515, C4-184516, C4-184568, C4-184485, C4-184486, C4-184487, C4-184488	1.2.0
2018-06	CT#80	CP-181107				Presented for approval	2.0.0
2018-06	CT#80					Approved in CT#80	15.0.0
2018-09	CT#81	CP-182062	0001	2	F	RAT Selector for PWS	15.1.0
2018-09	CT#81	CP-182062	0002	3	F	AM Policy Triggers in MM Context	15.1.0
2018-09	CT#81	CP-182062	0003	1	F	Update UE context and MM context as per latest stage 2 agreements	15.1.0
2018-09	CT#81	CP-182062	0004	1	F	Corrections to EBI Assignment	15.1.0
2018-09	CT#81	CP-182062	0005	1	F	Clarify Max number of reports and Max duration of reporting in alignment with stage 2	15.1.0
2018-09	CT#81	CP-182062	0006		F	N1/N2 Message Transfer Temporary Reject	15.1.0
2018-09	CT#81	CP-182062	0008		F	Remove AN Type from N1/N2 Message Transfer Request	15.1.0
2018-09	CT#81	CP-182165	0009	2	F	Update SeafData as per agreements in SA3	15.1.0
2018-09	CT#81	CP-182062	0010	1	F	Include TimeStamp in AMF Event Notification	15.1.0
2018-09	CT#81	CP-182062	0011		F	Provide Domain Selection Info	15.1.0
2018-09	CT#81	CP-182062	0012	1	F	RAN UE NGAP ID in RegistrationContextContainer	15.1.0
2018-09	CT#81	CP-182062	0013	1	F	NG-RAN TargetID in RegistrationContextContainer	15.1.0
2018-09	CT#81	CP-182062	0014	3	F	BackUp AMF Info	15.1.0
2018-09	CT#81	CP-182062	0015		F	Description of N1N2TransferFailureNotification Operation	15.1.0
2018-09	CT#81	CP-182062	0016	1	F	Add Quotes for Runtime Expression	15.1.0
2018-09	CT#81	CP-182062	0017		F	Callback URI for N2InfoNotify during N2 based handover	15.1.0
2018-09	CT#81	CP-182062	0018	1	F	Resolve Editor's Note on regular expression pattern	15.1.0
2018-09	CT#81	CP-182095	0019	4	F	Location Service ProvideLocationInfo	15.1.0
2018-09	CT#81	CP-182062	0020	2	F	Location Service ProvidePositioningInfo	15.1.0
2018-09	CT#81	CP-182062	0021	2	F	N1N2MessageTransfer Rejection due to SAR	15.1.0
2018-09	CT#81	CP-182062	0022	3	F	N2 Content Type Definition	15.1.0
2018-09	CT#81	CP-182062	0023		F	Selected TAI in NgRanTargetId	15.1.0
2018-09	CT#81	CP-182062	0024	2	F	Skip Indicator	15.1.0
2018-09	CT#81	CP-182062	0025	1	F	UEContextTransfer Integrity Check Failure	15.1.0
2018-09	CT#81	CP-182068	0026	1	B	Add support for 5G Trace	15.1.0
2018-09	CT#81	CP-182094	0027	3	F	NgApCause Definition	15.1.0
2018-09	CT#81	CP-182062	0028	1	F	N1N2 Transfer Failure Notification	15.1.0
2018-09	CT#81	CP-182062	0029		F	N2 Container Data Type During Handover	15.1.0
2018-09	CT#81	CP-182175	0031	1	F	Correction to RegistrationCompleteNotify	15.1.0
2018-09	CT#81	CP-182062	0032	3	F	N1N2MessageTransfer and Notify for PCF	15.1.0
2018-09	CT#81	CP-182166	0033	3	F	Regular expression pattern for UeContextId parameter in OpenAPI	15.1.0

2018-09	CT#81	CP-182062	0036	2	F	Presence Reporting Area	15.1.0
2018-09	CT#81	CP-182062	0037	1	F	Notification Correlation Id for subscription correlation Id change	15.1.0
2018-09	CT#81	CP-182062	0038	1	F	Default Subscription for Notification to LMF	15.1.0
2018-09	CT#81	CP-182062	0039	1	F	LCS Correlation Identifier in N2Notify	15.1.0
2018-09	CT#81	CP-182062	0040	1	F	Mobility Restriction	15.1.0
2018-09	CT#81	CP-182062	0041		F	Not Allowed Slice	15.1.0
2018-09	CT#81	CP-182062	0042	1	F	UE-AMBR	15.1.0
2018-09	CT#81	CP-182062	0044	1	F	Array Attributes	15.1.0
2018-09	CT#81	CP-182062	0045	2	F	Default Response Codes	15.1.0
2018-09	CT#81	CP-182062	0046		F	AMF service operations	15.1.0
2018-09	CT#81	CP-182048	0047	2	F	Passing NSSF information in N1MessageNotification	15.1.0
2018-09	CT#81	CP-182062	0049	3	F	Clarification on location information in immediate report	15.1.0
2018-09	CT#81	CP-182062	0050	1	F	Resource Figures	15.1.0
2018-09	CT#81	CP-182062	0051		F	Correct reference for Event Report Information	15.1.0
2018-09	CT#81	CP-182062	0052		F	Consistent use of "Correlation Id"	15.1.0
2018-09	CT#81	CP-182062	0053	1	F	API version number update	15.1.0
2018-09	CT#81	CP-182062	0054	1	F	Custom Operation Name Correction for EBI Assignment	15.1.0
2018-09	CT#81	CP-192096	0055		F	Correction of CorrelationId Reference in OpenAPI	15.1.0
2018-12	CT#82	CP-183020	56	1	F	Editorial Corrections	15.2.0
2018-12	CT#82	CP-183020	57		F	Usage for EnableUEReachability Service Operation	15.2.0
2018-12	CT#82	CP-183020	58	1	F	Update to SeafData	15.2.0
2018-12	CT#82	CP-183232	60	4	F	Transfer UE Radio Capability between AMFs	15.2.0
2018-12	CT#82	CP-183020	61	2	F	Notification of the change of the PCF	15.2.0
2018-12	CT#82	CP-183020	62	1	F	Information in N1MessageNotify	15.2.0
2018-12	CT#82	CP-183020	63		F	Event Exposure	15.2.0
2018-12	CT#82	CP-183020	64		F	Correct the references	15.2.0
2018-12	CT#82	CP-183020	65	5	F	Subscription lifetime	15.2.0
2018-12	CT#82	CP-183020	67		F	Corrections to TADS Query API	15.2.0
2018-12	CT#82	CP-183020	69	5	F	Transfer of Group Id Suscriptions	15.2.0
2018-12	CT#82	CP-183020	70	1	F	Attributes corrections for RegistrationContextContainer and MmContext	15.2.0
2018-12	CT#82	CP-183020	71	1	F	Correction on tables	15.2.0
2018-12	CT#82	CP-183020	72		F	Mandatory Status Code Correction	15.2.0
2018-12	CT#82	CP-183020	74	1	F	N2InfoNotify correction for Handover Confirm	15.2.0
2018-12	CT#82	CP-183020	75	1	F	Naming convention of provideLocInfo and providePosInfo	15.2.0
2018-12	CT#82	CP-183020	76	2	F	OpenAPI specification alignments	15.2.0
2018-12	CT#82	CP-183020	77	1	F	Remove Duplicated Common Application Errors	15.2.0
2018-12	CT#82	CP-183020	78		F	Required routingId	15.2.0
2018-12	CT#82	CP-183020	79	1	F	Resource URIs Alignment	15.2.0
2018-12	CT#82	CP-183020	80		F	Seaf data type correction	15.2.0
2018-12	CT#82	CP-183020	81		F	UeContextId Pattern Complement	15.2.0
2018-12	CT#82	CP-183020	82		F	Use RefToBinaryData from common data types	15.2.0
2018-12	CT#82	CP-183020	83	3	F	Range Definition in OpenAPI	15.2.0
2018-12	CT#82	CP-183020	84		F	sessionId in N1N2MessageTransferReqData	15.2.0
2018-12	CT#82	CP-183020	85	1	F	New rejection cause for UE in CM-IDLE state	15.2.0
2018-12	CT#82	CP-183151	86	8	F	Notifying Subscription ID Change	15.2.0
2018-12	CT#82	CP-183020	87	1	F	SMF Reallocation requested Indication	15.2.0
2018-12	CT#82	CP-183020	88	1	F	Paging Policy Indicator	15.2.0
2018-12	CT#82	CP-183020	89	1	F	EPS bearer identity	15.2.0
2018-12	CT#82	CP-183020	90	1	F	29518 CR cardinality	15.2.0
2018-12	CT#82	CP-183020	92	1	F	Editorial Correction to PduSessionContext	15.2.0
2018-12	CT#82	CP-183020	93	1	F	Global RAN Node ID in RegistrationContextContainer	15.2.0
2018-12	CT#82	CP-183154	97	2	F	Update of Subscription Lifetime	15.2.0
2018-12	CT#82	CP-183020	98	1	F	EBI Allocation Rejection Cause	15.2.0
2018-12	CT#82	CP-183020	100	2	F	UE Context Transfer during initial registration via another access type	15.2.0
2018-12	CT#82	CP-183020	101	1	F	RAN Status Transfer Transparent Container in N2 based handover	15.2.0
2018-12	CT#82	CP-183020	103	1	F	NgapIeType for X2 and N2 based handover	15.2.0
2018-12	CT#82	CP-183020	104		F	Update of N1N2 Message Operations	15.2.0
2018-12	CT#82	CP-183020	105	1	F	Clarify the handling of EBI assignment	15.2.0
2018-12	CT#82	CP-183020	106		F	Align Usage of Tags	15.2.0
2018-12	CT#82	CP-183020	107	1	F	Altitude in Provide Positioning Information	15.2.0
2018-12	CT#82	CP-183020	108		F	AmfStatusChangeSubcribe Modify in Resource Table	15.2.0
2018-12	CT#82	CP-183020	109	1	F	API Root	15.2.0
2018-12	CT#82	CP-183020	110	1	F	Case Convention	15.2.0
2018-12	CT#82	CP-183020	111	1	F	Clarification of ProvideLocInfo when CM-CONNECTED	15.2.0
2018-12	CT#82	CP-183020	118	1	F	N1 N2 Message for Positioning	15.2.0
2018-12	CT#82	CP-183020	119	3	F	N3GPP DDN handling when UE CM-IDLE on N3GPP	15.2.0
2018-12	CT#82	CP-183020	121	1	F	Alignment on TADS Query	15.2.0
2018-12	CT#82	CP-183020	122	1	F	Configuration Transfer procedure over N14	15.2.0
2018-12	CT#82	CP-183020	123		F	N1N2MessageTransfer Request message	15.2.0

2018-12	CT#82	CP-183020	124	2	F	UDM group Id	15.2.0
2018-12	CT#82	CP-183020	125		F	Warning Request Transfer Procedure	15.2.0
2018-12	CT#82	CP-183020	126	1	F	Location Header	15.2.0
2018-12	CT#82	CP-183020	127		F	Remove duplicate references	15.2.0
2018-12	CT#82	CP-183020	128	1	F	429 Response Codes	15.2.0
2018-12	CT#82	CP-183020	129		F	API Version	15.2.0
2018-12	CT#82	CP-183020	130	1	F	Oauth2 correction	15.2.0
2018-12	CT#82	CP-183191	131		F	Editorial Correction to AMF Event Type Enumeration	15.2.0
2018-12	CT#82	CP-183229	132		F	Correction to OpenAPI definition of UeContextTransferRspData	15.2.0
2019-03	CT#83	CP-190025	133	1	F	OpenAPI correction for HTTP method of EnableUEReachability	15.3.0
2019-03	CT#83	CP-190025	134		F	PDU sessions not accepted by target AMF in N2 based handover	15.3.0
2019-03	CT#83	CP-190025	135	1	F	Sending Secondary RAT usage over N14 during N2 handover with AMF change	15.3.0
2019-03	CT#83	CP-190025	136		F	SM Context URI in UE context	15.3.0
2019-03	CT#83	CP-190025	137	2	F	UE policy delivery and control	15.3.0
2019-03	CT#83	CP-190025	138		F	Correct Event Exposure Service Description	15.3.0
2019-03	CT#83	CP-190025	139	2	F	Simplify N1N2MessageTransfer when UE is in CM-IDLE	15.3.0
2019-03	CT#83	CP-190025	140	2	F	Update EBIAssignment Service Operation to Align with Stage 2	15.3.0
2019-03	CT#83	CP-190025	141	1	F	Corrections to the HTTP methods and URI	15.3.0
2019-03	CT#83	CP-190025	143	1	F	Correction to Reponse Code for Positioning Failed	15.3.0
2019-03	CT#83	CP-190025	144	1	F	Essential Clairfication on Event Subscription Creation	15.3.0
2019-03	CT#83	CP-190025	145	1	F	OpenAPI Syntax Correction	15.3.0
2019-03	CT#83	CP-190025	146	1	F	Reference Id	15.3.0
2019-03	CT#83	CP-190025	148	1	F	SMF Service Instance during AMF change	15.3.0
2019-03	CT#83	CP-190025	149	1	F	GMLC URI for Namf_Location EventNotify	15.3.0
2019-03	CT#83	CP-190025	150	1	F	Correction of keyAmfChangeInd	15.3.0
2019-03	CT#83	CP-190025	151	1	F	N2SmInformation in UeContextCreateData & UeContextCreatedData	15.3.0
2019-03	CT#83	CP-190025	153		F	API version update	15.3.0
2019-06	CT#84	CP-191036	154		F	ngapCause in UeContextCreatedData	15.4.0
2019-06	CT#84	CP-191036	160		F	Correction N1 N2 Message Transfer when CM-IDLE	15.4.0
2019-06	CT#84	CP-191036	161		F	Correction on CR0021 implementation	15.4.0
2019-06	CT#84	CP-191036	162		F	Event Notify Failure Response	15.4.0
2019-06	CT#84	CP-191036	164		F	UE Identities for Event Notification	15.4.0
2019-06	CT#84	CP-191036	155	1	F	Content Type	15.4.0
2019-06	CT#84	CP-191036	163	1	F	LPP Handling	15.4.0
2019-06	CT#84	CP-191036	165	1	F	AMF Event Alignment	15.4.0
2019-06	CT#84	CP-191036	166	1	F	Missing Loss Of Connectivity Event	15.4.0
2019-06	CT#84	CP-191036	171	2	F	Storage of OpenAPI specification files	15.4.0
2019-06	CT#84	CP-191036	172	1	F	Location header in redirect response	15.4.0
2019-06	CT#84	CP-191036	173	1	F	LMF Service Instance Id for N1N2MessageTransfer	15.4.0
2019-06	CT#84	CP-191036	174		F	Remove Subscribed-Data-Report event type and SARI data type	15.4.0
2019-06	CT#84	CP-191036	175	1	F	Correction in PwsInformation Parameter	15.4.0
2019-06	CT#84	CP-191036	177	1	F	Copyright Note in OpenAPI Spec	15.4.0
2019-06	CT#84	CP-191036	178	1	F	Correction on EBI in PDU session context	15.4.0
2019-06	CT#84	CP-191036	179	1	F	Major API version	15.4.0
2019-06	CT#84	CP-191036	181	1	F	Status code of Namf_EventExposure Unsubscrive service operation	15.4.0
2019-06	CT#84	CP-191036	187		F	TS 29.518 API version update	15.4.0
2019-06	CT#84	CP-191046	182	2	F	Corrections of the references to retrieve Callback URI from NRF for N1and N2 notifications	16.0.0
2019-06	CT#84	CP-191049	159	2	B	Updates to CreateUEContext for eNS Support	16.0.0
2019-06	CT#84	CP-191054	168	3	B	Update N2InformationNotification for I-SMF insertion, change and removal	16.0.0
2019-06	CT#84	CP-191050	184	3	B	Add NB-IoT specific UE Radio Access Capability in UE context	16.0.0
2019-06	CT#84	CP-191050	185	1	B	Update to the UEContextTransfer service for adding Gap timer	16.0.0
2019-06	CT#84	CP-191048	186		B	TS 29.518 API version update	16.0.0
2019-09	CT#85	CP-192110	0189	2	A	Wrong Cardinality of lcsSupportedGADShapes in RequestPosInfo	16.1.0
2019-09	CT#85	CP-192128	0190	1	F	Correction for ngapMessageType	16.1.0
2019-09	CT#85	CP-192128	0191	1	F	NonUeN2InfoUnscribe for PWS	16.1.0
2019-09	CT#85	CP-192188	0193	1	B	Transfer 5G SRVCC Parameters between AMFs	16.1.0
2019-09	CT#85	CP-192193	0194	1	B	CreateUEContext – I-SMF and SM Context ID Information	16.1.0
2019-09	CT#85	CP-192110	0197	1	A	Use of ARP value for Priority Paging	16.1.0
2019-09	CT#85	CP-192193	0198	1	B	Correction of the smfChangeIndication	16.1.0
2019-09	CT#85	CP-192110	0200		A	Signalling Old GUAMI to target AMF during the AMF planned removal procedure	16.1.0
2019-09	CT#85	CP-192128	0201	1	F	5GS User State retrieval	16.1.0
2019-09	CT#85	CP-192128	0202	1	F	Forwarding UL N2 message to target AMF during AMF planned removal procedure	16.1.0
2019-09	CT#85	CP-192128	0203	1	F	MT SMS to UE in RRC INACTIVE state with NG-RAN paging failure	16.1.0
2019-09	CT#85	CP-192128	0205		F	Corrections to Mapped Service Operations of Namf_Communication service	16.1.0
2019-09	CT#85	CP-192110	0208	1	A	Missing Location header	16.1.0

2019-09	CT#85	CP-192110	0210	1	A	Missing status codes	16.1.0
2019-09	CT#85	CP-192134	0211		B	Transfer Information of MA PDU Session between AMFs	16.1.0
2019-09	CT#85	CP-192110	0214	3	A	OpenAPI Correction on Location Header	16.1.0
2019-09	CT#85	CP-192128	0215		F	Error response of the EBIAssignment	16.1.0
2019-09	CT#85	CP-192135	0216		B	Namf_EventExposure service invoked by NWDAF	16.1.0
2019-09	CT#85	CP-192193	0217		B	ETSUN_N1N2MessageTransfer Failure due to SM Context relocation needed	16.1.0
2019-09	CT#85	CP-192132	0218	1	F	Service Gap Time	16.1.0
2019-09	CT#85	CP-192132	0221	2	B	HLCom extended buffering in MT Service	16.1.0
2019-09	CT#85	CP-192132	0223	2	B	Small Data Rate Control Status	16.1.0
2019-09	CT#85	CP-192123	0224	1	F	Example of HTTP multipart message	16.1.0
2019-09	CT#85	CP-192132	0225	1	B	Extended Buffering Support in Communication Service	16.1.0
2019-09	CT#85	CP-192120	0227		F	TS 29.518 API version update	16.1.0
2019-10						Corrupted references fixed	16.1.1
2019-12	CT#86	CP-193051	0229	1	B	Target Access type in N1N2MessageTransfer Request for a MA PDU session	16.2.0
2019-12	CT#86	CP-193036	0230		F	egiList and ncgiList in N2InformationTransferReqData not needed	16.2.0
2019-12	CT#86	CP-193056	0231		B	Event exposure between AMF and SMF	16.2.0
2019-12	CT#86	CP-193051	0233	1	B	MA PDU session accepted indication	16.2.0
2019-12	CT#86	CP-193031	0235	1	A	Source AMF NGAP ID	16.2.0
2019-12	CT#86	CP-193031	0239		A	N1N2MessageTransfer request during an on-going handover procedure	16.2.0
2019-12	CT#86	CP-193036	0240		B	RIM Information Transfer procedure	16.2.0
2019-12	CT#86	CP-193046	0241		B	User location report	16.2.0
2019-12	CT#86	CP-193055	0244	4	B	Update the service operation of AMF	16.2.0
2019-12	CT#86	CP-193031	0246		A	Correction to ProvideLocInfo	16.2.0
2019-12	CT#86	CP-193062	0248	3	B	Transferring UE Radio Capability ID between AMFs	16.2.0
2019-12	CT#86	CP-193031	0250	1	A	Reference correction	16.2.0
2019-12	CT#86	CP-193048	0251	1	F	Reference correction	16.2.0
2019-12	CT#86	CP-193049	0253	1	F	Correction on MT Enable UE Reachability	16.2.0
2019-12	CT#86	CP-193063	0254		F	Excluding security context in the UE context	16.2.0
2019-12	CT#86	CP-193049	0255	1	B	Adding Rate Control attributes to N1N2messageTransferReq data type	16.2.0
2019-12	CT#86	CP-193049	0256	2	B	Mobile Terminated Data Transfer for Control Plane CIoT 5GS Optimisation	16.2.0
2019-12	CT#86	CP-193036	0257	1	F	PDU Session Release for UE in RRC INACTIVE state with NG-RAN paging failure	16.2.0
2019-12	CT#86	CP-193036	0260	2	F	Add Corresponding OpenAPI descriptions in clause 5.1	16.2.0
2019-12	CT#86	CP-193164	0261	2	B	Updating support for subscription-based access restriction	16.2.0
2019-12	CT#86	CP-193166	0262	2	B	AMF Location Service Operations for a Commercial and Deferred 5GC-MT-LR	16.2.0
2019-12	CT#86	CP-193055	0263	1	B	LMF identification for LMF change	16.2.0
2019-12	CT#86	CP-193055	0264	1	B	Location Service ProvidePositioningInfo	16.2.0
2019-12	CT#86	CP-193122	0266	2	B	NF/NF Service Set ID in UE Context Transfer	16.2.0
2019-12	CT#86	CP-193031	0268	1	A	Definition of hpcfId	16.2.0
2019-12	CT#86	CP-193080	0270	3	A	Secondary RAT Data Usage Report	16.2.0
2019-12	CT#86	CP-193055	0273	1	B	AMF forwarding Location services messages beween UE and LMF	16.2.0
2019-12	CT#86	CP-193044	0275		F	TS 29.518 API version update	16.2.0
2020-03	CT#87	CP-200017	0276	3	F	SMF change indication during Inter-AMF registration	16.3.0
2020-03	CT#87	CP-200020	0277	3	F	DNN encoding in Namf_Communication API	16.3.0
2020-03	CT#87	CP-200043	0279	2	F	smsSupport attribute in UE context	16.3.0
2020-03	CT#87	CP-200043	0280	2	F	AMF event subscription without the "options" attribute	16.3.0
2020-03	CT#87	CP-200039	0281	2	D	Editorial corrections	16.3.0
2020-03	CT#87	CP-200043	0282	1	F	Correction of typos	16.3.0
2020-03	CT#87	CP-200043	0283	2	F	Class indication in subscription response	16.3.0
2020-03	CT#87	CP-200043	0284	3	F	Cause values for PWS errors detected by AMF	16.3.0
2020-03	CT#87	CP-200039	0285	2	F	Correction - formatting consistency	16.3.0
2020-03	CT#87	CP-200020	0286	1	B	29518 CR optionality of ProblemDetails	16.3.0
2020-03	CT#87	CP-200031	0287	1	B	Additional Access Type in UE Context Transfer	16.3.0
2020-03	CT#87	CP-200017	0288	1	B	Granularity of the SMF change Indication	16.3.0
2020-03	CT#87	CP-200179	0289	1	B	V2X information in UE Context	16.3.0
2020-03	CT#87	CP-200178	0290	1	B	Availability after DDN Failure	16.3.0
2020-03	CT#87	CP-200020	0294	1	B	Ongoing registration or handover during paging	16.3.0
2020-03	CT#87	CP-200033	0295	1	B	5G CIOT Attribute in UeContext	16.3.0
2020-03	CT#87	CP-200030	0296	2	B	Event Exposure invoked by NWDAF	16.3.0
2020-03	CT#87	CP-200017	0297	1	F	V-SMF insertion or removal	16.3.0
2020-03	CT#87	CP-200033	0298		F	Feature definition for support of CIoT features	16.3.0
2020-03	CT#87	CP-200033	0299		F	Mobile Terminated Data	16.3.0
2020-03	CT#87	CP-200043	0300		F	UE_IN_NON_ALLOWED_AREA error in EnableUEReachability response	16.3.0
2020-03	CT#87	CP-200035	0302	1	B	SUPI pattern	16.3.0
2020-03	CT#87	CP-200018	0303		B	LCS service authorization	16.3.0
2020-03	CT#87	CP-200018	0305	3	B	Cm state exposure	16.3.0
2020-03	CT#87	CP-200052	0306		F	TS 29.518 API Rel16 API External doc update	16.3.0

2020-06	CT#88e	CP-201054	0307		F	Storage of YAML files in ETSI Forge	16.4.0
2020-06	CT#88e	CP-201031	0308		F	V-SMF and I-SMF service instance Id	16.4.0
2020-06	CT#88e	CP-201054	0309	1	F	N1N2Transfer Failure Notification for UEs in RRC Inactive state	16.4.0
2020-06	CT#88e	CP-201045	0310	1	B	NPN extensions for Inter-AMF N2 Handover	16.4.0
2020-06	CT#88e	CP-201054	0311	1	F	Supported Headers Tables for Response codes 2xx and 3xx	16.4.0
2020-06	CT#88e	CP-201054	0312	1	F	Binary Data Types Table	16.4.0
2020-06	CT#88e	CP-201046	0313	1	B	Maximum UP resources activation of 2 PDU sessions	16.4.0
2020-06	CT#88e	CP-201054	0314	1	F	Add new Notifications Overview Tables	16.4.0
2020-06	CT#88e	CP-201054	0315		F	subscriptionId in AmfCreatedEventSubscription and AmfEventReport	16.4.0
2020-06	CT#88e	CP-201054	0316		F	Non-delivery of N1 message to UE due to Xn/N2 handover	16.4.0
2020-06	CT#88e	CP-201054	0318		F	Reference Corrections	16.4.0
2020-06	CT#88e	CP-201034	0319	1	F	Optionality of ProblemDetails in TS29.518 cleanup	16.4.0
2020-06	CT#88e	CP-201034	0321		F	Default LocationFilter	16.4.0
2020-06	CT#88e	CP-201067	0322	2	B	MDT Configuration	16.4.0
2020-06	CT#88e	CP-201043	0323	2	B	Update the event subscription and notification on area of interest	16.4.0
2020-06	CT#88e	CP-201047	0324	2	B	Authentication and Authorization status	16.4.0
2020-06	CT#88e	CP-201048	0325	1	F	Stage 2 procedures for wireline access	16.4.0
2020-06	CT#88e	CP-201048	0326	1	F	TWAP ID change reporting	16.4.0
2020-06	CT#88e	CP-201054	0328	2	F	Periodic reporting	16.4.0
2020-06	CT#88e	CP-201054	0330	1	F	Reasons for loss of connectivity	16.4.0
2020-06	CT#88e	CP-201023	0331	2	F	UEContextTransfer - N3IWF/W-AGF/TNGF ID and RAN NGAP ID	16.4.0
2020-06	CT#88e	CP-201018	0339	2	A	Binary IE Encoding	16.4.0
2020-06	CT#88e	CP-201054	0340	1	F	Broadcast Empty Area List	16.4.0
2020-06	CT#88e	CP-201044	0341	1	F	Clarification on EBI Allocation for MAPDU	16.4.0
2020-06	CT#88e	CP-201032	0342		F	Correct Reference on Location Procedures	16.4.0
2020-06	CT#88e	CP-201046	0343	4	B	UE Maximum Availability Time	16.4.0
2020-06	CT#88e	CP-201023	0344	3	A	Event of UE Reachability	16.4.0
2020-06	CT#88e	CP-201032	0345	1	F	GUAMI in N1/N2 Message Notification	16.4.0
2020-06	CT#88e	CP-201032	0346	1	F	LCS Correlation Id for NRPPa Transfer	16.4.0
2020-06	CT#88e	CP-201054	0347	1	F	PWS Message Transfer Precedence	16.4.0
2020-06	CT#88e	CP-201054	0348	1	F	Data type column in Resource URI variables Table	16.4.0
2020-06	CT#88e	CP-201054	0349	1	F	Add custom operation Name	16.4.0
2020-06	CT#88e	CP-201046	0350	2	B	Monitoring Event Information	16.4.0
2020-06	CT#88e	CP-201032	0351	2	F	LMF indicating access type for transmission of LPP message	16.4.0
2020-06	CT#88e	CP-201032	0352	1	F	UePrivacyRequirements for Location Request	16.4.0
2020-06	CT#88e	CP-201044	0354	1	F	Condition of MA-PDU Session Context Transfer	16.4.0
2020-06	CT#88e	CP-201054	0355	1	F	N2 PDU Session Modification for a UE in CM-IDLE state	16.4.0
2020-06	CT#88e	CP-201032	0356	1	F	GMLC authorization in RequestPosInfo	16.4.0
2020-06	CT#88e	CP-201197	0357	1	F	PC5 policy container from PCF	16.4.0
2020-06	CT#88e	CP-201054	0358	2	F	Maximum number of reports	16.4.0
2020-06	CT#88e	CP-201054	0359		F	Correction for implementation error	16.4.0
2020-06	CT#88e	CP-201032	0362	1	B	Indication of control plane CIoT 5GS optimization to an LMF	16.4.0
2020-06	CT#88e	CP-201043	0367	1	F	Sampling ratio for AMF event exposure	16.4.0
2020-06	CT#88e	CP-201032	0368	1	F	The result of location verification by UE	16.4.0
2020-06	CT#88e	CP-201043	0369	2	F	AMF event exposure for any UE	16.4.0
2020-06	CT#88e	CP-201018	0371	1	A	pwdErrorInfo should be pwsErrorInfo in openAPI	16.4.0
2020-06	CT#88e	CP-201073	0375		F	29.518 Rel-16 API version and External doc update	16.4.0
2020-09	CT#89e	CP-202097	0376	2	F	DAPS Handover information	16.5.0
2020-09	CT#89e	CP-202114	0378	3	F	Clarification on hSmfId in PduSessionContext transferred to target AMF	16.5.0
2020-09	CT#89e	CP-202093	0379	2	F	Clairification on Max Number of Reports	16.5.0
2020-09	CT#89e	CP-202093	0380	2	F	Event Reort in Response to AMF Event Subscription Update	16.5.0
2020-09	CT#89e	CP-202109	0381	1	F	SNSSAI during mobility procedure	16.5.0
2020-09	CT#89e	CP-202093	0382		F	Callback URI correction	16.5.0
2020-09	CT#89e	CP-202093	0383	1	A	Definition of DRX	16.5.0
2020-09	CT#89e	CP-202093	0384	2	A	Cardinality of AmfUpdateEventSubscriptionItem	16.5.0
2020-09	CT#89e	CP-202093	0385		F	Identifier of the NF service consumer sending an N1 message	16.5.0
2020-09	CT#89e	CP-202093	0386		F	Clarifications to EBI Assignment procedure	16.5.0
2020-09	CT#89e	CP-202043	0388		A	Correction of UE Context Transfer payload in case of UE initial registration	16.5.0
2020-09	CT#89e	CP-202043	0392	1	A	Registration Status Update for PCF for UE Policy	16.5.0
2020-09	CT#89e	CP-202093	0394	1	F	Additional PraId	16.5.0
2020-09	CT#89e	CP-202093	0395	1	F	PCF Group Id	16.5.0
2020-09	CT#89e	CP-202040	0397	1	A	Selected EPS NAS Security Algorithm_Rel16	16.5.0
2020-09	CT#89e	CP-202112	0398	1	F	Removal of EN on CP 5G CIoT Optimisation	16.5.0
2020-09	CT#89e	CP-202112	0399	1	F	Correction of Notification or Verification only for UE Positioning	16.5.0
2020-09	CT#89e	CP-202108	0400	2	F	Managing RACS ID for mobility across ePLMNs	16.5.0
2020-09	CT#89e	CP-202093	0401	1	F	Correction of n2InfoNotifyUrl in figures	16.5.0
2020-09	CT#89e	CP-202112	0402	2	F	Add Response Codes on operation provide-pos-info	16.5.0
2020-09	CT#89e	CP-202112	0403		F	Corrections on N2InformationNotification	16.5.0
2020-09	CT#89e	CP-202096	0407		F	29.518 Rel-16 API version and External doc update	16.5.0
2020-12	CT#90e	CP-203050	0409	1	F	Broadcast of Assistance Data by an LMF	16.6.0
2020-12	CT#90e	CP-203050	0410	1	F	Serving Cell Id in N1MessageNotification	16.6.0

2020-12	CT#90e	CP-203080	0411	3	F	Supplement to UeContext	16.6.0
2020-12	CT#90e	CP-203030	0413		F	Clarification on usage of "locationAge" and "geoInfo" in ProvideLocInfo	16.6.0
2020-12	CT#90e	CP-203030	0414		F	Incorrect NOTE	16.6.0
2020-12	CT#90e	CP-203163	0415	1	F	HTTP 3xx redirection	16.6.0
2020-12	CT#90e	CP-203048	0417	1	F	IMS AS query for UE IP Reachability	16.6.0
2020-12	CT#90e	CP-203035	0418	1	F	UE Reachability Status Change	16.6.0
2020-12	CT#90e	CP-203040	0420	2	F	Transfer N2 SM Info Received from SMF to Target AMF	16.6.0
2020-12	CT#90e	CP-203048	0421	2	F	Miscellaneous corrections	16.6.0
2020-12	CT#90e	CP-203045	0422	1	F	Partial failure of event subscription	16.6.0
2020-12	CT#90e	CP-203054	0423		F	SBI Binding Level	16.6.0
2020-12	CT#90e	CP-203030	0425	2	F	Current location of a UE	16.6.0
2020-12	CT#90e	CP-203030	0426	1	F	CreateUEContext Failue	16.6.0
2020-12	CT#90e	CP-203041	0430	1	F	Event Subscription Synchronization	16.6.0
2020-12	CT#90e	CP-203054	0431	1	F	HPCF Set Id	16.6.0
2020-12	CT#90e	CP-203027	0433	1	A	Initial Location	16.6.0
2020-12	CT#90e	CP-203030	0437	3	F	Corrections for unused data types and OperationId in OpenAPI	16.6.0
2020-12	CT#90e	CP-203048	0438		F	User Location	16.6.0
2020-12	CT#90e	CP-203027	0439		A	Event subscription update	16.6.0
2020-12	CT#90e	CP-203036	0441		F	29.518 Rel-16 API version and External doc update	16.6.0
2020-12	CT#90e	CP-203064	0412	1	F	Essential corrections	17.0.0
2020-12	CT#90e	CP-203057	0424	1	F	EBI and ARP mapping update	17.0.0
2020-12	CT#90e	CP-203057	0427		F	N51 interface between NEF and AMF	17.0.0
2020-12	CT#90e	CP-203055	0442		F	29.518 Rel-17 API version and External doc update	17.0.0
2021-03	CT#91e	CP-210178	0443	2	F	Subscription not found inconsistency	17.1.0
2021-03	CT#91e	CP-210021	0444	2	B	NF discovery based on SUCI information	17.1.0
2021-03	CT#91e	CP-210177	0446	2	A	Handover Reject during EPS to 5GS Handover with AMF Re-allocation	17.1.0
2021-03	CT#91e	CP-210157	0448	1	A	Handover Cancel during EPS to 5GS Handover with AMF Re-allocation	17.1.0
2021-03	CT#91e	CP-210159	0450	1	A	Encoding of Forward Relocation Request	17.1.0
2021-03	CT#91e	CP-210040	0452	1	A	DNN and Selected DNN	17.1.0
2021-03	CT#91e	CP-210037	0454	1	A	Binding information of AMF event subscriptions	17.1.0
2021-03	CT#91e	CP-210173	0456		A	Error Responses for Indirect Communication	17.1.0
2021-03	CT#91e	CP-210043	0458	1	A	UE context transfer during Inter-PLMN mobility registration	17.1.0
2021-03	CT#91e	CP-210043	0460		A	User Location in ProvideLocInfo	17.1.0
2021-03	CT#91e	CP-210059	0462		A	EBI allocation for Emergency PDU sessions	17.1.0
2021-03	CT#91e	CP-210059	0464	1	A	Implementation error	17.1.0
2021-03	CT#91e	CP-210049	0468	2	A	Interworking S-NSSAI during EPS to 5GS handover with AMF Relocation	17.1.0
2021-03	CT#91e	CP-210041	0470	1	A	Target Node in Location continuity for handover from NG-RAN	17.1.0
2021-03	CT#91e	CP-210030	0471	1	F	Wrong Reference for Reachable of Regulatory	17.1.0
2021-03	CT#91e	CP-210043	0473	1	A	Corrections on resource and notification URI	17.1.0
2021-03	CT#91e	CP-210043	0475		A	Storage of YAML files	17.1.0
2021-03	CT#91e	CP-210161	0477	1	A	Add the missing MDT parameters for NR	17.1.0
2021-03	CT#91e	CP-210048	0479	1	A	Corrections on Enhanced Coverage information	17.1.0
2021-03	CT#91e	CP-210048	0481	1	A	UE Differentiation Information	17.1.0
2021-03	CT#91e	CP-210021	0482	2	F	Clarification to Communication-Failure-Report	17.1.0
2021-03	CT#91e	CP-210155	0483	3	B	PRA Information update	17.1.0
2021-03	CT#91e	CP-210046	0485		A	4xx codes during event notification	17.1.0
2021-03	CT#91e	CP-210048	0487	1	F	Correction on UE Reachability	17.1.0
2021-03	CT#91e	CP-210046	0489		A	Support of immediate report	17.1.0
2021-03	CT#91e	CP-210029	0490		F	29.518 Rel-17 API version and External doc update	17.1.0
2021-06	CT#92e	CP-211076	0493		A	Indicating the Serving PLMN ID to the Target AMF during inter-AMF handover	17.2.0
2021-06	CT#92e	CP-211076	0495		A	PDU session contexts transfer during a UE initial registration	17.2.0
2021-06	CT#92e	CP-211063	0497	1	A	LMF using AMF event exposure service	17.2.0
2021-06	CT#92e	CP-211065	0499	1	F	PPI mapping	17.2.0
2021-06	CT#92e	CP-211083	0502	1	A	Incomplete Implementation of CR	17.2.0
2021-06	CT#92e	CP-211047	0503	2	F	RAN Node Level Location Accuracy	17.2.0
2021-06	CT#92e	CP-211054	0504	2	F	UE Reachability with Not Allowed Areas	17.2.0
2021-06	CT#92e	CP-211023	0507	1	F	hNRF from NSSF in home PLMN	17.2.0
2021-06	CT#92e	CP-211058	0508		F	OpenAPI Reference	17.2.0
2021-06	CT#92e	CP-211059	0511		F	NF type of consumer subscribing to AMF event	17.2.0
2021-06	CT#92e	CP-211039	0512	1	B	Authorization and QoS data for ProSe services	17.2.0
2021-06	CT#92e	CP-211036	0513	2	B	Event Exposure enhancement with Partitioning criteria at AMF	17.2.0
2021-06	CT#92e	CP-211067	0515	2	A	Maximum Response Time in the EE subscription request	17.2.0
2021-06	CT#92e	CP-211028	0518		F	Data Type Description for Namf_MT Service API	17.2.0
2021-06	CT#92e	CP-211028	0519		F	Data Type Description for Namf_Location Service API	17.2.0
2021-06	CT#92e	CP-211030	0521	1	B	New parameter Subscribed-UE-Slice-MBR added	17.2.0
2021-06	CT#92e	CP-211028	0522	1	F	Terminating Domain Selection request during on-going Registration	17.2.0

2021-06	CT#92e	CP-211028	0523	2	F	Network Triggered Service Request for UE in CM-CONNECTED state outside of the validity area included in N1N2MessageTransfer Request	17.2.0
2021-06	CT#92e	CP-211065	0525		A	Network Provided Location Information for non-3GPP access	17.2.0
2021-06	CT#92e	CP-211076	0527	1	A	Group subscription transfer during inter-AMF mobility	17.2.0
2021-06	CT#92e	CP-211077	0529	1	A	IAB Authorization for Inter-AMF handover	17.2.0
2021-06	CT#92e	CP-211026	0530	1	B	GMLC using AMF event exposure service	17.2.0
2021-06	CT#92e	CP-211032	0531	1	B	N1N2MessageTransfer supporting MUSIM	17.2.0
2021-06	CT#92e	CP-211026	0533	1	B	Add Local location	17.2.0
2021-06	CT#92e	CP-211076	0535	1	A	Registration with AMF re-direction	17.2.0
2021-06	CT#92e	CP-211036	0536	1	B	Analytics subscription information	17.2.0
2021-06	CT#92e	CP-211036	0537	1	B	S-NSSAIs per TA mapping event	17.2.0
2021-06	CT#92e	CP-211059	0541		A	Redirect Response for Namf_Communication	17.2.0
2021-06	CT#92e	CP-211036	0545	1	B	Support of Mute Reporting	17.2.0
2021-06	CT#92e	CP-211059	0546		A	Redirect Response for Namf_EventExposure	17.2.0
2021-06	CT#92e	CP-211059	0548		A	Redirect Response for Namf_MT	17.2.0
2021-06	CT#92e	CP-211059	0550	1	A	Redirect Response for Namf_Location	17.2.0
2021-06	CT#92e	CP-211059	0555	1	A	Missing 307 and 308 for Namf_Communication	17.2.0
2021-06	CT#92e	CP-211028	0556	1	F	Data Type Description for Namf_Communication Service API	17.2.0
2021-06	CT#92e	CP-211028	0557	1	F	Data Type Description for Namf_EventExposure Service API	17.2.0
2021-06	CT#92e	CP-211028	0558	1	F	Corrections on cardinality issues	17.2.0
2021-06	CT#92e	CP-211062	0564		A	hSmfId in PduSessionContext transferred to target AMF	17.2.0
2021-06	CT#92e	CP-211050	0565		F	29.518 Rel-17 API version and External doc update	17.2.0
2021-09	CT#93e	CP-212026	0568		C	Broadcast Empty Area List for Write-Replace-Warning Request NG-RAN	17.3.0
2021-09	CT#93e	CP-212026	0569	1	F	Corrections to NGAP messages	17.3.0
2021-09	CT#93e	CP-212082	0572	1	A	AM Policy Information	17.3.0
2021-09	CT#93e	CP-212051	0573	1	F	The maxReports IE in AmfEvent or AmfEventMode	17.3.0
2021-09	CT#93e	CP-212051	0574		F	Resource archetype correction	17.3.0
2021-09	CT#93e	CP-212041	0575		B	NF Services consumed by DCCF	17.3.0
2021-09	CT#93e	CP-212051	0576		F	Binding Indication	17.3.0
2021-09	CT#93e	CP-212026	0578		F	Missing errors in AMF APIs	17.3.0
2021-09	CT#93e	CP-212034	0580	1	B	Add UE Positioning Capabilities	17.3.0
2021-09	CT#93e	CP-212097	0582		A	3xx description correction for SCP	17.3.0
2021-09	CT#93e	CP-212034	0585	1	B	Multiple QoS Class	17.3.0
2021-09	CT#93e	CP-212037	0586		B	Dynamic management of group based event monitoring	17.3.0
2021-09	CT#93e	CP-212051	0591	1	F	NfInstanceId of CBCF	17.3.0
2021-09	CT#93e	CP-212036	0592		F	Miscellaneous 5G ProSe related corrections and updates	17.3.0
2021-09	CT#93e	CP-212059	0593		F	29.518 Rel-17 API version and External doc update	17.3.0
2021-12	CT#94e	CP-213097	0596		B	Introduction of new AMF services (MBSBroadcast and MBSCommunication) to clauses 4.1 and 5.1	17.4.0
2021-12	CT#94e	CP-213097	0597		B	MBSBroadcast API - Overview of MBSBroadcast service	17.4.0
2021-12	CT#94e	CP-213097	0598	4	B	MBSBroadcast API - ContextCreate service operation	17.4.0
2021-12	CT#94e	CP-213097	0599	2	B	MBSBroadcast API - ContextUpdate service operation	17.4.0
2021-12	CT#94e	CP-213097	0600		B	MBSBroadcast API - ContextRelease service operation	17.4.0
2021-12	CT#94e	CP-213097	0601		B	MBSBroadcast API - Resources and methods overview	17.4.0
2021-12	CT#94e	CP-213097	0602		B	MBSBroadcast API – Resource Definition – Broadcast MBS session contexts collection	17.4.0
2021-12	CT#94e	CP-213097	0603		B	MBSBroadcast API – Resource Definition – Individual broadcast MBS session context	17.4.0
2021-12	CT#94e	CP-213097	0604	3	B	MBSBroadcast API - Data Model & OpenAPI for ContextCreate and ContextStatusNotify service operations	17.4.0
2021-12	CT#94e	CP-213097	0605	3	B	MBSBroadcast API - Data Model & OpenAPI for ContextUpdate service operation	17.4.0
2021-12	CT#94e	CP-213097	0606	1	B	MBSBroadcast API - Data Model & OpenAPI for ContextRelease service operation	17.4.0
2021-12	CT#94e	CP-213097	0608	1	B	Namf_MBSCommnuication service description	17.4.0
2021-12	CT#94e	CP-213097	0609	1	B	Namf_MBSCommnuication resources and methods	17.4.0
2021-12	CT#94e	CP-213097	0610	2	B	Namf_MBSCommnuication data type and openAPI	17.4.0
2021-12	CT#94e	CP-213097	0611	1	B	Namf_MBSCommnuication error handling	17.4.0
2021-12	CT#94e	CP-213086	0612	2	F	Transfer UE radio capability for paging between AMFs	17.4.0
2021-12	CT#94e	CP-213112	0613	1	B	UUAA-MM status indication in UE Context	17.4.0
2021-12	CT#94e	CP-213112	0614	1	B	N1N2MessageTransfer update	17.4.0
2021-12	CT#94e	CP-213112	0615	1	B	Notification enhancement with additional filtering	17.4.0
2021-12	CT#94e	CP-213102	0616	1	B	AMF event correction	17.4.0
2021-12	CT#94e	CP-213100	0617	2	B	UEContext for SNPN	17.4.0
2021-12	CT#94e	CP-213097	0618	1	B	EnableGroupReachability service procedure	17.4.0
2021-12	CT#94e	CP-213097	0619	1	B	EnableGroupReachability resource and OpenAPI definition	17.4.0
2021-12	CT#94e	CP-213101	0622	1	B	AM Policy Association modification Time synchronization enhancement	17.4.0
2021-12	CT#94e	CP-213108	0623	2	B	Notification for SM Policy Association Events	17.4.0
2021-12	CT#94e	CP-213096	0624	1	B	Higher Resolution Timestamp for Location Estimates	17.4.0

2021-12	CT#94e	CP-213096	0625	1	F	UE Positioning Capabilities Data Type	17.4.0
2021-12	CT#94e	CP-213085	0627	1	F	Correction on MT service	17.4.0
2021-12	CT#94e	CP-213087	0628	3	F	S-NSSAI in PDU session context	17.4.0
2021-12	CT#94e	CP-213138	0630	1	A	Idle Status Indication	17.4.0
2021-12	CT#94e	CP-213096	0633		B	Add scheduled location time	17.4.0
2021-12	CT#94e	CP-213097	0641		B	MBSBroadcast API - ContextStatusNotify service operation	17.4.0
2021-12	CT#94e	CP-213097	0642		B	MBSBroadcast API – Resource Definition - ContextStatusNotify service operation	17.4.0
2021-12	CT#94e	CP-213117	0643		F	One time location report when the current location cannot be obtained	17.4.0
2021-12	CT#94e	CP-213087	0644	1	B	Minimal Report Interval	17.4.0
2021-12	CT#94e	CP-213117	0645		F	Event Subscription Modification Pattern	17.4.0
2021-12	CT#94e	CP-213138	0647	1	A	Immediate Reporting	17.4.0
2021-12	CT#94e	CP-213138	0649	1	A	Resolve EN for Event Subscription Sync	17.4.0
2021-12	CT#94e	CP-213145	0651	1	A	5GS User State Correction	17.4.0
2021-12	CT#94e	CP-213148	0654	1	A	Essential Correction on N1N2MessageSubscribe for UE Policy	17.4.0
2021-12	CT#94e	CP-213098	0655	1	B	MT_EnableUEReachability supporting MUSIM	17.4.0
2021-12	CT#94e	CP-213098	0656		F	Update MUSIM references	17.4.0
2021-12	CT#94e	CP-213117	0657	1	F	Correcting citation to N1 messages	17.4.0
2021-12	CT#94e	CP-213110	0658	1	B	Addition of UEs for group based event subscription	17.4.0
2021-12	CT#94e	CP-213086	0659		F	3gpp-Sbi-Consumer-Info in UE Context	17.4.0
2021-12	CT#94e	CP-213087	0660	1	F	Corrections related to the description fields in the OpenAPI descriptions	17.4.0
2021-12	CT#94e	CP-213121	0661		F	29.518 Rel-17 API version and External doc update	17.4.0
2022-03	CT#95	CP-220023	0664		F	New application error for ProvideDomainSelectionInfo (T-ADS) for a deregistered UE	17.5.0
2022-03	CT#95	CP-220072	0665		F	Correction to CreateUEContext service operation regarding 5G-SRVCC	17.5.0
2022-03	CT#95	CP-220081	0666	1	A	Release of old access resources during Intra-AMF HO between 3GPP and non-3GPP accesses	17.5.0
2022-03	CT#95	CP-220084	0667	1	A	Secondary RAT data usage reporting over N14 during Inter-AMF handover	17.5.0
2022-03	CT#95	CP-220034	0668	1	B	Schedule location time for AMF	17.5.0
2022-03	CT#95	CP-220051	0669		B	RedCap indication in UE context	17.5.0
2022-03	CT#95	CP-220035	0670		F	Miscellaneous corrections	17.5.0
2022-03	CT#95	CP-220048	0671	1	F	Correction on time synchronization error budget	17.5.0
2022-03	CT#95	CP-220055	0672		F	Essential Clarification for SMF ID in N1 Container	17.5.0
2022-03	CT#95	CP-220049	0673	2	B	UE Access Behavior Trends Event	17.5.0
2022-03	CT#95	CP-220049	0674	2	B	UE Location Trends Event	17.5.0
2022-03	CT#95	CP-220049	0675	1	B	UE MM Transactions Report Event	17.5.0
2022-03	CT#95	CP-220035	0676		B	Correct the IEs included in EnableGroupReachability request	17.5.0
2022-03	CT#95	CP-220035	0677		B	Service operation definition of UEReachabilityInfoNotify	17.5.0
2022-03	CT#95	CP-220035	0678	1	B	Resource and data types definition of UEReachabilityInfoNotify	17.5.0
2022-03	CT#95	CP-220024	0679	1	F	Rerouted Registration Request message	17.5.0
2022-03	CT#95	CP-220024	0681	1	F	Corrections related to the description fields in the OpenAPI descriptions	17.5.0
2022-03	CT#95	CP-220025	0682	1	B	Inter-PLMN mobility of PDU sessions	17.5.0
2022-03	CT#95	CP-220035	0683		F	Miscellaneous corrections to the Namf_MBSBroadcast API	17.5.0
2022-03	CT#95	CP-220035	0684		B	N2 MBS Session Management Information in Namf_MBSBroadcast API	17.5.0
2022-03	CT#95	CP-220035	0685	1	B	N2 MBS Session Management Information in Namf_MBSCommunication API	17.5.0
2022-03	CT#95	CP-220065	0693		B	Additional Subscribed Policy Request Triggers in 3GPP R17	17.5.0
2022-03	CT#95	CP-220084	0696		A	Essential Correction on Policy Trigger	17.5.0
2022-03	CT#95	CP-220081	0698		A	Missing Subscribed Policy Request Triggers in 3GPP R16	17.5.0
2022-03	CT#95	CP-220025	0699	2	B	SM Context Consistency Validation	17.5.0
2022-03	CT#95	CP-220076	0701	1	A	Add UE triggered policy provisioning pocedure in N1MessageNotify operation	17.5.0
2022-03	CT#95	CP-220079	0705		A	V-SMF removal during Inter-AMF registration	17.5.0
2022-03	CT#95	CP-220049	0706		F	Removal of Editor's Note	17.5.0
2022-03	CT#95	CP-220025	0707	1	F	204 No Content in subscription modification response	17.5.0
2022-03	CT#95	CP-220044	0709	1	B	Update on AMF exposure events	17.5.0
2022-03	CT#95	CP-220081	0711	1	A	200 OK in subscription modification response	17.5.0
2022-03	CT#95	CP-220066	0712		F	29.518 Rel-17 API version and External doc update	17.5.0
2022-06	CT#96	CP-221043	0716		F	N1MessageNotify for ProSe	17.6.0
2022-06	CT#96	CP-221023	0717	1	F	NGAP MB-SMF related IE	17.6.0
2022-06	CT#96	CP-221023	0718	1	F	MBS Service Area Information for Location dependent MBS session	17.6.0
2022-06	CT#96	CP-221023	0719		F	MBS Service Area in Namf_MBSCommunication N2MessageTransfer Request	17.6.0
2022-06	CT#96	CP-221024	0720	2	F	Location dependent MBS broadcast session	17.6.0
2022-06	CT#96	CP-221043	0721		F	pc5QoSPara attribute name in ProseContext data type	17.6.0
2022-06	CT#96	CP-221027	0722		F	Correction of typos in description fields	17.6.0
2022-06	CT#96	CP-221023	0723		F	Paging strategy handling for multicast MBS session	17.6.0

2022-06	CT#96	CP-221039	0724		F	Disaster Roaming Registration	17.6.0
2022-06	CT#96	CP-221027	0725		F	Query parameters not complying with 29.501 naming conventions	17.6.0
2022-06	CT#96	CP-221045	0726	1	F	Released PDU Sessions during Registration	17.6.0
2022-06	CT#96	CP-221045	0727	1	F	Mobility between HPLMN and VPLMN	17.6.0
2022-06	CT#96	CP-221024	0729	3	F	Adding MBS session ID to ContextCreateRspData	17.6.0
2022-06	CT#96	CP-221024	0730	2	F	Adding SNSSAI to ContextCreateReqData	17.6.0
2022-06	CT#96	CP-221024	0733	1	F	Corrctions on HTTP Response	17.6.0
2022-06	CT#96	CP-221024	0734	1	F	Broadcast MBS Session Release Require procedure	17.6.0
2022-06	CT#96	CP-221024	0735		F	N2 MBS Info Change Indicator	17.6.0
2022-06	CT#96	CP-221024	0736	1	F	Signaling of NG-RAN Node ID from AMF to MB-SMF	17.6.0
2022-06	CT#96	CP-221061	0738		A	Updp Subscription Callback Binding	17.6.0
2022-06	CT#96	CP-221061	0740	2	A	Essential Correction for PCF Bindings	17.6.0
2022-06	CT#96	CP-221033	0741		F	PCF Provided UE Slice MBR in UE Context	17.6.0
2022-06	CT#96	CP-221068	0743		A	SmfSelInfo in UE Context	17.6.0
2022-06	CT#96	CP-221024	0745	1	F	Remove non-existent ngapData in the ContextCreateReqData as required in openAPI	17.6.0
2022-06	CT#96	CP-221024	0746	1	B	Reporting NG-RAN failure to MB-SMF	17.6.0
2022-06	CT#96	CP-221022	0747	1	F	Event Reporting in RRC inactive state	17.6.0
2022-06	CT#96	CP-221033	0748	1	F	Subscribed-UE-Slice-MBR	17.6.0
2022-06	CT#96	CP-221068	0750		A	pc5QoSPara attribute name in V2xContext data type	17.6.0
2022-06	CT#96	CP-221051	0751		F	29.518 Rel-17 API version and External doc update	17.6.0
2022-09	CT#97	CP-222047	0754	1	F	Current Location	17.7.0
2022-09	CT#97	CP-222031	0755	1	F	NGAP MB-SMF related IE	17.7.0
2022-09	CT#97	CP-222026	0758	1	F	Handling of N1N2MessageTransfer Failure when UE in Non-Allowed Area	17.7.0
2022-09	CT#97	CP-222053	0760		F	Correct the description of the provide-loc-info and the cancel-pos-info	17.7.0
2022-09	CT#97	CP-222063	0764	1	A	MSC Server Identity in Namf_Location_EventNotify during SRVCC handover	17.7.0
2022-09	CT#97	CP-222031	0765		F	Corrections for the N2MbsSmInfo data type	17.7.0
2022-09	CT#97	CP-222031	0766		F	Correction for the Namf_MBSBroadcast API	17.7.0
2022-09	CT#97	CP-222061	0768	1	A	SMSF Set and Binding Info	17.7.0
2022-09	CT#97	CP-222043	0769	1	F	SMF Security and Capability in PDU Session Context	17.7.0
2022-09	CT#97	CP-222054	0770	2	F	Create UE Context with AMF Relocation	17.7.0
2022-09	CT#97	CP-222065	0772	1	A	Timestamp for Periodic Event Reporting during Mobility	17.7.0
2022-09	CT#97	CP-222047	0774	1	F	EE Subscription Notification Error Handling	17.7.0
2022-09	CT#97	CP-222068	0776	1	A	409 Response on Xn HO and Intra-AMF N2 HO	17.7.0
2022-09	CT#97	CP-222053	0777	1	F	Essential Clarification for N2 Info Subscription	17.7.0
2022-09	CT#97	CP-222068	0783		A	AMF relocation in EPS to 5GS handover	17.7.0
2022-09	CT#97	CP-222035	0785	1	F	Removal of Editor's Note	17.7.0
2022-09	CT#97	CP-222036	0786	1	F	Indication of Network Assisted Positioning method	17.7.0
2022-09	CT#97	CP-222031	0787	3	F	Clarification to OperationStatus	17.7.0
2022-09	CT#97	CP-222031	0788	1	F	Correction to ContextCreateReqData	17.7.0
2022-09	CT#97	CP-222057	0789	1	F	EPS interworking Info in UE Context	17.7.0
2022-09	CT#97	CP-222058	0790		F	29.518 Rel-17 API version and External doc update	17.7.0
2022-09	CT#97	CP-222232	0793		F	Inserting missing clarification on Max Number of Reports	17.7.0
2022-12	CT#98	CP-223057	0794		F	Feature bit alignment	17.8.0
2022-12	CT#98	CP-223036	0797	1	F	Add MBS Update procedure to the ContextCreate service operation	17.8.0
2022-12	CT#98	CP-223060	0799	1	F	Inter AMF mobility when UE is registered in both 3GPP and non-3GPP	17.8.0
2022-12	CT#98	CP-223036	0801	1	F	Missing clauses for Namf_MBSBroadcast Service	17.8.0
2022-12	CT#98	CP-223036	0802	1	F	Missing clauses for Namf_MBSCommunication Service	17.8.0
2022-12	CT#98	CP-223099	0810	3	A	Area of Interest Event Status from Old AMF	17.8.0
2022-12	CT#98	CP-223069	0812	1	A	Missing IMEISV in N1N2 Message Subscription	17.8.0
2022-12	CT#98	CP-223051	0815	1	F	PLMN with disaster condition	17.8.0
2022-12	CT#98	CP-223062	0817	1	F	Correction of boolean type IEs	17.8.0
2022-12	CT#98	CP-223066	0822		F	29.518 Rel-17 API version and External doc update	17.8.0
2022-12	CT#98	CP-223030	0800	1	B	Inter AMF mobility when UE is registered in SNPN with different access	18.0.0
2022-12	CT#98	CP-223035	0803	1	B	Support of RRC_INACTIVE with long eDRX	18.0.0
2022-12	CT#98	CP-223036	0804		B	Multicast MBS session (de)activation or update after an AMF failure	18.0.0
2022-12	CT#98	CP-223036	0805		F	MBS session update for Broadcast	18.0.0
2022-12	CT#98	CP-223028	0806	1	F	Missing mandatory status codes in OpenAPI	18.0.0
2022-12	CT#98	CP-223027	0808	1	B	Retry Timer for N1N2 Transfer Failure	18.0.0
2022-12	CT#98	CP-223058	0813	3	F	Event Subscription Termination Notification	18.0.0
2022-12	CT#98	CP-223062	0816	1	F	Value of ageOfLocationInformation	18.0.0
2022-12	CT#98	CP-223033	0821		F	29.518 Rel-18 API version and External doc update	18.0.0
2023-03	CT#99	CP-230039	0825	1	B	Support Unavailability Duration in Namf_EE API	18.1.0
2023-03	CT#99	CP-230090	0830		A	Essential Corrections on Resource URI	18.1.0
2023-03	CT#99	CP-230062	0835		D	Editorial correction to ContextRelease	18.1.0
2023-03	CT#99	CP-230036	0836	1	B	Protocol support for MBS Session in MOCN	18.1.0
2023-03	CT#99	CP-230077	0838	1	A	Update operation status and event for broadcast session release	18.1.0
2023-03	CT#99	CP-230049	0839		F	Miscellaneous Corrections	18.1.0

2023-03	CT#99	CP-230030	0840	1	B	Parameters used to consume Namf_MT_enableUeReachability service	18.1.0
2023-03	CT#99	CP-230046	0841	1	B	Manage Event Muting Impact on NFp	18.1.0
2023-03	CT#99	CP-230029	0843		B	OAuth2 scopes in the Namf_MT API	18.1.0
2023-03	CT#99	CP-230029	0844	1	B	OAuth2 scopes in the Namf_Communication API	18.1.0
2023-03	CT#99	CP-230032	0845	1	B	Local LMF and GMLC selection	18.1.0
2023-03	CT#99	CP-230077	0847		A	Incorrect enable-group-reachability operation resource URI in the OpenAPI	18.1.0
2023-03	CT#99	CP-230088	0849		A	Add nextPeriodicReportTime IE to Namf_EventExposure OpenAPI	18.1.0
2023-03	CT#99	CP-230032	0852	2	B	Support of Event Report Allowed Area	18.1.0
2023-03	CT#99	CP-230093	0855	1	A	Essential Corrections on AMF Events	18.1.0
2023-03	CT#99	CP-230029	0856	2	B	PWS N2 Subscription Unavailability Indication	18.1.0
2023-03	CT#99	CP-230094	0859	1	A	Missed AM Policy Information in UE Context	18.1.0
2023-03	CT#99	CP-230031	0860	1	B	Multiple location report for MT-LR Immediate Location Request for the regulatory service	18.1.0
2023-03	CT#99	CP-230032	0863	1	B	UE Unaware Positioning	18.1.0
2023-03	CT#99	CP-230032	0864	2	B	Support of low power and high accuracy positioning	18.1.0
2023-03	CT#99	CP-230032	0865	1	B	Location service in PNI-NPN with signalling optimisation	18.1.0
2023-03	CT#99	CP-230041	0867	1	B	Satellite backhaul category change	18.1.0
2023-03	CT#99	CP-230042	0868		B	Event exposure subscribed by the TSCTSF	18.1.0
2023-03	CT#99	CP-230062	0869	1	F	Correct the name of the retry after timer	18.1.0
2023-03	CT#99	CP-230062	0870	1	F	Correction on UE Context Release	18.1.0
2023-03	CT#99	CP-230071	0872		F	29.518 Rel-18 API version and External doc update	18.1.0
2023-06	CT#100	CP-231028	0871	4	F	Location header description	18.2.0
2023-06	CT#100	CP-231043	0876	1	B	Presence-In-AOI-Report event with adjustment of the AoI based on the UE's RA	18.2.0
2023-06	CT#100	CP-231043	0877	1	B	Presence-In-AOI-Report event for RAN timing synchronization status change	18.2.0
2023-06	CT#100	CP-231025	0878		F	Correct the table of the HTTP status code for N1N2MessageTransfer	18.2.0
2023-06	CT#100	CP-231031	0879	1	B	Location service bi-directional continuity between EPS and 5GS	18.2.0
2023-06	CT#100	CP-231031	0880	2	B	Support of PRUs	18.2.0
2023-06	CT#100	CP-231047	0885		F	Correction of Event muting mechanism	18.2.0
2023-06	CT#100	CP-231064	0886		F	iwkSnssai in EPS to 5GS handover procedure with AMF relocation	18.2.0
2023-06	CT#100	CP-231064	0887		F	Correction on service operations in Namf_Communication service	18.2.0
2023-06	CT#100	CP-231081	0889	1	A	Pattern of path in AmfUpdateEventOptionItem	18.2.0
2023-06	CT#100	CP-231083	0891		A	Add group member UE(s) for a group subscription	18.2.0
2023-06	CT#100	CP-231075	0893	1	A	Missing finer periodicities than 1s and an infinite reporting amount	18.2.0
2023-06	CT#100	CP-231031	0894	1	B	PRU Indication in N1N2MessageTransfer	18.2.0
2023-06	CT#100	CP-231028	0895	1	B	Omit UE IDs for Number of UEs in Area Event	18.2.0
2023-06	CT#100	CP-231064	0898	3	B	Support of RACS feature	18.2.0
2023-06	CT#100	CP-231043	0899	1	B	Service Operations for Subscription and management of network timing synchronization status monitoring	18.2.0
2023-06	CT#100	CP-231043	0900	1	B	Data Type for Subscription and management of network timing synchronization status monitoring	18.2.0
2023-06	CT#100	CP-231030	0901	1	B	SMF as the NF consumer of Namf_MT_enableUeReachability service	18.2.0
2023-06	CT#100	CP-231069	0906	1	F	Essential Correction on 202 Location Header of N1N2MessageTransfer	18.2.0
2023-06	CT#100	CP-231029	0908	1	F	Event Synchronization with No EE Subscription Indication via UECM	18.2.0
2023-06	CT#100	CP-231047	0910	1	B	Variable reporting periodicity	18.2.0
2023-06	CT#100	CP-231083	0912	1	A	Correction the name of taiList attribute in TargetArea	18.2.0
2023-06	CT#100	CP-231031	0914	2	B	Add reporting indication	18.2.0
2023-06	CT#100	CP-231042	0915	1	B	Update on ProseContext	18.2.0
2023-06	CT#100	CP-231069	0917		F	Correct the data type UeContextTransferReqData name	18.2.0
2023-06	CT#100	CP-231069	0918		F	Correct the table in provide-pos-info response	18.2.0
2023-06	CT#100	CP-231048	0919	2	B	Partially allowed Network slice	18.2.0
2023-06	CT#100	CP-231031	0920	2	B	Requested LMF ID is not available	18.2.0
2023-06	CT#100	CP-231090	0923	1	F	Incorrect OpenAPI definition of aoiStateList in AmfEventSubscriptionAddInfo	18.2.0
2023-06	CT#100	CP-231070	0925		F	29.518 Rel-18 API version and External doc update	18.2.0
2023-09	CT#101	CP-232033	0928	1	F	Subscription authorization in Context Transfer	18.3.0
2023-09	CT#101	CP-232043	0930	1	B	Updating N1messageNotification during AMF re-allocation procedure to include partially Allowed NSSAI	18.3.0
2023-09	CT#101	CP-232036	0933	1	B	HR-SBO Allowed indication during intra-PLMN Handover	18.3.0
2023-09	CT#101	CP-232033	0934	1	F	Event subscription rejection with UE_NOT_SERVED_BY_AMF application error	18.3.0
2023-09	CT#101	CP-232046	0935	2	B	A2X information in UE Context	18.3.0
2023-09	CT#101	CP-232057	0937	1	B	Update the ProseContext data type	18.3.0
2023-09	CT#101	CP-232035	0938	1	F	Correction on Reporting Indication	18.3.0
2023-09	CT#101	CP-232043	0939	1	B	Slice Usage Control Information in UE Context	18.3.0
2023-09	CT#101	CP-232063	0941		A	Missed HA GNSS Metrics Support over SBI	18.3.0

2023-09	CT#101	CP-232053	0942	4	B	Support of Mobile Base Station Relay in AMF services	18.3.0
2023-09	CT#101	CP-232058	0944	1	F	Correction of NGAP IE type description in N2InfoContent	18.3.0
2023-09	CT#101	CP-232058	0945		F	Correction of Unsubscribe procedure description	18.3.0
2023-09	CT#101	CP-232058	0946		F	Correction of references to the tables in the description	18.3.0
2023-09	CT#101	CP-232049	0949	2	B	PC5 QoS parameters related to RSPP transport over PC5	18.3.0
2023-09	CT#101	CP-232035	0950	1	B	Support on Indoor/Outdoor indication	18.3.0
2023-09	CT#101	CP-232062	0953	1	A	Add GNSS integrity requirement	18.3.0
2023-09	CT#101	CP-232058	0954		F	Correction on the description of DateTime	18.3.0
2023-09	CT#101	CP-232049	0956	2	B	Update on AMF service for MT procedures for ranging_SL	18.3.0
2023-09	CT#101	CP-232033	0957		F	Correcting the definition of the maxRespTime attribute	18.3.0
2023-09	CT#101	CP-232035	0958	1	B	Support on NLOS/LOS measurement indication	18.3.0
2023-09	CT#101	CP-232060	0959		F	29.518 Rel-18 API version and External doc update	18.3.0
2023-12	CT#102	CP-233037	0936	2	B	Periodic or triggered location events via user plane to an LCS Client or AF	18.4.0
2023-12	CT#102	CP-233036	0955	3	B	Updates to support Extended DRX for RRC-INACTIVE state with CN based MT communication handling	18.4.0
2023-12	CT#102	CP-233028	0961	1	B	Event subscription not authorized by the target AMF	18.4.0
2023-12	CT#102	CP-233037	0963	2	B	Add LCS-UP context	18.4.0
2023-12	CT#102	CP-233044	0964		F	Incorrect numbering for ExpectedUeBehavior	18.4.0
2023-12	CT#102	CP-233063	0966	2	A	Correct the N2MbsSMinfo in the MBS broadcast service	18.4.0
2023-12	CT#102	CP-233044	0967	1	F	Editorial corrections and adding missing attributes in the procedure description	18.4.0
2023-12	CT#102	CP-233041	0968	2	B	Updates on the RAN Timing Synchronization Status Report related N2 information	18.4.0
2023-12	CT#102	CP-233044	0971	1	F	Missed Service Operations in Tables	18.4.0
2023-12	CT#102	CP-233045	0972	2	F	Clarification on muting mechanism in AMF event exposure service	18.4.0
2023-12	CT#102	CP-233041	0976	1	B	UE reconnection indication in UE context in AMF	18.4.0
2023-12	CT#102	CP-233041	0977	1	B	Update Non-UE N2 subscription and notification	18.4.0
2023-12	CT#102	CP-233033	0978	1	B	Support for resource sharing across multiple broadcast MBS Sessions during network sharing	18.4.0
2023-12	CT#102	CP-233050	0980	2	B	Update on AMF services for ranging_SL	18.4.0
2023-12	CT#102	CP-233044	0981	1	F	Clarification on Unavailability Period	18.4.0
2023-12	CT#102	CP-233031	0983	1	F	ProblemDetails RFC 7807 obsoleted by 9457	18.4.0
2023-12	CT#102	CP-233031	0984	1	F	HTTP RFCs obsoleted by IETF RFC 9110, 9111 and 9113	18.4.0
2023-12	CT#102	CP-233037	0986	1	F	Reporting Indication Definition Alignment to Stage 2	18.4.0
2023-12	CT#102	CP-233037	0987	1	B	Multiple QoS for Deferred Location Service Continuation from 5GS to EPS	18.4.0
2023-12	CT#102	CP-233031	0988	2	B	TAI Range List in AreaOfValidity	18.4.0
2023-12	CT#102	CP-233041	0991	1	F	Network Timing Synchronization Status feature in Table 6.1.8-1	18.4.0
2023-12	CT#102	CP-233041	0992	1	B	New event filters for Presence-In-AOI-Report event subscription targeting Any UE	18.4.0
2023-12	CT#102	CP-233077	0993	2	B	Broadcast Session Transport procedure support by the ContextStatusNotify service operation	18.4.0
2023-12	CT#102	CP-233040	0995	1	F	UE_NOT_RESPONDING Application Error for 504 Response Missing	18.4.0
2023-12	CT#102	CP-233037	0996		F	Update the support of PRU related procedures	18.4.0
2023-12	CT#102	CP-233056	1000	2	F	Corrections to support Extended DRX in CM-IDLE state	18.4.0
2023-12	CT#102	CP-233050	1003	1	B	Update on delivery of N2 information for rangingsl	18.4.0
2023-12	CT#102	CP-233056	1004	1	F	Update on delivery of N2 information for 5G Prose	18.4.0
2023-12	CT#102	CP-233060	1006		F	29.518 Rel-18 API version and External doc update	18.4.0
2024-03	CT#103	CP-240039	1009	1	B	Subscription to TSS information Reporting using Namf_NonUeN2MessageTransfer	18.5.0
2024-03	CT#103	CP-240039	1010		B	Event Filters for Subscriptions to Presence-In-AOI-Report events	18.5.0
2024-03	CT#103	CP-240062	1013	1	A	UeInfoList and UeInfo	18.5.0
2024-03	CT#103	CP-240028	1014		F	Immediate MDT	18.5.0
2024-03	CT#103	CP-240028	1015		F	MDT User Consent for PLMNs adjacent to the serving PLMN	18.5.0
2024-03	CT#103	CP-240035	1016		B	Fill in the missing RAN3 references for 5MBS NGAP IEs	18.5.0
2024-03	CT#103	CP-240028	1020	3	B	Addition of voice support match indicator in UE context	18.5.0
2024-03	CT#103	CP-240048	1023	1	B	Distinction of MBSR and IAB node indicators	18.5.0
2024-03	CT#103	CP-240045	1025	1	B	Aligning distance and location terminology with stage 2	18.5.0
2024-03	CT#103	CP-240029	1028		B	EnableUEReachability supporting additional N2 indication	18.5.0
2024-03	CT#103	CP-240029	1029	2	C	EnableUEReachability to support reporting of DL data size	18.5.0
2024-03	CT#103	CP-240053	1030	2	F	N1N2MessageTransfer enhancements for eDRX	18.5.0
2024-03	CT#103	CP-240042	1031	1	B	Alternative S-NSSAIs for PDU Sessions in UE Context	18.5.0
2024-03	CT#103	CP-240042	1032	1	B	Network Slice Deregistration Inactive Remaining Time	18.5.0
2024-03	CT#103	CP-240030	1034	1	B	Support of user plane positioning connection management procedures	18.5.0
2024-03	CT#103	CP-240045	1036		B	coordinate id in case of absolute locations	18.5.0
2024-03	CT#103	CP-240045	1037	1	F	Corrections on Application Layer ID	18.5.0
2024-03	CT#103	CP-240028	1038	1	F	Editorial Corrections	18.5.0
2024-03	CT#103	CP-240042	1039	2	F	Support of Network Slice Replacement and area restrictions at UE mobility	18.5.0
2024-03	CT#103	CP-240066	1040	1	A	Feature Negotiation for Analytics Subscriptions Support via N14	18.5.0
2024-03	CT#103	CP-240056	1041		F	29.518 Rel-18 API version and External doc update	18.5.0

2024-06	CT#104	CP-241028	1043		F	Attribute Name Correction	18.6.0
2024-06	CT#104	CP-241042	1044	1	F	Correct the description related to partially allowed NSSAI	18.6.0
2024-06	CT#104	CP-241042	1045	2	F	Remove the EN related to partially allowed NSSAI	18.6.0
2024-06	CT#104	CP-241042	1046	4	B	Subscribe to event notification for Slice Service Area	18.6.0
2024-06	CT#104	CP-241029	1048	1	F	Correct SMF behaviour of sending a new Namf_MT_EnableUEReachability	18.6.0
2024-06	CT#104	CP-241028	1052	1	F	Callbacks	18.6.0
2024-06	CT#104	CP-241057	1054	1	A	MBS service area in the EnableGroupReachabilityReqData	18.6.0
2024-06	CT#104	CP-241050	1056	1	F	Clarify the semantics of the S-NSSAI and the NSI in the AmfEventArea datatype	18.6.0
2024-06	CT#104	CP-241039	1057		B	Restoration of TSS monitoring upon an NG-RAN failure with or w/o restart	18.6.0
2024-06	CT#104	CP-241056	1059	1	A	Integrity Result	18.6.0
2024-06	CT#104	CP-241028	1061	1	F	To be Released PDU Session for Other Reasons during Handover	18.6.0
2024-06	CT#104	CP-241066	1064	1	A	Add GPSI to 5GC-MT-LR Procedure without UDM Query	18.6.0
2024-06	CT#104	CP-241050	1066	1	F	UE ID Usage for UE Related Resources	18.6.0
2024-06	CT#104	CP-241045	1067	2	F	Updates on feature description	18.6.0
2024-06	CT#104	CP-241050	1070	2	F	Resolving the case of conflicting Target identifiers in the event subscription	18.6.0
2024-06	CT#104	CP-241053	1069	3	A	Content of JSON Patch requests	18.6.0
2024-06	CT#104	CP-241050	1072		F	Service name corrections	18.6.0
2024-06	CT#104	CP-241050	1074		F	Correction of feature negotiation description	18.6.0
2024-06	CT#104	CP-241049	1075	1	B	Support for the XR Device with 2Rx	18.6.0
2024-06	CT#104	CP-241029	1076	1	B	Support for the eRedCap UEs	18.6.0
2024-06	CT#104	CP-241028	1077	1	B	Handling of unsupported event subscription	18.6.0
2024-06	CT#104	CP-241045	1078		F	NGAP Reference to Ranging and Sidelink Positioning Service Information	18.6.0
2024-06	CT#104	CP-241050	1083		F	Write-Replace Warning Indication & Stop Warning Indication	18.6.0
2024-06	CT#104	CP-241050	1084		F	EBI allocation applying to PDU sessions using SSC mode 1	18.6.0
2024-06	CT#104	CP-241028	1085	1	F	Handling of NW triggered SR during an on-going UE triggered SR race condition	18.6.0
2024-06	CT#104	CP-241038	1086	1	B	Remote UE Indication in Location Information	18.6.0
2024-06	CT#104	CP-241030	1087	1	F	Update the description of EventNotify service	18.6.0
2024-06	CT#104	CP-241050	1088	1	F	Updates on naming convention for enumeration	18.6.0
2024-06	CT#104	CP-241045	1089	1	F	Alignment with naming conventions	18.6.0
2024-06	CT#104	CP-241045	1091	1	F	Notification for privacy check on UE for RangingSl	18.6.0
2024-06	CT#104	CP-241052	1092		F	29.518 Rel-18 API version and External doc update	18.6.0
2024-09	CT#105	CP-242053	1095	1	F	subregTimer in IdleStatusIndication	18.7.0
2024-09	CT#105	CP-242237	1102	3	F	Network Slice Deregistration Inactive timer information	18.7.0
2024-09	CT#105	CP-242053	1106	1	F	Reachability-Report event	18.7.0
2024-09	CT#105	CP-242053	1108		F	Correction to the RAN-ID-LIST feature in the MBSCommunication API	18.7.0
2024-09	CT#105	CP-242053	1109	1	F	Incorrect reference to a table note	18.7.0
2024-09	CT#105	CP-242033	1099		F	Removing the un-used data type SmsSupport	19.0.0
2024-09	CT#105	CP-242033	1100	1	F	Missing descriptions in Namf_Location API	19.0.0
2024-09	CT#105	CP-242033	1101		F	Correction of attribute values and IE names	19.0.0
2024-09	CT#105	CP-242033	1103		F	Corrections of reference to supported features	19.0.0
2024-09	CT#105	CP-242033	1112	1	F	MDT parameters for M1, M8 and M9	19.0.0
2024-09	CT#105	CP-242033	1113	2	F	Clarification on the locationNotificationUri	19.0.0
2024-09	CT#105	CP-242032	1114	1	B	Minimization of AM and UE policy associations	19.0.0
2024-09	CT#105	CP-242038	1115		F	29.518 Rel-19 API version and External doc update	19.0.0
2024-12	CT#106	CP-243035	1105	2	B	AMF Set level event exposure Bulk Subscriptions	19.1.0
2024-12	CT#106	CP-243022	1119	1	A	PDU Session Priority	19.1.0
2024-12	CT#106	CP-243032	1120		F	The maxWaitingTime in the N1N2MsgTxFrFailureNotification	19.1.0
2024-12	CT#106	CP-243054	1121	4	B	Support of on-demand broadcast of GNSS assistance data	19.1.0
2024-12	CT#106	CP-243022	1125	1	A	Correction of unavailability period	19.1.0
2024-12	CT#106	CP-243042	1126	1	B	Support for Multi-hop 5G ProSe Layer-3	19.1.0
2024-12	CT#106	CP-243022	1132		A	Correction on LCS Correlation ID as UE Context ID	19.1.0
2024-12	CT#106	CP-243032	1133	1	F	PWS N2 Subscription per CBCF	19.1.0
2024-12	CT#106	CP-243057	1135	3	B	New AMF Event of Trajectory Tracking for USS Change Over	19.1.0
2024-12	CT#106	CP-243032	1136	1	F	Correction of data type name	19.1.0
2024-12	CT#106	CP-243032	1137	3	F	Adding missing abbreviation	19.1.0
2024-12	CT#106	CP-243060	1145	1	B	NRPPa Periodic Indication	19.1.0
2024-12	CT#106	CP-243059	1146		F	DNN and Slice information for Communication Failure Event	19.1.0
2024-12	CT#106	CP-243051	1150	1	A	Correction for the deferred 5GC-MT-LR procedure	19.1.0
2024-12	CT#106	CP-243044	1152	1	B	Addition of Data Collection parameters in AMF for LMF data collection procedure	19.1.0
2024-12	CT#106	CP-243059	1154		F	incorrect namf-comm resouces name	19.1.0
2024-12	CT#106	CP-243059	1155		F	Incorrect namf-comm service name	19.1.0
2024-12	CT#106	CP-243069	1159		F	API version and External doc update	19.1.0
2025-03	CT#107	CP-250046	1162	3	B	UE Location Trends Report at RAN Node Granularity	19.2.0
2025-03	CT#107	CP-250046	1164	3	F	Correct the Inclusion of SliceUsageControlInfo	19.2.0
2025-03	CT#107	CP-250043	1165		F	Incomplete implementation of the agreed CR	19.2.0

2025-03	CT#107	CP-250043	1166	1	B	Support for Multi-hop 5G ProSe Layer-2	19.2.0
2025-03	CT#107	CP-250046	1170	1	F	Correction on Handling of SM Policy Notification Info	19.2.0
2025-03	CT#107	CP-250222	1172	3	B	Enhancements in Namf_Communication service of AMF for UE Positioning	19.2.0
2025-03	CT#107	CP-250214	1173	1	B	AMF Signalling Measurement Event for Storm Mitigation	19.2.0
2025-03	CT#107	CP-250023	1175	2	A	Wrong cardinality in Namf_MBSBroadcast service	19.2.0
2025-03	CT#107	CP-250037	1176	1	B	Local Offloading Management Allowed Indication	19.2.0
2025-03	CT#107	CP-250046	1180		F	Incorrect clause reference	19.2.0
2025-03	CT#107	CP-250053	1181	2	B	Clarification on Storage and Transfer of Access and Mobility Management Policy Information in UE Context	19.2.0
2025-03	CT#107	CP-250137	1183		F	API version and External doc update	19.2.0
2025-06	CT#108	CP-251055	1188		F	Moving note on ImmediateFlag parameter applicability to AMF events	19.3.0
2025-06	CT#108	CP-251067	1190		F	Add the missing data type	19.3.0
2025-06	CT#108	CP-251055	1193		F	Missing re-used data type	19.3.0
2025-06	CT#108	CP-251057	1191	1	B	Clarification on UE Radio Capability ID for Indirect Network sharing	19.3.0
2025-06	CT#108	CP-251067	1184	1	F	Removal of EN in N2InformationTransferResult	19.3.0
2025-06	CT#108	CP-251073	1185	2	B	Indication of Energy Saving in UE Context	19.3.0
2025-06	CT#108	CP-251063	1197		F	Assigned Trajectory deviation time	19.3.0
2025-06	CT#108	CP-251052	1202		A	Add missing changes in the approved CR	19.3.0
2025-06	CT#108	CP-251066	1206		F	Correction on UE UP Positioning Capabilities	19.3.0
2025-06	CT#108	CP-251063	1178	6	B	Update Namf_EventExposure service for Altitude-Report Event	19.3.0
2025-06	CT#108	CP-251067	1214		F	Correction of the text and table numbers	19.3.0
2025-06	CT#108	CP-251067	1216		F	General text corrections	19.3.0
2025-06	CT#108	CP-251063	1218	1	B	Update the assigned trajectory parameters	19.3.0
2025-06	CT#108	CP-251046	1215	1	B	AMF AIoT service API	19.3.0
2025-06	CT#108	CP-251046	1219	1	B	Adding new interface	19.3.0
2025-06	CT#108	CP-251067	1210	1	F	Corrections in re-used data types	19.3.0
2025-06	CT#108	CP-251067	1198	1	F	CHF Group Id in UE context	19.3.0
2025-06	CT#108	CP-251067	1209	1	F	Event Exposure subscription context resynchronization	19.3.0
2025-06	CT#108	CP-251067	1205	1	F	Solving UE shall have maximum one LCS-UPP	19.3.0
2025-06	CT#108	CP-251046	1194	4	B	Adding a new AMF service description	19.3.0
2025-06	CT#108	CP-251042	1213	2	A	Correction of UE access behavior trend and UE location trend events reports	19.3.0
2025-06	CT#108	CP-251079	1222		F	API version and External doc update	19.3.0
2025-09	CT#109	CP-252037	1223		F	Rejection of SMF initiated request during 5GS to EPS handover	19.4.0
2025-09	CT#109	CP-252049	1225	1	F	LCS-UP Context Creation and Removal	19.4.0
2025-09	CT#109	CP-252057	1226	2	F	Correct the Description of AIoT Service	19.4.0
2025-09	CT#109	CP-252057	1227	1	F	Content type of Multipart messages for AIoT service	19.4.0
2025-09	CT#109	CP-252057	1228	1	B	Add a new value of application error	19.4.0
2025-09	CT#109	CP-252034	1231		A	IERSR for "UE Reachable for DL Traffic" and "Loss-of-Connectivity" events	19.4.0
2025-09	CT#109	CP-252048	1233	2	B	Support per-UE Signalling Analytics in Signalling-Measurement-Report Event	19.4.0
2025-09	CT#109	CP-252049	1234		F	Corrections to re-used data types	19.4.0
2025-09	CT#109	CP-252057	1236	2	B	Addition of RAN A-IoT Device NGAP ID	19.4.0
2025-09	CT#109	CP-252057	1237	1	B	AIoT sesseion release	19.4.0
2025-09	CT#109	CP-252049	1240	1	B	Support for multiple LCS UPP	19.4.0
2025-09	CT#109	CP-252049	1242	1	F	Correction on LCS Correlation ID for LCS UPP CM	19.4.0
2025-09	CT#109	CP-252045	1243	1	C	Altitude reporting cancelation	19.4.0
2025-09	CT#109	CP-252057	1245		D	Editorial corrections on AIoT services	19.4.0
2025-09	CT#109	CP-252057	1246		F	Update the Namf_AIoT Custom operation	19.4.0
2025-09	CT#109	CP-252057	1248	2	B	Add new identifiers in Namf_AIoT_MessageDelivery service operation	19.4.0
2025-09	CT#109	CP-252176	1249		F	API version and External doc update	19.4.0
2025-12	CT#110	CP-253160	1251		F	Correction of the description of Namf_AIoT service operations	19.5.0
2025-12	CT#110	CP-253160	1252	1	B	Aligning the procedure list with stage 2.	19.5.0
2025-12	CT#110	CP-253152	1253	1	F	Completing the descriptions of the re-used data types	19.5.0
2025-12	CT#110	CP-253152	1254	1	F	Correction of table note	19.5.0
2025-12	CT#110	CP-253160	1255	2	F	Update the reference	19.5.0
2025-12	CT#110	CP-253160	1256	1	B	Update the description of correlation Id	19.5.0
2025-12	CT#110	CP-253150	1257		F	Add UE and group IDs to event subscription and notification for signalling measurement event	19.5.0
2025-12	CT#110	CP-253151	1258		F	Correction to the subscription modification procedures	19.5.0
2025-12	CT#110	CP-253151	1259		F	Clarify Subscription Conditions and Add Missing reused data type	19.5.0
2025-12	CT#110	CP-253150	1260	2	F	Correct the presence of ueUpPosCap	19.5.0
2025-12	CT#110	CP-253151	1261		F	Add a new case for NRPPa message transfer	19.5.0
2025-12	CT#110	CP-253141	1267	2	A	Correlation of LCS-UPP Connection during UPP-CM Procedure	19.5.0
2025-12	CT#110	CP-253152	1269	1	F	Correction to the description for the IERSR feature	19.5.0
2025-12	CT#110	CP-253152	1270	1	F	Minor Corrections	19.5.0
2025-12	CT#110	CP-253152	1271	1	F	Corrections on Event Exposure Service	19.5.0
2025-12	CT#110	CP-253154	1235	2	F	Event Exposure on UE Reachable for DL Traffic for UE in RRC-Inactive	19.5.0

2025-12	CT#110	CP-253153	1274	3	F	Addition of LMF routing information to N1N2MessageTransfer Service Operation	19.5.0
2025-12	CT#110	CP-253154	1275	1	F	Expiry in Subscription Change Notification	19.5.0
2025-12	CT#110	CP-253148	1276	2	F	Immediate Report in Subscription Modification Response	19.5.0
2025-12	CT#110	CP-253153	1277	1	F	Single Subscription for UAS Events per UE	19.5.0
2025-12	CT#110	CP-253153	1278	1	F	Cleanup and corrections for MBS services	19.5.0
2025-12	CT#110	CP-253153	1279		F	Add missing reference	19.5.0
2025-12	CT#110	CP-253153	1280		D	Editorial corrections	19.5.0
2025-12	CT#110	CP-253143	1281	1	F	Correction of a data type	19.5.0
2025-12	CT#110	CP-253150	1282	1	F	Should corresponds to presence as Optional	19.5.0
2025-12	CT#110	CP-253167	1283	1	F	Clarification of Signalling Measurement event descriptions to align with SA2	19.5.0
2025-12	CT#110	CP-253153	1285		F	API version and External doc update	19.5.0
2026-03	CT#111	CP-260024	1287	3	A	UE Reachability for Data	19.6.0
2026-03	CT#111	CP-260026	1288	1	F	UPDP subscription transfer during inter-AMF mobility	19.6.0
2026-03	CT#111	CP-260036	1289		F	Request URI of Namf_AIoT_MessageDelivery request	19.6.0
2026-03	CT#111	CP-260036	1290	1	D	Editorial corrections to the Namf_AIoT API	19.6.0
2026-03	CT#111	CP-260029	1291	1	F	Signalling Storm Analytics data collection from AMF	19.6.0
2026-03	CT#111	CP-260030	1292		F	Correction of the description of the API definitions	19.6.0
2026-03	CT#111	CP-260026	1293	1	F	Correct the reference of obtaining non-UE associated network assistance data	19.6.0
2026-03	CT#111	CP-260029	1294	1	F	Correct notification of Frequent Mobility Registration Update	19.6.0
2026-03	CT#111	CP-260031	1297	1	F	Slice Information for Active PDU Session during inter-PLMN Handover	19.6.0
2026-03	CT#111	CP-260031	1298	1	F	Mapped Slices for Inter-PLMN Handover with AMF Relocation	19.6.0
2026-03	CT#111	CP-260025	1301		A	Correct placement of AM Policy and Network Slice Deregistration Timer handling in UEContextTransfer	19.6.0
2026-03	CT#111	CP-260040	1305		F	API version and External doc update	19.6.0
2026-06	CT#112	CP-261046	1309	1	F	Resources and methods overview of the Namf_EventExposure API	19.7.0
2026-06	CT#112	CP-261050	1318	1	F	Minimal Interval for Location Reporting	19.7.0
2026-06	CT#112	CP-261049	1321	4	F	Signalling Storm Analytics data collection from AMF UeRelatedInfo	19.7.0
2026-06	CT#112	CP-261049	1322	2	F	Signalling Storm Analytics data collection from AMF AmfTimerInfo	19.7.0
2026-06	CT#112	CP-261044	1336	1	A	Missed UE Policy Request Trigger for VPLMN Specific URSP	19.7.0
2026-06	CT#112	CP-261088	1341		F	API version and External doc update	19.7.0
2026-09	CT#113	CP-262029	1347		A	Correction of OpenAPI schema	19.8.0
2026-09	CT#113	CP-262019	1350	1	F	Correction of NRPPa transfer failure enumeration	19.8.0
2026-09	CT#113	CP-262159	1358	1	F	Cancel Location in 5GS for EPS Initiated Deferred Location	19.8.0
2026-09	CT#113	CP-262165	1360	1	F	Correction for Location Service Continuity for Deferred MT-LR	19.8.0
2026-09	CT#113	CP-262025	1364	1	A	String enum values	19.8.0
2026-09	CT#113	CP-262043	1369		F	API version and External doc update	19.8.0

History

Version	Date	Status
V19.4.0	January 2026	Publication
V19.5.0	February 2026	Publication
V19.6.0	March 2026	Publication
V19.7.0	August 2026	Publication
V19.8.0	October 2026	Publication