ETSI TS 124 368 V12.3.0 (2015-04)



Universal Mobile Telecommunications System (UMTS);
LTE;
Non-Access Stratum (NAS)
configuration Management Object (MO)
(3GPP TS 24.368 version 12.3.0 Release 12)



Reference
RTS/TSGC-0124368vc30

Keywords
LTE,UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:
http://www.etsi.org/standards-search

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.
Information on the current status of this and other ETSI documents is available at
http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, please send your comment to one of the following services:
https://portal.etsi.org/People/CommiteeSupportStaff.aspx

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.
The content of the PDF version shall not be modified without the written authorization of ETSI.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2015.
All rights reserved.

DECT™, **PLUGTESTS**™, **UMTS**™ and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.
3GPP™ and **LTE**™ are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.
GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://ipr.etsi.org).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under http://webapp.etsi.org/key/queryform.asp.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the ETSI Drafting Rules (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights 2
Foreword 2
Modal verbs terminology 2
Foreword 4
1 Scope 5
2 References 5
3 Definitions, symbols and abbreviations 5
3.1 Definitions 5
3.2 Abbreviations 5
4 NAS configuration MO 6
5 NAS configuration MO parameters 6
5.1 General 6
5.2 Node: <*X*> 7
5.3 <*X*>/NAS_SignallingPriority 7
5.4 <*X*>/AttachWithIMSI 7
5.5 <*X*>/MinimumPeriodicSearchTimer 7
5.6 <*X*>/NMO_I_Behaviour 8
5.7 <*X*>/Timer_T3245_Behaviour 8
5.8 <*X*>/ExtendedAccessBarring 8
5.9 <*X*>/Override_NAS_SignallingLowPriority 9
5.10 <*X*>/Override_ExtendedAccessBarring 9
5.10a <*X*>/FastFirstHigherPriorityPLMNSearch 9
5.10b <*X*>/EUTRADisablingAllowedForEMMCause15 10
5.10c <*X*>/SM_RetryWaitTime 10
5.10d <*X*>/SM_RetryAtRATChange 10
5.11 <*X*>/Ext 11
Annex A (informative): NAS configuration MO DDF 12
Annex B (informative): Change history 16
History 17

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document defines a Management Object (MO) that can be used to configure the UE with parameters related to Non-Access Stratum (NAS) functionality.

The MO is compatible with the OMA Device Management (DM) protocol specifications, version 1.2 and upwards, and is defined using the OMA DM Device Description Framework (DDF) as described in the Enabler Release Definition OMA-ERELD-DM-V1_2 [2].

The MO consists of relevant parameters for NAS related configuration of a UE.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

[1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".

[2] OMA-ERELD-DM-V1_2: "Enabler Release Definition for OMA Device Management".

[3] 3GPP TS 23.122: "Non-Access-Stratum (NAS) functions related to Mobile Station (MS) in idle mode".

[4] 3GPP TS 24.008: "Mobile radio interface Layer 3 specification; Core network protocols; Stage 3".

[5] 3GPP TS 24.301: "Non-Access-Stratum (NAS) protocol for Evolved Packet System (EPS); Stage 3".

[5A] 3GPP TS 23.401: "GPRS enhancements for E-UTRAN access".

[6] 3GPP TS 31.102: "Characteristics of the USIM Application".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] apply.

Reserved: The value "reserved" is assigned to a code point to indicate that it is reserved for future use. The present document specifies no processing rules for handling of "reserved" value by the receiving entity.

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

ACL Access Control List

DDF	Device Description Framework
DM	Device Management
MO	Management Object
NAS	Non-Access Stratum
OMA	Open Mobile Alliance

4 NAS configuration MO

The NAS configuration MO is used to manage configuration parameters related to NAS functionality for a UE supporting provisioning of such information. The presence and format of the non-access stratum configuration file on the USIM is specified in 3GPP TS 31.102 [6].

The MO identifier is: urn:oma:mo:ext-3gpp-nas-config:1.0.

The OMA DM Access Control List (ACL) property mechanism (see OMA-ERELD-DM-V1_2 [2]) may be used to grant or deny access rights to OMA DM servers in order to modify nodes and leaf objects of the NAS configuration MO.

The following nodes and leaf objects are possible in the NAS configuration MO as described in figure 4-1:

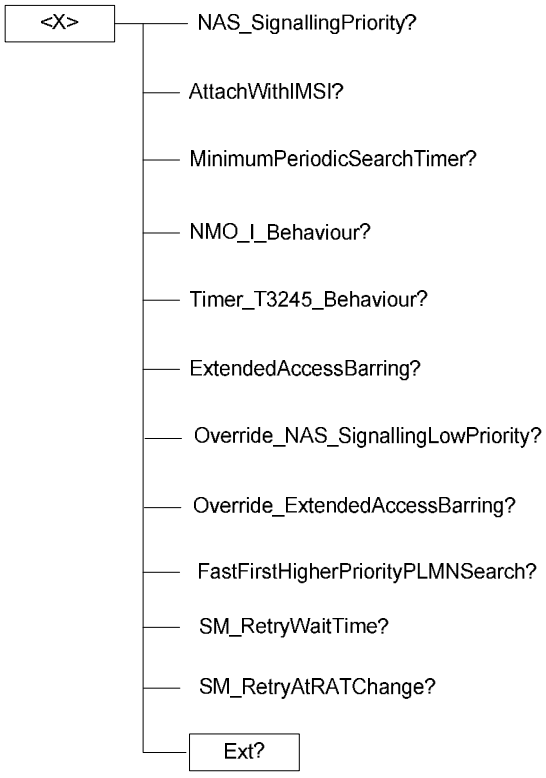


Figure 4-1: The NAS configuration Management Object

5 NAS configuration MO parameters

5.1 General

This clause describes the parameters for the NAS configuration MO.

5.2 Node: <*X*>

This interior node acts as a placeholder for zero or one accounts for a fixed node.

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get
- Values: N/A

5.3 <*X*>/NAS_SignallingPriority

The NAS_SignallingPriority leaf indicates a NAS signalling priority which is used to determine the setting of the low priority indicator to be included in NAS messages as specified in 3GPP TS 24.008 [4] and 3GPP TS 24.301 [5].

- Occurrence: ZeroOrOne
- Format: int
- Access Types: Get, Replace
- Values: <NAS signalling priority>

Possible values for the NAS signalling priority are specified in table 5.3.1.

Table 5.3.1: Values of NAS_SignallingPriority leaf

Value	Description
0	Reserved
1	NAS signalling low priority
2-255	Reserved

5.4 <*X*>/AttachWithIMSI

The AttachWithIMSI leaf indicates whether attach with IMSI is performed when moving to a non-equivalent PLMN as specified in 3GPP TS 24.008 [4] and 3GPP TS 24.301 [5].

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1

  0 Indicates that normal behaviour is applied.

  1 Indicates that attach with IMSI is performed when moving to a non-equivalent PLMN.

The default value 0 applies if this leaf is not provisioned.

5.5 <*X*>/MinimumPeriodicSearchTimer

The MinimumPeriodicSearchTimer leaf gives a minimum value in minutes for the timer T controlling the periodic search for higher prioritized PLMNs as specified in 3GPP TS 23.122 [3].

- Occurrence: ZeroOrOne
- Format: int

- Access Types: Get, Replace
- Values: 0-255

The default value 0 applies if this leaf is not provisioned.

5.6 <*X*>/NMO_I_Behaviour

The NMO_I_Behaviour leaf indicates whether the "NMO I, Network Mode of Operation I" indication as specified in 3GPP TS 24.008 [4] is applied by the UE.

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1

  0 Indicates that the "NMO I, Network Mode of Operation I" indication is not used.

  1 Indicates that the "NMO I, Network Mode of Operation I" indication is used, if available.

The default value 0 applies if this leaf is not provisioned.

5.7 <*X*>/Timer_T3245_Behaviour

The Timer_T3245_Behaviour leaf indicates whether the timer T3245 and the related functionality as specified in 3GPP TS 24.008 [4] and 3GPP TS 24.301 [5] is used by the UE.

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1

  0 Indicates that the timer T3245 is not used.

  1 Indicates that the timer T3245 is used.

The default value 0 applies if this leaf is not provisioned.

5.8 <*X*>/ExtendedAccessBarring

The ExtendedAccessBarring leaf indicates whether the extended access barring is applicable for the UE as specified in 3GPP TS 24.008 [4] and 3GPP TS 24.301 [5].

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1

  0 Indicates that the extended access barring is not applied for the UE.

  1 Indicates that the extended access barring is applied for the UE.

The default value 0 applies if this leaf is not provisioned.

5.9 <*X*>/Override_NAS_SignallingLowPriority

The Override_NAS_SignallingLowPriority leaf indicates whether the UE can override the NAS_SignallingPriority leaf node configured to NAS signalling low priority.

The setting of the low priority indicator included in NAS messages when the Override_NAS_SignallingPriority leaf exists is specified in 3GPP TS 24.008 [4] and 3GPP TS 24.301 [5].

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1

0 Indicates that the UE cannot override the NAS signalling low priority indicator

1 Indicates that the UE can override the NAS signalling low priority indicator

The default value 0 applies if this leaf is not provisioned.

NOTE: The Override_NAS_SignallingLowPriority leaf and the Override_ExtendedAccessBarring leaf is set to the same value, e.g., if the UE is configured to override the NAS signalling low access priority indicator, then it is configured to override extended access class barring (see 3GPP TS 23.401 [5A] subclause 4.3.17.4).

5.10 <*X*>/Override_ExtendedAccessBarring

The Override_ExtendedAccessBarring leaf indicates whether the UE can override ExtendedAccessBarring leaf node configured to extended access barring.

The handling of extended access barring for the UE when the Override_ExtendedAccessBarring leaf exists is specified in 3GPP TS 24.008 [4] and 3GPP TS 24.301 [5].

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1

0 Indicates that the UE cannot override extended access barring

1 Indicates that the UE can override extended access barring

The default value 0 applies if this leaf is not provisioned.

NOTE: The Override_ExtendedAccessBarring leaf and the Override_NAS_SignallingLowPriority leaf is set to the same value, e.g., if the UE is configured to override extended access class barring, then it is configured to override the NAS signalling low access priority indicator (see 3GPP TS 23.401 [5A] subclause 4.3.17.4).

5.10a <*X*>/FastFirstHigherPriorityPLMNSearch

The FastFirstHigherPriorityPLMNSearch leaf indicates whether the UE performs the first search for a higher priority PLMN after at least 2 minutes and at most T minutes upon entering a VPLMN as specified in 3GPP TS 23.122 [3].

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace

- Values: 0, 1

0 Indicates that the Fast First Higher Priority PLMN Search is disabled, see 3GPP TS 23.122 [3]

1 Indicates that the Fast First Higher Priority PLMN Search is enabled, see 3GPP TS 23.122 [3]

The default value 0 applies if this leaf is not provisioned.

5.10b <*X*>/EUTRADisablingAllowedForEMMCause15

The EUTRADisablingAllowedForEMMCause15 leaf indicates whether the UE is allowed to disable the E-UTRA capability when it receives the Extended EMM cause IE with value "E-UTRAN not allowed" as described in 3GPP TS 24.301 [5].

- Occurrence: ZeroOrOne

- Format: bool

- Access Types: Get, Replace

- Values: 0, 1

0 Indicates that "E-UTRA Disabling for EMM cause #15" is disabled, see 3GPP TS 24.301 [5]

1 Indicates that "E-UTRA Disabling for EMM cause #15" is enabled, see 3GPP TS 24.301 [5]

The default value 0 applies if this leaf is not provisioned.

5.10c <*X*>/SM_RetryWaitTime

The SM_RetryWaitTime leaf indicates a configured UE retry wait time value applicable in (E)HPLMN for controlling the UE session management retry behaviour when prior session management request was rejected by the network with cause value #8, #27, #32, #33 as specified in 3GPP TS 24.008 [4] and 3GPP TS 24.301 [5].

- Occurrence: ZeroOrOne

- Format: int

- Access Types: Get, Replace

- Values: 0-255

The default value 12mins applies if this leaf is not provisioned.

SM_RetryWaitTime shall be coded in the same format as the value part of GPRS Timer 3 IE as specified in Table 10.5.163a/3GPP TS 24.008 [4] converted into a decimal value.

5.10d <*X*>/SM_RetryAtRATChange

The SM_RetryAtRATChange leaf indicates the UE's retry behaviour in (E)HPLMN after inter-system change between S1 mode and A/Gb or Iu mode as specified in 3GPP TS 24.008 [4] and 3GPP TS 24.301 [5].

- Occurrence: ZeroOrOne

- Format: bool

- Access Types: Get, Replace

- Values: 0, 1

0 Indicates that the UE is allowed to retry the corresponding ESM procedure in S1 mode if an SM procedure was rejected in A/Gb or Iu mode, and to retry the corresponding SM procedure in A/Gb or Iu mode if an ESM procedure was rejected in S1 mode, see 3GPP TS 24.008 [4] and 3GPP TS 24.301 [5]

1 Indicates that the UE is not allowed to retry an SM procedure or the corresponding ESM procedure in any of the modes: A/Gb, Iu and S1 mode, see 3GPP TS 24.008 [4] and 3GPP TS 24.301 [5]

The default value 0 applies if this leaf is not provisioned.

5.11 <*X*>/Ext

The Ext is an interior node for where the vendor specific information about the NAS configuration MO is being placed (vendor meaning application vendor, device vendor etc.). Usually the vendor extension is identified by vendor specific name under the ext node. The tree structure under the vendor identifier is not defined and can therefore include one or more un-standardized sub-trees.

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get
- Values: N/A

Annex A (informative): NAS configuration MO DDF

This DDF is the standardized minimal set. A vendor can define its own DDF for the complete device. This DDF can include more features than this minimal standardized version.

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE MgmtTree PUBLIC "-//OMA//DTD-DM-DDF 1.2//EN"
"http://www.openmobilealliance.org/tech/DTD/dm_ddf-v1_2.dtd">

<MgmtTree>
    <VerDTD>1.2</VerDTD>
    <Man>--The device manufacturer--</Man>
    <Mod>--The device model--</Mod>

    <Node>
        </NodeName>
        <DFProperties>
            <AccessType>
                <Get/>
            </AccessType>
            <Description>NAS configuration</Description>
            <DFFormat>
                <node/>
            </DFFormat>
            <Occurrence>
                <ZeroOrOne/>
            </Occurrence>
            <DFTitle>The NAS configuration Management Object.</DFTitle>
            <DFType>
                <DDFName>urn:oma:mo:ext-3gpp-nas-config:1.0<DDFName/>
            </DFType>
        </DFProperties>

        <Node>
            <NodeName>NAS_SignallingPriority</NodeName>
            <DFProperties>
                <AccessType>
                    <Get/>
                    <Replace/>
                </AccessType>
                <DFFormat>
                    <int/>
                </DFFormat>
                <Occurrence>
                    <ZeroOrOne/>
                </Occurrence>
                <DFTitle>NAS Signalling Priority.</DFTitle>
                <DFType>
                    <MIME>text/plain</MIME>
                </DFType>
            </DFProperties>
        </Node>

        <Node>
            <NodeName>AttachWithIMSI</NodeName>
            <DFProperties>
                <AccessType>
                    <Get/>
                    <Replace/>
                </AccessType>
                <DFFormat>
                    <bool/>
                </DFFormat>
                <Occurrence>
                    <ZeroOrOne/>
                </Occurrence>
                <DFTitle>Attach with IMSI.</DFTitle>
                <DFType>
                    <MIME>text/plain</MIME>
                </DFType>
            </DFProperties>
        </Node>
```

```
<Node>
    <NodeName>MinimumPeriodicSearchTimer</NodeName>
    <DFProperties>
        <AccessType>
            <Get/>
            <Replace/>
        </AccessType>
        <DFFormat>
            <int/>
        </DFFormat>
        <Occurrence>
            <ZeroOrOne/>
        </Occurrence>
        <DFTitle>Minimum periodic search timer.</DFTitle>
        <DFType>
            <MIME>text/plain</MIME>
        </DFType>
    </DFProperties>
</Node>

<Node>
    <NodeName>NMO_I_Behaviour</NodeName>
    <DFProperties>
        <AccessType>
            <Get/>
            <Replace/>
        </AccessType>
        <DFFormat>
            <bool/>
        </DFFormat>
        <Occurrence>
            <ZeroOrOne/>
        </Occurrence>
        <DFTitle>NMO I behaviour.</DFTitle>
        <DFType>
            <MIME>text/plain</MIME>
        </DFType>
    </DFProperties>
</Node>

<Node>
    <NodeName>Timer_T3245_Behaviour</NodeName>
    <DFProperties>
        <AccessType>
            <Get/>
            <Replace/>
        </AccessType>
        <DFFormat>
            <bool/>
        </DFFormat>
        <Occurrence>
            <ZeroOrOne/>
        </Occurrence>
        <DFTitle>Timer T3245 Behaviour.</DFTitle>
        <DFType>
            <MIME>text/plain</MIME>
        </DFType>
    </DFProperties>
</Node>

<Node>
    <NodeName>ExtendedAccessBarring</NodeName>
    <DFProperties>
        <AccessType>
            <Get/>
            <Replace/>
        </AccessType>
        <DFFormat>
            <bool/>
        </DFFormat>
        <Occurrence>
            <ZeroOrOne/>
        </Occurrence>
        <DFTitle>Extended Access Barring.</DFTitle>
        <DFType>
            <MIME>text/plain</MIME>
        </DFType>
```

```
    </DFProperties>
</Node>

<Node>
    <NodeName>Override_NAS_SignallingLowPriority>
    <DFProperties>
        <AccessType>
            <Get/>
            <Replace/>
        </AccessType>
        <DFFormat>
            <bool/>
        </DFFormat>
        <Occurrence>
            <ZeroOrOne/>
        </Occurrence>
        <DFTitle>Override NAS Signalling Low Priority.</DFTitle>
        <DFType>
            <MIME>text/plain</MIME>
        </DFType>
    </DFProperties>
</Node>


<Node>
    <NodeName>Override_ExtendedAccessBarring>
    <DFProperties>
        <AccessType>
            <Get/>
            <Replace/>
        </AccessType>
        <DFFormat>
            <bool/>
        </DFFormat>
        <Occurrence>
            <ZeroOrOne/>
        </Occurrence>
        <DFTitle>Override ExtendedAccessBarring.</DFTitle>
        <DFType>
            <MIME>text/plain</MIME>
        </DFType>
    </DFProperties>
</Node>

<Node>
    <NodeName>FastFirstHigherPriorityPLMNSearch>
    <DFProperties>
        <AccessType>
            <Get/>
            <Replace/>
        </AccessType>
        <DFFormat>
            <bool/>
        </DFFormat>
        <Occurrence>
            <ZeroOrOne/>
        </Occurrence>
        <DFTitle> FastFirstHigherPriorityPLMNSearch.</DFTitle>
        <DFType>
            <MIME>text/plain</MIME>
        </DFType>
    </DFProperties>
</Node>

<Node>
    <NodeName>EUTRADisablingAllowedForEMMCause15>
    <DFProperties>
        <AccessType>
            <Get/>
            <Replace/>
        </AccessType>
        <DFFormat>
            <bool/>
        </DFFormat>
        <Occurrence>
            <ZeroOrOne/>
        </Occurrence>
        <DFTitle> EUTRADisablingAllowedForEMMCause15.</DFTitle>
```

```
                <DFType>
                    <MIME>text/plain</MIME>
                </DFType>
            </DFProperties>
        </Node>

        <Node>
            <NodeName>SM_RetryWaitTime</NodeName>
            <DFProperties>
                <AccessType>
                    <Get/>
                    <Replace/>
                </AccessType>
                <DFFormat>
                    <int/>
                </DFFormat>
                <Occurrence>
                    <ZeroOrOne/>
                </Occurrence>
                <DFTitle> SM_RetryWaitTime</DFTitle>
                <DFType>
                    <MIME>text/plain</MIME>
                </DFType>
            </DFProperties>
        </Node>

        <Node>
            <NodeName>SM_RetryAtRATChange</NodeName>
            <DFProperties>
                <AccessType>
                    <Get/>
                    <Replace/>
                </AccessType>
                <DFFormat>
                    <bool/>
                </DFFormat>
                <Occurrence>
                    <ZeroOrOne/>
                </Occurrence>
                <DFTitle> SM_RetryAtRATChange</DFTitle>
                <DFType>
                    <MIME>text/plain</MIME>
                </DFType>
            </DFProperties>
        </Node>

        <Node>
            <NodeName>Ext</NodeName>
            <DFProperties>
                <AccessType>
                    <Get/>
                </AccessType>
                <DFFormat>
                    <node/>
                </DFFormat>
                <Occurrence>
                    <ZeroOrOne/>
                </Occurrence>
                <DFTitle>A collection of all extension objects.</DFTitle>
                <DFType>
                    <DDFName/>
                </DFType>
            </DFProperties>
        </Node>
    </Node>
</MgmtTree>
```

Annex B (informative): Change history

Change history							
Date	**TSG #**	**TSG Doc.**	**CR**	**Rev**	**Subject/Comment**	**Old**	**New**
2010-10	CT1#67				Includes the following contribution agreed by CT1: C1-104202		0.1.0
2010-11	CT1#68				Includes the following contribution agreed by CT1: C1-105247	0.1.0	0.2.0
2010-12	CT#50	CP-100719			V1.0.0 created by MCC for presentation for information at CT-50	0.2.0	1.0.0
2010-12	CT#50	CP-100888			V1.0.1 TS-number added at CT#50	1.0.0	1.0.1
2011-01	CT1#69				Includes the following contributions agreed by CT1: C1-110073, C1-110308, C1-110484	1.0.1	1.1.0
2011-02	CT1#70				Includes the following contributions agreed by CT1: C1-110790; C1-111456	1.1.0	1.2.0
2011-03	CT-51	CP-110153			Version 2.0.0 created by MCC for presentation to CT-51 for approval	1.2.0	2.0.0
2011-03	CT-51				Version 10.0.0 created by MCC after approval at CT-51	2.0.0	10.0.0
2011-06	CT-52	CP-110462	0001	1	Reference to NAS configuration in USIM	10.0.0	10.1.0
2011-09	CT-53	CP-110695	0002	1	Definition of reserved code point	10.1.0	11.0.0
2012-06	CT-56	CP-120315	0004	2	Override Low Priority Configuration	11.0.0	11.1.0
2012-06	CT-56				Re-ordering of subclauses of clause 5	11.1.0	11.1.1
2012-09	CT-57	CP-120589	0006		Correction on overriding configurations	11.1.1	11.2.0
2013-12	CT-62	CP-130762	0007	3	Fast higher priority PLMN search upon entering VPLMN	11.2.0	12.0.0
2014-06	CT-64	CP-140331	0009		Addition of configuration parameter for EMM cause #15 extension	12.0.0	12.1.0
2014-09	CT-65	CP-140643	0012	1	'Override_NAS_SignallingLowPriority' and "Override_ExtendedAccessBarring" linkage	12.1.0	12.2.0
2015-03	CT-67	CP-150069	0014	2	Addition of UE retry configuration parameter to NAS MO	12.2.0	12.3.0

History

Document history		
V12.2.0	October 2014	Publication
V12.3.0	April 2015	Publication