ETSI TS 103 874-4 V2.1.1 (2026-08)



TECHNICAL SPECIFICATION

DECT-2020 New Radio (NR);
Access Profile;
Part 4: Over the Air Software Update Operation
Release 2

Reference
DTS/DECT-00427

Keywords
access profile, DECT-2020, OTA

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the
ETSI Search & Browse Standards application.

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on ETSI deliver repository.

Users should be aware that the present document may be revised or have its status changed, this information is available in the Milestones listing.

If you find errors in the present document, please send your comments to the relevant service listed under Committee Support Staff.

If you find a security vulnerability in the present document, please report it through our Coordinated Vulnerability Disclosure (CVD) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.
No recommendation as to products and services or vendors is made or should be implied.
No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.
In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part of this document may be reproduced in any form, by any means and in any media, without the prior written authorization of ETSI and except as expressly permitted below.
By way of exception and when the document is a normative deliverable (European Standard (EN), Technical Specification (TS), Group Specification (GS) or ETSI Standard (ES)), ETSI authorizes to reproduce and incorporate into products, services and technical documentation only those extracts (e.g. templates) that are strictly necessary for the technical implementation of the normative deliverable, to ensure compliance with the latter.
Nothing in this notice shall be construed as limiting any mandatory exceptions to copyright provided by applicable law.

© ETSI 2026.
All rights reserved.

Contents

Intellectual Property Rights 4
Foreword 4
Modal verbs terminology 4
1 Scope 5
2 References 5
2.1 Normative references 5
2.2 Informative references 5
3 Definition of terms, symbols and abbreviations 5
3.1 Terms 5
3.2 Symbols 6
3.3 Abbreviations 6
4 General 6
4.1 Introduction 6
4.1.1 General 6
4.1.2 Configuration data distribution 6
4.1.3 OTA Management Application 7
4.2 Software Image Format 7
4.3 Services expected from lower layers 8
4.4 Order of transmission 8
5 Procedures 8
5.1 General 8
5.2 OTA management procedures 9
5.3 OTA Software Image Distribution Procedures 11
5.4 Activating New Software Image 12
6 PDU formats of the management application 13
6.1 General 13
6.2 Software Image Available message 13
6.3 Start Transfer message 13
6.4 First Block Transfer message 13
6.5 Block Transfer Failure 14
6.6 Block Request message 14
6.7 Block Transfer message 14
6.8 Block Transfer Completed message 15
Annex A (normative): Configuration data distribution for OTA 16
A.1 General 16
A.2 CDD Information Element: OTA Control Element 16
Annex B (informative): Change history 17
History 18

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables (European Standard (EN), Technical Specification (TS), Group Specification (GS) or ETSI Standard (ES)) may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI IPR online database.

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM**® and the GSM logo are trademarks registered and owned by the GSM Association.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Digital Enhanced Cordless Telecommunications (DECT).

The present document is part 4 of a multi-part deliverable covering DECT-2020 New Radio (NR); Access Profiles. Full details of the entire series can be found in part 1 [i.1].

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the ETSI Drafting Rules (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document specifies the access profile requirements and recommendations of features, operations and protocols how to integrate the Over the Air Software Update Operation to operate over DECT-2020 New Radio (NR).

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found in the ETSI docbox.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long-term validity.

The following referenced documents are necessary for the application of the present document.

[1] ETSI TS 103 636-3: "DECT-2020 New Radio (NR); Part 3: Physical layer; Release 2".

[2] ETSI TS 103 636-4: "DECT-2020 New Radio (NR); Part 4: MAC layer; Release 2".

[3] ETSI TS 103 636-5: "DECT-2020 New Radio (NR); Part 5: DLC and Convergence layers; Release 2".

[4] IETF RFC 9562: "Universally Unique IDentifiers (UUIDs)".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long-term validity.

The following referenced documents may be useful in implementing an ETSI deliverable or add to the reader's understanding, but are not required for conformance to the present document.

[i.1] ETSI TS 103 636-1: "DECT-2020 New Radio (NR); Part 1: Overview; Release 2".

3 Definition of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the terms given in ETSI TS 103 636-1 [i.1] and the following apply:

OTA process ID: identification of the OTA process being active in a DECT-2020 NR system

OTA software image ID: identification of the target software image being used in a given OTA process

target software image: software image that is being transferred and processed in the given OTA process

3.2 Symbols

Void.

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in ETSI TS 103 636-1 [i.1] and the following apply:

OTA Over-The-Air software update

4 General

4.1 Introduction

4.1.1 General

The present document defines how the Over-The-Air software update (OTA) is performed in a DECT-2020 New Radio (NR).

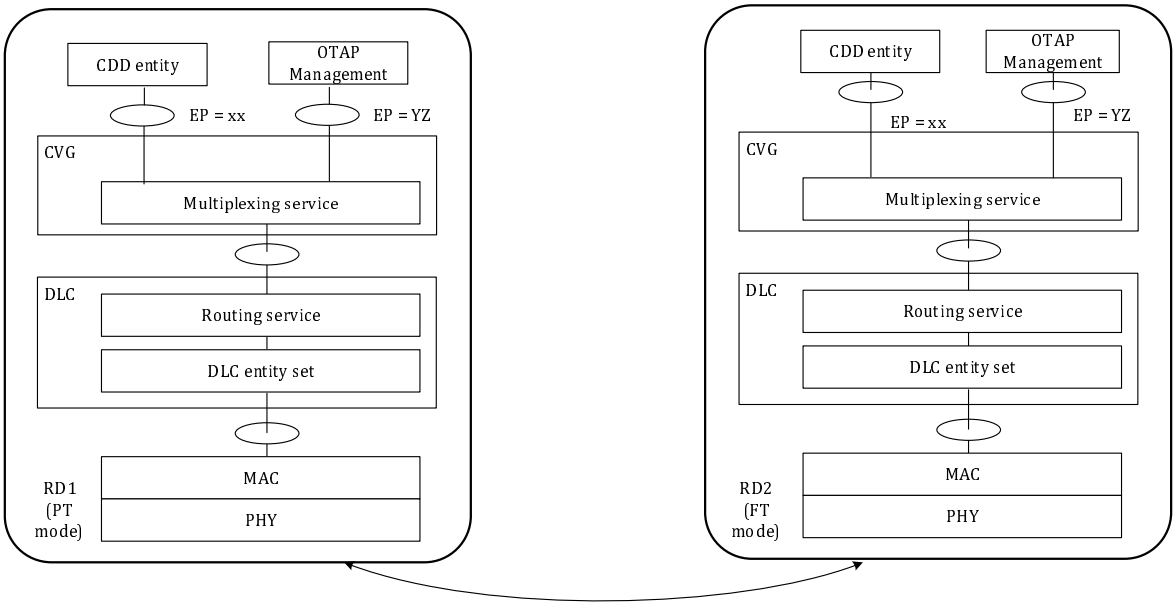


Figure 4.1-1: DECT-2020 NR protocol stack for OTA

As defined in ETSI TS 103 636-5 [3] and shown in Figure 4.1-1, OTA Management is an optional feature of the DECT-2020 NR protocol layers; when implemented, the requirements in the present document apply. The present document defines the RD memory requirements, OTA process management, and application behaviour for transferring a large software image over the DECT-2020 NR radio protocol layers to enable efficient software update processes for a high number of RDs. The result of OTA may be a complete or partial update to DECT-2020 NR protocol layers, an update of one or more applications of the device, or a combination of both.

4.1.2 Configuration data distribution

In the RD the CDD functionality as defined in ETSI TS 103 636-5 [3] shall support following states of the OTA process:

- OTA process is off: the RD shall not distribute new software or and shall not processes new software.

- OTA software distribution is activated: the RD shall perform the actions for obtaining the new software, and the RD shall indicate the availability of the new software and distribute it further when requested by another RD. The RD shall not take the new software into use.
- OTA software processing and distribution is activated: The RD shall take the new software into use, if valid for the RD, and the RD shall indicate the availability of the new software and distribute it further when requested by another RD.

4.1.3 OTA Management Application

In the RD, the OTA management application shall have the following functionality to support the transfer of a new software image:

- indicate the availability of the new software to other RDs;
- request the initiation of the transfer from another RD that has the image of the new software;
- ensure that all image segments of the new software are received;
- stop the transfer;
- verify the integrity of the new software data image;
- inform other RDs about the availability of the image;
- identify whether it should take the software into use;
- process the new software image when commanded.

The OTA management application uses the EndPoint defined in Annex A for sending request and response messages and transferring data segments of the software image.

The OTA management application in the RD shall have at least 1 Mbyte of memory available to store software files.

NOTE: If the complete distributed software image is larger than the minimum memory requirement for storing software files, the software image should be divided into multiple images and distributed in multiple software image distribution process, and targeted the RDs should compile the overall large software image. This functionality is left to implementations requiring such large software image sizes.

4.2 Software Image Format

The generic OTA software image format is presented in Figure 4.2-1, it contains, the OTA file header and the actual software image. The content of the OTA header fields is defined in Table 4.2-1.




Figure 4.2-1: DECT-2020 NR: Generic OTA Software Image

Table 4.2-1: Content of the OTA File header

Information element	Length [bytes]	Description
Version	1	Provides the version of the OTA file header.
Length	4	Software Image size in bytes.
OTA Software Image ID	2	OTA Software Image ID to verify that the file contains a software image that is allowed to be transferred, based on CDD.
Vendor ID type	1	The Vendor ID type used, which defines the length of the Vendor ID.
Vendor ID	Variable	The actual ID of the vendor that has prepared the software image.

The use of version ID is reserved for future extension and is set to 0x0 in this version of specification. The length field defines, in bytes, the size of the software image file. The same value is also used in the CDD information as defined in Annex A and in the First Block Transfer message as defined in clause 6.4.

The OTA Software Image ID field contains the calculated ID of the software image file. The calculation is done using the software image file bits as the input bits to the CRC computation as specified in ETSI TS 103 636-3 [1], clause 6.1.2, for a CRC length of 16. The obtained parity bits are included in the OTA Software Image ID field.

The Vendor ID types are defined in Table 4.2-2, defining the format of the Vendor ID. The Vendor ID is of variable length defined by the type.

After the OTA file header the actual software image file is included. The image file contains one or multiple actual software binaries to be used by the RD. The software image file shall be ciphered and authenticated using algorithms with a minimum of 128-bit security strength. The software image file shall be compressed; however, the actual methods are left to the implementations.

Table 4.2-2: Vendor ID Type

Value	Description
0x0	Reserved.
0x01	EndPoint (EP) value as defined in ETSI TS 103 636-5 [3]. Company specific values shall be used.
0x02	UUID [4].
0x03	EUI-64.
0x04-0xFF	Reserved.

4.3 Services expected from lower layers

The OTA profile expects the following services from the DECT-2020 NR protocol layers [2] and [3]:

- Transmission and reception of CVG PDUs.
- Support for a 1 280-byte CVG payload.
- Reliable transmissions.
- Indication of status of the CVG PDU transmissions.
- Configuration Data Distribution.

4.4 Order of transmission

The transmission order is big-endian, from left to right:

- A list of octets is transmitted with the 1st octet first.
- For each octet, bits are numbered from 0 to 7 according to transmission order. Bit 0 is transmitted first (ascending transmission order).
- This order is the same as that defined for the CVG layer.

5 Procedures

5.1 General

This clause covers procedures of the Over the Air Software Update Operation in a DECT-2020 NR system.

5.2 OTA management procedures

The OTA management commands are transferred using the Configuration Data Distribution (CDD) mechanism as defined in ETSI TS 103 636-5 [3], Annex C. The overall process is illustrated in Figure 5.2-1. In the first phase, CDD information indicates that the software image distribution is allowed for a given OTA Process ID by setting the Action field to 1 "*Software Image distribution allowed for this OTA process*". After the RD in FT mode has received the target Software Image from the backend, it starts signalling the availability of the target Software Image.

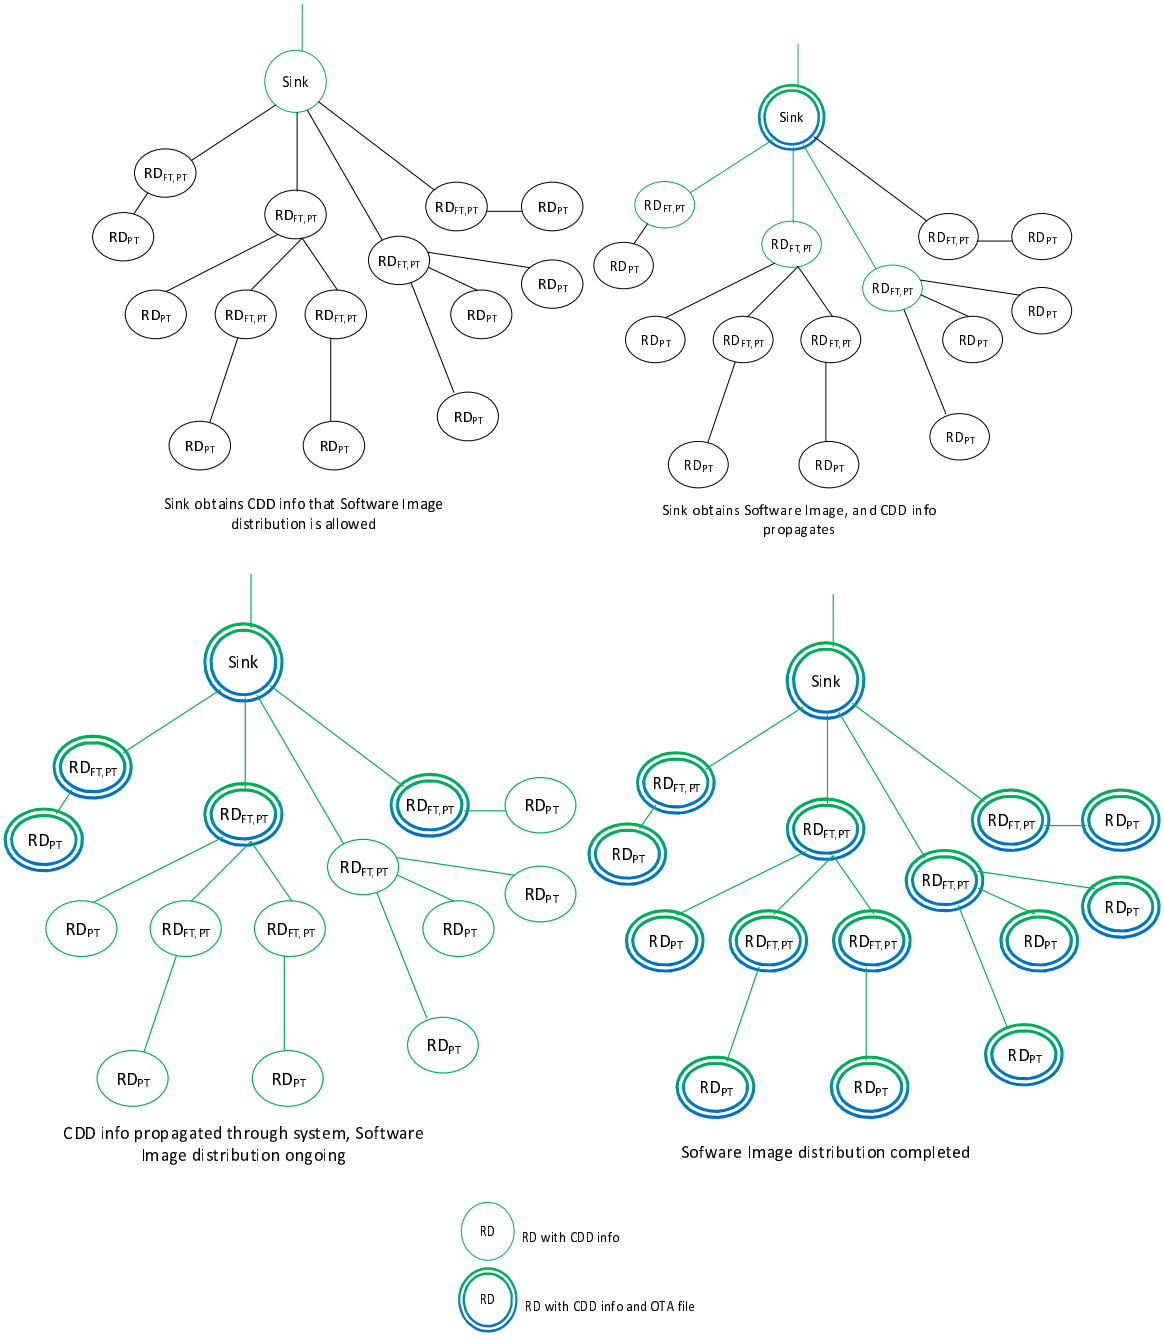


Figure 5.2-1: DECT-2020 NR: Distribution of CDD information and the OTA file

The Software image transfer states are illustrated by the state diagram depicted in Figure 5.2-2 for an RD operating in FT mode or an RD operating in both FT and PT modes. Figure 5.2-3 illustrates the Software image transfer states for an RD operating in PT mode only.

When CDD indicates that software image transfer of a given OTA Process ID is enabled, an RD in FT mode shall check whether it has the target software image based on the OTA Software Image ID, for the indicated OTA Process ID. If the RD in FT mode has the target software image it shall move to the *distribute*-state and start sending the *Software Image Available* message, as defined in clause 5.3, to indicate to other RDs that it has the target software image.

The CDD may include an EndPoint value as defined in ETSI TS 103 636-5 [3], indicating that software from a specific vendor is being distributed. An RD operating exclusively in PT mode that does not recognize the indicated EP value may skip the software image transfer process.

If an RD does not have the target software image the RD shall move to the *retrieve* state where it monitors the signalling indicating the availability of the target software image from RD in FT mode, which it has association with,. After it recognizes that the RD in FT mode has the target software image, it initiates the software image transfer procedure by sending a *Start Transfer* message as defined in clause 5.3.

If the RD in PT mode does not have an association with any RD in FT mode, then before sending the *Start Transfer* message the RD in PT mode shall have established an association with an RD in FT mode as defined in ETSI TS 103 636-4 [2].

After receiving all target software blocks, the RD shall store the target software image in its memory and, if it operates in FT mode the RD moves to the *distribute* state and starts sending the *Software Image Available* message, as defined in clause 5.3, to indicate to other RDs that it has the target software image.

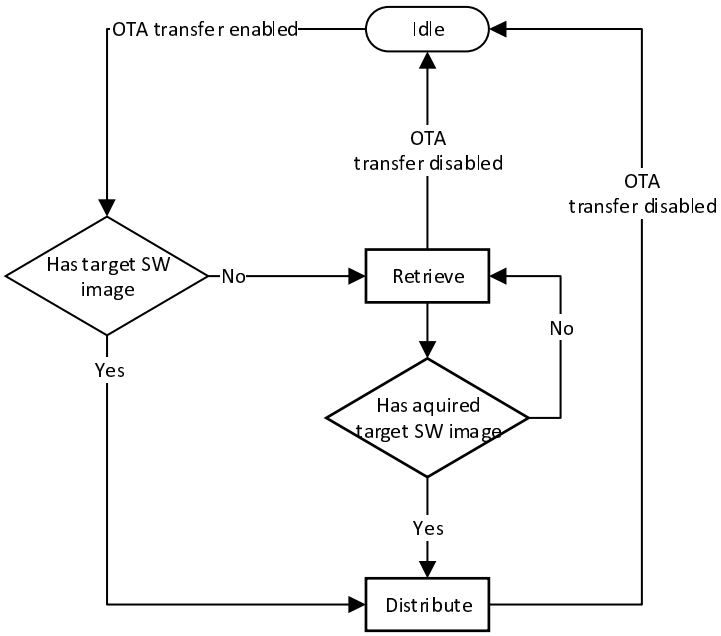


Figure 5.2-2: State diagram for an RD in FT mode operation during image transfer

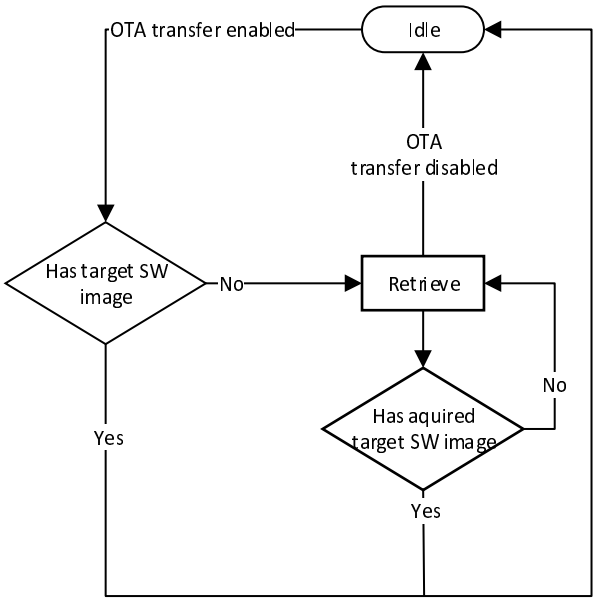


Figure 5.2-3: State diagram for an RD in PT mode operation during image transfer

5.3 OTA Software Image Distribution Procedures

The Software image transfer is illustrated in Figure 5.3-1. The transfer of the software image is performed through the DECT-2020 NR MAC, DLC and CVG layers using the EndPoint defined in Annex A.

The RD in FT mode indicates the availability of the target software by sending the *Software Image Available* message defined in clause 6.2. This message can be sent as a downlink unicast transmission to associated RDs.

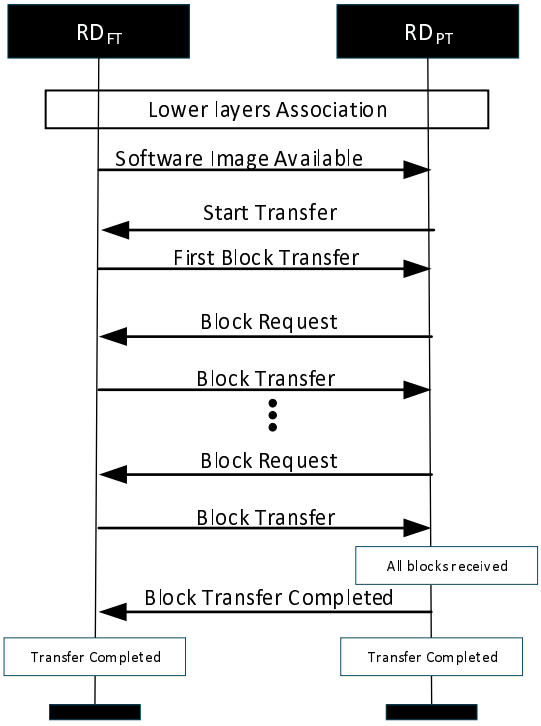


Figure 5.3-1: Signalling flow for the software image transfer

Upon receiving the *Software Image Available* message, the RD in PT mode should apply random delay before initiating software image file transfer. The RD in PT mode shall initiate the software image file transfer by sending a *Start Transfer* message defined in clause 6.3 to RD in FT mode. When RD in FT mode receives the *Start Transfer* message from an associated RD in PT mode, and the RD in FT mode has the capability to start the data transfer process, the RD in FT mode shall respond with a *First Block Transfer* message defined in clause 6.4.

After receiving the *First Block Transfer* message, the RD in PT mode shall request the following data blocks using the *Block Request* message defined in clause 6.6. The RD in FT mode shall respond to a *Block Request* message with a *Block Transfer* message defined in clause 6.7.

If either the RD in FT mode or the RD in PT mode detects an error during the software image transfer it shall send the *Block Transfer Failure* message with error code "*General error; Process is aborted*" defined in clause 6.5 to abort the software image transfer process. If the RD in FT mode receives a *Block Transfer Failure* message with the error code "*General error; Process is aborted*" the RD in FT mode shall consider the process aborted and stop any ongoing data transfer procedure. If the RD in PT mode receives a *Block Transfer Failure* message with the error code "*General error; Process is aborted*" the RD in PT mode shall delete all received segments of the software image and stop sending Block Request messages any further. The RD in PT mode shall not send a new Start Transfer message to that RD in FT mode within the next 300 seconds.

If the RD in FT mode detects an overload condition at the beginning of, or during the software image transfer the RD in FT mode may send the *Block Transfer Failure* message with error code "*FT side high load detected*" defined in clause 6.5 in order to delay or pause the software image transfer process. When RD in PT mode receives the *Block Transfer Failure* message with error code "*FT side high load detected*" the RD in PT mode shall wait at least 300 seconds before sending new a Start Transfer or Block Request message to initiate or continue the software image transfer process.

The RD in PT mode shall recognize that it has received all blocks when there are no empty data blocks between offset 0 and the total software image size received in the *First Block Transfer* message. When the RD in PT mode recognizes that it has received all the blocks of the software image it shall send the *Block Transfer Completed* message to the RD in FT mode. The RD in FT mode shall consider the transfer was successful when it receives the *Block Transfer Completed* message from the RD in PT mode.

5.4 Activating New Software Image

When the RD has received and stored the software image with OTA Software Image ID identical to the one indicated in the OTA Control Element for the given OTA Process ID, the RD shall check the Vendor ID type and the Vendor ID.

If the RD recognizes based on the Vendor ID field that the file is intended for it:

- the RD may send, using vendor specific EndPoint, an indication to backend that it has received the Software Image;
- if the OTA Control Element Action field indicates value 2 for the OTA Process ID, the RD shall:
  - initiate the processing of the software image and take the new software image in use;
- if the OTA Control Element Action field indicates value 3 for the OTA Process ID, the RD shall:
  - start timer *ProcessDelay* as indicated in the Process delay field;
  - if timer *ProcessDelay* expires:
    - initiate the processing of the software image and take the new software image in use.

After taking the new software image in use:

- the RD may send, using vendor specific EndPoint, an indication to the backend that it has taken the Software Image into use.

6 PDU formats of the management application

6.1 General

This clause covers the PDU formats of the OTA management application. The bit ordering is as defined in clause 4.4.

6.2 Software Image Available message

A *Software Image Available* message is sent by the RD in FT mode to indicate the presence of the software image to the other RDs.

Table 6.2-1: Software Image Available message

Field	Size [bytes]	Description
Message ID	1	Set to 0
Version	1	Provides the version of the message
OTA Process ID	1	OTA Process ID, that corresponds to the software image being available

6.3 Start Transfer message

A *Start Transfer* message is sent by the RD in PT mode to request the start of the software image transfer from the RD in FT mode having the target software image.

Table 6.3-1: Start Transfer Message

Field	Size [bytes]	Description
Message ID	1	Set to 1
Version	1	Provides the version of the message
OTA Process ID	1	OTA Process ID being retrieved
OTA Software Image ID	2	OTA Software Image ID to verify that the correct software image is being transferred, calculated as defined in clause 4.2

6.4 First Block Transfer message

A *First Block Transfer* message is sent by the RD in FT mode having the new software image as acceptance of the start of the software image transfer requested by the *Start Transfer* message. The message always contains the first segments of the software image.

Table 6.4-1: First Block Transfer Message

Field	Size [bytes]	Description
Message ID	1	Set to 2
Version	1	Provides the version of the message
OTA Process ID	1	OTA Process ID being retrieved
OTA Software Image ID	2	OTA Software Image ID to verify that the correct software image is being transferred, calculated as defined in clause 4.2
Length	4	Size of the target Software Image in bytes
Software Image data block	rest of the PDU, up to maximum CVG layer SDU size	The first block of bytes of the target Software Image (offset = 0)

6.5 Block Transfer Failure

A *Block Transfer Failure* message is sent by the RD in FT mode or RD in PT mode after detecting an error in software image transfer to abort the ongoing transfer process.

Table 6.5-1: Block Transfer Failure

Field	Size [bytes]	Description
Message ID	1	Set to 3
Version	1	Provides the version of the message
OTA Process ID	1	OTA Process ID being retrieved
OTA Software Image ID	2	OTA Software Image ID to verify that the correct software image is being transferred, calculated as defined in clause 4.2
Error cause	1	Error cause as defined in Table 6.5-2

Table 6.5-2: Error cause

Bit coding	Definition
00000000	FT side high load detected The FT indicated that transfer cannot be initiated or continued. PT side shall wait at least 150 seconds plus random back off value between 0 and 300 seconds before re-initiating the process
00000001	General error; Process is aborted
00000010-11111111	Reserved

6.6 Block Request message

A *Block Request* message is sent by the RD in PT mode requesting the next block of the software image from the RD in FT mode.

Table 6.6-1: Block Request Message

Field	Size [bytes]	Description
Message ID	1	Set to 4
Version	1	Provides the version of the message
OTA Process ID	1	OTA Process ID being retrieved
OTA Software Image ID	2	OTA Software Image ID to verify that the correct software image is being transferred, calculated as defined in clause 4.2
Offset	4	Offset to the beginning of the target Software Image

6.7 Block Transfer message

A *Block Transfer* message is sent by the RD in FT mode as the response to the *Block Request* message to transfer next block of the software image. The message always contains segments of the software image.

Table 6.7-1: Block Transfer Message

Field	Size [bytes]	Description
Message ID	1	Set to 5
Version	1	Provides the version of the message
OTA Process ID	1	OTA Process ID being retrieved
OTA Software Image ID	2	OTA Software Image ID to verify that the correct software image is being transferred, calculated as defined in clause 4.2
Offset	4	Offset to the beginning of the target Software Image
Software Image data block	rest of the PDU, up to maximum CVG layer SDU size	Blocks of bytes of the target Software Image from indicated offset onwards

6.8 Block Transfer Completed message

A *Block Transfer completed* message is sent by the RD in PT mode to indicate complete reception of the software image to the RD in FT mode.

Table 6.8-1: Block Transfer Completed message

Field	Size [bytes]	Description
Message ID	1	Set to 6
Version	1	Provides the version of the message
OTA Process ID	1	OTA Process ID for which the transfer was completed

Annex A (normative): Configuration data distribution for OTA

A.1 General

The Configuration Data Distribution defined in ETSI TS 103 636-5 [3] uses EPs to differentiate Data Items, allowing multiple information elements within a Data Item. The Data Items for the Over the Air Software Update Operation profile are normatively defined below. The OTA profile data is identified with the CVG EndPoint value of 0x8007 as defined in https://portal.etsi.org/PNNS/Protocol-Specification-Allocation/DECT-2020-NR-Endpoint-Multiplexing-Addresses.

Table A.2-1 defines the OTA Control information element and its support is mandatory.

The element content may include features that are optional to support, but the general structure of the element shall be supported as a minimum so that unsupported content is ignored but the next element can be found.

A.2 CDD Information Element: OTA Control Element

The support of this CDD information element is mandatory. The element length is 10 bytes, plus the optional extension fields.

Table A.2-1: OTA Control Element definition

Field Name	# of bits	Explanation
OTA Process ID	8	OTA Process ID that is active in the system
OTA Software Image ID	16	OTA Software Image ID to verify that the correct software image is being transferred, calculated as defined in clause 4.2.
Length	32	Expected size of the target Software Image in bytes
Action	8	Action that is allowed for OTA. Coded as: 0: No action allowed. 1: Software Image distribution allowed for this OTA process 2: Software Image distribution allowed and software image processing allowed for this OTA process ID. 3: Software Image distribution allowed and software image processing allowed after process delay for this OTA process ID
Delay unit	2	Unit of the Process delay field Coded as: 00: reserved 01: Minutes 10: Hours 11: Days
Process delay	6	Process delay value Signalled value is directly given in indicated units
OTA Extensions	8	Provides optional extensions of the OTA Control Element Extensions are included in the indicated order

Table A.2-2: OTA Extensions

Field Name	bit	Explanation
EndPoint	0	When this bit is set, an EndPoint (EP) value, as defined in ETSI TS 103 636-5 [3], is included, indicating that software from a specific vendor is being distributed. Company specific values shall be used for this purpose
Reserved	1-7	Reserved for future use

Annex B (informative): Change history

Date	Version	Information about changes
December 2024	V0.0.1	Skeleton
June 2025	V0.0.2	Updated based on agreement on TC DECT meeting #106 by including content from DECT(25)000047r3 DECT(25)000099
November 2025	V0.0.3	Updated based on proposal in DECT(25)000254r1 and discussion in ETSI TC DECT meeting #108
June 2026	V0.0.6	Final version for TC DECT approval

History

Version	Date	Status
V2.1.1	August 2026	Publication