

## ISOMETRIC IFC - CHECK LIST


Line I	Number	021402VT00	01			Stress C	N / Level		Nº EJ	Level: I							
Isomo	etric Number	023A102140	2VT0001_01			Process	Approval Required		YES	NO <table-cell-columns></table-cell-columns>		Carqill°		Technip	FMC – Butte	erfly Projec	t
	Intrumetation Approval Required (N/A)  YES  NO				<b>J</b>												
Infor	mation to be attach	ed:							•					HOLD	S		
Maste	er Copy of PID:	YES	Х	N/A		Nº 80	00124-024-PID-0021-001		Rev. 0 IFC		Nº		SHORT DE	SCRIPTION		RESOLV	/ED ( <b>√</b> )
PID N	Nodification Sheet:			N/A	X	N°			Rev.								
	ment Vendor Dwg. :	_	х	N/A			096-40-02-C02		Rev.								
	ment Dwg. :	_	X	N/A		N°			Rev.								
$\vdash$	ct By-Pass <sup>(4)</sup> :	YES _		N/A	X	N°			Rev.								
$\vdash$	Approved Isometric:	YES		N/A	X	Rev.			Extraction Date:								
SII A	pproved Isometric:	YES		N/A	X	Rev.			Extraction Date:							<u> </u>	
		(SP)				LDG) De		<u>CHECKED</u> ) Stress Specialist / (LS s / (SL) Spooler / (CHK)					" N/A " NO APLICA / NOT APPLICABLE	IFC ,	REV 0	REV 1	REV 2
		(- )			( - )		ision By : (D) Designer /								у: D	1st-Chk (2) By: I	2nd-Chk (3)
	Nº de línea según l	PID v lieta de	líneas / Line NI	hr accord	ling to PID and line I		ision by . (b) besigner /	(LDG) Design Leader					1	<b>✓</b>	1		-50
5						131							-		ļ!	✓	
Information	Datos de la línea s													<b>*</b>	ļ!	₩	
nfor	Clase de tubería se	egún PID y L	ista de Líneas /	Piping cla	ss according to PID	and Line L	List							<b>*</b>	ļ	✓	
so	Vinculo E3D con Diagrams (Process Unit, Temp Operación, Numeracion TODAS válvulas manuales) / Link between E3D and Diagrams (Process Unit, Op Temp, ALL manual valves Tagged)									<b>*</b>		✓					
	Diámetro de la líne	a indicado e	n número de líne	a en el c	ajetin / Line diamete	r indicated	in the line number in th	ne title block						<b>*</b>		✓	
		uipo modelado según plano Vendor válido para generar isométrica IFC / Equipment modelled according Vendor drawing valid for Isometric IFC generation									-1		<b>V</b>				
ᆴ	Código / Code: 2													*	ļ		
Equipment	Nombre de tubulad	luras según l	PID y plano Ven	dor / Nam	ne of nozzle accordir	g to PID a	nd Vendor drawing						$oxed{oxed}$	<b>*</b>		✓	
Equ	Rating y diámetro d	de tubuladura	as según plano \	/endor / F	Rating and diameter	of nozzles	according to vendor dra	awing					<u> </u>	<b>*</b>		<b>✓</b>	
	Posición y elevació	n de tubulad	luras según plar	o Vendor	/ Position and eleva	ation of noz	zzles according to Vendo	or drawing			_			<b>*</b>		✓	
						Revi	ision By : (D) Designer /	(LDG) Design Leader						Ву	y: D	By: I	_DG
	Línea sin colisión (	verificación i	ncluyendo la nu	be de pur	ntos) / Line is clash f	ree (check	red including points cloud	ıd)						✓		✓	
	,			· ·			<del></del>	<u> </u>	anahus dia 11 1	mented to the control of	ant 1	la u la accesa			+		
							ırıaı para emision / <i>Proce</i>	ess comments to critical lines i	eceived and impler	nentea betore final extra	action fo	or issuance	~				
	Verificación contra P&ID y Lista de Lineas / Check Iso vs P&ID and Line List:  Correcta referencia de la continuidad de la isométrica en líneas nuevas, líneas existentes u otra hoja de la isométrica en los extremos de línea y sus ramales, incluyendo elevaciones y coordenadas / Correct continuity isometric reference to new lines, existing lines or other isometric sheet in each end of the line and its branches including elevations and coordinates										~		<b>✓</b>				
	Verificación contra P&ID / Check Iso vs P&ID: Elementos en línea incluidos, secuencia de picajes, pendiente, sentido de flujo, numeración de instrumentos, cambios de especificación, cumplimiento de notas / in-line components included, branch sequence,									<b>*</b>		✓					
Design	slope, flow direction, instrument numbering, pipe class breaks, notes accomplishment  Verificación contra P&ID / Check Iso vs P&ID : Longitudes requeridas de entrada y/o salida a equipos, distancias y/o elevaciones mínimas o máximas requeridas, formación de condensados / Required inlet and/or outlet lengths to equipments, minimum or									<b>✓</b>		<b>✓</b>					
Line	maximum distances and/or elevations, condensate generation																
-	Comentarios de SI1 a recibidos e implementados antes de extracción final para emisión / Instrumentation comments received and implemented before final extraction for issuance									<b>V</b>							
	Verificación contra Planos de Vendor o Hook-up Instrumentacion / Check Iso vs Instrument Vendor Drawings or Hook-up:  Tamaño de las válvulas de control y de seguridad, instalación de acuerdo a hook-up / Size of control valves and safety valves, instrument installation according to hook-up									•		<b>✓</b>					
	Picajes según tabla de picajes correspondiente / Branch configuration according to correspondent branch table										- 10	•	ļ				
	Venteos y drenajes de Procesos según requerimientos de PIDs y de puntos altos y bajos para prueba hidrostática y modelados según "assembly" correspondiente / Process vents and drains according PID								" 0.0	*		ļ					
	requirements and high and low points for hydrostatic test and modelled according proper assembly								according PID	<b>*</b>							
	Verificación de distancia mínima entre soldaduras / Check minimum distance between welds								~		+						
	Notas explicativas adicionales incorporadas / Additional clarification notes added								~		-						
	ivotas explicativas	auicionales i	ricorporadas / A	Julional	ciarincation notes au		- D (OT) Ot O	-1:-+ / /I OT\ O+ I					•	D.	. 0.7	D	LOT
							,	alist / (LST) Stress Leader						Ву	: ST	By: I	LSI
Stress			· · · · · · · · · · · · · · · · · · ·				s calculation is not await								<u> </u>		
s	Los requisitos segú	ín el cálculo	de stress están	incorpora	dos (si son aplicable	es) / Stress	s calculation requiremen	nts have been added (if applica	ble)								
						Revision B	sy : (SP) Supports Specia	ialist / (LSP) Supports leader						Ву	: SP	By: I	LSP
	La línea está sopor	rtada por con	npleto y la lista d	le soporte	es rellenada / <i>Line is</i>	complete	ly supported and suppor	rt list updated									
	Concepto de sopor	te y separac	ión máxima entr	e soporte	s / Support concept	and suppo	ort spans										
rts		soportes es	tan de acuerdo a	al cálculo	de stress y ajustado	s con el es	specialista de Stress / S	Support requirements according	g to stress calculation	ion note are included an	nd adjusi	sted jointly with					
Supports	stress specialist														ļ!	ļ <sup> </sup>	
เร	Numeración correc												igsquare		<u> </u>	ļ	
	Código de soportes	s correctame	nte indicados (S	TD - SPC	- COM - MRS - PR	F) / Suppo	ort code correctly indicate	ted (STD - SPC - COM - MRS	PRF)								
L	Marcado de eleme	ntos soldado	s de los soporte	s en Iso S	Spool preliminar corr	espondien	nte / Mark-up of welded	supports components in the co	rrespondent prelim	ninary Iso Spool			N/A				
							Revision By : (M	<u>,                                      </u>						Ву	y: M		
							la Lista de Lineas Crítica isometrics require exah	as de Materiales. Sus isometri nustive verification	cas requieren Verif	ficacion exahustiva / Th	e Line b	belongs to some or	N/A		7	i <sup>7</sup>	
	·							All materials are identified in the	ne isometric and are	e listed in the BOM				<b>V</b>			
					•			tubería (Verificar en adicional			namic-t	ito en diseño o:		*	<del>                                     </del>		
<u>8</u>								e tuberia (Verificar en adicional al List (Verify identification nur					N/A				
Materials	Nº de identificación	n de válvulas	manuales (sea	ı́n PID\/ /	dentification number	of manual	I valve (according to PID	0)			•		N/A		+		
Σ									ne /RE EE Dalla *	Machine Polto				<b>1</b>	+		
								s placed according required ty	• • • • •	viacinine BUITS)				<b>V</b>	ļ	<del></del>	
								nsion modelled and reflected in	Isometric BOM				N/A				
	Válvulas colocadas	s según PID	y Piping Class /	Valves pla	aced according PID	an Piping (	Class						N/A				
							Revision By : (Cl	HK) Issuer							Ву:	СНК	
															Chk <sup>(2)</sup>	2nd-C	hk <sup>(3)</sup>
														✓	Х	✓	Х
	La isométrica verifi	cada por Pro	ocesos (SPO) se	correspo	nde a la última revis	sión / The i	isometric verified by Pro	ocess (SPO) corresponds to its	last revision				<b>V</b>				
ᇂ	La isométrica verifi	cada por Ins	trumentación (S	T) se cor	responde a la última	revisión /	The isometric verified b	by Instrumentation (SIT) corres	oonds to its last rev	vision			<u> </u>		<u>                                     </u>	<u>_</u>	
Check	Las notas a mano e	están incorpo	oradas en las isc	métricas	/ The hand-made a	nnotation i	is included							<b>V</b>			
Final	La revisión de los o	documentos	para la verificaci	ón siguer	n siendo las actuales	s / Current	t revision of documents	for checking are still the latest	available					V			
"					ision number and the			<u> </u>							<del>                                     </del>		
								be included or discarded					$\vdash$	¥	+		
								De Incidued of discarded					$\vdash$	<b>V</b>	<del>                                     </del>	<del></del>	
	Holds resueltos o e	en su defecto	By-Pass aprob	ado / Holo	ds resolved or instea	d By-Pass	approved							V			
								SIGNATURES (	Name and date	e)							
	ONLEADER " T'	REVIEWED				T							,	DEVIEWED			
DESI	GN LEADER (LD)		at 9:46 am, Feb 19, 2021	<u></u>		s	UPPORTS LEADER	(LSP)	<u>L</u>			ISSUER	(CHK)	REVIEWED  By oscar at 11:39 a	m, Feb 20, 2021		
STPF	SS LEADER (LST)					,,	IATERIALS	(M)	REVIEWED			DISCIPLINE	LEAD (L)				
JIKE	LLADER (LOT)					IVI	IN LINALO	(191)	By Jose G. Suarez at 10:05 an	m, Feb 20, 2021		DISCIPLINE	-LAD (L)				
_	NOTES:																


- [1] If "X" marqued, a "HOLD" note should be included in the Holds area for justification.
  [2] 1st checking round: Checker to place a (\checkmark) or a (X) confirming or not Designer verification. A (✓) or a (X) should also be placed to confirm or reject any (X) mark placed by the Designer confirming or not the implicit HOLD.
  [3] 2nd checking round: Checker to place a (✓) to validate the points that were not confirmed in the 1st round and were corrected by respective Specialist.
  [4] If an isometric with HOLD is approved by IFC Leader for issuance, the correspondent By-Pass should be attached.



MATERIAL LIST - ERECTION

PT NO	N.S. (MM)	DESCRIPTION	IDENT	QTY
1	80	NM Flat Gk, EN 1514-1, RF as per EN 1092-1, PN 40, IBC Type, Thk=3.2mm, Klingersil C-4430, TA-Luft & EC1935 (D.S. 5101)/ CNAF,	C1MSERAM	1
2	80	GENERIC TRAMSMITTER 021402LT001		1
3	80	1 Set 8 unit x M16 x 50 MM Heavy Hex Machine Bolt w/ 1 Washer, Full Length Threaded, ISO 4017, ISO 3506-1 Gr.A2-70, -, F.Wash. EN ISO 887, A2, EN ISO 7089	C4A7GTFL	1

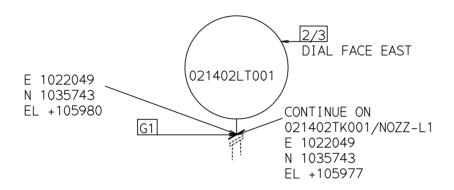

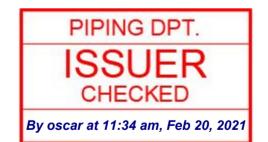

0	01/03/20	ยปPA	LP	OMC	IFC - ISSUED FOR CONSTRUCTION	
REV	DATE	DWN	CHK	APP	DESCRIPTION	

All dimensions to be checked in field prior to construction. Dimensions and routing shall be field adjusted, it is the piping contractors responsibility to check and verify all closing dimensions to equipment and make adjustments as required in field. All dimensions, elevations and coordinates are in millimeter unless noted otherwise. Fieldwelds and overlengths to be determined by piping contractor. Bolt holes to straddle horizontal and vertical centerline unless shown otherwise. Contractor will provide all necessary pipe supports.

021402-80-VT-10SS21-0001

SHEET

of 1

01


	horizo	ntal and vertic	al centerline unless shown otherwis	e. Contractor will provide						
	PROJECT DESCRIPTION/LOCATION									
		BUTTERFLY	TechnipF							
.pe	PROCESS UNIT	DESIGN AREA	LINE	NUMBER						


l						
ſ	NOTES:	REFERENCES / DOCUMENT	Γς	SPEC	10SS21	
l	NOTES.	NEI ENENCES / DOCOMEN		SYMBOLOGY		
For pines < dp50 supporting to	For pipes < dn50 supporting to be studied and defined by construction contractor before	LINE LIST	30201-042-001000-001	Insulated Pipe	Insulated and Traced Pi	
l	line fabrication and installation.	ISOMETRIC INDEX	30303-042-023000-200	]		
l		PIPING SUPPORT	30207-042-021300-001	]		



MATERIAL LIST - ERECTION

PT NO —	N.S. (MM)	DESCRIPTION	<u>IDENT</u>	QT\
1	80	NM Flat Gk, EN 1514-1, RF as per EN 1092-1, PN 40, IBC Type, Thk=3.2mm, Klingersil C-4430, TA-Luft & EC1935 (D.S. 5101)/ CNAF,	C1MSERAM	1
2	80	GENERIC TRAMSMITTER 021402LT001		1
3	80	1 Set 8 unit x M16 x 50 MM Heavy Hex Machine Bolt w/ 1 Washer, Full Length Threaded, ISO 4017, ISO 3506-1 Gr.A2-70, -, F.Wash. EN ISO 887, A2, EN ISO 7089	C4A7GTFL	1

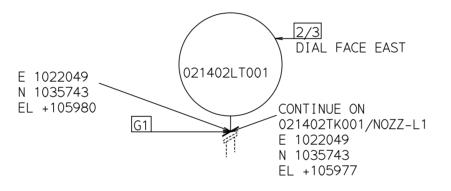

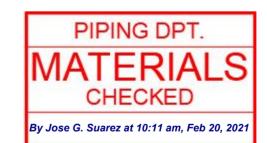

0	01/03/20	ยปPA	LP	OMC	IFC - ISSUED FOR CONSTRUCTION
REV	DATE	DWN	CHK	APP	DESCRIPTION

All dimensions to be checked in field prior to construction. Dimensions and routing shall be field adjusted, it is the piping contractors responsibility to check and verify all closing dimensions to equipment and make adjustments as required in field. All dimensions, elevations and coordinates are in millimeter unless noted otherwise. Fieldwelds and overlengths to be determined by piping contractor. Bolt holes to straddle all necessary pipe supports.

. Contractor will provide a	izontal and vertical centerline unless shown otherwise
TechninFM	OJECT DESCRIPTION/LOCATION
TechnipFM	BUTTERFLY PROJECT/KREFELD


	TION/LOCATION PROJECT/KREFELD	*	TechnipFMC	Cái	gill'	
4	LINE N	TRAIN	SHEET	REV		
	021402-80-VT-10S	S21	-0001	01	1 of 1	0

						1101 62011	itat and vertica	at	
	NOTES:	REFERENCES / DOCUMENT	. <	SPEC	10SS21	PROJECT D			
NOTES.		THE ENERGES / DOCOMENT	J	SYMBOLOGY			BUTTERFLY F		
For pipes a dp50 suppor	For pipes < dn50 supporting to be studied and defined by construction contractor before	LINE LIST	30201-042-001000-001	Insulated Pipe	Insulated and Traced Pipe			т	
	line fabrication and installation.	ISOMETRIC INDEX	30303-042-023000-200	<u> </u>		UNIT	DESIGN AREA	ot	
		PIPING SUPPORT	30207-042-021300-001			024	023A1		



MATERIAL LIST - ERECTION

PT NO —	N.S. (MM)	DESCRIPTION	IDENT	QTY
1	80	NM Flat Gk, EN 1514-1, RF as per EN 1092-1, PN 40, IBC Type, Thk=3.2mm, Klingersil C-4430, TA-Luft & EC1935 (D.S. 5101)/ CNAF,	C1MSERAM	1
2	80	GENERIC TRAMSMITTER 021402LT001		1
3	80	1 Set 8 unit x M16 x 50 MM Heavy Hex Machine Bolt w/ 1 Washer, Full Length Threaded, ISO 4017, ISO 3506-1 Gr.A2-70, -, F.Wash. EN ISO 887, A2, EN ISO 7089	C4A7GTFL	1

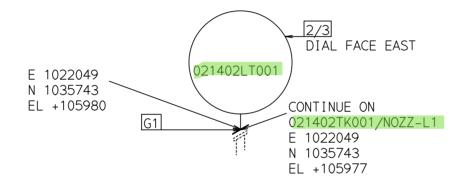





0	01/03/20	ยปPA	LP	OMC	IFC - ISSUED FOR CONSTRUCTION
REV	DATE	DWN	CHK	APP	DESCRIPTION

All dimensions to be checked in field prior to construction. Dimensions and routing shall be field adjusted, it is the piping contractors responsibility to check and verify all closing dimensions to equipment and make adjustments as required in field. All dimensions, elevations and coordinates are in millimeter unless noted otherwise. Fieldwelds and overlengths to be determined by piping contractor. Bolt holes to straddle horizontal and vertical centerline unless shown otherwise. Contractor will provide all necessary pipe supports.

	hortzor	ntal and vertic	al centerline	unless	shown	otherwise.	Contractor Will pi		
	PROJECT DESCRIPTION/LOCATION								
ipe	BUTTERFLY PROJECT/KREFELD				Techni				
rpe	PROCESS UNIT	DESIGN AREA	LINE NUMBER				UMBER		

BUTTERFLY PROJECT/KREFELD			TechnipFMC	Cárgilli*		
	DESIGN AREA	LINE NUMBER			SHEET	REV
	023A1	021402-80-VT-10S	S21-0001	01	1 of 1	0

NOTES:	REFERENCES / DOCUMENT	-C	SPEC	10SS21	Ī
NOTES.	THE LINEINGES / DOCOMENT	J	SYMBOLOGY		
For pipes < dn50 supporting to be studied and defined by construction contractor before	LINE LIST	30201-042-001000-001	Insulated Pipe	Insulated and Traced Pipe	PI
line fabrication and installation.	ISOMETRIC INDEX	30303-042-023000-200		<del></del> _	_
	PIPING SUPPORT	30207-042-021300-001			(