
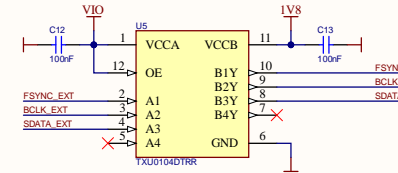


BRAD6515 - SSM6515 Breakout Board

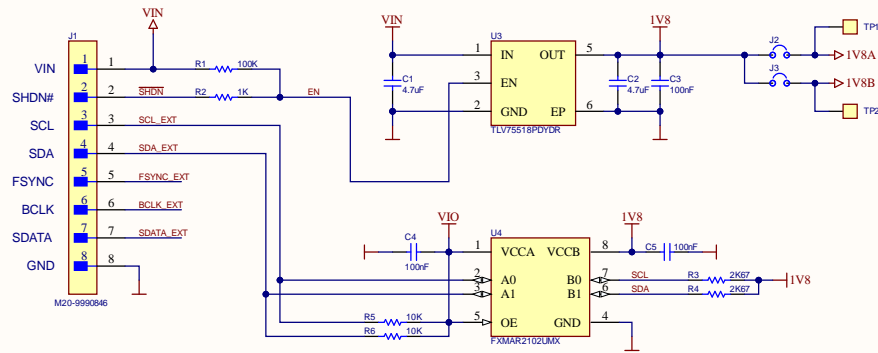

I2C ADDRESS SELECT			
J11	J12	AMP1 (U1)	
J19	J20	AMP2 (U2)	
1-2	CLOSED	0x34	
1-2	OPEN	0x35	
OPEN	OPEN	0x36	
2-3	OPEN	0x37	
2-3	CLOSED	STANDALONE	

MODE SELECT		
	I2C	STANDALONE
J7/J8 (AMP1)	CLOSED	OPEN
J15/J16 (AMP2)	CLOSED	OPEN

STANDALONE MODE				
AMP1	J5	J6	J9	J10
AMP2	J13	J14	J17	J18
I2S-L	OPEN	CLOSED	1-2	1-2
I2S-R	OPEN	CLOSED	2-3	1-2
PDM-L 3M	1-2	OPEN	1-2	2-3
PDM-R 3M	2-3	OPEN	1-2	2-3
PDM-L 6M	1-2	OPEN	2-3	2-3
PDM-R 6M	2-3	OPEN	2-3	2-3

DEFAULT JUMPER CONFIGURATION (I2C MODE)																
J2	J3	J5	J6	J7	J8	J9	J10	J11	J12	J13	J14	J15	J16	J17	J18	J19
CLOSED	OPEN	OPEN	CLOSED	CLOSED	CLOSED	OPEN	OPEN	1-2	CLOSED	OPEN	CLOSED	CLOSED	CLOSED	OPEN	OPEN	1-2

