

SCT013 Split core current transformer



Product features

- Safety lock buckle, Simple installation
- Audio connector output
- Lead type output, The length can be customized
- Suspended mounting

Product application


- Portable instrument
- Household metering
- Monitoring the load of the machine

Product advantage


- Small volume, Light weight
- Low cost
- High turns, High precision

Installation diagram


One time threading




1. Open the buckle



2. Open the buckle



3. Drop lead



4. Fasten the buckle

Typical technical index:


- Core material——ferrite
- Working voltage——Phase voltage≤720V
- Working temperature——-25℃ ~ +60℃
- Storage temperature——-30℃ ~ +90℃
- Frequency range——50Hz ~ 1KHz
- Dielectric strength——Input (bare conductor) /output AC 800V/1min 5mA 50Hz
output /Outer shell AC 3.5KV/1min 5mA 50Hz

Electrical parameters

Model	Input current	output	Turns	Load resistance	Accuracy	linearity	weight
SCT013-000	100A	50mA	1: 2000	10 Ω	1%	1%	50 g
SCT013-005	5A	1V	-	built-in	1%	1%	50 g
SCT013-010	10A	1V	-	built-in	1%	1%	50 g
SCT013-015	15A	1V	-	built-in	1%	1%	50 g
SCT013-020	20A	1V	-	built-in	1%	1%	50 g
SCT013-025	25A	1V	-	built-in	1%	1%	50 g
SCT013-030	30A	1V	-	built-in	1%	1%	50 g
SCT013-050	50A	1V	-	built-in	1%	1%	50 g
SCT013-060	60A	1V	-	built-in	1%	1%	50 g
SCT013-000V	100A	1V	-	built-in	1%	1%	50 g

Model	Input current	output	Turns	Load resistance	Accuracy	linearity	weight
SCT013	5A	0.333V	-	built-in	1%	1%	50 g
SCT013	10A	0.333V	-	built-in	1%	1%	50 g
SCT013	15A	0.333V	-	built-in	1%	1%	50 g
SCT013	20A	0.333V	-	built-in	1%	1%	50 g
SCT013	25A	0.333V	-	built-in	1%	1%	50 g
SCT013	30A	0.333V	-	built-in	1%	1%	50 g
SCT013	50A	0.333V	-	built-in	1%	1%	50 g
SCT013	60A	0.333V	-	built-in	1%	1%	50 g
SCT013	100A	0.333V	-	built-in	1%	1%	50 g


Wiring schematic diagram:

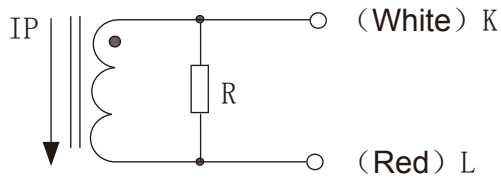

Built-in with sampling resistance

Voltage output type

Secondary are not allowed to short circuit

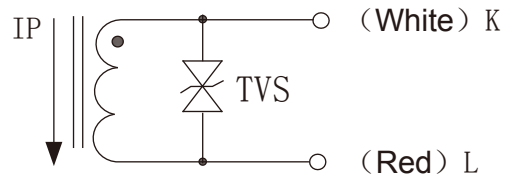


TVS: Transient voltage suppressor


Current output type

Secondary does not allow open circuit


Dimensions (in mm) :

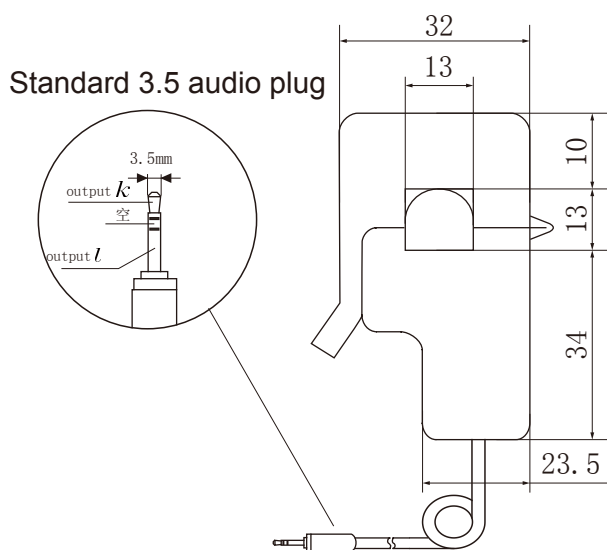

Front view

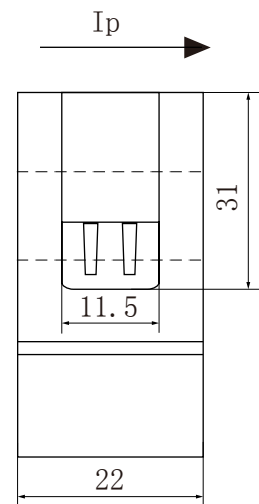

Side view

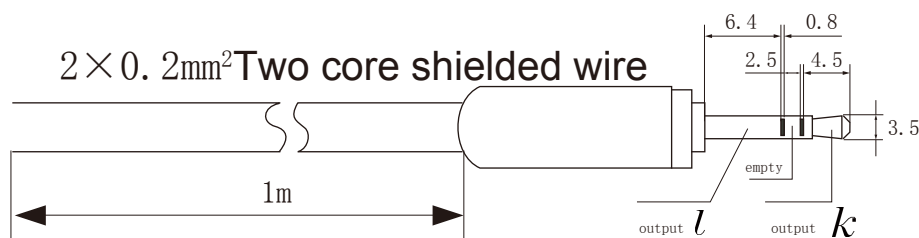

Standard three-pin plug diagram

