Low voltage cables type GKN Cu

GKN 4 X 6/6 Cure 0.6/1 kV

Contact

Phone: +41 32 843 55 55
sales.ch@nexans.com

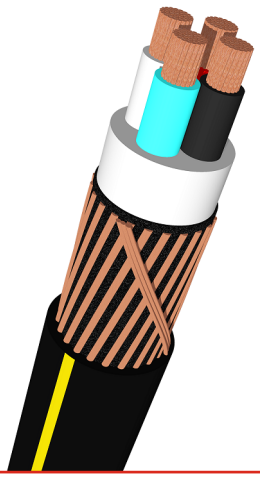

International Designation: NHXC2Y
Nexans Ref.: 10512716
EAN 13: 7611755568399

LV underground distibution cable with **cross-linked HEPR insulation** and **concentric copper-wire conductor**.

DESCRIPTION

Applications

- Underground distribution networks
- Pipe laying and ground laying
- Installation in electrical substations

Construction

- Copper or aluminium conductor
- Cross-linked HEPR insulation
- Assembly of insulated conductors
- Extruded filler
- Ceander concentric conductor made of copper wire
- Black PE outer sheath with 2 yellow longitudinal stripes

Properties

- Cross-linked insulation with high resistance to high operating temperatures in case of overload and short circuit.
- No release of corrosive gases = safe installation
- Outer sheath made of specially abrasion-resistant PE with low shrinkage rate.
- No interruption of the protective conductor when making a branch
- Halogen-free

DECLARATION OF PERFORMANCE

F_{ca}

STANDARDS

International HD 603; IEC 60228

National ASE

Conductor flexibility
Solid class 1

Halogen free
Yes

Rated Voltage Uo/U (Um)
0.6/1 kV

Bending factor when laying
10 (xD)

Bending factor installed
8 (xD)

Maximum operating temperature
90 °C

Minimum installation temperature
-5 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.

Low voltage cables type GKN Cu

GKN 4 X 6/6 Cure 0.6/1 kV

Contact

Phone: +41 32 843 55 55
sales.ch@nexans.com

CHARACTERISTICS

Construction characteristics	
Conductor material	Copper
Conductor shape	Circular
Conductor flexibility	Solid class 1
Insulation	HEPR
Number of conductors	4
Core identification	Red, White, Blue, Black
Material of the outer core / screen	Copper wires
Outer core type	Waveform concentric
Outer sheath	PE
Sheath colour	Black + 2 yellow lines
Halogen free	Yes
Dimensional characteristics	
Conductor cross-section	6 mm²
Conductor diameter	2.7 mm
Diameter over insulation	4.0 mm
Screen section	6 mm²
Diameter over external conductor / metallic screen	13.8 mm
Nominal outer diameter	17.1 mm
Approximate weight	48.7 kg/100m
Auxiliary cable diameter	- mm
Electrical characteristics	
Rated Voltage Uo/U (Um)	0.6/1 kV
Maximum operating voltage	1 kV
Perm. current rating in air 30°C - trefoil formation	55 A
Perm. current rating buried 20°C - trefoil formation	51 A
Nominal phase capacitance	0.186 µF / km
Impedance (AC) at max. operating temperature	3.927 Ohm
Phase reactance 50 Hz - trefoil formation	0.09 Ohm/km
Max. DC resistance of the conductor at 20°C	3.08 Ohm/km
Mechanical characteristics	
Maximum pulling force by laying	0.96 kN
Usage characteristics	
Bending factor when laying	10 (xD)
Bending factor when installed	8 (xD)
Maximum operating temperature	90 °C
Short-circuit max. conductor temperature	250 °C
Minimum installation temperature	-5 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.