



How to Reset Password Quick Guide

(How to reset password of IPC/PTZ/DVR/NVR)

HIKVISION TECHNICAL SUPPORT TEAM



Hikvision Support Team

Requested Information

Thank you for purchasing HIKVISION products! With the form below you can apply for a password recovery. In order to proceed with the password recovery request, we need your information for security purposes. Please kindly complete the form below and sent it to

Hikvision's Technical Support at: support@pramahikvision.com together with the *.XML file or *.EXCEL file previously exported from your device. After we received your email we will confirm the information and if everything is correct we will provide you with a *.XML file or reset codes.

Customer Information	
Name*:	
Email: *	
Phone: *	
Company*:	
Address:	
Country*:	
Are you a distributor, professional installer, reseller, retailer or end-user?*	
Name of distributor, professional installer, reseller, retailer or website where you did purchased your product?*	
Purchasing channel* (from what company)	
Complete Device Serial Number*: (example:DS-72xxABCD-XY/SN123456789ABCD123456789ABCD)	
Current date on device* : (example: 2014-05-22)	
Firmware Version*:	

Device start time & date on SADP* :
(example: 2014-05-22 1:11 PM)

Note: The items marked with * are required.

NOTE: In order to fill in the form you'll
need to download Adobe Acrobat
Reader at: www.adobe.com

Click on **Fill & Sign** at the right side of
Adobe Acrobat Reader menu to enter
text into the digital form.

Thank you for purchasing HIKVISION products!

For security reasons we need your information in order to proceed with the password recovery. Please kindly complete the form below and sent it to Hikvision's Technical Support: support.eu@hikvision.com together with the *.XML file previously exported from your device.

Customer Information	
Name*	
Email:	
Contact Number:	
Company Name*	
Company Address:	
Country*	
Type* (End user, Installer, Distributor, etc.)	
Purchase from: (what company)*	
Device Information	
Firmware Version*	
Complete Device Serial Number*	
Start Date*	

Note: The items marked with * are required.

Click on Fill & Sign to enter text on the form


How to reset password

Reset password by SADP Tool

SADP Tool

<https://www.hikvisioneurope.com/eu/portal/?dir=portal/Technical%20Materials/11%20%20Software%E3%80%90For%20Latest%20Tools%26Software%2C%20please%20download%20directly%20from%20Hikvision%20Website%E3%80%9100%20%20Software%20Tool%20Package/01%20%20%20SADP%20Tools/V3.0.2.4>

Connect the device to local network and open SADP Tool to search online devices. Select the device and click **Forget Password**:

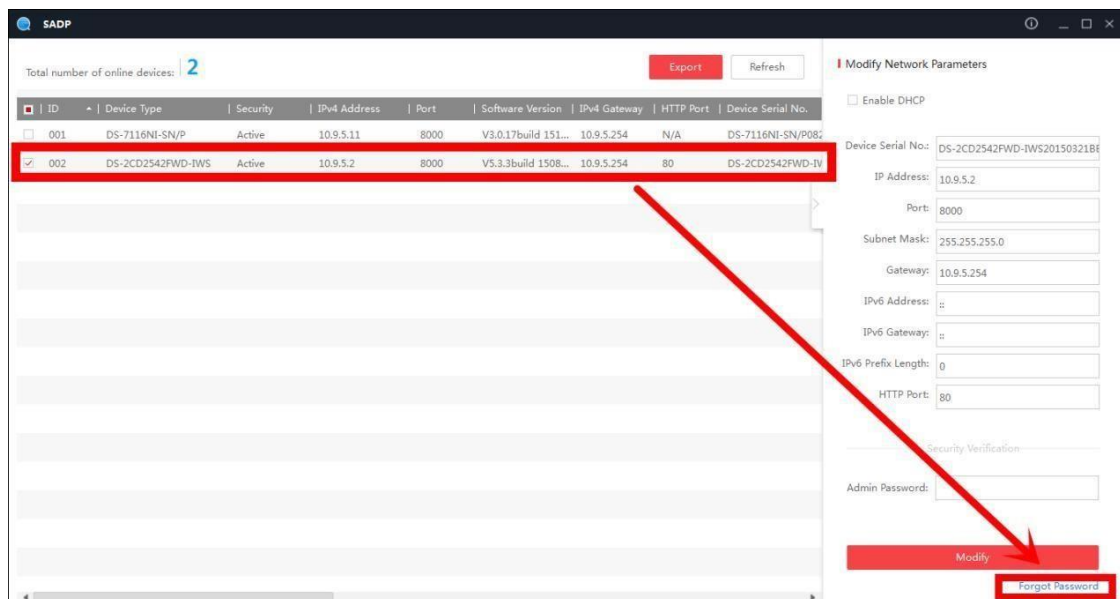


You might see one of the Two pop-ups.

1. If the pop-up requires a security code, please turn to **Method 1.**
(Security code Method)



A dialog box titled "Restore Default Password" with a red header bar and a close button (X) in the top right corner. The main content area is white and contains the text "Restore Default Password" followed by a label "Security Code:" and a text input field. At the bottom right, there are two buttons: "Confirm" (red) and "Cancel" (white).

2. If the pop-up requires encrypt file, please turn to **Method 2.**
(Encrypt_key Method)

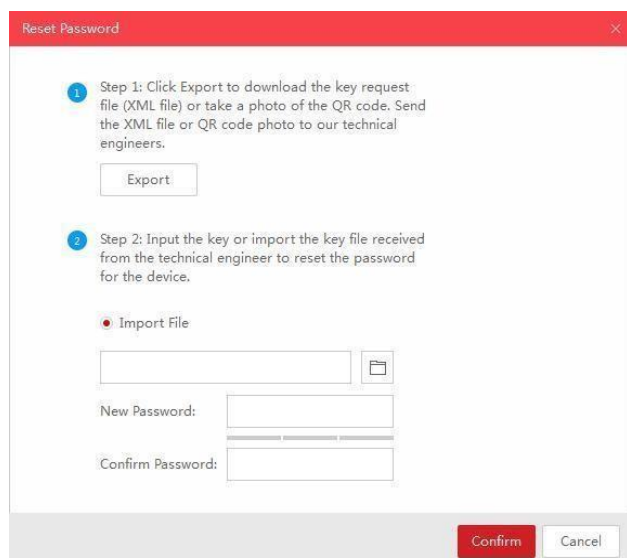

A dialog box titled "Reset Password" with a red header bar and a close button (X) in the top right corner. The main content area is white and contains two steps:
Step 1: Click Export to download the key request file (XML file) or take a photo of the QR code. Send the XML file or QR code photo to our technical engineers. Below this text is an "Export" button.
Step 2: Input the key or import the key file received from the technical engineer to reset the password for the device. Below this text is a radio button labeled "Import File" which is selected. Underneath is a text input field with a file selection icon (a folder with a plus sign) to its right. Below the input field are two more input fields labeled "New Password:" and "Confirm Password:". At the bottom right, there are two buttons: "Confirm" (red) and "Cancel" (white).

Method 1 Device Information (Security Code Method)

Select the Device and Click on The Export Option Select Any Folder Path and Provide Any File Name and click on the Confirm (File Will be save on CSV or XL Format)

The screenshot shows the SADP web interface. At the top, it says 'Total number of online devices: 5'. Below this is a table of devices. The 'Export' button is circled in red. An arrow points to it with the text 'Click here'. A dialog box titled 'Export Excel' is open, showing fields for 'File Name' and 'File Path'. The 'File Path' field contains 'C:\'. The 'Confirm' button is highlighted in red.

ID	Device Type	Security	IPv4 Address	Port	Software
001	DS-7204HGHI-B1	Active	172.19.2.54	8000	V3.4.75b
002	DS-7216HGHI-SH/16	Active	172.19.2.62	8000	V3.3.2bu
003	DS-A81016S	Active	172.19.2.123	8000	Storos
004	DS-7216HWI-SH	Active	172.19.2.205	9000	V3.0.1
005	STORAGE-SERVER	Active	172.19.2.69	8000	V1.2.1bu

Export Excel

File Name:

File Path:

Modify Network Parameters

☐ Enable DHCP

Device Serial No.:

IP Address:

Port:

Subnet Mask:

Gateway:

IPv6 Address:

IPv6 Gateway:

IPv6 Prefix Length:

HTTP Port:


Security Verification

Admin Password:

[Forgot Password](#)

After receiving security code, Put in the Security code option as Shown in the Snap Shot.


Input security code and click **Confirm**. The password will be reset to 12345.

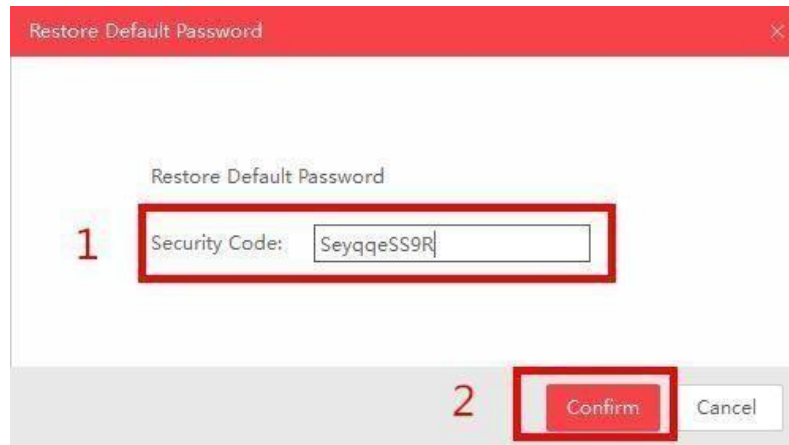


Method 2 XML File (Encrypt key Method)

Click **Export** to save XML file, send the XML file to HIKVISION technical support team.

Note: Do not reboot your device or Export the file again before import the encrypt file. if you had reboot or else please added the newest XML file

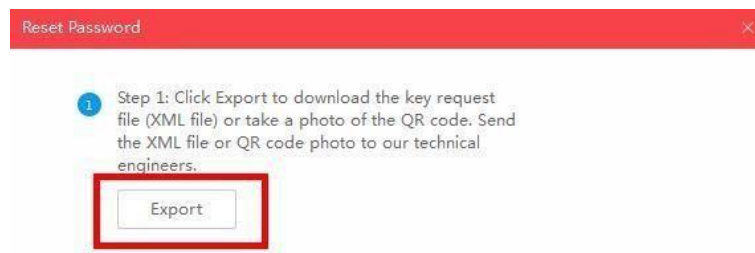

HIKVISION technical support team will return Encrypt file. Choose the path of the Encrypt file in Import File Option, input your new password and confirm, click **Confirm** and your password will be reset.

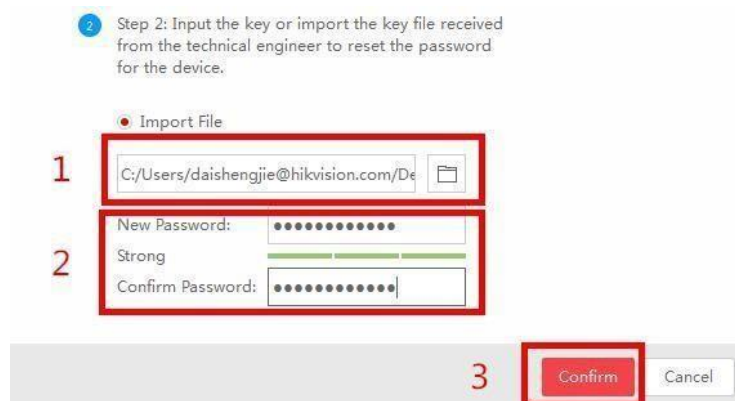

New password resetting strategy

Note:

(1) New password resetting strategy is available for **-E/-K/-I series NVR from V3.4.90**, and **Turbo 3.0 DVR (DS-HG/HO/HUHI-E series) from V3.4.80**. With this

Strategy, customers would be able to reset device password on their own.


(1) **All password resetting strategies below are only valid in local area network.**


Local GUI, SADP, iVMS-4200, and Web client support new password resetting strategy.

(3) **The security code resetting strategy (enter by double click left bottom corner of login interface) is removed from this version.)**

Method 1 GUID File

(1) User can export the GUID file **in advance** and reset the password by importing the GUID file when needed. Remember to key in the old password before exporting the GUID file. Please notice that if the admin password is changed or GUID file has been used, GUID file will be invalid.

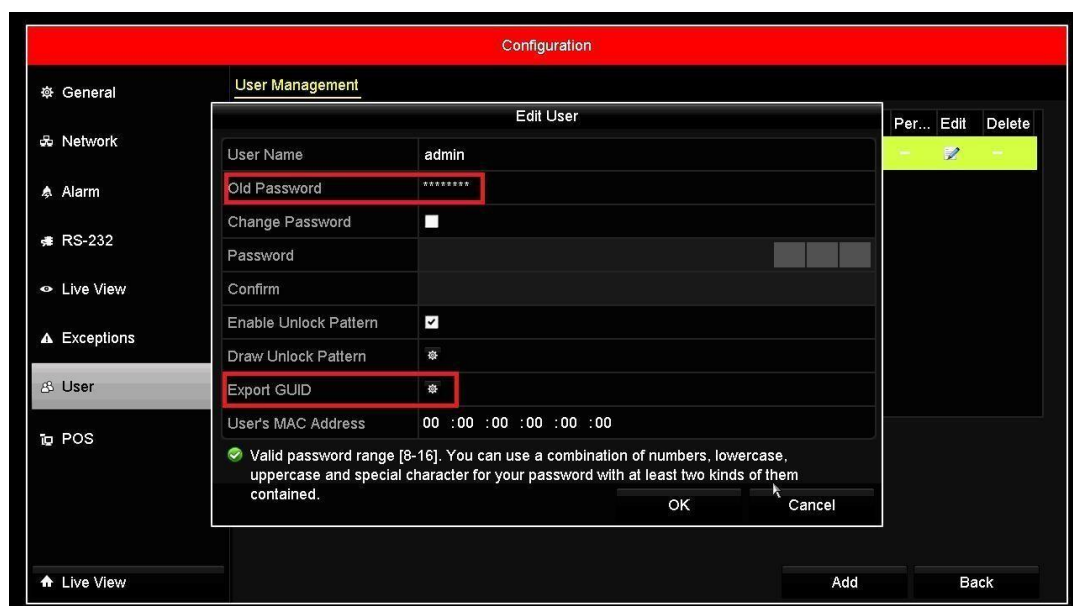


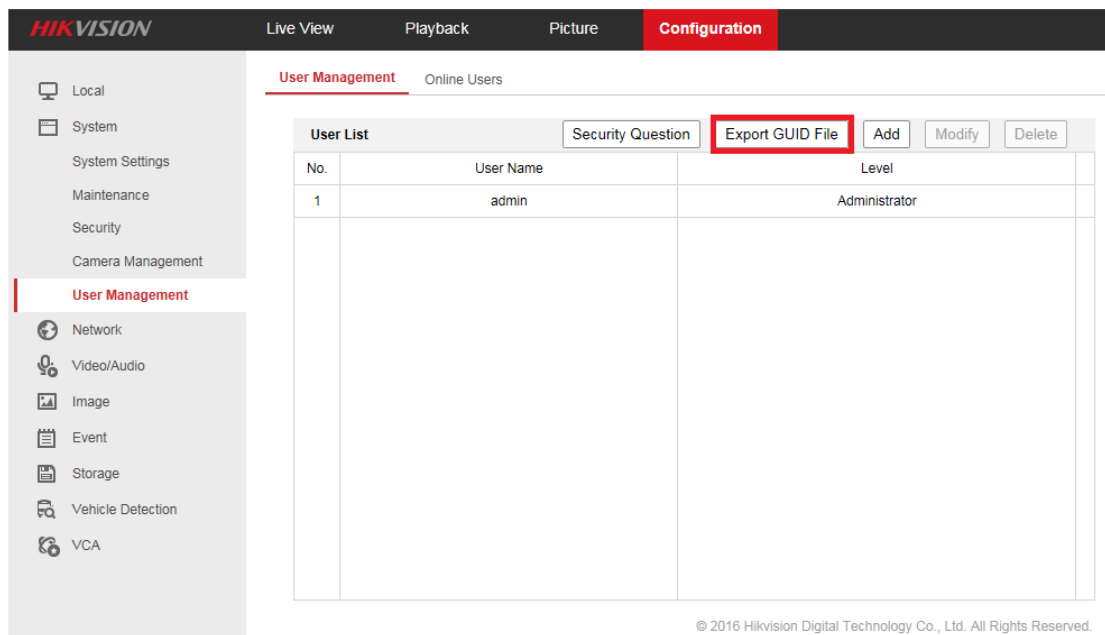

(2) When you forget your device password, enter new password resetting interface by clicking **Forget password**.




(3) Find the exported GUID file, then import it to reset device password.

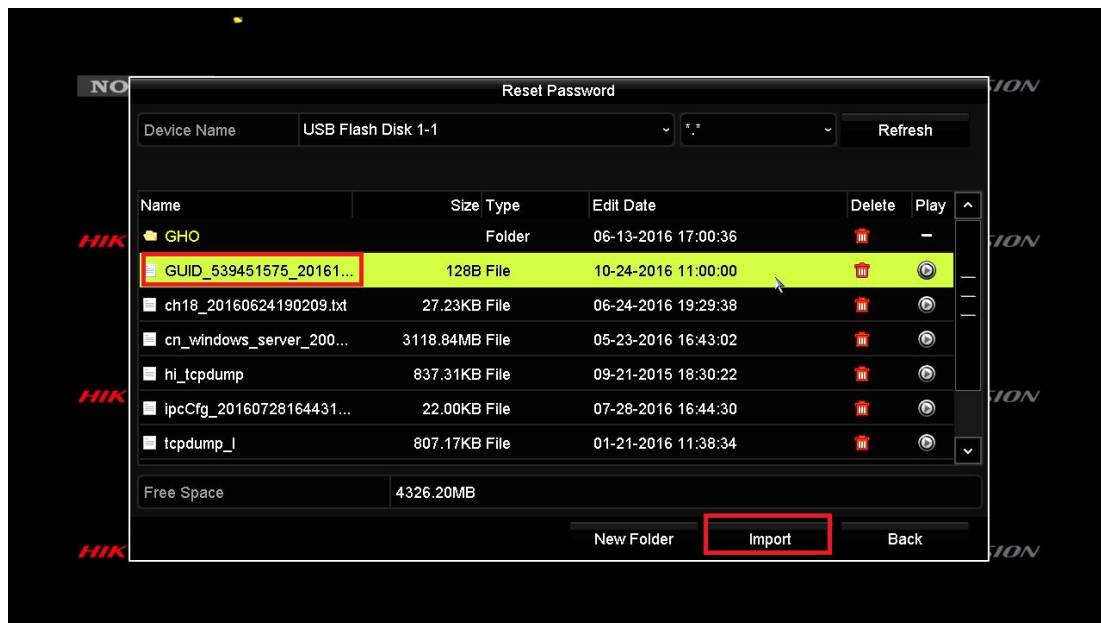

Method 2 Validation Question

(1) User can set validation questions and reset the password by answering the pre-set questions when needed.

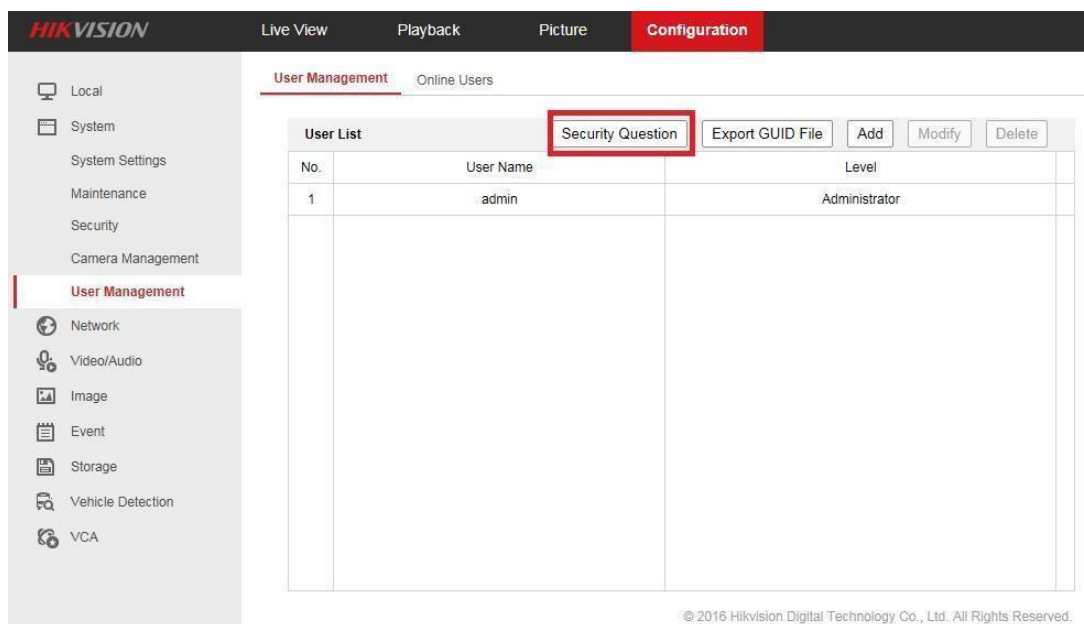

Security Question Configuration

Security Question1

You father's name.

Answer

Security Question2

You mother's name.

Answer

Security Question3

Your senior class teacher's name.

Answer

OK

Cancel

(2) When you forget your device password, enter new password resetting interface by clicking **Forget password.**

HIKVISION

English

User Name

Password

Forget password?

Login

© 2016 Hikvision Digital Technology Co., Ltd. All Rights Reserved.

(3) After answering all the questions correctly, you'd be able to change your device password.

1

2

3

Verify IdentificationSet f4ew PasswordComplete

Verification ktode	<u>Secunty Question Venfication</u>	•
Sec urity Question 1	<u>You father's name.</u>	•
Answer		
Security Quesdon2	<u>You mother's name.</u>	•
Answer		
Security Question 3	<u>Your senior class teacher's name.</u>	•
Answer		


Net

Clear

Troubleshooting:

In case that you do not succeed and still having problems to reset the password check following steps:

If you get the error message: **Reset password failed.**

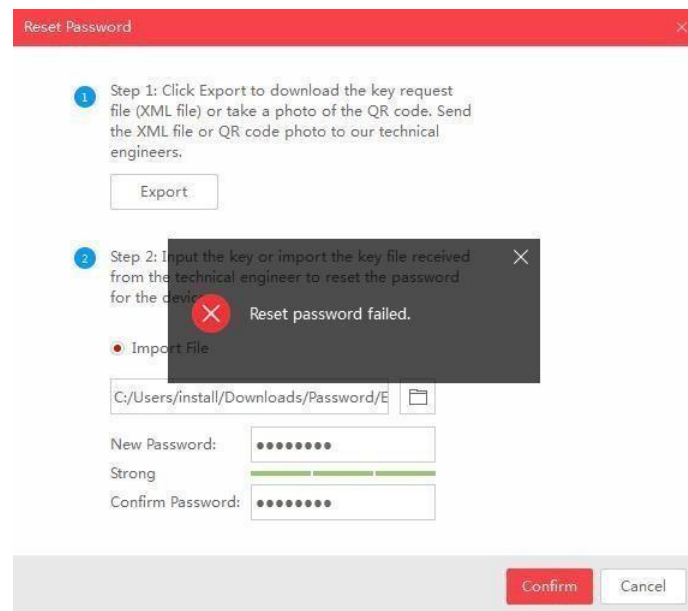

- Make sure that all your devices (*computers, cameras, recorders, switches, etc.*) are connected to same IP range in your LAN (*Local Area Network*).
- If you are using a laptop which is connected to same switch via a network cable, not WIFI connection, make sure that your WIFI adapter is disabled. Then restart SADP tool and try again. If you make any changes to your IP address while SADP is on, then you'll need to restart SADP for the changes to apply.
- Kindly keep your device online after sending the *.xml file or *.excel file to us.

First Choice for Security Professionals

Hikvision Technical Support