

Syringenator

Generated by Doxygen 1.8.16

---

<b>1 README</b>	<b>1</b>
1.1 Development Team Hephaestus . . . . .	1
1.2 HypoRobot Assignment . . . . .	1
<b>2 Requirements</b>	<b>2</b>
2.1 Terminology . . . . .	2
2.2 Rules of the Game . . . . .	3
<b>3 Todo List</b>	<b>4</b>
<b>4 Namespace Index</b>	<b>4</b>
4.1 Namespace List . . . . .	4
<b>5 Class Index</b>	<b>4</b>
5.1 Class List . . . . .	4
<b>6 File Index</b>	<b>4</b>
6.1 File List . . . . .	4
<b>7 Namespace Documentation</b>	<b>5</b>
7.1 constants Namespace Reference . . . . .	5
7.1.1 Variable Documentation . . . . .	6
7.2 Syringenator Namespace Reference . . . . .	11
7.2.1 Detailed Description . . . . .	11
7.2.2 Function Documentation . . . . .	12
7.2.3 Variable Documentation . . . . .	15
<b>8 Class Documentation</b>	<b>15</b>
8.1 Syringenator.Target Class Reference . . . . .	15
<b>9 File Documentation</b>	<b>15</b>
9.1 README.md File Reference . . . . .	15
9.2 requirements.md File Reference . . . . .	15
9.3 src/constants.py File Reference . . . . .	15
9.3.1 Detailed Description . . . . .	17
9.4 src/controller/constants.hpp File Reference . . . . .	17
9.4.1 Detailed Description . . . . .	19
9.4.2 Macro Definition Documentation . . . . .	19
9.5 src/controller/controller.ino File Reference . . . . .	24
9.5.1 Detailed Description . . . . .	24
9.5.2 Function Documentation . . . . .	25
9.6 src/controller/Syringenator.hpp File Reference . . . . .	25

9.6.1 Detailed Description . . . . .	26
9.6.2 Function Documentation . . . . .	26
9.7 src/Syringenator.py File Reference . . . . .	29
9.7.1 Detailed Description . . . . .	30

<b>Index</b>	<b>31</b>
--------------	-----------

## 1 README

University of Washington

TCES 460

Winter 2019

### 1.1 Development Team Hephaestus

#### Authors

Name	Email
Alex Boyle	???
Ammon Dodson	<a href="mailto:ammon0@uw.edu">ammon0@uw.edu</a>
Alex Marlow	<a href="mailto:alexmarlow117@gmail.com">alexmarlow117@gmail.com</a>
Jake McKenzie	<a href="mailto:jake314@uw.edu">jake314@uw.edu</a>
Brooke Stevenson	???

#### Copyright

Copyright © 2019 by the authors. All rights reserved.

### 1.2 HypoRobot Assignment

If you've been paying any attention at all to current events you know that a major plague has descended on cities and counties throughout the country in the form of used and discarded hypodermic needles. Countless hours are spent cleaning up this mess. For instance, some schools are forced, for safety reasons, to send staff out to scour the playgrounds prior to children showing up.

Your task this quarter will be to design an autonomous robot that can help automate the arduous and sometimes dangerous job of spotting, retrieving, and disposing of hypodermic syringes.

Your robot will be a prototype, not a fully functional disposal robot, but it will have important technical features necessary on such a robot.

A second point is that we will be dealing with industrial (i.e. dull) syringes. These are typically used to disburse such things glue or solvents. They are commonly used in our labs to glue acrylic parts together. Anyone in the lab with a sharp needle will be immediately disqualified. Even so, if you would rather not design and test with any syringe, you may, with my written permission, use a ballpoint pen, a #2 pencil or a similar object of your choosing.

All testing will be done indoors on a flat surface.

–Robert Gutmann, Ph.D.

## 2 Requirements

### Author

Robert Gutmann, Ph.D.

### 2.1 Terminology

The following terms are used in this specification:

- The term “autonomous”, in this case, means that no commands can be transmitted to your robot from any outside agency (especially from a human or computer or other controller) and all sensors used in the contest must be physically attached to your robot. No wired connections are allowed between any outside agency and your robot.
- The term “course” refers to the area in which the contest takes place.
- The term “tape line” refers to an oval of white tape that runs from a start point around the oval, back to the start point (which is now the finish point). All targets will be placed outside of the oval.
- The term “target” refers to the object you are required to pick up and dispose of (syringe or, alternatively, a pen or pencil).
- The term “decoy” refers an object on the course that is not a target. A decoy will be less than 2 cm tall.
- The term “obstacle” refers to an object on the course that your robot must avoid running into. An obstacle will be at least 15 cm tall. A typical obstacle would be a cardboard box.
- The term “finish the course” will mean that your robot traverses the oval at least once. Note: Your robot will have to leave the tape line to pick up targets, but it should eventually either find another target or return to the tape line. The tape line is your navigation aid.
- The term “contact a target” will mean to touch a target with your pick-up mechanism in such a way as to move it. Note: moving a target with a robot wheel or track does not count as a contact.
- The term “participate” will mean that you either finish the course or contact a target.
- The term “acquire a target” means your robot has reported to its data logger that it has identified a target and reports an accurate position for that target. The term “acquire a decoy” means your robot has reported to its data logger that it has acquired a target that turns out to be a decoy.
- The term “pick up a target” refers to your robot picking up a target off the course surface.
- The term “dispose of a target” refers to your robot placing the target in container on your robot.
- A robot is “stationary” if its wheels are not rotating and its arm is not rotating about its vertical axis.

## 2.2 Rules of the Game

- You will be given two test runs, one per day over two class periods. The dates will be firmly established by midterm time.
- All tests will be conducted indoors.
- A somewhat different course may be laid out each day. The layout will consist of:
  - A tape line; this will serve as your navigation maker. Since we will be indoors, we won't have GPS; the tape line will serve as your navigation reference.
  - A number of targets will be placed within 1 meter of the tape line; you will have to leave the tape line to pick up your targets.
  - A number of decoys will be placed within 1 meter of the tape line.
  - A number of obstacles will be placed on the course. If you exactly follow the tape line you will not run into an obstacle; however, you may have to avoid obstacles as you maneuver away from the tape line to pick up targets.
- No human will be allowed on the course during a test run.
- Your robot must be autonomous.
- All test runs will be video 'taped.'
- The goal is to maximize your score according to the algorithm discussed below. The maximum score you achieve for any one day over the two days will be your final score.
- The scores for the entire class will be rank-ordered.
- You will be allowed ten minutes on the course for each test run. This will be strictly timed.
- Robot
  - You will be provided with
    - \* A basic robot chassis
    - \* Two motors with encoders and wheels
    - \* Two motor controllers (H-bridges)
    - \* A robotic arm
    - \* A battery pack with a power distribution unit
    - \* Distance sensors.
    - \* Line sensors
    - \* Data logger with SD card
  - You do not have to use this robot chassis or arm
  - You will need to supply your own processor(s)
  - You will need to supply your own cameras(s) and cables.
  - You may acquire additional mechanical or electronic parts for your robot.
  - If you plan to spend any money on your robot, you must get permission from me in writing first.
  - Your group has a strict budget of \$300, including any parts that you have already acquired and use on your robot (e.g., an Arduino).
- Rule 8 applies. Rule 8 comes from the official rules for the annual Race to Alaska (see <https://r2ak.com/official-rules/>). Rule 8 states, and I quote: If we decide it's necessary to consult a lawyer to figure out if you are disqualified or not, you are automatically disqualified. Play by the rules and live up to the spirit of the race. If you get cute and push the boundaries, we'll bring down the hammer.

## 3 Todo List

### File [Syringenator.py](#)

TODO: how do we initialize the robot run? a button press? –ABD

### Member [Syringenator.returnToLine \(\)](#)

TODO: do we need to check that we actually returned? how do we recover if dead reckoning fails? –ABD

## 4 Namespace Index

### 4.1 Namespace List

Here is a list of all namespaces with brief descriptions:

<a href="#">constants</a>	5
<a href="#">Syringenator</a> The top-level Pi program	11

## 5 Class Index

### 5.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

<a href="#">Syringenator.Target</a>	15
-------------------------------------	----

## 6 File Index

### 6.1 File List

Here is a list of all files with brief descriptions:

<a href="#">src/constants.py</a> Constants shared across the whole system	15
<a href="#">src/Syringenator.py</a> This is the main control script	29
<a href="#">src/controller/constants.hpp</a> Constants shared across the whole system	17
<a href="#">src/controller/controller.ino</a> The Arduino sketch	24

src/controller/[Syringenator.hpp](#)  
 Arduino controller code –ABD

25

## 7 Namespace Documentation

### 7.1 constants Namespace Reference

#### Variables

- int [ARM\\_AZIMUTH\\_MIN](#) = 0
- int [ARM\\_AZIMUTH\\_MAX](#) = 0
- int [ARM\\_RANGE\\_MIN](#) = 0
- int [ARM\\_RANGE\\_MAX](#) = 0
- int [ARM\\_ORIENT\\_MIN](#) = 0
- int [ARM\\_ORIENT\\_MAX](#) = 0
- int [PICKUP\\_X\\_MIN](#) = 0
- int [PICKUP\\_X\\_MAX](#) = 0
- int [PICKUP\\_Y\\_MIN](#) = 0
- int [PICKUP\\_Y\\_MAX](#) = 0
- int [ARDUINO\\_NULL](#) = 0x00  
*A place holder for troubleshooting etc.*
- int [ARDUINO\\_STATUS\\_ACK](#) = 0x01  
*If the arduino needs to acknowledge something.*
- int [ARDUINO\\_STATUS\\_READY](#) = 0x02  
*If the arduino needs to indicate it is ready.*
- int [ARDUINO\\_STATUS\\_PICK\\_FAIL](#) = 0x03  
*Report that the pick failed.*
- int [ARDUINO\\_STATUS\\_PICK\\_SUCCESS](#) = 0x04  
*Report that the pick succeeded.*
- int [ARDUINO\\_STATUS\\_ARM\\_FAULT](#) = 0x05  
*Report a general arm failure.*
- int [ARDUINO\\_STATUS\\_OBSTACLE](#) = 0x06  
*Report an obstacle detected.*
- int [ARDUINO\\_ROTATE](#) = 0x10  
*command the arduino to rotate the robot.*
- int [ARDUINO\\_MOVE](#) = 0x11  
*command the arduino to advance the robot.*
- int [ARDUINO\\_LINE\\_FOLLOW](#) = 0x12  
*command the arduino to follow the line*
- int [ARDUINO\\_ARM\\_PARK](#) = 0x20  
*call the park action sequence*
- int [ARDUINO\\_ARM\\_DISPOSE](#) = 0x21  
*call the dispose action sequence*
- int [ARDUINO\\_ARM\\_PICKUP](#) = 0x22  
*attempt a pick, followed by three bytes: azimuth, range, and orientation*
- [PORT\\_MOTOR\\_FWD](#) = None

- [PORT\\_MOTOR\\_AFT](#) = None
- [STBD\\_MOTOR\\_FWD](#) = None
- [STBD\\_MOTOR\\_AFT](#) = None
- [PORT\\_LINE\\_SENSE](#) = None
- [STBD\\_LINE\\_SENSE](#) = None
- [PORT\\_FWD\\_OBSTACLE](#) = None
- [PORT\\_AFT\\_OBSTACLE](#) = None
- [STBD\\_FWD\\_OBSTACLE](#) = None
- [STBD\\_AFT\\_OBSTACLE](#) = None
- [ARM\\_CONTROL](#) = None

### 7.1.1 Variable Documentation

#### 7.1.1.1 ARDUINO\_ARM\_DISPOSE

```
int constants.ARDUINO_ARM_DISPOSE = 0x21
```

call the dispose action sequence

#### 7.1.1.2 ARDUINO\_ARM\_PARK

```
int constants.ARDUINO_ARM_PARK = 0x20
```

call the park action sequence

#### 7.1.1.3 ARDUINO\_ARM\_PICKUP

```
int constants.ARDUINO_ARM_PICKUP = 0x22
```

attempt a pick, followed by three bytes: azimuth, range, and orientation

#### 7.1.1.4 ARDUINO\_LINE\_FOLLOW

```
int constants.ARDUINO_LINE_FOLLOW = 0x12
```

command the arduino to follow the line



#### 7.1.1.5 ARDUINO\_MOVE

```
int constants.ARDUIINO_MOVE = 0x11
```

command the arduino to advance the robot.

This byte is followed by a signed byte indicating magnitude and direction

#### 7.1.1.6 ARDUINO\_NULL

```
int constants.ARDUIINO_NULL = 0x00
```

A place holder for troubleshooting etc.

#### 7.1.1.7 ARDUINO\_ROTATE

```
int constants.ARDUIINO_ROTATE = 0x10
```

command the arduino to rotate the robot.

This byte is followed by a signed byte indicating magnitude and direction

#### 7.1.1.8 ARDUINO\_STATUS\_ACK

```
int constants.ARDUIINO_STATUS_ACK = 0x01
```

If the arduino needs to acknowledge something.

#### 7.1.1.9 ARDUINO\_STATUS\_ARM\_FAULT

```
int constants.ARDUIINO_STATUS_ARM_FAULT = 0x05
```

Report a general arm failure.

#### 7.1.1.10 ARDUINO\_STATUS\_OBSTACLE

```
int constants.ARDUIINO_STATUS_OBSTACLE = 0x06
```

Report an obstacle detected.

#### 7.1.1.11 ARDUINO\_STATUS\_PICK\_FAIL

```
int constants.ARDUIINO_STATUS_PICK_FAIL = 0x03
```

Report that the pick failed.

#### 7.1.1.12 ARDUINO\_STATUS\_PICK\_SUCCESS

```
int constants.ARDUIINO_STATUS_PICK_SUCCESS = 0x04
```

Report that the pick succeeded.

#### 7.1.1.13 ARDUINO\_STATUS\_READY

```
int constants.ARDUIINO_STATUS_READY = 0x02
```

If the arduino needs to indicate it is ready.

#### 7.1.1.14 ARM\_AZIMUTH\_MAX

```
int constants.ARM_AZIMUTH_MAX = 0
```

#### 7.1.1.15 ARM\_AZIMUTH\_MIN

```
int constants.ARM_AZIMUTH_MIN = 0
```

#### 7.1.1.16 ARM\_CONTROL

```
constants.ARM_CONTROL = None
```

#### 7.1.1.17 ARM\_ORIENT\_MAX

```
int constants.ARM_ORIENT_MAX = 0
```

#### 7.1.1.18 ARM\_ORIENT\_MIN

```
int constants.ARM_ORIENT_MIN = 0
```

#### 7.1.1.19 ARM\_RANGE\_MAX

```
int constants.ARM_RANGE_MAX = 0
```

#### 7.1.1.20 ARM\_RANGE\_MIN

```
int constants.ARM_RANGE_MIN = 0
```

#### 7.1.1.21 PICKUP\_X\_MAX

```
int constants.PICKUP_X_MAX = 0
```

#### 7.1.1.22 PICKUP\_X\_MIN

```
int constants.PICKUP_X_MIN = 0
```

#### 7.1.1.23 PICKUP\_Y\_MAX

```
int constants.PICKUP_Y_MAX = 0
```

#### 7.1.1.24 PICKUP\_Y\_MIN

```
int constants.PICKUP_Y_MIN = 0
```

#### 7.1.1.25 PORT\_AFT\_OBSTACLE

```
constants.PORT_AFT_OBSTACLE = None
```

**7.1.1.26 PORT\_FWD\_OBSTACLE**

```
constants.PORT_FWD_OBSTACLE = None
```

**7.1.1.27 PORT\_LINE\_SENSE**

```
constants.PORT_LINE_SENSE = None
```

**7.1.1.28 PORT\_MOTOR\_AFT**

```
constants.PORT_MOTOR_AFT = None
```

**7.1.1.29 PORT\_MOTOR\_FWD**

```
constants.PORT_MOTOR_FWD = None
```

**7.1.1.30 STBD\_AFT\_OBSTACLE**

```
constants.STBD_AFT_OBSTACLE = None
```

**7.1.1.31 STBD\_FWD\_OBSTACLE**

```
constants.STBD_FWD_OBSTACLE = None
```

**7.1.1.32 STBD\_LINE\_SENSE**

```
constants.STBD_LINE_SENSE = None
```

**7.1.1.33 STBD\_MOTOR\_AFT**

```
constants.STBD_MOTOR_AFT = None
```

## 7.1.1.34 STBD\_MOTOR\_FWD

```
constants.STBD_MOTOR_FWD = None
```

## 7.2 Syringenator Namespace Reference

The top-level Pi program.

## Classes

- class [Target](#)

## Functions

- def [log](#) (arg)
- def [arduinoSend](#) (bytes)  
*Send serial data to the arduino.*
- def [arduinoReceive](#) ()  
*Wait some fixed time for the arduino to send one or more bytes.*
- def [scan](#) ()  
*A routine to take a picture and report back the closest target The Computer vision routine must be able to handle multiple targets in the image.*
- def [moveCloser](#) (t)  
*Move the robot closer to the given target.*
- def [pickUp](#) (t)  
*Attempt to pickup and dispose the target.*
- def [returnToLine](#) ()  
*signl the arduino to return to the line.*
- def [lineFollow](#) ()  
*Follow the line.*
- def [canBePicked](#) (t)  
*A routine to determine if the target is in position to be picked up.*

## Variables

- bool [onTheLine](#) = True  
*boolean indicating whether we are on the line*
- def [target](#) = [scan](#)()

## 7.2.1 Detailed Description

The top-level Pi program.

## 7.2.2 Function Documentation

### 7.2.2.1 `arduinoReceive()`

```
def Syringenator.arduinoReceive ( )
```

Wait some fixed time for the arduino to send one or more bytes.

#### Returns

a list of bytes

### 7.2.2.2 `arduinoSend()`

```
def Syringenator.arduinoSend (
    bytes )
```

Send serial data to the arduino.

#### Parameters

<i>bytes</i>	one or more bytes of data to send to the arduino
--------------	--

### 7.2.2.3 `canBePicked()`

```
def Syringenator.canBePicked (
    t )
```

A routine to determine if the target is in position to be picked up.

Calculates whether the center of the target bounding box is in the pickup area.

#### Returns

a boolean

#### 7.2.2.4 lineFollow()

```
def Syringenator.lineFollow ( )
```

Follow the line.

this routine simply signals the arduino to execute its [lineFollow\(\)](#) routine

##### Returns

None

#### 7.2.2.5 log()

```
def Syringenator.log (
    arg )
```

#### 7.2.2.6 moveCloser()

```
def Syringenator.moveCloser (
    t )
```

Move the robot closer to the given target.

The [moveCloser\(\)](#) routine attempts to approach the target by relatively small increments. Because the move routines may be interrupted by the obstacle avoidance ISRs and the risk of jamming the wheels etc. we cannot expect to be able to approach successfully on the first try. Hence [moveCloser\(\)](#) should only move a relatively short distance before exiting to allow another loop through the scan cycle.

Should we spend effort trying to avoid running over decoys here?

This routine should check for ARDUINO\_STATUS\_OBSTACLE. then what?

This routine is likely where we will have the most issues. –ABD

##### Parameters

<i>t</i>	a <a href="#">Target</a> object containing the location of the target to be approached
----------	--

##### Returns

None

#### 7.2.2.7 `pickUp()`

```
def Syringenator.pickUp (
    t )
```

Attempt to pickup and dispose the target.

This routine must determine orientation of the target. If this is not done by some OpenCV magic we can attempt it here using the raw image data and the bounding box.

Divide the longer dimension of the bounding box by some constant divisor. Scan along each of those raster lines twice. On the first pass calculate an average brightness (RGB values can be summed). The second pass will pick out points of greatest brightness. Find the centers of clustered bright pixels. We now have a set of points in cartesian space. Have Jake find the slope of the line of best fit.

The center can be estimated as the center of the bounding box, or the center of the points, the mean of both, etc.

Once the values for x, y, and m have been determined they will have to pass through a calibration transform to determine the arm a, r, o values. –ABD

##### Parameters

<i>t</i>	a <a href="#">Target</a> object containing the raw bitmap data
----------	--

##### Returns

None

#### 7.2.2.8 `returnToLine()`

```
def Syringenator.returnToLine ( )
```

signl the arduino to return to the line.

**Todo** TODO: do we need to check that we actually returned? how do we recover if dead reckoning fails? –ABD

##### Returns

None



#### 7.2.2.9 scan()

```
def Syringenator.scan ( )
```

A routine to take a picture and report back the closest target The Computer vision routine must be able to handle multiple targets in the image.

It would be best if all targets are reported. Then this routine will determine the closest one to pursue. –ABD

#### Returns

a target object

### 7.2.3 Variable Documentation

#### 7.2.3.1 onTheLine

```
bool Syringenator.onTheLine = True
```

boolean indicating whether we are on the line

#### 7.2.3.2 target

```
def Syringenator.target = scan()
```

## 8 Class Documentation

### 8.1 Syringenator.Target Class Reference

The documentation for this class was generated from the following file:

- [src/Syringenator.py](#)

## 9 File Documentation

### 9.1 README.md File Reference

### 9.2 requirements.md File Reference

### 9.3 src/constants.py File Reference

Constants shared across the whole system.

## Namespaces

- [constants](#)

## Variables

- int [constants.ARM\\_AZIMUTH\\_MIN](#) = 0
- int [constants.ARM\\_AZIMUTH\\_MAX](#) = 0
- int [constants.ARM\\_RANGE\\_MIN](#) = 0
- int [constants.ARM\\_RANGE\\_MAX](#) = 0
- int [constants.ARM\\_ORIENT\\_MIN](#) = 0
- int [constants.ARM\\_ORIENT\\_MAX](#) = 0
- int [constants.PICKUP\\_X\\_MIN](#) = 0
- int [constants.PICKUP\\_X\\_MAX](#) = 0
- int [constants.PICKUP\\_Y\\_MIN](#) = 0
- int [constants.PICKUP\\_Y\\_MAX](#) = 0
- int [constants.ARDUINO\\_NULL](#) = 0x00  
*A place holder for troubleshooting etc.*
- int [constants.ARDUINO\\_STATUS\\_ACK](#) = 0x01  
*If the arduino needs to acknowledge something.*
- int [constants.ARDUINO\\_STATUS\\_READY](#) = 0x02  
*If the arduino needs to indicate it is ready.*
- int [constants.ARDUINO\\_STATUS\\_PICK\\_FAIL](#) = 0x03  
*Report that the pick failed.*
- int [constants.ARDUINO\\_STATUS\\_PICK\\_SUCCESS](#) = 0x04  
*Report that the pick succeeded.*
- int [constants.ARDUINO\\_STATUS\\_ARM\\_FAULT](#) = 0x05  
*Report a general arm failure.*
- int [constants.ARDUINO\\_STATUS\\_OBSTACLE](#) = 0x06  
*Report an obstacle detected.*
- int [constants.ARDUINO\\_ROTATE](#) = 0x10  
*command the arduino to rotate the robot.*
- int [constants.ARDUINO\\_MOVE](#) = 0x11  
*command the arduino to advance the robot.*
- int [constants.ARDUINO\\_LINE\\_FOLLOW](#) = 0x12  
*command the arduino to follow the line*
- int [constants.ARDUINO\\_ARM\\_PARK](#) = 0x20  
*call the park action sequence*
- int [constants.ARDUINO\\_ARM\\_DISPOSE](#) = 0x21  
*call the dispose action sequence*
- int [constants.ARDUINO\\_ARM\\_PICKUP](#) = 0x22  
*attempt a pick, followed by three bytes: azimuth, range, and orientation*
- [constants.PORT\\_MOTOR\\_FWD](#) = None
- [constants.PORT\\_MOTOR\\_AFT](#) = None
- [constants.STBD\\_MOTOR\\_FWD](#) = None
- [constants.STBD\\_MOTOR\\_AFT](#) = None
- [constants.PORT\\_LINE\\_SENSE](#) = None
- [constants.STBD\\_LINE\\_SENSE](#) = None
- [constants.PORT\\_FWD\\_OBSTACLE](#) = None
- [constants.PORT\\_AFT\\_OBSTACLE](#) = None
- [constants.STBD\\_FWD\\_OBSTACLE](#) = None
- [constants.STBD\\_AFT\\_OBSTACLE](#) = None
- [constants.ARM\\_CONTROL](#) = None

### 9.3.1 Detailed Description

Constants shared across the whole system.

Includes constants used by both the arduino sketch and the the python script. The format of `constants.in` is three whitespace sparated columns:

[NAME] [value] [comments]

Any changes must be made in `constants.in` and followed by running:

```
make constants
```

—ABD

### Copyright


Copyright © 2019 by the authors. All rights reserved.

This file has been autogenerated, CHANGES MADE HERE WILL NOT PERSIST

## 9.4 src/controller/constants.hpp File Reference

Constants shared across the whole system.

This graph shows which files directly or indirectly include this file:

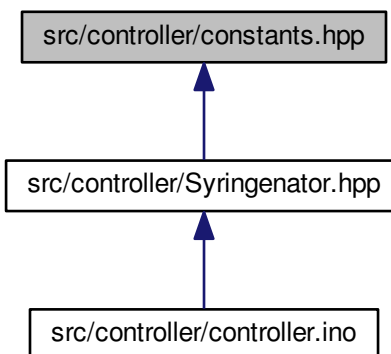

## Macros

- `#define ARM_AZIMUTH_MIN 0`
- `#define ARM_AZIMUTH_MAX 0`
- `#define ARM_RANGE_MIN 0`
- `#define ARM_RANGE_MAX 0`
- `#define ARM_ORIENT_MIN 0`
- `#define ARM_ORIENT_MAX 0`
- `#define PICKUP_X_MIN 0`
- `#define PICKUP_X_MAX 0`
- `#define PICKUP_Y_MIN 0`
- `#define PICKUP_Y_MAX 0`
- `#define ARDUINO_NULL 0x00`  
*A place holder for troubleshooting etc.*
- `#define ARDUINO_STATUS_ACK 0x01`  
*If the arduino needs to acknowledge something.*
- `#define ARDUINO_STATUS_READY 0x02`  
*If the arduino needs to indicate it is ready.*
- `#define ARDUINO_STATUS_PICK_FAIL 0x03`  
*Report that the pick failed.*
- `#define ARDUINO_STATUS_PICK_SUCCESS 0x04`  
*Report that the pick succeeded.*
- `#define ARDUINO_STATUS_ARM_FAULT 0x05`  
*Report a general arm failure.*
- `#define ARDUINO_STATUS_OBSTACLE 0x06`  
*Report an obstacle detected.*
- `#define ARDUINO_ROTATE 0x10`  
*command the arduino to rotate the robot. This byte is followed by a signed byte indicating magnitude and direction*
- `#define ARDUINO_MOVE 0x11`  
*command the arduino to advance the robot. This byte is followed by a signed byte indicating magnitude and direction*
- `#define ARDUINO_LINE_FOLLOW 0x12`  
*command the arduino to follow the line*
- `#define ARDUINO_ARM_PARK 0x20`  
*call the park action sequence*
- `#define ARDUINO_ARM_DISPOSE 0x21`  
*call the dispose action sequence*
- `#define ARDUINO_ARM_PICKUP 0x22`  
*attempt a pick, followed by three bytes: azimuth, range, and orientation*
- `#define PORT_MOTOR_FWD None`
- `#define PORT_MOTOR_AFT None`
- `#define STBD_MOTOR_FWD None`
- `#define STBD_MOTOR_AFT None`
- `#define PORT_LINE_SENSE None`
- `#define STBD_LINE_SENSE None`
- `#define PORT_FWD_OBSTACLE None`
- `#define PORT_AFT_OBSTACLE None`
- `#define STBD_FWD_OBSTACLE None`
- `#define STBD_AFT_OBSTACLE None`
- `#define ARM_CONTROL None`

### 9.4.1 Detailed Description

Constants shared across the whole system.

Includes constants used by both the arduino sketch and the the python script. The format of `constants.in` is three whitespace sparated columns:

[NAME] [value] [comments]

Any changes must be made in `constants.in` and followed by running:

```
make constants
```

–ABD

#### Copyright

Copyright © 2019 by the authors. All rights reserved.

This file has been autogenerated, CHANGES MADE HERE WILL NOT PERSIST

### 9.4.2 Macro Definition Documentation

#### 9.4.2.1 ARDUINO\_ARM\_DISPOSE

```
#define ARDUINO_ARM_DISPOSE 0x21
```

call the dispose action sequence

#### 9.4.2.2 ARDUINO\_ARM\_PARK

```
#define ARDUINO_ARM_PARK 0x20
```

call the park action sequence

#### 9.4.2.3 ARDUINO\_ARM\_PICKUP

```
#define ARDUINO_ARM_PICKUP 0x22
```

attempt a pick, followed by three bytes: azimuth, range, and orientation

#### 9.4.2.4 ARDUINO\_LINE\_FOLLOW

```
#define ARDUINO_LINE_FOLLOW 0x12
```

command the arduino to follow the line

#### 9.4.2.5 ARDUINO\_MOVE

```
#define ARDUINO_MOVE 0x11
```

command the arduino to advance the robot. This byte is followed by a signed byte indicating magnitude and direction

#### 9.4.2.6 ARDUINO\_NULL

```
#define ARDUINO_NULL 0x00
```

A place holder for troubleshooting etc.

#### 9.4.2.7 ARDUINO\_ROTATE

```
#define ARDUINO_ROTATE 0x10
```

command the arduino to rotate the robot. This byte is followed by a signed byte indicating magnitude and direction

#### 9.4.2.8 ARDUINO\_STATUS\_ACK

```
#define ARDUINO_STATUS_ACK 0x01
```

If the arduino needs to acknowledge something.

#### 9.4.2.9 ARDUINO\_STATUS\_ARM\_FAULT

```
#define ARDUINO_STATUS_ARM_FAULT 0x05
```

Report a general arm failure.

#### 9.4.2.10 ARDUINO\_STATUS\_OBSTACLE

```
#define ARDUINO_STATUS_OBSTACLE 0x06
```

Report an obstacle detected.

#### 9.4.2.11 ARDUINO\_STATUS\_PICK\_FAIL

```
#define ARDUINO_STATUS_PICK_FAIL 0x03
```

Report that the pick failed.

#### 9.4.2.12 ARDUINO\_STATUS\_PICK\_SUCCESS

```
#define ARDUINO_STATUS_PICK_SUCCESS 0x04
```

Report that the pick succeeded.

#### 9.4.2.13 ARDUINO\_STATUS\_READY

```
#define ARDUINO_STATUS_READY 0x02
```

If the arduino needs to indicate it is ready.

#### 9.4.2.14 ARM\_AZIMUTH\_MAX

```
#define ARM_AZIMUTH_MAX 0
```

#### 9.4.2.15 ARM\_AZIMUTH\_MIN

```
#define ARM_AZIMUTH_MIN 0
```

#### 9.4.2.16 ARM\_CONTROL

```
#define ARM_CONTROL None
```

**9.4.2.17 ARM\_ORIENT\_MAX**

```
#define ARM_ORIENT_MAX 0
```

**9.4.2.18 ARM\_ORIENT\_MIN**

```
#define ARM_ORIENT_MIN 0
```

**9.4.2.19 ARM\_RANGE\_MAX**

```
#define ARM_RANGE_MAX 0
```

**9.4.2.20 ARM\_RANGE\_MIN**

```
#define ARM_RANGE_MIN 0
```

**9.4.2.21 PICKUP\_X\_MAX**

```
#define PICKUP_X_MAX 0
```

**9.4.2.22 PICKUP\_X\_MIN**

```
#define PICKUP_X_MIN 0
```

**9.4.2.23 PICKUP\_Y\_MAX**

```
#define PICKUP_Y_MAX 0
```

**9.4.2.24 PICKUP\_Y\_MIN**

```
#define PICKUP_Y_MIN 0
```



#### 9.4.2.25 PORT\_AFT\_OBSTACLE

```
#define PORT_AFT_OBSTACLE None
```

#### 9.4.2.26 PORT\_FWD\_OBSTACLE

```
#define PORT_FWD_OBSTACLE None
```

#### 9.4.2.27 PORT\_LINE\_SENSE

```
#define PORT_LINE_SENSE None
```

#### 9.4.2.28 PORT\_MOTOR\_AFT

```
#define PORT_MOTOR_AFT None
```

#### 9.4.2.29 PORT\_MOTOR\_FWD

```
#define PORT_MOTOR_FWD None
```

#### 9.4.2.30 STBD\_AFT\_OBSTACLE

```
#define STBD_AFT_OBSTACLE None
```

#### 9.4.2.31 STBD\_FWD\_OBSTACLE

```
#define STBD_FWD_OBSTACLE None
```

#### 9.4.2.32 STBD\_LINE\_SENSE

```
#define STBD_LINE_SENSE None
```

#### 9.4.2.33 STBD\_MOTOR\_AFT

```
#define STBD_MOTOR_AFT None
```

#### 9.4.2.34 STBD\_MOTOR\_FWD


```
#define STBD_MOTOR_FWD None
```

### 9.5 src/controller/controller.ino File Reference

The Arduino sketch.

```
#include "Syringenator.hpp"
```

Include dependency graph for controller.ino:

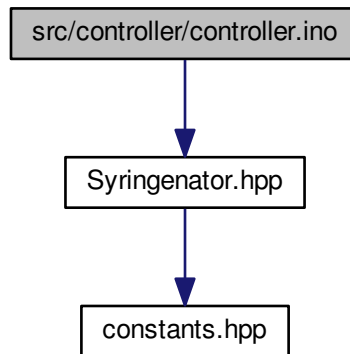

#### Functions

- void `setup` ()
- void `loop` ()

#### 9.5.1 Detailed Description

The Arduino sketch.

### 9.5.2 Function Documentation

#### 9.5.2.1 loop()

```
void loop ( )
```

#### 9.5.2.2 setup()


```
void setup ( )
```

## 9.6 src/controller/Syringenator.hpp File Reference


Arduino controller code –ABD.

```
#include "constants.hpp"
```

Include dependency graph for Syringenator.hpp:

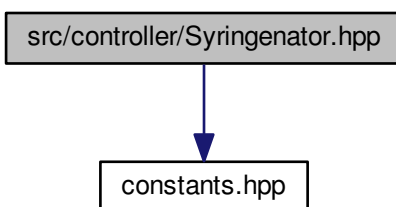

This graph shows which files directly or indirectly include this file:

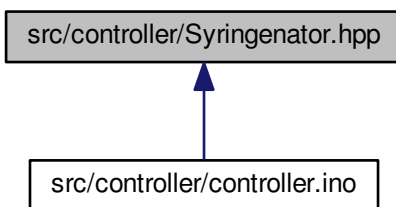

## Functions

- void `lineDetector_ISR` (void)  
*A function to respond to a line detector being triggered.*
- void `obstacleDetector_ISR` (void)  
*A function to respond to a detected obstacle while under locomotion.*
- void `motorEncoder_ISR` (void)  
*Motor encoder ISR.*
- void `serialCommunication_ISR` (void)  
*A function to handle incoming communication from the pi.*
- void `moveRotate` (int ticks)  
*Rotate the robot around central axis rotate by running both motors at the same speed in opposite directions.*
- void `moveStraight` (int ticks)  
*Move the robot forward or reverse.*
- void `moveLineFollow` (void)  
*Routine to follow the guide-line for some fixed interval.*
- void `armPark` (void)  
*Move the arm to its parking position.*
- void `armDispose` (void)  
*Routine to dispose of a syringe once it has been picked.*
- bool `armPick` (byte azimuth, byte range, byte orientation)  
*Routine to attempt target pickup.*

### 9.6.1 Detailed Description

Arduino controller code –ABD.

## Copyright

Copyright © 2019 by the authors. All rights reserved.

### 9.6.2 Function Documentation

#### 9.6.2.1 `armDispose()`

```
void armDispose (  
    void )
```

Routine to dispose of a syringe once it has been picked.

### 9.6.2.2 armPark()

```
void armPark (
    void )
```

Move the arm to its parking position.

The parking position needs to leave a clear view of the pickup area, but also should move the center of gravity as far forward as possible to reduce drive wheel slippage.

### 9.6.2.3 armPick()

```
bool armPick (
    byte azimuth,
    byte range,
    byte orientation )
```

Routine to attempt target pickup.

This routine should attempt to close the claw completely and detect if an object as actually been grabbed. parameters should be bytes because they will have to be transmitted over serial from the pi. Ranges on these values TBD as convenient for the arm software, but must be recorded in the system constants file. —ABD

#### Parameters

<i>azimuth</i>	arm azimuth value
<i>range</i>	distance to the target
<i>orientation</i>	rotation of the target

#### Returns

true on successful pick, false otherwise.

### 9.6.2.4 lineDetector\_ISR()

```
void lineDetector_ISR (
    void )
```

A function to respond to a line detector being triggered.

The line detectors are mounted forward and inboard of the wheels. This function needs to reorient the robot to clear the sensor, but also to prevent the line from being hit again.

The simplest way to do this is to rotate the opposite wheel forward until the sensor clears. Because the sensor is forward of the wheel it will rotate away from the line as the opposite wheel moves forward. This should work as long as the curvature of the line is not too great.

This may need to be two routines, one for each sensor —ABD

#### 9.6.2.5 motorEncoder\_ISR()

```
void motorEncoder_ISR (
    void )
```

Motor encoder ISR.

#### 9.6.2.6 moveLineFollow()

```
void moveLineFollow (
    void )
```

Routine to follow the guide-line for some fixed interval.

This function assumes that we are already over the line

#### 9.6.2.7 moveRotate()

```
void moveRotate (
    int ticks )
```

Rotate the robot around central axis rotate by running both motors at the same speed in opposite directions.

##### Parameters

<i>ticks</i>	sign indicates direction of rotation: positive is rotation to the right. magnitude indicates the number of encoder ticks on each motor.
--------------	---

#### 9.6.2.8 moveStraight()

```
void moveStraight (
    int ticks )
```

Move the robot forward or reverse.

##### Parameters

<i>ticks</i>	number of encoder ticks to move. Sign indicates direction: positive is forward.
--------------	---

#### 9.6.2.9 obstacleDetector\_ISR()

```
void obstacleDetector_ISR (
    void )
```

A function to respond to a detected obstacle while under locomotion.

There may be two cases to handle: whether we are line following, or approaching. If we are line following we need to ensure that we don't lose the line while avoiding the obstacle.

This may need to be multiple routines, one for each sensor –ABD

#### 9.6.2.10 serialCommunication\_ISR()

```
void serialCommunication_ISR (
    void )
```

A function to handle incoming communication from the pi.

## 9.7 src/Syringenator.py File Reference

This is the main control script.

### Classes

- class [Syringenator.Target](#)

### Namespaces

- [Syringenator](#)  
*The top-level Pi program.*

### Functions

- def [Syringenator.log](#) (arg)
- def [Syringenator.arduinoSend](#) (bytes)  
*Send serial data to the arduino.*
- def [Syringenator.arduinoReceive](#) ()  
*Wait some fixed time for the arduino to send one or more bytes.*
- def [Syringenator.scan](#) ()  
*A routine to take a picture and report back the closest target The Computer vision routine must be able to handle multiple targets in the image.*
- def [Syringenator.moveCloser](#) (t)  
*Move the robot closer to the given target.*
- def [Syringenator.pickUp](#) (t)  
*Attempt to pickup and dispose the target.*
- def [Syringenator.returnToLine](#) ()  
*signal the arduino to return to the line.*
- def [Syringenator.lineFollow](#) ()  
*Follow the line.*
- def [Syringenator.canBePicked](#) (t)  
*A routine to determine if the target is in position to be picked up.*

### Variables

- bool `Syringenator.onTheLine` = True  
*boolean indicating whether we are on the line*
- def `Syringenator.target` = scan()

#### 9.7.1 Detailed Description

This is the main control script.

It will run on the Raspberry Pi and direct all robot operations.

**Todo** TODO: how do we initialize the robot run? a button press? –ABD

### Copyright

Copyright © 2019 by the authors. All rights reserved.



## Index

ARDUINO\_ARM\_DISPOSE  
  constants, 6  
  constants.hpp, 19

ARDUINO\_ARM\_PARK  
  constants, 6  
  constants.hpp, 19

ARDUINO\_ARM\_PICKUP  
  constants, 6  
  constants.hpp, 19

ARDUINO\_LINE\_FOLLOW  
  constants, 6  
  constants.hpp, 19

ARDUINO\_MOVE  
  constants, 6  
  constants.hpp, 20

ARDUINO\_NULL  
  constants, 7  
  constants.hpp, 20

ARDUINO\_ROTATE  
  constants, 7  
  constants.hpp, 20

ARDUINO\_STATUS\_ACK  
  constants, 7  
  constants.hpp, 20

ARDUINO\_STATUS\_ARM\_FAULT  
  constants, 7  
  constants.hpp, 20

ARDUINO\_STATUS\_OBSTACLE  
  constants, 7  
  constants.hpp, 20

ARDUINO\_STATUS\_PICK\_FAIL  
  constants, 7  
  constants.hpp, 21

ARDUINO\_STATUS\_PICK\_SUCCESS  
  constants, 8  
  constants.hpp, 21

ARDUINO\_STATUS\_READY  
  constants, 8  
  constants.hpp, 21

arduinoReceive  
  Syringenator, 12

arduinoSend  
  Syringenator, 12

ARM\_AZIMUTH\_MAX  
  constants, 8  
  constants.hpp, 21

ARM\_AZIMUTH\_MIN  
  constants, 8  
  constants.hpp, 21

ARM\_CONTROL  
  constants, 8  
  constants.hpp, 21

ARM\_ORIENT\_MAX  
  constants, 8  
  constants.hpp, 21

ARM\_ORIENT\_MIN  
  constants, 8  
  constants.hpp, 22

ARM\_RANGE\_MAX  
  constants, 9  
  constants.hpp, 22

ARM\_RANGE\_MIN  
  constants, 9  
  constants.hpp, 22

armDispose  
  Syringenator.hpp, 26

armPark  
  Syringenator.hpp, 26

armPick  
  Syringenator.hpp, 27

canBePicked  
  Syringenator, 12

constants, 5

  ARDUINO\_ARM\_DISPOSE, 6

  ARDUINO\_ARM\_PARK, 6

  ARDUINO\_ARM\_PICKUP, 6

  ARDUINO\_LINE\_FOLLOW, 6

  ARDUINO\_MOVE, 6

  ARDUINO\_NULL, 7

  ARDUINO\_ROTATE, 7

  ARDUINO\_STATUS\_ACK, 7

  ARDUINO\_STATUS\_ARM\_FAULT, 7

  ARDUINO\_STATUS\_OBSTACLE, 7

  ARDUINO\_STATUS\_PICK\_FAIL, 7

  ARDUINO\_STATUS\_PICK\_SUCCESS, 8

  ARDUINO\_STATUS\_READY, 8

  ARM\_AZIMUTH\_MAX, 8

  ARM\_AZIMUTH\_MIN, 8

  ARM\_CONTROL, 8

  ARM\_ORIENT\_MAX, 8

  ARM\_ORIENT\_MIN, 8

  ARM\_RANGE\_MAX, 9

  ARM\_RANGE\_MIN, 9

  PICKUP\_X\_MAX, 9

  PICKUP\_X\_MIN, 9

  PICKUP\_Y\_MAX, 9

  PICKUP\_Y\_MIN, 9

  PORT\_AFT\_OBSTACLE, 9

  PORT\_FWD\_OBSTACLE, 9

  PORT\_LINE\_SENSE, 10

  PORT\_MOTOR\_AFT, 10

- PORT\_MOTOR\_FWD, [10](#)
- STBD\_AFT\_OBSTACLE, [10](#)
- STBD\_FWD\_OBSTACLE, [10](#)
- STBD\_LINE\_SENSE, [10](#)
- STBD\_MOTOR\_AFT, [10](#)
- STBD\_MOTOR\_FWD, [10](#)
- constants.hpp
  - ARDUINO\_ARM\_DISPOSE, [19](#)
  - ARDUINO\_ARM\_PARK, [19](#)
  - ARDUINO\_ARM\_PICKUP, [19](#)
  - ARDUINO\_LINE\_FOLLOW, [19](#)
  - ARDUINO\_MOVE, [20](#)
  - ARDUINO\_NULL, [20](#)
  - ARDUINO\_ROTATE, [20](#)
  - ARDUINO\_STATUS\_ACK, [20](#)
  - ARDUINO\_STATUS\_ARM\_FAULT, [20](#)
  - ARDUINO\_STATUS\_OBSTACLE, [20](#)
  - ARDUINO\_STATUS\_PICK\_FAIL, [21](#)
  - ARDUINO\_STATUS\_PICK\_SUCCESS, [21](#)
  - ARDUINO\_STATUS\_READY, [21](#)
  - ARM\_AZIMUTH\_MAX, [21](#)
  - ARM\_AZIMUTH\_MIN, [21](#)
  - ARM\_CONTROL, [21](#)
  - ARM\_ORIENT\_MAX, [21](#)
  - ARM\_ORIENT\_MIN, [22](#)
  - ARM\_RANGE\_MAX, [22](#)
  - ARM\_RANGE\_MIN, [22](#)
  - PICKUP\_X\_MAX, [22](#)
  - PICKUP\_X\_MIN, [22](#)
  - PICKUP\_Y\_MAX, [22](#)
  - PICKUP\_Y\_MIN, [22](#)
  - PORT\_AFT\_OBSTACLE, [22](#)
  - PORT\_FWD\_OBSTACLE, [23](#)
  - PORT\_LINE\_SENSE, [23](#)
  - PORT\_MOTOR\_AFT, [23](#)
  - PORT\_MOTOR\_FWD, [23](#)
  - STBD\_AFT\_OBSTACLE, [23](#)
  - STBD\_FWD\_OBSTACLE, [23](#)
  - STBD\_LINE\_SENSE, [23](#)
  - STBD\_MOTOR\_AFT, [23](#)
  - STBD\_MOTOR\_FWD, [24](#)
- controller.ino
  - loop, [25](#)
  - setup, [25](#)
- lineDetector\_ISR
  - Syringenator.hpp, [27](#)
- lineFollow
  - Syringenator, [12](#)
- log
  - Syringenator, [13](#)
- loop
  - controller.ino, [25](#)
- motorEncoder\_ISR
  - Syringenator.hpp, [27](#)
- moveCloser
  - Syringenator, [13](#)
- moveLineFollow
  - Syringenator.hpp, [28](#)
- moveRotate
  - Syringenator.hpp, [28](#)
- moveStraight
  - Syringenator.hpp, [28](#)
- obstacleDetector\_ISR
  - Syringenator.hpp, [28](#)
- onTheLine
  - Syringenator, [15](#)
- pickUp
  - Syringenator, [13](#)
- PICKUP\_X\_MAX
  - constants, [9](#)
  - constants.hpp, [22](#)
- PICKUP\_X\_MIN
  - constants, [9](#)
  - constants.hpp, [22](#)
- PICKUP\_Y\_MAX
  - constants, [9](#)
  - constants.hpp, [22](#)
- PICKUP\_Y\_MIN
  - constants, [9](#)
  - constants.hpp, [22](#)
- PORT\_AFT\_OBSTACLE
  - constants, [9](#)
  - constants.hpp, [22](#)
- PORT\_FWD\_OBSTACLE
  - constants, [9](#)
  - constants.hpp, [23](#)
- PORT\_LINE\_SENSE
  - constants, [10](#)
  - constants.hpp, [23](#)
- PORT\_MOTOR\_AFT
  - constants, [10](#)
  - constants.hpp, [23](#)
- PORT\_MOTOR\_FWD
  - constants, [10](#)
  - constants.hpp, [23](#)
- README.md, [15](#)
- requirements.md, [15](#)
- returnToLine
  - Syringenator, [14](#)
- scan
  - Syringenator, [14](#)
- serialCommunication\_ISR
  - Syringenator.hpp, [29](#)
- setup

- controller.ino, [25](#)
- src/constants.py, [15](#)
- src/controller/constants.hpp, [17](#)
- src/controller/controller.ino, [24](#)
- src/controller/Syringenator.hpp, [25](#)
- src/Syringenator.py, [29](#)
- STBD\_AFT\_OBSTACLE
  - constants, [10](#)
  - constants.hpp, [23](#)
- STBD\_FWD\_OBSTACLE
  - constants, [10](#)
  - constants.hpp, [23](#)
- STBD\_LINE\_SENSE
  - constants, [10](#)
  - constants.hpp, [23](#)
- STBD\_MOTOR\_AFT
  - constants, [10](#)
  - constants.hpp, [23](#)
- STBD\_MOTOR\_FWD
  - constants, [10](#)
  - constants.hpp, [24](#)
- Syringenator, [11](#)
  - arduinoReceive, [12](#)
  - arduinoSend, [12](#)
  - canBePicked, [12](#)
  - lineFollow, [12](#)
  - log, [13](#)
  - moveCloser, [13](#)
  - onTheLine, [15](#)
  - pickUp, [13](#)
  - returnToLine, [14](#)
  - scan, [14](#)
  - target, [15](#)
- Syringenator.hpp
  - armDispose, [26](#)
  - armPark, [26](#)
  - armPick, [27](#)
  - lineDetector\_ISR, [27](#)
  - motorEncoder\_ISR, [27](#)
  - moveLineFollow, [28](#)
  - moveRotate, [28](#)
  - moveStraight, [28](#)
  - obstacleDetector\_ISR, [28](#)
  - serialCommunication\_ISR, [29](#)
- Syringenator.Target, [15](#)
- target
  - Syringenator, [15](#)