NOVA SCHOOL OF SCIENCE & TECHNOLOGY

DEPARTMENT OF ELECTRICAL AND COMPUTER ENGINEERING

A VERY LONG AND IMPRESSIVE THESIS TITLE WITH A FORCED LINE BREAK

SOME THOUGHTS ON THE LIFE, THE UNIVERSE, AND EVERYTHING ELSE

JOHN VERY LONGNAME DOE

Master/BSc in Name of Previous Degree

DOCTORATE IN AEROSPACE ENGINEERING

SPECIALIZATION IN SPECIALIZATION NAME

NOVA University Lisbon

September, 2000

NOVA SCHOOL OF SCIENCE & TECHNOLOGY

DEPARTMENT OF ELECTRICAL AND COMPUTER ENGINEERING

A VERY LONG AND IMPRESSIVE THESIS TITLE WITH A FORCED LINE BREAK

SOME THOUGHTS ON THE LIFE, THE UNIVERSE, AND EVERYTHING ELSE

JOHN VERY LONGNAME DOE

Master/BSc in Name of Previous Degree

Adviser: Mary Doe Adviser Name
Full Professor, NOVA University Lisbon

Co-advisers: John Doe Co-Adviser Name
Associate Professor, NOVA University Lisbon

John Doe other Co-Adviser Name
Full Professor, NOVA University Lisbon

Examination Committee

Chair: Name of the committee chairperson
Full Professor, FCT-NOVA

Rapporteur: Name of a rapporteur
Associate Professor, Another University

Members: Another member of the committee
Full Professor, Another University

Yet another member of the committee
Assistant Professor, Another University

DOCTORATE IN AEROSPACE ENGINEERING
SPECIALIZATION IN SPECIALIZATION NAME

NOVA University Lisbon
September, 2000

A Very Long and Impressive Thesis Title with a Forced Line Break
Some thoughts on the Life, the Universe, and Everything Else

Copyright © John Very Longname Doe, NOVA School of Science and Technology, NOVA University Lisbon.
The NOVA School of Science and Technology and the NOVA University Lisbon have the right, perpetual and without geographical boundaries, to file and publish this dissertation through printed copies reproduced on paper or on digital form, or by any other means known or that may be invented, and to disseminate through scientific repositories and admit its copying and distribution for non-commercial, educational or research purposes, as long as credit is given to the author and editor.

This document was created with the (pdf/Xe/Lua)LaTeX processor and the NOVAthesis template (v7.3.9) [15].

Dedicatory lorem ipsum.

Acknowledgements

Acknowledgments are personal text and should be a free expression of the author.

However, without any intention of conditioning the form or content of this text, I would like to add that it usually starts with academic thanks (instructors, etc.); then institutional thanks (Research Center, Department, Faculty, University, FCT / MEC scholarships, etc.) and, finally, the personal ones (friends, family, etc.).

But I insist that there are no fixed rules for this text, and it must, above all, express what the author feels.

"You cannot teach a man anything; you can only help him discover it in himself."

— **Galileo**, Somewhere in a book or speach
(Astronomer, physicist and engineer)

Abstract

This thesis presents a set of low-effort CLF-CBF based frameworks that via optimization of a single parameter of the CBF condition is capable to have a better fit to the variable encountered scenarios. Among the presented control techniques, it is also shown how changing the stability objective to a transitive computed point on the boundary of the safe set prevents some potential convergence to unwanted equilibrium points and massively improves the path taken, as it mitigates CLF-CBF unnecessary approximations to the unsafe set that lead to larger control inputs, without diminishing its speed of convergence to the desired equilibrium point. The controllers are tested in different collision scenarios and for different systems, including a unicycle and spacecraft.

Resumo

Esta tese apresenta um conjunto de técnicas de controlo com baixos requerimentos em termos computacionais, sustentadas pelas muito estudadas CLF-CBF, que através da otimização de um único parâmetro da condição de segurança visada pela CBF, são capazes de se adaptar melhor aos diferentes cenários encontrados. Entre as técnicas de controlo apresentadas, também é mostrado como a alteração do objetivo de estabilidade para um ponto transitivo calculado no limite do conjunto composto por estados se segurança precavem em certa parte contra potencial convergência para pontos de equilíbrio indesejados e melhora significativamente o caminho percorrido, uma vez que mitiga as aproximações desnecessárias por parte da CLF-CBF ao conjunto de estados restringidos promotores de inputs maiores, sem diminuir a sua velocidade de convergência para o ponto de equilíbrio desejado. Os controladores são testados em diferentes cenários de colisão e para diferentes sistemas, incluindo um monociclo e uma nave espacial.

Contents

List of Figures ix

List of Algorithms x

Acronyms xi

1 Introduction 1

2 Methodology 4

2.1 CLF-CBF . . . 4

2.1.1 Relative Degree One Formulation . . . 4

2.1.2 Backstepping (Second-Order Formulation) . . . 7

2.1.3 Closed Form Solution . . . 8

2.1.4 Unifying CBF . . . 10

2.2 Single Parameter Optmization . . . 14

2.2.1 Gradient of the Cost Function - Discretization . . . 14

2.2.2 Gradient Descent . . . 14

2.2.3 Binary Search . . . 15

2.3 Constraint Contour Point . . . 17

2.3.1 Constraint Fit . . . 17

2.3.2 State Propagation Simulation . . . 17

2.3.3 Constraint Contour Point Algorithm . . . 20

2.4 Proposed Decision Algorithms . . . 22

2.4.1 Just Optimized (A-JO) . . . 22

2.4.2 Double CLF . . . 23

3 Results 25

3.1 Setup . . . 25

3.1.1 Decision Algorithms . . . 25

3.1.2 Unicycle . . . 26

3.1.3 Orbital . . . 29

3.1.4 Some Data . . . 32

3.2 Experiments . . . 33

3.2.1 Unicycle 33
3.2.2 Orbital 37

4 Conclusion **38**

Bibliography **39**

Appendices

A Deductions **41**
A.1 Closed-Form QP given CLF-CBF Constraints 41
A.2 Closed-Form Ellipsoide Tangent Point 45
A.3 Multiple CLF Transition Formulation 45

List of Figures

3.1 UCC 3.1.2.3 33
3.2 UCF 3.1.2.3 34
3.3 UEV 3.1.2.3 35
3.4 UEH 3.1.2.3 36
3.5 UED 3.1.2.3 37

List of Algorithms

1 Discrete Gradient Function (DGF) 14
2 Binary Search Phase 1 16
3 Binary Search Phase 2 16
4 State Propagation Simulation (SPS) 19
5 Natural Convergence Direction Vector ($NCDV$) 20

Acronyms

A-CLF-I CLFs Independent *(pp. 24–26, 34–37)*
A-CLF-S CLFs Summed *(pp. 23, 25, 26, 33–37)*
A-CLF-U CLFs Unified *(p. 24)*
A-JO Just Optimized *(pp. vii, 22, 24, 25, 33–37)*
APF Artificial Potential Fields *(p. 1)*

CBF Control Barrier Function *(pp. v–vii, 1–3, 5–13, 22–24, 27, 31, 33, 35, 41–43)*
CLF Control Lyapunov Function *(pp. vii, viii, 1–9, 13, 22–24, 26, 27, 30, 31, 33, 41–45)*
CLF-CBF Control Lyapunov Function - Control Barrier Function *(pp. v–viii, 1, 2, 4, 5, 7, 9–11, 13, 17, 22, 23, 26, 28, 30, 33, 36, 41, 43, 45)*

DP Dormand Prince *(p. 33)*

ECBF Exponential Control Barrier Function *(p. 2)*
ECI Earth-centered-inertial *(p. 29)*

KKT Karush-Kuhn-Tucker *(pp. 9, 41, 43, 44)*

LVLH local-vertical-local-horizontal *(p. 29)*

MPC Model Predictive Control *(pp. 2, 34–37)*

NERM non-linear equations of relative movement *(p. 29)*

ODE ordinarinary differential equation *(p. 17)*

QP Quadratic program *(pp. viii, 1, 2, 6–8, 10, 13, 22, 23, 41, 43, 45)*

RK Runge-Kutta *(pp. 17–19, 22, 23)*

UAV Unmanned Aerial Vehicle *(p. 2)*

1

Introduction

Collision avoidance is a crucial factor that permeates our society, and when it comes to automation, robots should aim safety. However the baseline framework of the usual online safety critical control techniques could have some limitations. In the context of space, the high budget missions along with the limited size to carry resources like fuel..., the recurrent spacecrafts maneuvers to avoid collisions with debris [8] (and other hazards), lead essentially to a need for safety and reliability, but welcome to improved performance and possible costs reductions.

Previously, one of the most used collision avoidance control techniques used to be Artificial Potential Fields (APF) [12], not that robust, subject to relative highly sensible performance according to the environment and with high necessity to a fine tuning of its parameters.

Meanwhile, it arised in popularity the Control Barrier Function (CBF) that allows to design a controller aiming to online, keep a system safe [2]. It is characterized by a control affine constraint, if respected contibutes to foward invariance of a well defined safe set. Compared to the APF, the Control Barrier Function (CBF) reveal more appetence, it generates smoother trajectories and is able to deal with more complex scenarios [21].

The Control Lyapunov Function (CLF) [3] in opposition of the keep away behaviour from the unsafe states of the CBF, the condition governed by it induce an assymptotically stabillity to an desired equilibrium sate.

It was proposed a Quadratic program (QP) formulation in [1], combining the CLF and CBF in order to syntethise a controller that could achieve safety and stability of the system, which is not always possible, so more recently [2] presented a way to ensure feasibility, the stability objective is soften, but potentially leading to deadlock situations. More than that, in the given formulation, the CLF-CBF parameters are generally static, tunned according to a given problem, showing a decrease in performance as the scenario differs from what was initially conceptualized. The QP also lacks a prediction horizon, so the decision algorithm, in particular the CBF, just provides safety on the given instant, possibly resulting in sates close to the boudary which demands returning high control inputs to manitain the system safe.

The purposed techniques are compromised to deal with the respective characteristics. Among them the lack of adaptiveness through an offline (or at least opportunistic) optimization of the severity of the CBF condition, making use of algoritms such as gradient descent [20], highly used in deep learning [24], or a binary search [14] variation. Beyond that, it is pruposed a way to deal with undesired (assymptotically stable) equilibria in the closed-loop system, by changing the stabilization objective from the CLF, forcing the convergence of the closed-loop system to a

transitive deduced point on the boundary of the safe set, but essentially aiming to optimize the path taken, relative to the nominal CLF-CBF framework, avoiding the unwanted large inputs near the unsafe set while keeping the nominal speed of convergence. If is not capable to reach the desired state, through a MPC, sending the simulated trajectory as initial guess for a warm start optimization it is possible to mitigate the chances of a deadlock situation.

A MPC performs an optimization of multiple variables along an constrained receeding horizon (MPC applied in spacrafts rendezvous [10, 11]), able to the incorporate CBF conditions to enforce safety of the close-loop system [7], whilst CLF-CBF simply returns a single control input based on the given instant providing faster computations. The aim of this thesis is develop a low-effort CLF-CBF based decision algorithm, suited to spacecrafts (processors), that similar to [17, 19] comes by founding a closed-form solution of the constrained QP. The given solution is periodical but potentially beeing approximately continuos with the implementation of circuits designed to process gradient descent methods or even the closed-form solution of the respective QP [9].

This work, aims to generalize the given algorithms to be able to deal with unsafe sets, usually delimited by an ellipsoide. Given the CBF formulation that enables encoding the obstacles complex shapes by doing the polytope fit shown in [18].

The porposed techiniques, also extends to high-order systems, as robotic systems such as spacecrafts are generally governed by high relative-degree constraints, therefore [2] came with Exponential Control Barrier Function (ECBF) as a solution to it while [23] with backstepping which was the chosen one to apply on this thesis experiments. Relevant to say, CBF have been gaining lots of focus in reasearch, including in spacecrafts and satellites [5, 4], Unmanned Aerial Vehicle (UAV) [21], among many others robotic systems [2] (bipedal robots, multi-robot systems...).

Works in the area such as [19], showed that the QP [2] introduce undesired equilibrium points in the obstacles boundary and conditions that is propitious to happen. Then [19] presented a method as a way to deal with that, by composing a rotative CLF and adding to the QP formulation a CBF condition preventing the system convergence to the unwanted stabilization conditions related with the used CLF. Although the results dont't show boundary equilibria, due to probably the CLF level set initial setup relative to the starting point the trajectories reveal undesired behaviours.

Meanwhile, [17] presents a collision avoidance hybrid CLF-CBF framework given a polytopic delimitation of the unsafe states. Its method porposes as solution a switching mechanism between active half-spaces and associated (intermediate) equilibrium points able to converge to the desired equilibrium point.

Following a receeding horizon approach (like MPC), [5] formulates a CBF that under collision of a given nominal trajectory along the respective horizon, based on the suppposing time until the next predicted collision and next local maximum of the CBF function is able to return a single control input preventing possible future collisions with minimal intrusion of the nominal controller.

The proposed control techniques stand out by the fast computational speed, adaptatively capacity, options given the different scenarios and easy implementation.

This thesis starts in chapter 2 with the section 2.1 by introducing the methodology of the CLF-CBF, including the formulation for backstepping, for the polytope fit and the closed-form controller governed by those concepts. Secondly, it is presented the particular methods used by the pruposed techniques, the different single parameter optimization algorithms 2.2, such as variations of gradient descent and the binary search method, and coming after, is shown how to obtain the obstale contour point 2.3. Given the presented contents, in section 2.4 it's elaborated the

purposed algorithms. Finally, in chapter 3 there are simulations of the developed algorithms in collision scenarios, applied on a mixed-relative-degree-two unicycle system and on a second-order perturbed orbital model, both with their CLF and CBF defined accordingly. In the results it is provided the computational time of the respective algorithms and also some performance data. Concluding with chapter 4, providing some reflections on this thesis results and some suggestions on how to continue this work.

2

Methodology

2.1 CLF-CBF

Considering a nonlinear control-affine system:

$$\dot{\mathbf{x}} = f(\mathbf{x}) + g(\mathbf{x})\mathbf{u} \tag{2.1}$$

with state $\mathbf{x} \in \mathbb{R}^n$, control input $\mathbf{u} \in \mathbb{R}^m$, and locally Lipschitz continuous[1] functions $f : \mathbb{R}^n \to \mathbb{R}^n$ and $g : \mathbb{R}^n \to \mathbb{R}^{n\times m}$. Given a locally Lipschitz continuos $k : \mathbb{R}^n \to \mathbb{R}^m$, it results in the closed-loop system:

$$\dot{\mathbf{x}} = f(\mathbf{x}) + g(\mathbf{x})k(\mathbf{x}) \tag{2.2}$$

For any initial condition $\mathbf{x}_0 \in \mathbb{R}^n$, there is a maximal time interval $\mathcal{I}(\mathbf{x}_0) = [0; t_{max}(\mathbf{x}_0)[$ and unique continuously differentiable solution $\varphi : \mathcal{I}(\mathbf{x}_0) \to \mathbb{R}^n$ such that:

$$\begin{aligned} &\dot{\varphi}(t) = f(\varphi(t)) + g(\varphi(t))k(\varphi(t)) \quad \forall t \in \mathcal{I}(\mathbf{x}_0) \\ &\varphi(0) = \mathbf{x}_0 \end{aligned} \tag{2.3}$$

2.1.1 Relative Degree One Formulation

2.1.1.1 Control Lyapunov Function (CLF)

Having the objective of global assymptotically stability of the system 2.2, is desired for the system converge to an equilibrium point $\bar{\mathbf{x}}$. A solution comes by designing a positive definite function $V : \mathbb{R}^n \to \mathbb{R}_{\geq 0}$ which converges to zero while the system converges to the respective equilibrium point, and for that, designing a control law that acts in order to achieve specifically the convergence of the function. Consequentially is pretended to the function $V(\mathbf{x})$ to be continuos and differentiable:

$$\dot{V}(\mathbf{x}, \mathbf{u}) = \frac{\partial V}{\partial x}\dot{x} = L_f V(\mathbf{x}) + L_G V(\mathbf{x})\mathbf{u}$$

where $L_f V$ and $L_G V$ are the Lie derivatives of V and $\mathbf{u}$ the control input vector resposible to manipulate the function, more precisely, its convergence rate.

[1] Given two metric spaces (X, d_X) and (Y, d_Y), where d_X and d_Y represent the X and Y metrics respectively, a function $f : X \to Y$ is Lipschitz continuos if there exist a constant $L \geq 0$ such that $\forall (x_1, x_2) \in X, \quad d_Y(f(x_1), f(x_2)) \leq L\, d_X(x_1, x_2)$

That beeing said, a continuosly differentiable, positive definite function $V : \mathbb{R}^n \to \mathbb{R}_{\geq 0}$ wich $\lim_{\mathbf{x}\to\bar{\mathbf{x}}} V(\mathbf{x}) = 0$ is a CLF if there exists a $\gamma \in \mathcal{K}_\infty^e$ [2] such that for all $\mathbf{x} \in \mathbb{R}^n \setminus \{\bar{\mathbf{x}}\}$:

$$\inf_{\mathbf{u}\in\mathbb{R}^m} [L_f V(\mathbf{x}) + L_G V(\mathbf{x})\mathbf{u}] \leq -\gamma(V(\mathbf{x})) \tag{2.4}$$

From CLF V and an adequate tuning of γ parameter results a control law followed by the controller K_{CLF}:

$$K_{CLF}(\mathbf{x}) = \{\mathbf{u} \in \mathbb{R}^m : L_f V(\mathbf{x}) + L_G V(\mathbf{x})\mathbf{u} \leq -\gamma(V(\mathbf{x}))\} \tag{2.5}$$

The stets generated by $K_{CLF}(\mathbf{x})$ $\forall x \in \mathbb{R}^n$ refer to the possible control input values necessary to the CLF $V(\mathbf{x})$ continuosly converge to zero while the closed-loop system 2.2 to the equilibrium point, but more slowly as is close to reach the objective.

2.1.1.2 Control Barrier Function (CBF)

Now having the objective of garantee safety to system 2.2, is aimed to keep the state inside a safe set C (foward invariant[3]) defined accordingly the problem needs. The notion of safety, i.e., the safe set C is defined as the 0-superlevel[4] set of a continuosly differentiable function $h : \mathbb{R}^n \to \mathbb{R}$:

$$\begin{aligned} C &= \{\mathbf{x} \in \mathbb{R}^n : h(\mathbf{x}) \geq 0\} \\ \partial C &= \{\mathbf{x} \in \mathbb{R}^n : h(\mathbf{x}) = 0\} \\ int(C) &= \{\mathbf{x} \in \mathbb{R}^n : h(\mathbf{x}) > 0\} \end{aligned} \tag{2.6}$$

In order to mantain $h(\mathbf{x})$ positive, there is a need to have a control law and but first to be able to interface with the function. Since $h(\mathbf{x})$ is differentiable:

$$\dot{h}(\mathbf{x}, \mathbf{u}) = \frac{\partial h}{\partial x}\dot{x} = L_f h(\mathbf{x}) + L_G h(\mathbf{x})\mathbf{u}$$

where $L_f h$ and $L_G h$ are the Lie derivatives of h and $\mathbf{u}$ the control input vector resposible to manipulate the function, more precisely, its time derivative.

So, a differentiable function $h : \mathbb{R}^n \to \mathbb{R}$ is a CBF if there exists a $\alpha \in \mathcal{K}_\infty^e$ such that for all $\mathbf{x} \in \mathbb{R}^n \setminus \{\bar{\mathbf{x}}\}$:

$$\sup_{\mathbf{u}\in\mathbb{R}^m} [L_f h(\mathbf{x}) + L_G h(\mathbf{x})\mathbf{u}] \geq -\alpha(h(\mathbf{x})) \tag{2.7}$$

Similar to the CLF, from CBF h and an adequate tuning of α parameter results a control law encapsulated by the controller K_{CBF}:

$$K_{CBF}(\mathbf{x}) = \{\mathbf{u} \in \mathbb{R}^m : L_f h(\mathbf{x}) + L_G h(\mathbf{x})\mathbf{u} \geq -\alpha(h(\mathbf{x}))\} \tag{2.8}$$

[2] If a continuos functions $\alpha : [-b, a] \to \mathbb{R}$ with $(a, b) > 0$, strictly increasing and $\alpha(0) = 0$ then $\alpha \in \mathcal{K}^e$ and if it adds $\lim_{r\to\infty} \alpha(r) = \infty$ then $\alpha \in \mathcal{K}_\infty^e$

[3] A set $\mathcal{S}$ is said foward invariant if the initial system state $x_0 \in \mathcal{S}$ and so $x(t) \in \mathcal{S}$ $\forall t \geq 0$

[4] For function $f : \mathbb{R}^n \to \mathbb{R}$, its superlevel set is given by $\mathcal{S}(f) = \{(x_1, ..., x_n) : f(x_1, ..., x_n) \geq c\}$, where having $c = 0$ corresponds to the 0-superlevel set of f

The controller $K_{CLF}(\mathbf{x})\ \ \forall x \in \mathbb{R}^n$ renders control input sets that keep the closed-loop system 2.2 safe with respect to the set C. The controller by defenition is able to evolve the closed-loop system more freely when $\dot{h}(\mathbf{x}) > 0$ and more cautiously as $h(\mathbf{x})$ shortens and $\dot{h}(\mathbf{x}) < 0$, if $h(\mathbf{x}) < 0$ it means is in the unsafe region, so $\dot{h}(\mathbf{x}) > 0$ implies converging continuosly to the safe set C.

2.1.1.3 Quadratic Program Formulation

Now having the objective of not only achieve safety but also assymptotically stability through the usage of CLF and CBF it renders a set of control inputs able to achieve the respective purposes.

Using the conditions imposed by CLF and CBF as constraints, is presented an optimization problem via Quadratic program (QP) [5], given a locally Lipschitz continuos controller $k : \mathbb{R}^n \longrightarrow \mathbb{R}^m$:

$$\begin{aligned} k(\mathbf{x}) = \underset{\mathbf{u}\in\mathbb{R}^m}{\operatorname{argmin}}\ \ & \tfrac{1}{2}(\mathbf{u}^\top R\mathbf{u}) \\ st.\ \ & L_f V(\mathbf{x}) + L_G V(\mathbf{x})\mathbf{u} \leq -\gamma(V(\mathbf{x})) \\ & L_f h(\mathbf{x}) + L_G h(\mathbf{x})\mathbf{u} \geq -\alpha(h(\mathbf{x})) \end{aligned} \tag{2.9}$$

The sets of control inputs restricted to the optimization problem are given by $K_{CLF-CBF}(\mathbf{x}) = K_{CLF}(\mathbf{x}) \cap K_{CBF}(\mathbf{x})$ hopefully non-empty which can happen if the conditions are in conflict.

In case of conditions' conflict, in order to the closed loop system 2.2 controller have a solution from the QP, since safety is critical, using a slack variable δ allows to relax the stability condition imposed by the CLF and highly contribute to obtaining a solution while keeping system safe:

$$\begin{aligned} k(\mathbf{x}) = \underset{\mathbf{u}\in\mathbb{R}^m,\ \delta\in\mathbb{R}}{\operatorname{argmin}}\ \ & \tfrac{1}{2}(\mathbf{u}^\top R\mathbf{u} + p\delta^2) \\ st.\ \ & L_f V(\mathbf{x}) + L_G V(\mathbf{x})\mathbf{u} \leq -\gamma(V(\mathbf{x})) + \delta \\ & L_f h(\mathbf{x}) + L_G h(\mathbf{x})\mathbf{u} \geq -\alpha(h(\mathbf{x})) \end{aligned} \tag{2.10}$$

Having δ as an optimization variable not only allows to balance between the input values exceed usage and the level of relaxation but also to not have a fixed δ value which would result for all states not so faster convergence and to the neighborhood of the equilibrium point instead of the actual target point.

[5] Quadratic program consists of solving a mathematical optimization problem with a quadratic objective function

2.1.2 Backstepping (Second-Order Formulation)

2.1.2.1 Second-Order Systems

Usually control systems are governed by higher-order systems, such as some second-order cyber-physical systems controlling the position by applying some force to manipulate the speed that is felt in the position just instants after. Higher order systems' outputs variation is felt by an multiple integrative effect, by an integration of each state affecting the next state dynamic until reach the so wanted output. Considering a non-linear system in strict-feedback form:

$$\dot{\mathbf{x}} = f_0(\mathbf{x}) + g_0(\mathbf{x})\xi \tag{2.11a}$$

$$\dot{\xi} = f_1(\mathbf{x}, \xi) + g_1(\mathbf{x}, \xi)\mathbf{u} \tag{2.11b}$$

with $\mathbf{x} \in \mathbb{R}^n$, $\xi \in \mathbb{R}^p$, and $\mathbf{u} \in \mathbb{R}^m$, and functions $f_0 : \mathbb{R}^n \to \mathbb{R}^n$, $g_0 : \mathbb{R}^n \to \mathbb{R}^{n\times p}$, $f_1 : \mathbb{R}^n \times \mathbb{R}^p \to \mathbb{R}^p$ and $g_1 : \mathbb{R}^n \times \mathbb{R}^p \to \mathbb{R}^{p\times m}$ locally Lipschitz continuos on their respective domains.

Given a locally Lipschitz continuos feedback controller $\mathbf{k} : \mathbb{R}^n \times \mathbb{R}^p \to \mathbb{R}^m$ the closed-loop system is:

$$\begin{aligned} \dot{\mathbf{x}} &= f_0(\mathbf{x}) + g_0(\mathbf{x})\xi \\ \dot{\xi} &= f_1(\mathbf{x}, \xi) + g_1(\mathbf{x}, \xi)\mathbf{k}(\mathbf{x}, \xi) \end{aligned} \tag{2.12}$$

for any initial states $(\mathbf{x}_0, \xi_0) \in \mathbb{R}^n \times \mathbb{R}^p$ exists a maximum time interval $I(\mathbf{x}_0, \xi_0) \subseteq \mathbb{R}_{\geq 0}$ and a unique solution $\varphi = (\varphi_{\mathbf{x}}, \varphi_{\xi})$ satisfying 2.3 $\forall t \in I(\mathbf{x}_0, \xi_0)$.

2.1.2.2 Purposal Solution Obtaining

Having a second order system 2.11 the output dynamic don't have direct access to control $\mathbf{u}$ or even is able to control ξ. In order to affect ξ and consequentially control the wanted dynamic $\dot{\mathbf{x}}$, the strategy passes by obtaining the solution if it was a first order system 2.1 and if ξ could be directly controlled (i.e. as part of the first order system control input), so given a differentiable and locally Lipschitz continuos $k_0(\mathbf{x}) : \mathbb{R}^n \to \mathbb{R}^p$ (that encompasses the "controllable ξ"), the closed-loop system:

$$\dot{\mathbf{x}} = f_0(\mathbf{x}) + g_0(\mathbf{x})k_0(\mathbf{x}) \tag{2.13}$$

That beeing said, the first order solution could be obtained via QP, so supposing a CLF V_0, CBF h_0, a differentiable and locally Lipschitz continuos described just now $k_0(\mathbf{x})$ and $(\gamma_0, \alpha_0) \in \mathcal{K}^e_\infty \times \mathcal{K}^e_\infty$:

$$\begin{aligned} k_0(\mathbf{x}) = \underset{\mathbf{u}\in\mathbb{R}^p,\ \delta\in\mathbb{R}}{\operatorname{argmin}} \ & \tfrac{1}{2}(\mathbf{u}^\top R_0 \mathbf{u} + p_0\delta^2) \\ st.\ \ & L_f V_0(\mathbf{x}) + L_G V_0(\mathbf{x})\mathbf{u} \leq -\gamma_0(V_0(\mathbf{x})) + \delta \\ & L_f h_0(\mathbf{x}) + L_G h_0(\mathbf{x})\mathbf{u} \geq -\alpha_0(h_0(\mathbf{x})) \end{aligned} \tag{2.14}$$

The solution is equivalent to a value of ξ closest to an optimal value taken by it that would impose safety and contribute to stability not only to the first-order system 2.13 but also to the actual second-order system. Although like it was said is not possible to have direct access to ξ, the backstepping technique is essentially the second-order trying to converge to the first order solution.

Now considering the second-order system 2.11, supposing there is $V_\xi(\mathbf{x}, \xi) : \mathbb{R}^n \times \mathbb{R}^p \to \mathbb{R}_{\geq 0}$, the new CLF $V(\mathbf{x}, \xi)$ and CBF $h(\mathbf{x}, \xi)$ are:

$$V_\xi(\mathbf{x}, \xi) = \frac{1}{2}\|\xi - k_0(\mathbf{x})\|^2 \tag{2.15a}$$

$$V(\mathbf{x}, \xi) = V_0(\mathbf{x}) + \eta V_\xi(\mathbf{x}, \xi) \tag{2.15b}$$

$$h(\mathbf{x}, \xi) = h_0(\mathbf{x}) - \eta V_\xi(\mathbf{x}, \xi) \tag{2.15c}$$

With $\eta \in \mathbb{R}_{\geq 0}$. Finally, via QP, given a differentiable and locally Lipschitz continuos $k(\mathbf{x}, \xi) : \mathbb{R}^n \times \mathbb{R}^p \to \mathbb{R}^m$:

$$\begin{aligned} k(\mathbf{x}, \xi) = \underset{\mathbf{u}\in\mathbb{R}^m,\, \delta\in\mathbb{R}}{\operatorname{argmin}} \ & \tfrac{1}{2}(\mathbf{u}^\top R\mathbf{u} + p\delta^2) \\ st. \ & L_f V(\mathbf{x}, \xi) + L_G V(\mathbf{x}, \xi)\mathbf{u} \leq -\gamma(V_0(\mathbf{x})) - \gamma'(V_\xi(\mathbf{x}, \xi)) + \delta \\ & L_f h(\mathbf{x}, \xi) + L_G h(\mathbf{x}, \xi)\mathbf{u} \geq -\alpha(h_0(\mathbf{x})) + \alpha'(V_\xi(\mathbf{x}, \xi)) \end{aligned} \tag{2.16}$$

It's expected that $\gamma << \gamma'$ contributing to a faster convergence of ξ and more similar behaviour of the system 2.12 relative to the first-order system 2.13 and mitigate the chances of the system 2.12 not be safe in relation to C_0.

Notes:

- If it's not pretended to enforce stability or safety, just remove from both optimization problem (2.14 and 2.16) the respective constraint responsible to it

2.1.3 Closed Form Solution

The objective of this thesis is to purpose a set of low computational effort techniques suitable to spacecrafts. Aiming a faster computation of the optimization problems solutions, any of the previous QPs (2.9, 2.10, 2.14, 2.16) have a closed-form[6] solution which allows to calculate directly the respective solution instead of depending of a numerical solver. Given the QP optimization problem and a controller $k(\mathbf{x}, \xi) : \mathbb{R}^n \times \mathbb{R}^p \to \mathbb{R}^m$ (if it is a second-order system):

$$\begin{aligned} k(\mathbf{x}, \xi) = \underset{\mathbf{u}\in\mathbb{R}^m,\, \delta\in\mathbb{R}}{\operatorname{argmin}} \ & \tfrac{1}{2}(\mathbf{u}^\top R\mathbf{u} + p\delta^2) \\ st. \ & \underbrace{L_f V(\mathbf{x}, \xi) + \gamma(V_0(\mathbf{x})) + \gamma'(V_\xi(\mathbf{x}, \xi))}_{F_V(\mathbf{x},\xi)} + L_G V(\mathbf{x}, \xi)\mathbf{u} - \delta \leq 0 \\ & \underbrace{L_f h(\mathbf{x}, \xi) + \alpha(h_0(\mathbf{x})) - \alpha'(V_\xi(\mathbf{x}, \xi))}_{F_h(\mathbf{x},\xi)} + L_G h(\mathbf{x}, \xi)\mathbf{u} \geq 0 \end{aligned} \tag{2.17}$$

With a CLF V, CBF h, $\mathbf{x} \in \mathbb{R}^n$, the first-order system CLF V_0(= V like in 2.9, 2.10 and 2.14) , and if it is a second-order system with $\xi \in \mathbb{R}^p$ (equivalent to the QP seen while doing Backstepping 2.16).

[6] An closed-form expression is expressed by a limit number and well defined operations (elementary functions)

Using [17] as a reference, assuming equal control input wheights relative to each other ($R = \mathbf{I}_{m\times m}$) and just one CLF and CBF each, according to the Karush-Kuhn-Tucker (KKT) conditions[7] (to see the full deduction A.1):

$$\mathbf{k}(\mathbf{x}, \xi) = \begin{cases} \mathbf{k}_1(\mathbf{x}, \xi), & (\mathbf{x}, \xi) \in \mathcal{S}_1 \\ \mathbf{k}_2(\mathbf{x}, \xi), & (\mathbf{x}, \xi) \in \mathcal{S}_2 \\ \mathbf{k}_3(\mathbf{x}, \xi), & (\mathbf{x}, \xi) \in \mathcal{S}_3 \\ \mathbf{0}_{m\times 1} \quad , & (\mathbf{x}, \xi) \in \mathcal{S}_4 \end{cases} \tag{2.18}$$

Where each controller $\mathbf{k}_i$, for $i = 1, \ldots, 4$, corresponds to the closed-form equation depending which constraints (CLF or CBF) are active what can be inferred by $\mathcal{S}_i$, for $i = 1, \ldots, 4$. Via KKT conditions the respectives controllers and domains are obtained due to the KKT multipliers.

Auxiliary Variables:

$$\begin{aligned} L(\mathbf{x}, \xi) &= L_G V(\mathbf{x}, \xi)\, L_G h(\mathbf{x}, \xi)^\top \\ \Delta &= L(\mathbf{x}, \xi)^2 (p^{-1} + \|L_G h(\mathbf{x}, \xi)\|^2)\, \|L_G h(\mathbf{x}, \xi)\|^2 \end{aligned}$$

KKT multipliers:

$$\begin{aligned} \lambda_1(\mathbf{x}, \xi) &= \Delta^{-1}(L(\mathbf{x}, \xi)\, F_h(\mathbf{x}, \xi) \; - \|L_G h(\mathbf{x}, \xi)\|^2\, F_V(\mathbf{x}, \xi)) \\ \lambda_2(\mathbf{x}, \xi) &= \Delta^{-1}(L(\mathbf{x}, \xi) F_V(\mathbf{x}, \xi) \; - (p^{-1} + \|L_G h(\mathbf{x}, \xi)\|^2)\, F_h(\mathbf{x}, \xi)) \end{aligned} \tag{2.19}$$

Controller $\mathbf{k}_i$ closed-form equation:

$$\begin{aligned} \mathbf{k}_1(\mathbf{x}, \xi) &= -(p^{-1} + \|L_G V(\mathbf{x}, \xi)\|^2)^{-1}\, F_V(\mathbf{x}, \xi)\, L_G V(\mathbf{x}, \xi)^\top \\ \mathbf{k}_2(\mathbf{x}, \xi) &= -\|L_G h(\mathbf{x}, \xi)\|^{-2}\, F_h(\mathbf{x}, \xi)\, L_G h(\mathbf{x}, \xi)^\top \\ \mathbf{k}_3(\mathbf{x}, \xi) &= -\lambda_1(\mathbf{x}, \xi) L_G V(\mathbf{x}, \xi)^\top + \lambda_2(\mathbf{x}, \xi) L_G h(\mathbf{x}, \xi)^\top \end{aligned} \tag{2.20}$$

Constraint Activation Subdomains $\mathcal{S}_i$ (based on the dual feasibilitie condition [7]):

If CLF is active:

$$\mathcal{S}_1(\mathbf{x}, \xi) = \{(\mathbf{x}, \xi) \in \mathbb{R}^n \times \mathbb{R}^p : \lambda_1 \geq 0 \cap \lambda_2 < 0\}$$

If CBF is active:

$$\mathcal{S}_2(\mathbf{x}, \xi) = \{(\mathbf{x}, \xi) \in \mathbb{R}^n \times \mathbb{R}^p : \lambda_1 < 0 \cap \lambda_2 \geq 0\}$$

(2.21)

If CLF and CBF is active:

$$\mathcal{S}_3(\mathbf{x}, \xi) = \{(\mathbf{x}, \xi) \in \mathbb{R}^n \times \mathbb{R}^p : \lambda_1 \geq 0 \cap \lambda_2 \geq 0\}$$

If Any is active:

$$\mathcal{S}_4(\mathbf{x}, \xi) = \{(\mathbf{x}, \xi) \in \mathbb{R}^n \times \mathbb{R}^p : \lambda_1 < 0 \cap \lambda_2 < 0\}$$

[7] KKT Conditions Wikipedia (Click here to be Redirected)

2.1.4 Unifying CBF

The previous controllers synthesized control inputs based on just one CBF, i.e., those controllers garantee safety w.r.t. a single safe set C, but given diffrent scenarios, it could exist more complex safety specifications and the need to impose more than one safety contraints simultaneously such as CBF $h_i(\mathbf{x})$, for $i \in \mathcal{I} = \{1, ...N\}$:

$$C_i = \{\mathbf{x} \in \mathbb{R}_n : h_i(\mathbf{x}) \geq 0\} \tag{2.22}$$

$$C = \bigcap_{i \in \mathcal{I}} C_i \tag{2.23}$$

But like it was said before regarding having more than one constraint could leave to conflict problems, empty safe sets ($C = \emptyset$) and an inexistent set of acceptable control inputs ($\mathbf{k}(\mathbf{x}, \xi) = \emptyset$). Using [18] as guidance, in order to avoid conflicts, merges all CBF into a single one that is able to capture all those safety notions and allow for even more complex safety specifications and to the resultant constraint fit the already obtained CLF-CBF closed-form solution 2.18.

2.1.4.1 First-Order System

The more complex safety specifications are defined via boolean logical operations between 0-superlevel sets of the diffrent CBF. Those operations are tipically seen in constrained optimization problems, like in QP of the form:

$$\begin{aligned} k(\mathbf{x}) = \underset{\mathbf{u} \in \mathbb{R}^p,\ \delta \in \mathbb{R}}{\text{argmin}} \ & \tfrac{1}{2}(\mathbf{u}^\top R \mathbf{u} + p\delta^2) \\ st. \ & L_f V(\mathbf{x}) + L_G V(\mathbf{x})\mathbf{u} \leq -\gamma(V(\mathbf{x})) + \delta \\ & L_f h_i(\mathbf{x}) + L_G h_i(\mathbf{x})\mathbf{u} \geq -\alpha_i(h_i(\mathbf{x})) \quad \forall i \in \mathcal{I} \end{aligned} \tag{2.24}$$

Where the resultant safe set 2.23 of the system refers to the intersection of all safe sets 2.22. More than be propitious to be not solvable, the formulation itself of the optimization problem 2.24 is limitated by no other logical operation than AND.

Among the the logical operations that could be applied to CBFs, there are:

Identity (Class-$\mathcal{K}^e$):

$$C_i = \{(\mathbf{x}, \alpha_i) \in \mathbb{R}^n \times \mathcal{K}^e : \alpha_i(h_i(\mathbf{x}) \geq 0)\} = \tag{2.25a}$$

$$= \{\mathbf{x} \in \mathbb{R}^n : h_i(\mathbf{x}) \geq 0\} \tag{2.25b}$$

Complement Set (Negation):

$$\bar{C}_i = \{\mathbf{x} \in \mathbb{R}^n : -h_i(\mathbf{x}) \geq 0\} \tag{2.26}$$

Intersection of Sets (AND):

$$\begin{aligned} \bigcap_{i \in \mathcal{I}} C_i \ &= \{\mathbf{x} \in \mathbb{R}^n : h_i(\mathbf{x}) \geq 0 \ \ \forall i \in \mathcal{I}\} \\ &= \{\mathbf{x} \in \mathbb{R}^n : \min_{i \in \mathcal{I}}(h_i(\mathbf{x})) \geq 0\} \end{aligned} \tag{2.27}$$

Union of Sets (OR):

$$\begin{aligned}\bigcup_{i\in\mathcal{I}} C_i &= \{\mathbf{x}\in\mathbb{R}^n : \exists i\in\mathcal{I} \;\; st. \;\; h_i(\mathbf{x})\geq 0\}\\ &= \{\mathbf{x}\in\mathbb{R}^n : \max_{i\in\mathcal{I}}(h_i(\mathbf{x}))\geq 0\}\end{aligned} \tag{2.28}$$

The logical operations identity, complement, intersection and union are represented by respectively, class-$\mathcal{K}^e$ functions, negation, min and max operations. Although the class-$\mathcal{K}^e$ $(\alpha_i(h_i(\mathbf{x})))$ and negation $(-h_i(\mathbf{x}))$ functions which are continuosly differentiable and valid as CBF, contrary to the AND and OR functions, $\min_{i\in\mathcal{I}}(h_i(\mathbf{x}))$ and $\max_{i\in\mathcal{I}}(h_i(\mathbf{x}))$ that aren't continuosly differentiable and therefore not CBF candidates. The max and min functions capacitate combining safe sets defined by multiple CBF (accordingly to the operation) and to obtain a new safety specification as is expected to see while merging multiple CBF into a single one. So, in order to viablize the AND and OR operation and achieve the merge of CBFs, the min and max functions can be replaced via smooth-aproximation, keeping their properties with just a relative small degradation of accuracy, by continuosly differentiable **log-sum-exp functions**:

Intersection of Sets \AND \ Minimum

$$\begin{aligned}h(\mathbf{x}) &= \frac{-1}{k} ln(\sum_{i\in\mathcal{I}} e^{-k\, h_i(\mathbf{x})})\\ &\approx \min_{i\in\mathcal{I}}(h_i(\mathbf{x}))\end{aligned} \tag{2.29}$$

Beeing $k\in\mathbb{R}_{>0}$ as smoothing parameter (if $k<0$ then is equivalent to the smooth-aproximation of $\max_{i\in\mathcal{I}}(h_i(\mathbf{x}))$).

$$\dot{h}(\mathbf{x},\mathbf{u}) = \underbrace{\sum_{i\in\mathcal{I}}[\lambda_i\, L_f h_i(\mathbf{x})]}_{Lfh(\mathbf{x})} + \underbrace{(\sum_{i\in\mathcal{I}}[\lambda_i\, L_G h_i(\mathbf{x})])}_{LGh(\mathbf{x})}\mathbf{u} \tag{2.30a}$$

$$\lambda_i(\mathbf{x}) = e^{-k(h_i(\mathbf{x})-h(\mathbf{x}))} \tag{2.30b}$$

With $\sum_{i\in\mathcal{I}}\lambda_i(\mathbf{x}) = 1$

Encountering an under-aproximation of h relative to the min function, given the safe set C defined based on 2.6 it verifies:

$$\min_{i\in\mathcal{I}}(h_i(\mathbf{x}))\geq h(\mathbf{x}) \quad \forall\mathbf{x}\in\mathbb{R}^n \tag{2.31a}$$

$$C\subseteq\bigcap_{i\in\mathcal{I}} C_i \tag{2.31b}$$

But, $\lim_{k\to\infty} h(\mathbf{x}) = \min_{i\in\mathcal{I}}(h_i(\mathbf{x}))$ and $\lim_{k\to\infty} C = \bigcap_{i\in\mathcal{I}} C_i$

On par with that, the new CBF $h(\mathbf{x})$ 2.29 could restrain too much the closed-loop system in comparison to theoretical CBF $\lim_{k\to\infty} h(\mathbf{x})$. In order to relax the safe set C and potentially contain $\bigcap_{i\in\mathcal{I}} C_i$:

$$h(\mathbf{x}) = \frac{-1}{k} ln(\sum_{i \in \mathcal{I}} e^{-k\ h_i(\mathbf{x})}) + \frac{b}{k} \tag{2.32}$$

Beeing b a parameter tuned according with the problem needs, knowing that if $b = ln(N)$:

$$\min_{i \in \mathcal{I}}(h_i(\mathbf{x})) \leq h(\mathbf{x}) \tag{2.33a}$$

$$C \supseteq \bigcap_{i \in \mathcal{I}} C_i \tag{2.33b}$$

Making the closed-loop system less constrained but not as safe.

Union of Sets \ OR \ Maximum

$$\begin{aligned} h(\mathbf{x}) &= \frac{1}{k} ln(\sum_{i \in \mathcal{I}} e^{k\ h_i(\mathbf{x})}) \\ &\approx \max_{i \in \mathcal{I}}(h_i(\mathbf{x})) \end{aligned} \tag{2.34}$$

Beeing $k \in \mathbb{R}_{>0}$ as smoothing parameter. The derivative of $h(\mathbf{x})$ is equal to 2.30a but:

$$\lambda_i(\mathbf{x}) = e^{k(h_i(\mathbf{x}) - h(\mathbf{x}))} \tag{2.35}$$

With also $\sum_{i \in \mathcal{I}} \lambda_i(\mathbf{x}) = 1$.

Due to an over-aproximation of h relative to the max function, given the safe set C defined based on 2.6 it verifies:

$$\max_{i \in \mathcal{I}}(h_i(\mathbf{x})) \leq h(\mathbf{x}) \quad \forall \mathbf{x} \in \mathbb{R}^n \tag{2.36a}$$

$$C \supseteq \bigcup_{i \in \mathcal{I}} C_i \tag{2.36b}$$

But, $\lim_{k \to \infty} h(\mathbf{x}) = \max_{i \in \mathcal{I}}(h_i(\mathbf{x}))$ and $\lim_{k \to \infty} C = \bigcup_{i \in \mathcal{I}} C_i$

Now showing a different point of view, safety is a critical factor, so in order to tight the safe set C and potentially be contained within $\bigcup_{i \in \mathcal{I}} C_i$:

$$h(\mathbf{x}) = \frac{1}{k} ln(\sum_{i \in \mathcal{I}} e^{k\ h_i(\mathbf{x})}) - \frac{b}{k} \tag{2.37}$$

Beeing b a tunable parameter. Taking $b = ln(N)$:

$$\max_{i \in \mathcal{I}}(h_i(\mathbf{x})) \geq h(\mathbf{x}) \tag{2.38a}$$

$$C \subseteq \bigcup_{i \in \mathcal{I}} C_i \tag{2.38b}$$

Therefore the higher b, the safer the system 2.13 but possibly too constrained by the new CBF $h(\mathbf{x})$ 2.37.

2.1.4.2 Second-Order System

Following the explanations given in the previous subsubsection 2.1.4.1, now applying for a second-order system 2.11, more precisely, for a Backstepping 2.1.2 situation.

Given a CLF $V_0(\mathbf{x})$: and multiple CBF $h0_i(\mathbf{x}) \quad \forall i \in \mathcal{I}$ combined into a CBF $h_0(\mathbf{x})$ via 2.32 or 2.37 (according it is an AND or OR operation), through the QP 2.14 (or its closed-form solution 2.18) is obtained a differentiable and locally Lipschitz continuos theoretical controller $k_0(\mathbf{x}) : \mathbb{R}^n \to \mathbb{R}$.

In order to the second-order system 2.12 dynamic converge to $k_0(\mathbf{x})$ imposed dynamic, given multiple CBF $h_i(\mathbf{x}) \quad \forall i \in \mathcal{I}$:

$$V_\xi(\mathbf{x}, \xi) = \frac{1}{2}\|\xi - k_0(\mathbf{x})\|^2 \tag{2.39a}$$

$$V(\mathbf{x}, \xi) = V_0(\mathbf{x}) + V_\xi(\mathbf{x}, \xi) \tag{2.39b}$$

$$h_i(\mathbf{x}, \xi) = h0_i(\mathbf{x}) - V_\xi(\mathbf{x}, \xi) \quad \forall i \in \mathcal{I} \tag{2.39c}$$

The resultant CBF $h_i(\mathbf{x}, \xi) \quad \forall i \in \mathcal{I}$, one more time can be merged via 2.32 or 2.37 (according it is an AND or OR operation) into a single CBF $h(\mathbf{x}, \xi)$. However there is another way in this case to have the new single CBF $h(\mathbf{x}, \xi)$, so, considering the second-order system 2.11 and $lo \in \{\max, \min\}$:

$$\begin{aligned} \underset{i\in\mathcal{I}}{lo}(h0_i(\mathbf{x}) - V_\xi(\mathbf{x}, \xi)) &= \underset{i\in\mathcal{I}}{lo}(h0_i(\mathbf{x})) - V_\xi(\mathbf{x}, \xi) \approx \\ &\approx h_0(\mathbf{x}) - V_\xi(\mathbf{x}, \xi) = \\ &= h(\mathbf{x}, \xi) \end{aligned} \tag{2.40}$$

$$\dot{h}(\mathbf{x}, \xi) = \underbrace{L_f h_0(\mathbf{x}) + L_G h_0(\mathbf{x})\xi - L_f V_\xi(\mathbf{x}, \xi)}_{L_f h(\mathbf{x},\xi)} + \underbrace{(-L_G V_\xi(\mathbf{x}, \xi))}_{L_G h(\mathbf{x},\xi)}\mathbf{u} \tag{2.41}$$

Having CBF h, the second-order solution, a differentiable and locally Lipschitz continuos controller $k(\mathbf{x}, \xi) : \mathbb{R}^n \times \mathbb{R}^p \to \mathbb{R}$ is obtained using the QP 2.16 (or its closed-form solution 2.18).

Notes:

- There are other possible variations of a second-order system that invalidates 2.41 like the unicycle model that will be shown next chapter.

2.2 Single Parameter Optmization

The optimization of the respective parameter is based on minimizing a cost function $g : \mathbb{R} \rightarrow \mathbb{R}$, which in the context of this work expected to be quasi-convex [8] along the optimization variable $x \in \mathbb{R}$, and to do that there are algorithms such as the highly used gradient descent 2.2.2 and binary search 2.2.3 method.

2.2.1 Gradient of the Cost Function - Discretization

In both algorithms is make use of $g(x)$ gradient in order to essentially indicate the direction the optimization variable x must take in order to minimize the cost. More than that, if $g(x)$ is a quasi-convex function to quantifie the proximity to a local optimal point.

If the $\nabla g(x)$ extact equation is not possible to obtain then:

$$\nabla g(x) = \lim_{dev \rightarrow 0} \frac{g(x + dev) - g(x)}{dev} \tag{2.42}$$

Is approximated by:

$$\nabla g(x, dev) = \frac{g(x + dev) - g(x)}{dev} \tag{2.43}$$

With $dev \in \mathbb{R}$ sufficiently close to 0.

If $g(x)$ has relevant noise could compromise the value obtained of $\nabla g(x)$, it could be needed increase the number of samples ($nS \in \mathbb{R}$) in the neighborhood of x separated by $devN$ between them, so digitally:

Algorithm 1: Discrete Gradient Function (DGF)

Data: $nS, devN, dev, g, x$
Result: $mean(grad_i)$
$i \leftarrow -1$;
while $i < nS - 1$ **do**
  $devN_i \leftarrow \frac{1}{2} \times (i + (i \; mod \; 2)) \times devN$;
  $grad_i \leftarrow \nabla g(x + (-1)^i \times devN_i, (-1)^i \times dev)$; /* Equation 2.43 */
  $i \leftarrow i + 1$;
end

Notes:

- It is possible to digitally obtain $\nabla g : \mathbb{R}^n \rightarrow \mathbb{R}^n$ by otaining each row r separately with $dev_r \in \{dev_1, ..., dev_n\}$. Beeing dev_r a column vector, just equal to the divisor dev in the respective row element ($dev = \|dev_r\|$).

2.2.2 Gradient Descent

This method is characterized by an iterative update of the optimization variable x, based on the current variable value and function $g(x)$ gradient responsible to indicate the evolution direction of x in order to minimize the cost:

[8] A quasi-convex function $f : \mathcal{S} \rightarrow \mathbb{R}$, beeing $\mathcal{S}$ a convex set, verifies $\forall x, y \in \mathcal{S}$ and $\lambda \in [0; 1]$, $f(\lambda x + (1 - \lambda)y) \leq max\{f(x), f(y)\}$

$$x_{k+1} = x_k + \underbrace{(-a\nabla g(x_k))}_{step_k} \tag{2.44}$$

where a is an arbitrary constant for the step intensity adjustment . Assuming $g(x)$ is a quasi-convex function, the closure to local minimum the smaller the gradient (or step) module.

However, this method has another variations including adding "momentum" where is had in account the previous iteration step applied:

$$x_{k+1} = x_k + b\underbrace{(x_k - x_{k-1})}_{step_{k-1}} - a\nabla g(x_k) \tag{2.45}$$

where b is an argument of this algorithm like a responsible to tune the previous step intensity.

According to [9] there are also another two methods. Refering to one of them, this expands on the idea of momentum called Nesterov's Accelerated Gradient, using a predictive step based on the previous one:

$$\begin{aligned} y_k &= x_k + b(x_k - x_{k-1}) \\ x_{k+1} &= y_k + (\underbrace{-a\nabla g(y_k)}_{predictive\ step}) \end{aligned} \tag{2.46}$$

where a now tunes the predictive step.

Finally the Triple-Momentum method which presents an output equation and the parameters applied on the previous step are distinct in all usages of it:

$$\begin{aligned} z_k &= x_k + d(x_k - x_{k-1}) \\ y_k &= x_k + c(x_k - x_{k-1}) \\ x_{k+1} &= x_k + b(x_k - x_{k-1}) - a\nabla g(y_k) \end{aligned} \tag{2.47}$$

where a, b, c, d are the respective steps intensity tuning parameter.

Notes:

- The method supports multiple optimization variables.

2.2.3 Binary Search

This method is composed by two phases, beeing the first one resposible to obtain two extreme points $(xI, xS) \in \mathbb{R} \times \mathbb{R}$ such that the Bolzano theorem [9] is verified for the continuos gradient funtion ($x^* = \{x \in]xI; xS[: \exists x\ \nabla g(x) = 0\}$). In order to achieve that, is used an variation of the gradient descent method 2.44, with a starting point x_0:

$$x_{k+1} = x_k + \underbrace{(-a\nabla g(x_0))}_{step} \tag{2.48}$$

Where the $step$ is always equal. That beeing said, the phase 1 algorithm:

[9] Bolzano's theorem says that given the continuos function $f : [a; b] \subset \mathbb{R} \to \mathbb{R}$ and $f(a)f(b) < 0$, then $\exists x \in]a; b[$ such that $f(x) = 0$

Algorithm 2: Binary Search Phase 1

```
Data: xI, a
Result: (xI, xS)
x_0 ← xI;
xS ← xI;
while ∇g(xI) × ∇g(xS) > 0 do
    xS ← xI − a∇g(x_0) ;                    /* Equation 2.48 */
    if ∇g(xI) × ∇g(xS) > 0 then
        xI ← xS;
    end
end
```

The second phase consists in iteratively taking the extreme points and do a weighted mean obtaining a new delimiter that replace one of the previous points while preserving the application of the Bolzano theorem for next iterations, narrowing the interval and approximating the points to a local minimum.

Algorithm 3: Binary Search Phase 2

```
Data: xI, xS, tI, w
Result: xMid
while i < tI AND Conditions* do
    xMid ← w × xI + (1 − w) × xS ;          /* Weighted Mean */
    if ∇g(xMid) > 0 then
        xS ← xMid;
    else
        xI ← xMid;
    end
end
```

2.3 Constraint Contour Point

Having the objective of global assympyotically stability of a system, the system converges a desired equilibrium point $\bar{\mathbf{x}}_F$ but kept outside a bounded unsafe set $\mathcal{B} \subset \mathbb{R}^n$. Depending on certain decision algorithms, such as 2.10 which uses CLF-CBF, by pursuing another equilibrium point $\bar{\mathbf{x}}_I$ first, the path taken by the system's states $\mathbf{x} \in \mathbb{R}^n$ until $\bar{\mathbf{x}}_F$ could be oriented in order to be a better fit for problem demands, specially to deal more efficiently with the implications of an unsafe set $\mathcal{B}$.

2.3.1 Constraint Fit

The program formulated in 2.3.3.2 responsible to obtain a new equilibrium point is characterized by its application in two-dimensional Euclidian Space safety constraints. Since the safe set $\bar{\mathcal{B}}$ (complement of $\mathcal{B}$) corresponds to the 0-superlevel set of an unkown safety function $h_{unkown} : \mathbb{R}^n \to \mathbb{R}$, then via logical operations 2.1.4 smoth-approximations (AND 2.32, OR 2.37), combining the different 0-superlevel sets $C_i \subset \mathbb{R}^n \quad \forall i \in \mathcal{I} = \{1, ..., p\}$ of the the functions $h_i : \mathbb{R}^n \to \mathbb{R}$:

$$\begin{aligned} &h_{unkown}(\mathbf{x}) \approx h(\mathbf{x}) = merge(h_i(\mathbf{x})) \quad \forall i \in \mathcal{I} \\ &\bar{\mathcal{B}} \subseteq C = \{\mathbf{x} \in \mathbb{R}^n : h(\mathbf{x}) \geq 0\} \end{aligned} \tag{2.49}$$

$\bar{\mathcal{B}}$ can also be approximated by an ellipsoide:

$$h_{unkown}(\mathbf{x}) \approx h(\mathbf{x}) = \frac{1}{2}((\mathbf{O}\mathbf{x} - p)^\top \mathbf{A}_{\mathbf{xis}}(\mathbf{O}\mathbf{x} - p) - 1) \tag{2.50}$$

$$st. \quad \bar{\mathcal{B}} \subseteq C \tag{2.51}$$

With $\mathbf{O} \in \mathbb{R}^{c \times n}$ as constrained states observer (c equal to the constrained states), $\mathbf{A}_{\mathbf{xis}} \in \mathbb{R}^{c \times c}_{>0}$ and $p \in \mathbb{R}^c$ susceptible to an optimization that tries to minimize the size of the set $C \cap \mathcal{B}$ or at least choosing them such that is garanteed 2.51. Even though the ellipsoidal approximation is less accurate as is not able to capture the shapes of other figures than ellipses, it shows sufficient for some problems, it provides less complexity and given its properties, suited for some strategies planning.

2.3.2 State Propagation Simulation

2.3.2.1 Runge-Kutta (RK) Methods

Its a technique used to solve ordinarinary differential equation (ODE)s [10] initial-value problems [11] ($\frac{dy}{dx} = f(x, y)$ with (x_0, y_0)), i.e., to obtain an approximation of a non-linear system solution $y(x)$ at some point in its domain without using the higher order derivatives of it.

The **Euler** method shows the most degradation of local truncature error[12] as the required (arbitrary valued) step $\Delta x = x_{n+1} - x_n$, $n \in \mathbb{N}_0$ increases but quicker to compute.

[10] An ODE is characterized by having a independent variable $x \in \mathbb{R}$ (commonly time t) and dependent variables $y \in \mathbb{R}^n$ and its derivatives relative to x, such that an ODE corresponds to an equation equivalent to $g(x, y, \frac{dy}{dx}, ... \frac{d^n y}{dx^n}) = 0$

[11] A initial-value-problem is an ODE $\dot{\mathbf{y}}(t) = f(t, \mathbf{y}(t))$ with $f : \mathbb{R} \times \mathbb{R}^n \to \mathbb{R}^n$ with an initial condition t_0, y_0

[12] A local truncature error corresponds to the error caused by the integrative effect of an iteration of a Runge-Kutta method

$$y_{n+1} = y_n + \Delta x f(x_n, y_n) \tag{2.52}$$

This method has just one stage, while the next Runge-Kutta (RK)s expanded on it such that allow more. Those stages correspond to intermediate point derivatives based on predictive steps. Introducing to the **Explicitit Runge-Kutta** :

$$y_{n+1} = y_n + \Delta x \sum_{i=1}^{s} b_i k_i \tag{2.53a}$$

$$k_i = f(x_n + \Delta x c_i, y_n + \Delta x \sum_{j=1}^{i-1} a_{ij} k_j) \tag{2.53b}$$

Where s is the number of stages, $\mathbf{a}$ the Runge-Kutta (RK) matrix, with $a_{ij} \in \mathbb{R}$ and usually tuned such that $\sum_{j=1}^{i-1} a_{ij} = c_i$, $\mathbf{b} \in \mathbb{R}^s$ are the weights, so $\sum_{i=1}^{s} b_i = 1$, $\mathbf{c} \in \mathbb{R}^s$ are the nodes and $c_i \in [0;1]$. These parameters are usually presented by a Butcher tableau:

$$\begin{array}{c|cccc} 0 & & & & \\ c_2 & a_{21} & & & \\ \vdots & \vdots & \ddots & & \\ c_s & a_{s;1} & \dots & a_{s;s-1} & \\ \hline & b_1 & \dots & b_{s-1} & b_s \end{array} = \begin{array}{c|c} \mathbf{c} & \mathbf{a} \\ \hline & \mathbf{b}^\top \end{array} \tag{2.54}$$

The <u>RK 4th order</u> is defined by 2.53 and its tableau:

$$\begin{array}{c|cccc} 0 & & & & \\ \frac{1}{2} & \frac{1}{2} & & & \\ \frac{1}{2} & 0 & \frac{1}{2} & & \\ 1 & 0 & 0 & 1 & \\ \hline & \frac{1}{6} & \frac{1}{3} & \frac{1}{3} & \frac{1}{6} \end{array} \tag{2.55}$$

Although this method solution is slower comparatively to Euler 2.52, its accuracy is higher.

The **Adaptive Runge-Kutta** method, with a adaptive step size Δx according to the estimated local truncature error. If its lower than some treshold, the step size increases and the solutions obtained faster since that point, while if it increases is reduced promoting a accurate solution, but with $\Delta x \in [\Delta x_{min}; \Delta x_{max}]$. The error estimations are calculated based on two different methods of one order more than the other. For this new Runge-Kutta variation the Butcher Tableau is:

$$\begin{array}{c|c} \mathbf{c} & \mathbf{a} \\ \hline & \mathbf{b}^\top \\ & \mathbf{b}^{*\top} \end{array} \tag{2.56}$$

The low and high order solution are based equally on 2.53a:

$$y_{n+1} = y_n + \Delta x \sum_{i=1}^{s} b_i k_i \text{ (low-order/output sol.)} \tag{2.57a}$$

$$z_{n+1} = y_n + \Delta x \sum_{i=1}^{s} b_i^* k_i \text{ (high-order sol.)} \tag{2.57b}$$

Where the intermediate derivatives k_i functions keep the same equation 2.53b and are equal for both (low and hig order methods) reducing some computing time. The local truncature error estimations ig given by:

$$e_{n+1} = |z_{n+1} - y_{n+1}| \tag{2.58}$$

This error affects the new step value, the Dormand Prince method [13] with its particular update step size iteration. This method Butcher Tableau is:

$$\begin{array}{c|ccccccc}
0 & & & & & & & \\
\frac{1}{5} & \frac{1}{5} & & & & & & \\
\frac{3}{10} & \frac{3}{40} & \frac{9}{40} & & & & & \\
\frac{4}{5} & \frac{44}{45} & -\frac{56}{15} & \frac{32}{9} & & & & \\
\frac{8}{9} & \frac{19372}{6561} & -\frac{25360}{2187} & \frac{64448}{6561} & -\frac{212}{729} & & & \\
1 & \frac{9017}{3168} & -\frac{355}{33} & \frac{46732}{5247} & \frac{49}{176} & -\frac{5103}{18656} & & \\
1 & \frac{35}{384} & 0 & \frac{500}{1113} & \frac{125}{192} & -\frac{2187}{6784} & \frac{11}{84} & \\
\hline
 & \frac{35}{384} & 0 & \frac{500}{1113} & \frac{125}{192} & -\frac{2187}{6784} & \frac{11}{84} & 0 \\
 & \frac{5179}{57600} & 0 & \frac{7571}{16695} & \frac{393}{640} & -\frac{92097}{339200} & \frac{187}{2100} & \frac{1}{40}
\end{array} \tag{2.59}$$

The k_7 derivative is calculated at the predicted point obtained by the low order solution y_{n+1}. The update size step equation as:

$$\Delta x_{new} = \Delta x \left(\frac{\epsilon \Delta x}{2 e_{n+1}} \right)^{\frac{1}{5}} \tag{2.60}$$

With ϵ as the error tolerance equal to 10^{-5} in the default version of Matlab ode45.

2.3.2.2 State Propagation Simulation Algorithm

Finding a new equilibrium point $\bar{\mathbf{x}}_I$ requires simulate the state convergence. Aiming to simulate a system evolution based on a decision algorithm, given the ordinary diferential states dynamics equations $\dot{\mathbf{x}} = f(\mathbf{x}, \mathbf{u})$:

Algorithm 4: State Propagation Simulation (SPS)

Data: $f, \mathbf{x}_0, tI, \Delta t, arg^*$
Result: $\mathbf{x}$, $\mathbf{u}$
$i \leftarrow 0$;
while $i < tI$ ***AND*** *Conditions** **do**
  $\mathbf{u}_i \leftarrow decision^*(\mathbf{x}_i, arg^*)$; /* Decision Algorithm */
  $\mathbf{x}_{i+1} \leftarrow integration^*(f, \mathbf{x}_i, \mathbf{u}_i, \Delta t)$; /* Euler 2.52, RK 4 2.3.2.1 or DP 2.3.2.1... */
  $i \leftarrow i + 1$;
end

2.3.3 Constraint Contour Point Algorithm

2.3.3.1 Natural Convergence Direction

The new point is obtained accounting with the natural movement direction of those states when they would reach the unsafe zone, which is provided approximately by the propagation algorithm 4 if the safety constraint defined by h (2.49 or 2.50) was inactive.

Algorithm 5: Natural Convergence Direction Vector ($NCDV$)

Data: $f, \mathbf{x}_0, tI, \Delta t, args^*$
Result: dir

$(\mathbf{x}, \mathbf{u}) \leftarrow \text{SPS}(f, \mathbf{x}_0, tI, \Delta t, args^*)$ $\begin{bmatrix} conditions^* \leftarrow h(\mathbf{x}) > 0 \\ decision^* \\ integration^* \end{bmatrix}$; `/* Algorithm 4 */`

$dir \leftarrow \frac{f(\mathbf{x}_{END}, \mathbf{u}_{END})}{\|f(\mathbf{x}_{END}, \mathbf{u}_{END})\|}$; `/* System Dynamic at` $(\mathbf{x}_{END}, \mathbf{u}_{END})$ `Normalized */`

This vector points to the direction where the system can aproximate more of $\bar{\mathbf{x}}_F$ given some decision algorithm and assuming is always safe.

2.3.3.2 Constraint Tangent Point

From the vector $\mathbf{v} = \left[\begin{smallmatrix} v_1 \\ v_2 \end{smallmatrix}\right]$ obtained in 5 is deduced a tangent point in the respective constraint. This point is the most far from the eminent of colliding unsafe set C given a perpendicular direction to the obtained vector.Assuming it's always used the ellipsoidal fit 2.50, where $\mathbf{A_{xis}} = \left[\begin{smallmatrix} a_x & a_u \\ a_u & a_y \end{smallmatrix}\right] \in \mathbb{R}^{c \times c}_{>0}$, $\mathbf{O} \in \mathbb{R}^{c \times n}$ and $\mathbf{p} \in \mathbb{R}^c$, the new point could be obtained using a closed-form solution (to see the full deduction A.2):

$$d = \frac{a_u \sqrt{2}}{\sqrt{a_x a_y}} \tag{2.61}$$

$$l = \sqrt{\frac{a_x}{2a_y}} \tag{2.62}$$

$$q = \pm \sqrt{\frac{1}{\frac{a_x}{2}(v_1^2 + v_2^2) + a_y v_1^2}} \tag{2.63}$$

$$\mathbf{z}_i = \begin{bmatrix} v_2 q \\ v_1 q \end{bmatrix} \quad i \in \{1, 2, 3, 4\} \tag{2.64}$$

In order to obtain both solutions from the perpedincular vectors to $\mathbf{v}$:

$$\mathbf{r}_1 = \underset{\mathbf{z}_i \in \mathbb{R}^2}{\arg\min} = \begin{bmatrix} a_y v_2 & -a_x v_1 \end{bmatrix} \mathbf{z}_i \tag{2.65a}$$

$$\mathbf{r}_2 = -\mathbf{r}_1 \tag{2.65b}$$

With $\mathbf{r} = \begin{bmatrix} \mathbf{r}_1 & \mathbf{r}_2 \end{bmatrix}$. The respective points are obtained with:

$$\mathbf{s}_j = \frac{\begin{bmatrix} d\, r_{1j} + l\, r_{2j} \\ d\, r_{2j} - l\, r_{1j} \end{bmatrix}}{d^2 + l^2} + \mathbf{p} \quad j \in \{1, 2\} \tag{2.66}$$

The closest-point to the current state is chosed as the intermediate equilibrium point:

$$\mathbf{O}\bar{\mathbf{x}}_I = \underset{\mathbf{s}_j \in \mathbb{R}^2}{\arg\min} \|\mathbf{s}_j - \mathbf{x}\| \tag{2.67}$$

2.4 Proposed Decision Algorithms

All the proposed algorithms are based on CLF-CBF 2.1 decision algorithm, having the objective of stabilizing a system while prioritizing its safety. Using CLF-CBF allows a relative lower computational effort, in particular its closed form solution 2.1.3, compared to other techniques, however it lacks adaptive power as its constant parameters consistently dictates an inneficient system behavior for probably the majority of the encoutered scenarios.

2.4.1 Just Optimized (A-JO)

Optimizing parameters can improve the system behaviour for the scenario is deparing with. And an eventual optimization make its behaviour more suited to actuate in an multi-scenario environment.

Based on single parameter optimization 2.2, the proposed technique is centered on the slope α of the CBF constraint function $\alpha : \mathbb{R} \to \mathbb{R}$ (CLF-CBF QP 2.10) as an optimization variable:

$$\alpha(h) = \alpha h \tag{2.68}$$

The parameter is optimized using 2.44 but for that is required a cost function $g_{\mathbf{x}_0} : \mathbb{R} \to \mathbb{R}$ which accounts with a whole predction horizon:

$$\begin{aligned} g_{\mathbf{x}_0}(\alpha) &= g(\alpha, \mathbf{x}_0 = cte) \\ &= \textstyle\sum_{k=0}^{N} \mathbf{x}_{k+1}(\mathbf{x}_k, \mathbf{u}_k)^\top \mathbf{Q} \mathbf{x}_{k+1}(\mathbf{x}_k, \mathbf{u}_k) + \mathbf{u}_k(\alpha, \mathbf{x}_k)^\top \mathbf{R} \mathbf{u}_k(\alpha, \mathbf{x}_k) \\ &= \textstyle\sum_{k=0}^{N} \mathbf{x}_{k+1}(\alpha, \mathbf{x}_0)^\top \mathbf{Q} \mathbf{x}_{k+1}(\alpha, \mathbf{x}_0) + \mathbf{u}_k(\alpha, \mathbf{x}_0)^\top \mathbf{R} \mathbf{u}_k(\alpha, \mathbf{x}_0) \\ &= \mathbf{X}(\alpha, \mathbf{x}_0)^\top \tilde{\mathbf{Q}} \mathbf{X}(\alpha, \mathbf{x}_0) + \mathbf{U}(\alpha, \mathbf{x}_0)^\top \tilde{\mathbf{R}} \mathbf{U}(\alpha, \mathbf{x}_0) \end{aligned} \tag{2.69}$$

Where N is equivalent to the total of samples, $\mathbf{x}_0$ the present state, $\mathbf{Q} \in \mathbb{R}^n_{>0}$ is the states cost weight matrix, $\mathbf{R} \in \mathbb{R}^m_{>0}$ is the inputs cost weight matrix.

Because of the conditioned control input values given by CLF-CBF controller, the gradient $\nabla g_{\mathbf{x}_0}(\alpha)$ exact equation is difficult to have it, hence is required a discretization of it 2.2.1. Which leds to the exact function of $g_{\mathbf{x}_0}(\alpha)$ which is not known as $\mathbf{u}_k$ and $\mathbf{x}_{k+1}$ could not be obtained directly. Like it was said, $\mathbf{u}_k$ is obtained based on a closed-form CLF-CBF controller 2.1.3, governed by a CLF V and a CBF h. Meanwhile, $\mathbf{x}_{k+1}$ is given by an explicit RK2.3.2.1 in particular defined by the fourth order RK Butcher Tableau2.55, so given the system dynamics equation $f : \mathbb{R}^n \times \mathbb{R}^m \to \mathbb{R}^n$ and integration time interval Δt:

$$\begin{bmatrix} \mathbf{X}(\alpha, \mathbf{x}_0) & \mathbf{U}(\alpha, \mathbf{x}_0) \end{bmatrix} = SPS(f, \mathbf{x}_0, N, \Delta t, V, h, \alpha) \begin{bmatrix} conditions^* \leftarrow V(\mathbf{x}_i) \geq tol \\ decision^* \leftarrow \text{CLF-CBF } 2.1.3 \\ integration^* \leftarrow \text{RK4 } 2.55 \end{bmatrix} \tag{2.70}$$

With SPS (State Propagation Simulation) as the algorithm 4. So, choosing nS number of samples, $devS$ referent to the distance between them, dev the discretization step and with $g_{\mathbf{x}_0}(\alpha)$ given by 2.70:

$$\nabla g_{\mathbf{x}_0}(\alpha) = DGF(nS, devS, dev, g_{\mathbf{x}_0}, \alpha) \tag{2.71}$$

With DGF (Discrete Gradient Function) as the algorithm 1 and therefore enabling 2.2 and the optimization of the slope α.

Theoretically the CBF should garantee safety, however due to not be a continuos system (or integration errors), having a high α can lead to unsafe sets and can also provide a demand on a not possible control input values to keep the system safe, but if that happens is expected to reflect on the path taken, control inputs and therefore penalize in the cost function.

2.4.2 Double CLF

The CLF-CBF returns control input values based on purely the current state, resulting in global (infinite horizon) suboptimal solutions that could lead to states relatively close to the barrier (given some safety tunable defenitions) and unwanted inputs to deviate from it. So, changing the notion of stability by making the system follow another equilibrium point first could help mitigate the problems. This technique focus on the transition between two CLF aiming to converge for each of the equilibrium points, the current and next.

With constraint contour point algorithm 2.3.3 is obtained the new equilibrium point $\bar{\mathbf{x}_C} \in \mathbb{R}^n$. Given a system, with dynamics $f : \mathbb{R}^n \times \mathbb{R}^m \to \mathbb{R}^n$, at the sate $\mathbf{x}_0 \in \mathbb{R}^n$, a CLF V that targets $\bar{\mathbf{x}_N} \in \mathbb{R}^n$ and CBF h, the new equilibrium point could be obtained:

$$\mathbf{v} = NCDV(f, \mathbf{x}_0, N, \Delta t, V, h) \begin{bmatrix} decision^* \leftarrow \text{CLF-CBF } 2.1.3 \\ integration^* \leftarrow \text{RK4 } 2.55 \end{bmatrix} \tag{2.72}$$

Where $NCDV$ (Natural Convergence Direction Vector) is algorithm 5. Given the direction vector $\mathbf{v}$, assuming an ellipsoidal fit 2.50, with the constraint tangent point closed form solution 2.3.3.2 like this obtain $\bar{\mathbf{x}_C}$.

2.4.2.1 CLFs Summed (A-CLF-S)

From both equilibrium points is defined two CLF, V_C following the current equilibrium point $\bar{\mathbf{x}_C}$ and V_N stabilizing in $\bar{\mathbf{x}_N}$. By doing a wheighted mean between both CLF is defined a new one (a generalization for multiple CLF can be found in A.3):

$$V_1(\mathbf{x}) = \begin{cases} \sigma(\mathbf{x})V_C(\mathbf{x}) + (1 - \sigma(\mathbf{x}))V_N(\mathbf{x}) \\ \sigma(\mathbf{x}) = \frac{1}{1+e^{-\zeta V_C(\mathbf{x})}} \end{cases} \tag{2.73}$$

$$V(\mathbf{x}) = \begin{cases} V_1(\mathbf{x}) \quad \mathbf{x} \in \mathcal{S} \\ V_2(\mathbf{x}) = V_N(\mathbf{x}) \quad \mathbf{x} \in \bar{\mathcal{S}} \end{cases} \tag{2.74}$$

$$\mathcal{S} = \{\mathbf{x} \in \mathbb{R}^n : V_C(\mathbf{x}) \geq tol \cap \dot{V}_C(\mathbf{x}, \mathbf{u}) \leq 0 \cap \delta \leq tol_2\} \tag{2.75}$$

Where $\sigma(V_C(\mathbf{x}))$ is a sigmoide function responsible to the transition between the CLF and $\zeta \in \mathbb{R}_{\geq 0}$ is its slope. $\mathcal{S}$ refers to the just one time activation set of the respective CLF V_1, with δ referent to the CLF-CBF QP optimized relaxation variable.

The sets of possible control inputs, given the new CLF V_1 and assuming a high slope ζ ($\dot{\sigma}(\mathbf{x}, \mathbf{u}) \approx 0$), is approximately:

$$K_{V_1}(\mathbf{x}) = \Big\{\mathbf{u} \in \mathbb{R}^m : \dot{V}_1(\mathbf{x}, \mathbf{u}) = \dot{V}_C(\mathbf{x}, \mathbf{u})\sigma(\mathbf{x}) + (1 - \sigma(\mathbf{x}))\dot{V}_N(\mathbf{x}, \mathbf{u}) \\ \leq -\gamma(\mu\sigma(\mathbf{x})V_C(\mathbf{x}) + (1 - \sigma(\mathbf{x}))V_N(\mathbf{x}))\Big\} \tag{2.76}$$

With μ as a parameter with default value as $\frac{V_N(\mathbf{x})}{V_C(\mathbf{x})}$. The set $K_{V_2}(\mathbf{x})$ is equivalent to 2.5.

Finally, with A-JO 2.4.1 adapt the Control Barrier Function (CBF) slope α to the new Control Lyapunov Function (CLF) V and improve possibly even more the state convergence to the final equilibrium point.

2.4.2.2 CLFs Independent (A-CLF-I)

From both equilibrium points is defined two CLF, V_C following the current equilibrium point $\bar{\mathbf{x}_C}$ and V_N stabilizing in $\bar{\mathbf{x}_N}$. If $\zeta \to \infty$, according to equations 2.73 and 2.74:

$$V(\mathbf{x}) = \begin{cases} V_C(\mathbf{x}) & \mathbf{x} \in \mathcal{S} \\ V_N(\mathbf{x}) = V_N(\mathbf{x}) & \mathbf{x} \in \bar{\mathcal{S}} \end{cases} \tag{2.77}$$

$$\mathcal{S} = \{\mathbf{x} \in \mathbb{R}^n : V_C(\mathbf{x}) \geq tol \cap \dot{V}_C(\mathbf{x}, \mathbf{u}) \leq 0 \cap \delta \leq tol_2\} \tag{2.78}$$

And if $\mu = \frac{V_N(\mathbf{x})}{V_C(\mathbf{x})}$ then:

$$K_{V_C}(\mathbf{x}) = \Big\{\mathbf{u} \in \mathbb{R}^m : \dot{V}_C(\mathbf{x}, \mathbf{u}) \leq -\gamma(V_N(\mathbf{x}))\Big\} \tag{2.79}$$

The set $K_{V_N}(\mathbf{x})$ is is defined by 2.5.

Like in the previous technique 2.4.2.1, it is possible to apply A-JO 2.4.1 and improve the trajectory.

2.4.2.3 CLFs Unified (A-CLF-U)

Estou a pensar em deixar de parte para já, e como os resultados desta tecnica não são grande coisa acho que vou me focar no capitulo 3 para já.

3

Results

The algorithms seen in 2.4, namely, A-JO, A-CLF-S and A-CLF-I, are going to be implemented in different systems, in a unicycle 3.1.2 and orbital system 3.1.3, and subject to different types of experiments according to the system in question (unicycle 3.1.2.3 or orbital 3.1.3.3). In each of the contexts, there is an analisys of the techniques and a comparation between them highlingting some relevant data.

3.1 Setup

3.1.1 Decision Algorithms

3.1.1.1 A-JO

The parameter α is optimized based on a cost function $g_{\mathbf{x}_0}(\alpha)$ 2.69, which takes $N = 6000$ samples and has the weight cost matrices $\mathbf{Q} = \mathbf{I}_{2\times2}$ and $\mathbf{R} = 5 \cdot \mathbf{I}_{2\times2}$.

The function SPS 2.70 and DGF 2.71 parameters used in these experiments are given by:

Table 3.1: SPS 2.70 Parameters

f	$\mathbf{x}_0$	N	Δt	$V,\ h,\ \alpha_{ini}$
3.1 or **??**	3.1.2.3 or 3.1.3.3	6000	0.005	3.1.2.2 or **??**

Table 3.2: DGF 2.71 Parameters

nS	$devS$	dev	$g_{\mathbf{x}_0}(\alpha)$	α_{ini}
3	0.01	0.005	2.69	3.1.2.2 or **??**

3.1.1.2 Double CLF

The double CLF algorithms 2.4.2 functions parameters are defined by:

Table 3.3: NCDV 2.72 Parameters

f	$\mathbf{x}_0$	N	Δt	V, h
3.1 or **??**	3.1.2.3 or 3.1.3.3	6000	0.005	3.1.2.2 or **??**

Table 3.4: Double CLF 2.4.2 Transition Parameters

Algorithms	ζ	μ	tol	tol_2
A-CLF-S 2.4.2.1	1	$\frac{V_N(\mathbf{x})}{V_C(\mathbf{x})}$	$0.03 \cdot V_C(\mathbf{x}_0)$	999
A-CLF-I 2.4.2.2	—	—	$0.05 \cdot V_C(\mathbf{x}_0)$	50

With $V_C(\mathbf{x})$ and $V_N(\mathbf{x})$ following the same formulation but different equilibrium points.

3.1.2 Unicycle

This example consists in drive a unicycle to a specific location **ref** $\in \mathbb{R}^2$. Drive a vehicle implies the possibilitie of founding some obstacles, and while a collision could mean a fatality there are other factors as the fuel/energy consumed and how fast to achieve the wanted location, that beeing said, this represents an example of safety-critical control subject to an optimization of its path.

3.1.2.1 Dynamics

This unicycle doesn't loose traction in its wheels, and it is not constrained by its control inputs or its consume. It is also not affected by any perturbation such as drag force characteristic from the enviroment. It can be modeled mathematically as a relative two degree system:

$$\begin{bmatrix} \dot{x} \\ \dot{y} \\ \dot{\theta} \end{bmatrix} = \begin{bmatrix} \frac{1}{2}cos\theta & \frac{1}{2}cos\theta \\ \frac{1}{2}sin\theta & \frac{1}{2}sin\theta \\ -L & L \end{bmatrix} \begin{bmatrix} v_l \\ v_r \end{bmatrix} \tag{3.1}$$

Where the states are the (x, y) 2D position and θ the orientation, and the control inputs $\mathbf{u} \in \mathbb{R}^2$ are the left and right wheel speed v_l and v_r respectively, in addition, the constant $L = 10m^{-1}$ refers to the inverse of the distance between the two wheels.

3.1.2.2 CLF-CBF Formulation

As the decision algoritms subject to comparations 3.1.1 are governed by the CLF-CBF 2.1 backstepping technique 2.1.2, the system can be written as:

$$\begin{aligned} \dot{\mathbf{x}} &= f_0(\mathbf{x}) + g_0(\mathbf{x}, \xi)\mathbf{u} \\ \dot{\xi} &= f_1(\mathbf{x}, \xi) + g_1(\mathbf{x}, \xi)\mathbf{u} \end{aligned} \tag{3.2}$$

With $\mathbf{x} = \left[\begin{smallmatrix} x \\ y \end{smallmatrix}\right]$, $\xi = \left[\begin{smallmatrix} cos\theta \\ sin\theta \end{smallmatrix}\right]$, $f_0(\mathbf{x}) = \mathbf{0}_{2\times1}$, $g_0(\mathbf{x}, \xi) = \left[\begin{smallmatrix} \frac{1}{2}\xi_1 & \frac{1}{2}\xi_1 \\ \frac{1}{2}\xi_2 & \frac{1}{2}\xi_2 \end{smallmatrix}\right]$, $f_1(\mathbf{x}, \xi) = \mathbf{0}_{2\times1}$ and $g_1(\mathbf{x}, \xi) = \left[\begin{smallmatrix} \xi_2 L & -\xi_2^L \\ -\xi_1 L & \xi_2 L \end{smallmatrix}\right]$.

Since it's a second-order system, to use backstepping and obtain the first-order solution $\mathbf{k}_0(\mathbf{x})$ it is considered the system:

$$\dot{\mathbf{x}} = k_0(\mathbf{x}) \tag{3.3}$$

In order to make the vehicle to the wanted position is formulated a CLF V_0 which actively works to stabilize the system in the constant **ref**.

$$V_0(\mathbf{x}) = \frac{1}{2}(\mathbf{x} - \mathbf{ref})^\top(\mathbf{x} - \mathbf{ref}) \tag{3.4a}$$

$$\dot{V}_0(\mathbf{x}) = \underbrace{(\mathbf{x} - \mathbf{ref})^\top}_{L_G V_0(\mathbf{x})} \mathbf{k}_0(\mathbf{x}) \tag{3.4b}$$

$$\gamma_0(\mathbf{x}) = V_0(\mathbf{x}) \tag{3.4c}$$

The safety is defined according to the CBF h_0 which restricts the obstacles using a ellipsoidal fit 2.50:

$$h_0(\mathbf{x}) = (\mathbf{x} - \mathbf{p})^\top \mathbf{A_{xis}}(\mathbf{x} - \mathbf{p}) - 1 \tag{3.5a}$$

$$\dot{h}_0(\mathbf{x}) = \underbrace{((\mathbf{A_{xis}}(\mathbf{x} - \mathbf{p}))^\top + (\mathbf{x} - \mathbf{p})^\top \mathbf{A_{xis}})}_{L_G h_0(\mathbf{x})}\mathbf{k}_0(\mathbf{x}) \tag{3.5b}$$

$$\alpha_0(\mathbf{x}, \alpha) = \alpha h_0(\mathbf{x}) \tag{3.5c}$$

With $\mathbf{A_{xis}} \in \mathbb{R}^{2\times 2}_{\geq 0}$ referent to the ellipse axis and $\mathbf{p} \in \mathbb{R}^2$ equal to the center of the ellipse, both stipulated in 3.1.2.3. Given the system 3.2, the solution $\mathbf{k}_0(\mathbf{x})$, the CLF V and CBF V are defined (according to 2.15) as:

$$V(\mathbf{x}, \xi) = V_0(\mathbf{x}) + 1 - cos(\theta - \theta_0(\mathbf{x})) \tag{3.6a}$$

$$\dot{V}(\mathbf{x}, \xi) = \underbrace{\left(((\mathbf{x} - \mathbf{ref}))^\top g_0(\mathbf{x}, \mathbf{k}_{0,\xi}) + sin(\theta - \theta_0(\mathbf{x}))\begin{bmatrix} -L & L \end{bmatrix}\right)}_{L_G V(\mathbf{x},\xi)}\mathbf{k}(\mathbf{x}) \tag{3.6b}$$

$$\gamma(\mathbf{x}) = V(\mathbf{x}) \tag{3.6c}$$

$$h(\mathbf{x}, \xi) = h_0(\mathbf{x}) - 1 + cos(\theta - \theta_0(\mathbf{x})) \tag{3.7a}$$

$$\dot{h}(\mathbf{x}, \xi) = \underbrace{\left(\left((\mathbf{A_{xis}}(\mathbf{x} - \mathbf{p}))^\top + (\mathbf{x} - \mathbf{p})^\top \mathbf{A_{xis}}\right) g_0(\mathbf{x}, \mathbf{k}_{0,\xi}) - sin(\theta - \theta_0(\mathbf{x}))\begin{bmatrix} -L & L \end{bmatrix}\right)}_{L_G h(\mathbf{x},\xi)}\mathbf{k}(\mathbf{x}) \tag{3.7b}$$

$$\alpha(\mathbf{x}, \xi, \alpha = 1.2) = \alpha h(\mathbf{x}, \xi) \tag{3.7c}$$

With $\mathbf{k}_{0,\xi}(\mathbf{x})$ and $\theta(\mathbf{x})$ given by:

$$\mathbf{k}_{0,\xi}(\mathbf{x}) = \frac{\mathbf{k}_0(\mathbf{x})}{||\mathbf{k}_0(\mathbf{x})||} \tag{3.8}$$

$$\theta_0(\mathbf{x}) = angle(\mathbf{k}_{0,\xi,1}(\mathbf{x}) + \mathbf{i}\,\mathbf{k}_{0,\xi,2}(\mathbf{x})) \tag{3.9}$$

3.1.2.3 Type of Experiments

During the experiments the CLF-CBF provide a new solution each 0.005 seconds.

<u>UCC</u>:

- The unicycle starts at $\mathbf{x}_0 = \begin{bmatrix} 0 \\ 0 \\ \frac{\pi}{4} \end{bmatrix}$ and moves towards $\mathbf{ref} = \begin{bmatrix} 2.9563 \\ 2.9832 \end{bmatrix}$
- The obstacle separating the vehicle and **ref** is a circle centered in $\mathbf{p} = \begin{bmatrix} 2.1213 \\ 2.1213 \end{bmatrix}$ with radius equal one, $\mathbf{A_{xis}} = \mathbf{I}_{2\times 2}$.

<u>UCF</u>:

- The unicycle starts at $\mathbf{x}_0 = \begin{bmatrix} 0 \\ 0 \\ \frac{\pi}{4} \end{bmatrix}$ and moves towards now a far location $\mathbf{ref} = \begin{bmatrix} 4.2087 \\ 4.2760 \end{bmatrix}$
- The obstacle separating the vehicle and **ref** is again a circle centered in $\mathbf{p} = \begin{bmatrix} 2.1213 \\ 2.1213 \end{bmatrix}$ with radius equal one, $\mathbf{A_{xis}} = \mathbf{I}_{2\times 2}$.

<u>UEV</u>:

- The unicycle starts at $\mathbf{x}_0 = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix}$ and moves towards $\mathbf{ref} = \begin{bmatrix} 6.9915 \\ 0.2064 \end{bmatrix}$
- The obstacle separating the vehicle and **ref** is a ellipse centered in $\mathbf{p} = \begin{bmatrix} 4.5 \\ 0 \end{bmatrix}$ with its biggest axis making a more acute angle with the unicycle unsafe inertial speed when it reaches the obstacle, $\mathbf{A_{xis}} = \begin{bmatrix} 2 & 0 \\ 0 & 1 \end{bmatrix}$.

<u>UEH</u>:

- The unicycle starts at $\mathbf{x}_0 = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix}$ and moves towards $\mathbf{ref} = \begin{bmatrix} 4.9966 \\ 0.0826 \end{bmatrix}$
- The obstacle separating the vehicle and **ref** is a ellipse centered in $\mathbf{p} = \begin{bmatrix} 4 \\ 0 \end{bmatrix}$ with its smallest axis making a more acute angle with the unicycle unsafe inertial speed when it reaches the obstacle, $\mathbf{A_{xis}} = \begin{bmatrix} 1 & 0 \\ 0 & 2 \end{bmatrix}$.

<u>UED</u>:

- The unicycle starts at $\mathbf{x}_0 = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix}$ and moves towards $\mathbf{ref} = \begin{bmatrix} 9 \\ 0 \end{bmatrix}$
- The obstacle separating the vehicle and **ref** is a ellipse centered in $\mathbf{p} = \begin{bmatrix} 6 \\ 1 \end{bmatrix}$, diagonally against the unicycle, $\mathbf{A_{xis}} = \begin{bmatrix} 1 & -1.35 \\ -1.35 & 0.7 \end{bmatrix}$.

3.1.3 Orbital

The satellites, space ships... orbiting around a celestial body are vulnerable to found sapce debris, other ships, among other space elements that could put in risk the highly regarded safety of the ships, and to avoid them demanding more of the limited resources such as fuel, energy consume... Given that like in the unicycle case this represents an example of safety-critical control subject to an optimization of its path. More than that, the computers presented on the vehicles are designed to demand low energy consume, they need to have an suited shielding but also low weight, among other specifications which results in lower power processors, receptive to lower-effort control techniques.

3.1.3.1 Dynamics

The vehicle is trying to converge to a formation position, following an theoretical circular Kepler orbit [1] with constant null latitude, in an environment subject to J_2 [2] perturbations. It has thrusters in all directions, with unconstrained power or some variation of it, and also without a fuel/energy limitation. It is considered a chaser spacecraft with equal null latitude as the reference **ref** is trying to rendezvous [3], and is assumed the obstacles encountered, or preferebly the other ship in formation, with infinite length in the direction perpedicular to the equatorial plane, disabling the possibilitie of the ship to move in that direction to avoid them, providing a problem with just two-dimensional Euclidian Space safety contraints. The model, based on the second-order NERM [22], is:

$$\begin{bmatrix} \partial\dot{x} \\ \partial\dot{y} \\ \partial\ddot{x} \\ \partial\ddot{y} \end{bmatrix} = \begin{bmatrix} \partial\dot{x} \\ \partial\dot{y} \\ 2\dot{\theta}_t\partial\dot{y} + \left(\dot{\theta}_t\right)^2\partial x - \frac{\mu(r_t+\partial x)}{\left((r_t+\partial x)^2+\partial y^2\right)^{\frac{3}{2}}} + \frac{\mu}{r_t^2} \\ 2\dot{\theta}_t\partial\dot{x} + \left(\dot{\theta}_t\right)^2\partial y - \frac{\mu\partial y}{\left((r_t+\partial x)^2+\partial y^2\right)^{\frac{3}{2}}} + \frac{\mu}{r_t^2} \end{bmatrix} - \begin{bmatrix} \mathbf{0}_{2\times1} \\ R_{\text{LVLH,ECI}}(\nu)\cdot p_{J_2}(\theta_t, \partial x, \partial y) \end{bmatrix} + \begin{bmatrix} \mathbf{0}_{2\times1} \\ \mathbf{T} \end{bmatrix} \tag{3.10}$$

With $(\partial x, \partial y)$ as the position of the chaser relative to the target in the LVLH frame, $(\dot{\partial x}, \dot{\partial y})$ as the relative speed, θ_t equal to the target true anomaly and $\dot{\theta}_t = \sqrt{\frac{\mu}{r_t^3}}$ equivalent to the (mean) orbital rate, the earth $\mu = 3.983 \times 10^{14}\ m^3/s^2$, r_t is the radius of the target orbit. The thrusters$\mathbf{T}$ corresponds to the controllable input values. The pertubation p_{J2} is in the ECI referencial so is applied a change of basis to the LVLH frame with $R_{\text{LVLH,ECI}}(\Omega, \nu)$.

[1] A Kepler orbit is the elliptical, circular or hyperbolic movement of a body relative to another. This orbits are characterized for neglecting perturbations.

[2] The J_2 perturbation [6] is originated from the oblate spheroidal shapes of celestial bodies, resulting from the centrifugal force due to their axial rotation. Beeing J a component corresponding to a zonal harmonic obtained from observations dependent of the respective celestial body, and J_2 the most relevant one.

[3] Rendezvous [16] consists of making two spacecraft meet each other (target and chaser), i.e, converging to a point where the orbital trajectories of them coincide. This maneuver is characterized by two autonomous control phases, where are implemented the purposed algorithms.

$$p_{J2} = -\frac{3}{2}\frac{J_2 \mu R^2}{r_t^5}\left(r_t(\theta_t) + R^{-1}_{\text{LVLH,ECI}}(\nu)\begin{bmatrix}\partial x \\ \partial y\end{bmatrix}\right) \tag{3.11}$$

$$r_t(\theta_t) = r_t \begin{bmatrix} cos(\theta_t) \\ sin(\theta_t)\end{bmatrix} \tag{3.12}$$

$$R_{\text{LVLH,ECI}}(\nu) = \begin{bmatrix} cos(\nu) & sin(\nu) \\ -sin(\nu) & cos(\nu)\end{bmatrix} \tag{3.13}$$

With $\nu = \omega + \theta_t = \theta_t = \dot{\theta}_t t$ as the argument of latitude, ω as the argument of periapsis. So, adding a new state θ_t:

$$\dot{\mathbf{x}}_{aug} = \begin{bmatrix}\dot{\mathbf{x}} \\ \dot{\theta}_t\end{bmatrix} = \begin{bmatrix}\partial\dot{x} \\ \partial\dot{y} \\ \partial\ddot{x} \\ \partial\ddot{y} \\ \sqrt{\frac{\mu}{r_t^3}}\end{bmatrix} \tag{3.14}$$

This augmented dynamics are used just for simulation of the state propagation, for bakstepping purposes is used 3.10.

3.1.3.2 CLF-CBF Formulation

The given system is non-linear and in strict-feedback form 2.11:

$$\begin{aligned} f_0(\mathbf{x}) &= \mathbf{0}_{2\times1} \\ g_0(\mathbf{x}) &= \mathbf{I}_{2\times2} \end{aligned} \tag{3.15}$$

$$\begin{aligned} f_1(\mathbf{x},\xi) &= \begin{bmatrix} 2\dot{\theta}_t\partial\dot{y} + \left(\dot{\theta}_t\right)^2\partial x - \frac{\mu(r_t+\partial x)}{\left((r_t+\partial x)^2+\partial y^2\right)^{\frac{3}{2}}} + \frac{\mu}{r_t^2} \\ 2\dot{\theta}_t\partial\dot{x} + \left(\dot{\theta}_t\right)^2\partial y - \frac{\mu\partial y}{\left((r_t+\partial x)^2+\partial y^2\right)^{\frac{3}{2}}} + \frac{\mu}{r_t^2} \end{bmatrix} - R_{\text{LVLH,ECI}}(\theta_t)\cdot p_{J_2}(\theta_t,\partial x,\partial y) \\ g_1(\mathbf{x},\xi) &= \mathbf{I_{2\times2}} \end{aligned} \tag{3.16}$$

With $\mathbf{x} = \left[\begin{smallmatrix}\partial x \\ \partial y\end{smallmatrix}\right]$ and $\xi = \left[\begin{smallmatrix}\partial\dot{x} \\ \partial\dot{y}\end{smallmatrix}\right]$.

Following the standart backstepping technique 2.1.2, to obtain the first-order solution $\mathbf{k}_0(\mathbf{x})$ is considered the system 2.13. The first-order CLF V_0 stabilizing the system in $\mathbf{ref} \in \mathbb{R}^2$ is given by:

$$V_0(\mathbf{x}) = \frac{1}{2}(\mathbf{x}-\mathbf{ref})^\top(\mathbf{x}-\mathbf{ref}) \tag{3.17a}$$

$$\dot{V}_0(\mathbf{x}) = \underbrace{(\mathbf{x}-\mathbf{ref})^\top}_{L_G V_0(\mathbf{x})}\mathbf{k}_0(\mathbf{x}) \tag{3.17b}$$

$$\gamma_0(\mathbf{x}) = V_0(\mathbf{x}) \tag{3.17c}$$

The safety is defined by CBF h_0, restricting the obstacles using a ellipsoidal fit 2.50:

$$h_0(\mathbf{x}) = (\mathbf{x}-\mathbf{p})^\top \mathbf{A_{xis}}(\mathbf{x}-\mathbf{p}) - 1 \tag{3.18a}$$

$$\dot{h_0}(\mathbf{x}) = \underbrace{((\mathbf{A_{xis}}(\mathbf{x}-\mathbf{p}))^\top + (\mathbf{x}-\mathbf{p})^\top \mathbf{A_{xis}})}_{L_G h_0(\mathbf{x})}\mathbf{k}_0(\mathbf{x}) \tag{3.18b}$$

$$\alpha_0(\mathbf{x}, \alpha) = \alpha h_0(\mathbf{x}) \tag{3.18c}$$

With the ellipse axis $\mathbf{A_{xis}} \in \mathbb{R}^{2\times 2}_{\geq 0}$ and the center of the ellipse $\mathbf{p} \in \mathbb{R}^2$, both associated a value in 3.1.2.3. Given the high-order system, the solution $\mathbf{k}_0(\mathbf{x})$, the CLF V and CBF V are defined (according to 2.15) as:

$$V(\mathbf{x}, \xi) = V_0(\mathbf{x}) + \frac{1}{2}\|\xi - \mathbf{k_0}(\mathbf{x})\|^2 \tag{3.19a}$$

$$\dot{V}(\mathbf{x}, \xi) = \underbrace{(\mathbf{x}-\mathbf{ref})^\top \xi + (\xi - \mathbf{k_0}(\mathbf{x}))f_1(\mathbf{x}, \xi)}_{L_f V(\mathbf{x},\xi)} + \underbrace{(\xi - \mathbf{k_0}(\mathbf{x}))}_{L_G V(\mathbf{x},\xi)}\mathbf{k}(\mathbf{x}) \tag{3.19b}$$

$$\gamma(\mathbf{x}) = V(\mathbf{x}) \tag{3.19c}$$

$$h(\mathbf{x}, \xi) = h_0(\mathbf{x}) - \frac{1}{2}\|\xi - \mathbf{k_0}(\mathbf{x})\|^2 \tag{3.20a}$$

$$\dot{h}(\mathbf{x}, \xi) = \underbrace{L_G h_0(\mathbf{x})\xi - (\xi - \mathbf{k_0}(\mathbf{x}))f_1(\mathbf{x}, \xi)}_{L_f h(\mathbf{x},\xi)} + \underbrace{\Big(-(\xi - \mathbf{k_0}(\mathbf{x}))\Big)}_{L_G V(\mathbf{x},\xi)}\mathbf{k}(\mathbf{x}) \tag{3.20b}$$

$$\alpha(\mathbf{x}, \xi, \alpha = 1.2) = \alpha h(\mathbf{x}, \xi) \tag{3.20c}$$

3.1.3.3 Type of Experiments

-Acho que vão ser todos iguais aos do unicycle fora a defenição de alguns parametros que se tem de indicar para defenir a orbita.
-Os experimentos que não entrarem aqui talvez serão colocados nos anexos.
-Acho que estes são os que agregam mais para já.
-Ainda assim parace que tenho pouco conteudo logo parece que deveria ter resultados para quando se usa o algoritmo de Binary Search, e quando se usa o Polytope Fit embora exija que eu adicione à metdologia o algporitmo para se obter o ponto de contorno para esses fits.
-Cheguei à conclusão que para mais que um obstaculo desvaloriza a tecnica e que seria outro topico a parte que exigiria outras estratégias que eu tenho mas necessitaria de mais tempo para implementar se assim for o caso. -Algumas explicaçoes não batem muito certo com o que os graficos mostram mas é pela reformulação das tecnicas acho que iram corrigir e vai passar a bater certo quando implementadas

3.1.4 Some Data

The techniques will be evaluated having in account a cost, given by the function $g(\mathbf{X}, \mathbf{U})$, equivalent to $g_{\bar{\mathbf{x}}_0}(\alpha)$ defined before 3.1.1.1, such as the weight cost matrices, $\mathbf{Q} = \mathbf{I}_{2\times2}$ and $\mathbf{R} = 5 \cdot \mathbf{I}_{2\times2}$, besides that the function is calculated with $N = 6000$ samples. It is also presented the time the system f takes to reach the equilibrium point.

The computational time for each experiment is given based on a single test (one sample Monte Carlo) using the the processor *Intel(R) Core(TM) i7-8650U CPU @ 1.90GHz*.

3.2 Experiments

The dynamical system propagation with respective decision algorithm 3.1.1 during the experiments is simulated using the Dormand Prince integrative method 2.59. So, given a dynamical system (unicycle 3.1 or orbital 3.14) $f : \mathbb{R}^n \to \mathbb{R}^n$, at $\mathbf{x}_0 \in \mathbb{R}^n$, a CLF V and a CBF h, a sampling time $\Delta t = 0.005$ seconds ($\leq$ than CLF-CBF calling time 3.1.2.3 or 3.1.3.3) and a total of 6000 iterations totaling a simulation of 30 seconds:

$$\begin{bmatrix} \mathbf{X} & \mathbf{U} \end{bmatrix} = SPS(f, \mathbf{x}_0, 6000, 0.005, V, h) \begin{bmatrix} conditions^* \leftarrow V(\mathbf{x}) \geq tol \\ decision^* \leftarrow \text{algorithms } 3.1.1 \\ integration^* \leftarrow \text{DP } 2.59 \end{bmatrix} \tag{3.21}$$

Where SPS (State Propagation Simulation) is the algorithm 4.

3.2.1 Unicycle

<u>UCC</u>

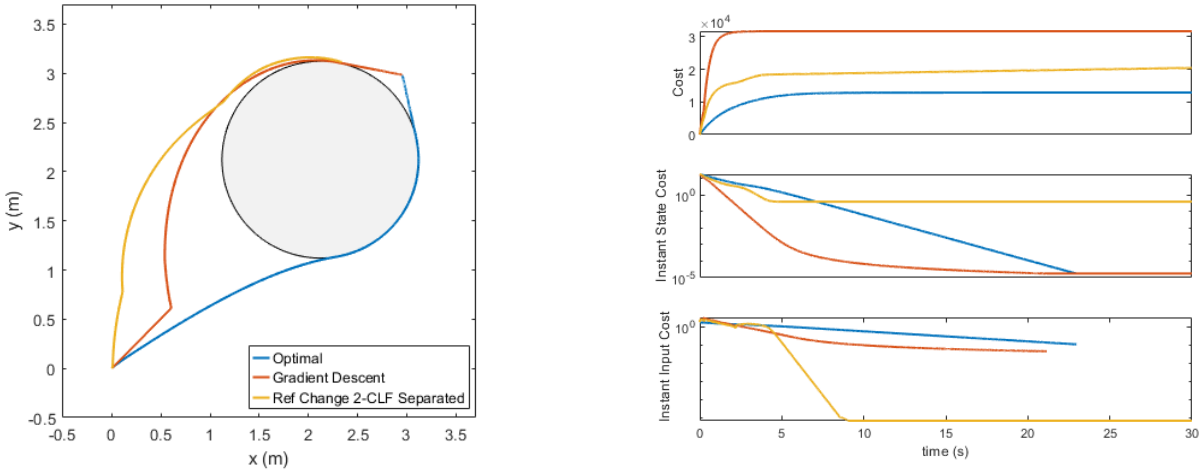

Figure 3.1: UCC 3.1.2.3

Although A-JO α parameter is optimized its decision keeps beeing purely based on a CLF-CBF technique which lacks a bigger prediction horizon and thus taking the unicycle close to the obstacle as it is the way that approximates more to the **ref** in the moment (less state cost initially compared to A-CLF-summed), obligating eventually to higher input values to deviate from the barrier safely while forcing as much as possible a speed of convergence to **ref**. The A-CLF-S following the other point first results in a initially not so fast approximation to **ref** but to a shorter countour path and that allows to avoid abrupt maneuvers leading to less input cost.

Algorithms	ComputationalTime	ReachTime	InputCost	StateCost	Cost
A-JO 2.4.1	8.3014	21.16	29896	1907.9	31804
A-CLF-S 2.4.2.1	9.386	30	14481	5973.9	20455
A-CLF-I 2.4.2.2	—	—	—	—	—
Optimal (MPC of 6000 horizon)	—	22.965	6440	6448.8	12889

Table 3.5: Some UCC Data

However the A-JO was less time consuming than A-CLF-S during the experiment as it reached the final location faster and owing to an optimization of α parameter by A-CLF-S too, the resulting cost is comparably way higher.

UCF

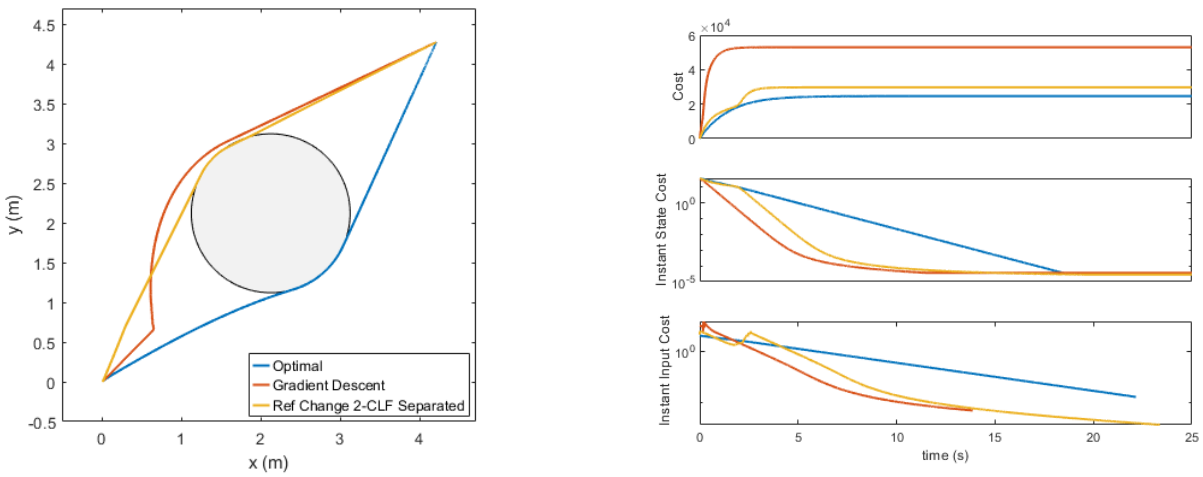

Figure 3.2: UCF 3.1.2.3

The A-JO keeps showing the same characteristics in comparison with A-CLF-S as it was seen in UCC3.2.1. The A-CLF-S reveals a relatively similar path to the optimal solution but a faster convergence to **ref** as the γ parameter value (not subject to an optimization) is not suited, which results in higher inputs and penalizing in the total cost.

Algorithms	ComputationalTime	ReachTime	InputCost	StateCost	Cost
A-JO 2.4.1	2.2433	13.875	49425	3756.3	53182
A-CLF-S 2.4.2.1	19.793	23.385	20190	9568.4	29758
A-CLF-I 2.4.2.2	—	—	—	—	—
Optimal (MPC of 6000 horizon)	—	22.16	12330	12348	24678

Table 3.6: Some UCF Data

UEV

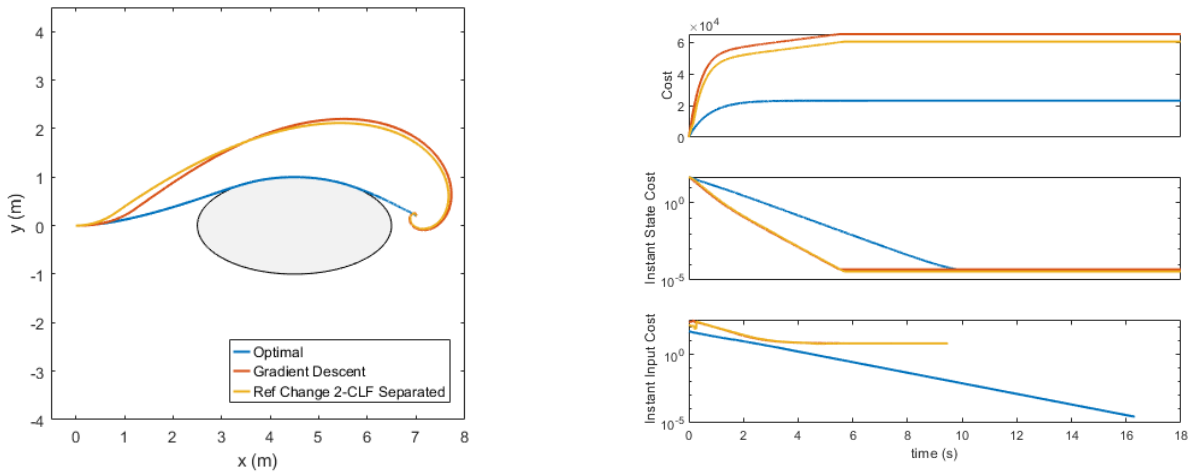

Figure 3.3: UEV 3.1.2.3

Now given an ellipsoidal obstacle, with this kind of axis configuration, the bigger the axis is relative to the other one, the less impactful is A-CLF-S, not only because of the new point demanding a not so relevant maneuver but also because of the respective ellipse CBF natural imposure of a more soft avoidance.

Algorithms	ComputationalTime	ReachTime	InputCost	StateCost	Cost
A-JO 2.4.1	3.3449	9.185	53112	4983.7	58096
A-CLF-S 2.4.2.1	9.5229	9.485	47649	5899	53547
A-CLF-I 2.4.2.2	—	—	—	—	—
Optimal (MPC of 6000 horizon)	—	16.315	11522	11547	23069

Table 3.7: Some UEV Data

A-JO computational time keeps beeing lower than A-CLF-S and now for an not so worst cost.

UEH

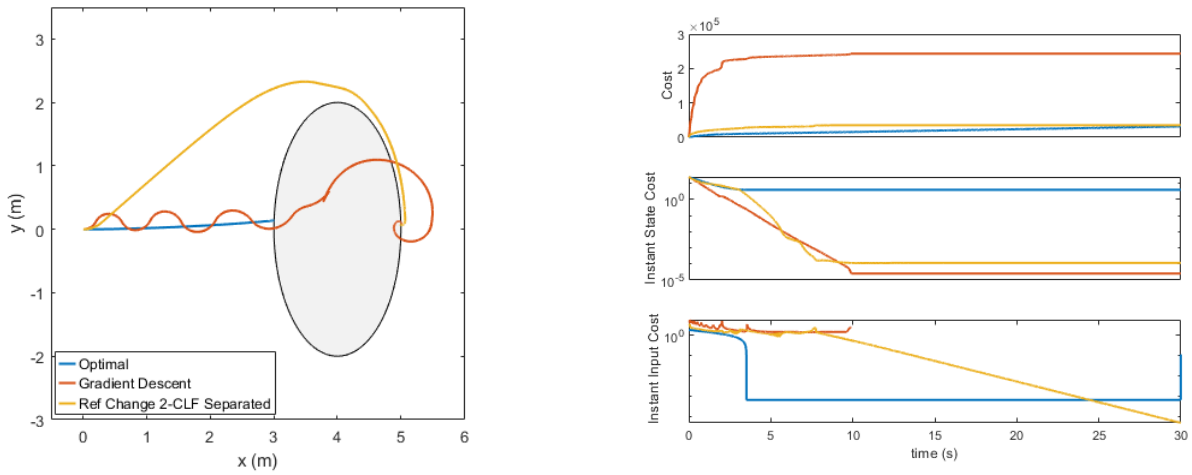

Figure 3.4: UEH 3.1.2.3

If in UEV 3.2.1 the A-CLF-S shows a relative worst performance, in this case its path cost is comparatively to it considerably better than A-JO. Beyond that, important to say that against this type of ellipsoides and orientation againts it and the **ref** , or speacially against straight surfaces, the best solution given by the CLF-CBF is to get the system as close to the obstacle, converging to the its surface, as the CLF-CBF keeps providing control inputs that lead the system as much closer as possible to the **ref** for each exclusive moment, while the A-CLF-S converging to the contour point is capable to free from it. The MPC solution presented corresponds to a local minimum, but its path reveals a similar problem to A-JO due to the finite horizon and its objective function trying to approximate the system as much to **ref** instead of actually optimize its reaching time.

Algorithms	ComputationalTime	ReachTime	InputCost	StateCost	Cost
A-JO 2.4.1	13.68	9.92	1.3522e+05	3543.4	1.3877e+05
A-CLF-S 2.4.2.1	42.607	30	21563	6332.5	27896
A-CLF-I 2.4.2.2	—	—	—	—	—
Optimal (MPC of 6000 horizon)	—	30	3727.1	27617	31344

Table 3.8: Some UEH Data

Notes:

- If the constraint is circular and the vehicle is oriented to the **ref** and to the center of the circle, the unicycle converges to the obstacle limit.

UED

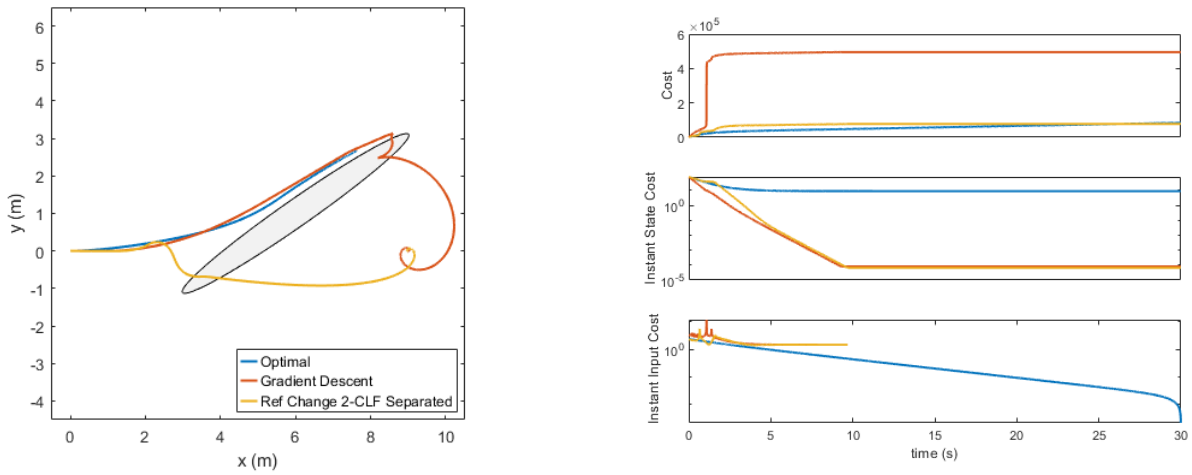

Figure 3.5: UED 3.1.2.3

As in UEH 3.2.1, although the other techiniques don't keep stuck, they keep the same characteristics and go for the longest side. While the A-CLF-S keeps showing a better result.

Algorithms	ComputationalTime	ReachTime	InputCost	StateCost	Cost
A-JO 2.4.1	3.939	9.295	4.0474e+05	8500	4.1324e+05
A-CLF-S 2.4.2.1	53.897	9.7	43945	19422	63367
A-CLF-I 2.4.2.2	—	—	—	—	—
Optimal (MPC of 6000 horizon)	—	30	15047	69133	84180

Table 3.9: Some UED Data

3.2.2 Orbital

-mostrar as simulaçoes
-explicar os resultados obtidos

4

Conclusion

Conclusao, resumindo as elaçoes dos resultados, dizendo direcionando as explicaçoes para um caso generico, em de a entender que isto da para aplicar em qq lado e que se vai verificar os mesmos problemas em todos.

Falar daquilo que se pode melhorar aqui, para onde se pode ir.

Bibliography

[1] A. D. Ames, J. W. Grizzle, and P. Tabuada. "Control barrier function based quadratic programs with application to adaptive cruise control". In: *53rd IEEE conference on decision and control*. IEEE. 2014, pp. 6271–6278 (cit. on p. 1).

[2] A. D. Ames et al. "Control barrier functions: Theory and applications". In: *2019 18th European control conference (ECC)*. Ieee. 2019, pp. 3420–3431 (cit. on pp. 1, 2).

[3] A. D. Ames et al. "Rapidly exponentially stabilizing control lyapunov functions and hybrid zero dynamics". In: *IEEE Transactions on Automatic Control* 59.4 (2014), pp. 876–891 (cit. on p. 1).

[4] J. Breeden and D. Panagou. "Guaranteed safe spacecraft docking with control barrier functions". In: *IEEE Control Systems Letters* 6 (2021), pp. 2000–2005 (cit. on p. 2).

[5] J. Breeden and D. Panagou. "Predictive control barrier functions for online safety critical control". In: *2022 IEEE 61st Conference on Decision and Control (CDC)*. IEEE. 2022, pp. 924–931 (cit. on p. 2).

[6] H. D. Curtis. *Orbital mechanics for engineering students*. Butterworth-Heinemann, 2019 (cit. on p. 29).

[7] R. Grandia et al. "Multi-layered safety for legged robots via control barrier functions and model predictive control". In: *2021 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE. 2021, pp. 8352–8358 (cit. on p. 2).

[8] L. Hall. "The history of space debris". In: (2014) (cit. on p. 1).

[9] H. Hao, D. Silvestre, and C. Silvestre. "Analysis of gradient descent algorithms: Discrete to continuous domains and circuit equivalents". In: *Systems & Control Letters* 203 (2025), p. 106146 (cit. on pp. 2, 15).

[10] E. N. Hartley. "A tutorial on model predictive control for spacecraft rendezvous". In: *2015 European control conference (ECC)*. IEEE. 2015, pp. 1355–1361 (cit. on p. 2).

[11] J. J. Kaczmarek and C. Zagaris. "Autonomous multi-phase rendezvous, proximity operations, and docking via model predictive control". In: *2023 IEEE Aerospace Conference*. IEEE. 2023, pp. 1–10 (cit. on p. 2).

[12] O. Khatib. "Real-time obstacle avoidance for manipulators and mobile robots". In: *The international journal of robotics research* 5.1 (1986), pp. 90–98 (cit. on p. 1).

[13] T. Kimura. "On dormand-prince method". In: *Jpn. Malaysia Tech. Instit* 40 (2009), pp. 1–9 (cit. on p. 19).

[14] A. Lin. "Binary search algorithm". In: *WikiJournal of Science* 2.1 (2019), pp. 1–13 (cit. on p. 1).

[15] J. M. Lourenço. *The NOVAthesis LaTeX Template User's Manual*. NOVA University Lisbon. 2021. URL: https://github.com/joaomlourenco/novathesis/raw/main/template.pdf (cit. on p. i).

[16] Y. Luo, J. Zhang, and G. Tang. "Survey of orbital dynamics and control of space rendezvous". In: *Chinese Journal of Aeronautics* 27.1 (2014), pp. 1–11 (cit. on p. 29).

[17] H. Matias and D. Silvestre. "Hybrid Lyapunov and Barrier Function-Based Control with Stabilization Guarantees". In: *arXiv preprint arXiv:2504.09760* (2025) (cit. on pp. 2, 9).

[18] T. G. Molnar and A. D. Ames. "Composing control barrier functions for complex safety specifications". In: *IEEE Control Systems Letters* 7 (2023), pp. 3615–3620 (cit. on pp. 2, 10).

[19] M. F. Reis, A. P. Aguiar, and P. Tabuada. "Control barrier function-based quadratic programs introduce undesirable asymptotically stable equilibria". In: *IEEE Control Systems Letters* 5.2 (2020), pp. 731–736 (cit. on p. 2).

[20] S. Ruder. "An overview of gradient descent optimization algorithms". In: *arXiv preprint arXiv:1609.04747* (2016) (cit. on p. 1).

[21] A. Singletary et al. "Comparative analysis of control barrier functions and artificial potential fields for obstacle avoidance". In: *2021 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE. 2021, pp. 8129–8136 (cit. on pp. 1, 2).

[22] J. Sullivan, S. Grimberg, and S. D'Amico. "Comprehensive survey and assessment of spacecraft relative motion dynamics models". In: *Journal of Guidance, Control, and Dynamics* 40.8 (2017), pp. 1837–1859 (cit. on p. 29).

[23] A. J. Taylor et al. "Safe backstepping with control barrier functions". In: *2022 IEEE 61st Conference on Decision and Control (CDC)*. IEEE. 2022, pp. 5775–5782 (cit. on p. 2).

[24] Y. Tian, Y. Zhang, and H. Zhang. "Recent advances in stochastic gradient descent in deep learning". In: *Mathematics* 11.3 (2023), p. 682 (cit. on p. 1).

A

Deductions

A.1 Closed-Form QP given CLF-CBF Constraints

Following the QP 2.17, suppose there is only one CLF, given the differentiable quadratic objective function $f : \mathbb{R}^{m+1} \to \mathbb{R}$:

$$f(\mathbf{u}, \delta) = \frac{1}{2}(\mathbf{u}^\top R\mathbf{u} + p\delta^2) \tag{A.1}$$

where $\mathbf{u} \in \mathbb{R}^m$, $\delta \in \mathbb{R}$, $R \in \mathbb{R}^{m\times m}$ and $p \in \mathbb{R}$.

And the optimization problem constrained just by a CLF V and a CBF h presented in the respective differentiable functions $g_i(\mathbf{x}, \mathbf{u}, \delta) : \mathbb{R}^{n+m+1} \to \mathbb{R}, \quad \forall i \in \{1, 2\}$:

$$\begin{aligned} &\underbrace{F_V(\mathbf{x}) + L_G V(\mathbf{x})\mathbf{u} - \delta}_{g_1(\mathbf{x},\mathbf{u},\delta)} \leq 0 \\ &\underbrace{F_h(\mathbf{x}) + L_G h(\mathbf{x})\mathbf{u}}_{-g_2(\mathbf{x},\mathbf{u},\delta)} \geq 0 \end{aligned} \tag{A.2}$$

whith $\mathbf{x} \in \mathbb{R}^n$ (corresponding not to an optimzation variable but as a constant, as a current state of the system **??**).

The constrained optimization problem can form the Lagrangian function:

$$\mathcal{L}(\mathbf{x}, \mathbf{u}, \delta, \lambda) = f(\mathbf{u}, \delta) + \lambda^\top g(\mathbf{x}, \mathbf{u}, \delta) \tag{A.3}$$

where $\lambda \in \mathbb{R}^2$ is called the KKT multiplier.

Aiming to hold the stationarity condition and find the optimal (minimal) solution:

$$\nabla(\mathcal{L}(\mathbf{x}, \mathbf{u}, \delta, \lambda)) = 0 \tag{A.4}$$

Supposing $g(\mathbf{x}, \mathbf{u}, \delta) = \left[\begin{smallmatrix} g_1(\mathbf{x},\mathbf{u},\delta) \\ g_2(\mathbf{x},\mathbf{u},\delta) \end{smallmatrix}\right] = F(\mathbf{x}) + L_G(\mathbf{x})\mathbf{u} + \left[\begin{smallmatrix} -\delta \\ 0 \end{smallmatrix}\right]$ with $L_G(\mathbf{x}) = \left[\begin{smallmatrix} L_G V(\mathbf{x}) \\ -L_G h(\mathbf{x}) \end{smallmatrix}\right]$ and $F(\mathbf{x}) = \left[\begin{smallmatrix} F_V(\mathbf{x}) \\ -F_h(\mathbf{x}) \end{smallmatrix}\right]$:

$$\begin{aligned} \frac{\partial \mathcal{L}(\mathbf{x}, \mathbf{u}, \delta, \lambda)}{\partial \mathbf{u}} = 0 &\iff \mathbf{u}^\top R + \lambda^\top L_G = 0 \\ &\iff R^\top \mathbf{u} + L_G^\top \lambda = 0 \\ &\iff \mathbf{u} = -(R^\top)^{-1} L_G^\top \lambda = -L_G^\top \lambda \quad \text{(Considering } R = \mathbf{I}_{m\times m} \\ &\qquad\qquad\qquad\qquad\qquad\qquad\qquad\qquad \text{i.e, assuming input consume equally)} \end{aligned} \tag{A.5}$$

$$\frac{\partial \mathcal{L}(\mathbf{x}, \mathbf{u}, \delta, \lambda)}{\partial \delta} = 0 \iff p\delta + \lambda^\top \begin{bmatrix} -1 \\ 0 \end{bmatrix} = 0$$
$$\iff \delta = p^{-1} \begin{bmatrix} 1 & 0 \end{bmatrix} \lambda \tag{A.6}$$

$$\begin{aligned}
\frac{\partial \mathcal{L}(\mathbf{x}, \mathbf{u}, \delta, \lambda)}{\partial \lambda} = 0 &\iff F(\mathbf{x}) + L_G(\mathbf{x})\mathbf{u} + \begin{bmatrix} -\delta \\ 0 \end{bmatrix} = 0 \\
&\iff F(\mathbf{x}) - \begin{bmatrix} \delta \\ 0 \end{bmatrix} - L_G(\mathbf{x})L_G^\top(\mathbf{x})\lambda = 0 \\
&\iff F(\mathbf{x}) - \begin{bmatrix} p^{-1} \begin{bmatrix} 1 & 0 \end{bmatrix} \lambda \\ 0 \end{bmatrix} - L_G(\mathbf{x})L_G^\top(\mathbf{x})\lambda = 0 \\
&\iff F(\mathbf{x}) - \left(\begin{bmatrix} p^{-1} & 0 \\ 0 & 0 \end{bmatrix} + L_G(\mathbf{x})L_G^\top(\mathbf{x}) \right) \lambda = 0 \\
&\iff \lambda = \left(\begin{bmatrix} p^{-1} & 0 \\ 0 & 0 \end{bmatrix} + L_G(\mathbf{x})L_G^\top(\mathbf{x}) \right)^{-1} F(\mathbf{x})
\end{aligned} \tag{A.7}$$

$$\left(\begin{bmatrix} p^{-1} & 0 \\ 0 & 0 \end{bmatrix} + L_G(\mathbf{x})L_G(\mathbf{x})^\top(\mathbf{x}) \right)^{-1} = \begin{bmatrix} p^{-1} + L_G V(\mathbf{x}) L_G V^\top(\mathbf{x}) & -L_G V(\mathbf{x}) L_G h^\top(\mathbf{x}) \\ -L_G h(\mathbf{x}) L_G V^\top(\mathbf{x}) & L_G h(\mathbf{x}) L_G h^\top(\mathbf{x}) \end{bmatrix}^{-1}$$

$$= \frac{adj(.)}{det(.)} = \frac{adj(.)}{\Delta} \tag{A.8}$$

$$adj(.) = \begin{bmatrix} L_G h(\mathbf{x}) L_G h^\top(\mathbf{x}) & L_G V(\mathbf{x}) L_G h^\top(\mathbf{x}) \\ L_G h(\mathbf{x}) L_G V^\top(\mathbf{x}) & p^{-1} + L_G V(\mathbf{x}) L_G V^\top(\mathbf{x}) \end{bmatrix} \tag{A.9}$$

$$\begin{aligned}
\Delta &= L_G h(\mathbf{x}) L_G V^\top(\mathbf{x}) L_G V(\mathbf{x}) L_G h^\top(\mathbf{x}) + (p^{-1} + L_G V(\mathbf{x}) L_G V^\top(\mathbf{x}))(L_G h(\mathbf{x}) L_G h^\top(\mathbf{x})) \\
&= (L_G h(\mathbf{x}) L_G V^\top(\mathbf{x}))^2 + (p^{-1} + \|L_G V(\mathbf{x})\|^2)\|L_G h(\mathbf{x})\|^2 \qquad \text{(Since there are just one CLF and CBF)}
\end{aligned} \tag{A.10}$$

$$\begin{aligned}
\lambda &= \Delta^{-1} adj(.) F(\mathbf{x}) \\
&= \Delta^{-1} \begin{bmatrix} -L_G V(\mathbf{x}) L_G h(\mathbf{x})^\top F_h + \|L_G h(\mathbf{x})\|^2 F_V \\ \\ L_G h(\mathbf{x}) L_G V(\mathbf{x})^\top F_V - (p^{-1} + \|L_G V(\mathbf{x})\|^2) F_h \end{bmatrix} \\
&= \begin{bmatrix} \lambda_1 \\ \lambda_2 \end{bmatrix}
\end{aligned} \tag{A.11}$$

$$\begin{aligned}
\mathbf{u} &= -L_G^\top \lambda \\
&= -L_G V(\mathbf{x}) \lambda_1 + L_G h(\mathbf{x}) \lambda_2
\end{aligned} \tag{A.12}$$

According with the dual feasibility condition the respective constraint is active if $\lambda_i \geq 0$, for $i = \{1, 2\}$, so given the activation subdomain $\mathcal{S}_j$, for $j = \{1, 2, 3, 4\}$:

If any is active then:

$$\mathcal{S}_4(\mathbf{x}) = \{(\mathbf{x}) \in \mathbb{R}^n : \lambda_1 < 0 \cap \lambda_2 < 0\} \tag{A.13}$$

$$k_4 = \mathbf{0} \tag{A.14}$$

If both, the CLF and CBF is active then:

$$\mathcal{S}_3(\mathbf{x}) = \{(\mathbf{x}) \in \mathbb{R}^n : \lambda_1 \geq 0 \cap \lambda_2 \geq 0\} \tag{A.15}$$

$$k_3 = -L_G V(\mathbf{x})\lambda_1 + L_G h(\mathbf{x})\lambda_2 \tag{A.16}$$

If just the CBF is active:

$$\mathcal{S}_2(\mathbf{x}) = \{(\mathbf{x}) \in \mathbb{R}^n : \lambda_1 \geq 0 \cap \lambda_2 < 0\} \tag{A.17}$$

Or just the CLF is active:

$$\mathcal{S}_1(\mathbf{x}) = \{(\mathbf{x}) \in \mathbb{R}^n : \lambda_1 < 0 \cap \lambda_2 \geq 0\} \tag{A.18}$$

The equation A.12 is not suitable and doesn't support the KKT conditions and therefore there is a need to obtain the controller $k_j(\mathbf{x}) : \mathbb{R}^n \to \mathbb{R}$, for $j = \{3, 4\}$, by removing from the optimization problem the respective inactive constraint.

Considering just the **CBF active**, the new Lagrangian function:

$$\mathcal{L}(\mathbf{x}, \mathbf{u}, \delta, \lambda_2) = f(\mathbf{u}, \delta) + \lambda_2^\top g_2(\mathbf{x}, \mathbf{u}, \delta) \tag{A.19}$$

One more time, keeping with the stationarity condition:

$$\nabla(\mathcal{L}(\mathbf{x}, \mathbf{u}, \delta, \lambda_2)) = 0 \tag{A.20}$$

$$\begin{aligned} \frac{\partial \mathcal{L}(\mathbf{x}, \mathbf{u}, \delta, \lambda_2)}{\partial \mathbf{u}} = 0 &\iff \mathbf{u}^\top R - \lambda_2^\top L_G h(\mathbf{x}) = 0 \\ &\iff R^\top \mathbf{u} - L_G h^\top(\mathbf{x})\lambda_2 = 0 \\ &\iff \mathbf{u} = (R^\top)^{-1} L_G h^\top(\mathbf{x})\lambda_2 = L_G h^\top \lambda_2 \quad (R = \mathbf{I}_{m\times m}) \end{aligned} \tag{A.21}$$

$$\begin{aligned} \frac{\partial \mathcal{L}(\mathbf{x}, \mathbf{u}, \delta, \lambda_2)}{\partial \delta} = 0 &\iff p\delta = 0 \\ &\iff \delta = 0 \end{aligned} \tag{A.22}$$

$$\begin{aligned}\frac{\partial \mathcal{L}(\mathbf{x},\mathbf{u},\delta,\lambda_2)}{\partial \lambda_2} = 0 &\iff -F_h(\mathbf{x}) - L_G h(\mathbf{x})\mathbf{u} = 0 \\ &\iff F_h(\mathbf{x}) + L_G h(\mathbf{x}) L_G h^\top(\mathbf{x})\lambda_2 = 0 \\ &\iff \lambda_2 = -(L_G h(\mathbf{x}) L_G h^\top(\mathbf{x}))^{-1} F_h(\mathbf{x}) \\ &\iff \lambda_2 = -\|L_G h(\mathbf{x})\|^{-2} F_h(\mathbf{x})\end{aligned} \tag{A.23}$$

Combinig the input equation A.21 and the KKT multiplier formula A.23:

$$\begin{aligned}k_2(\mathbf{x}) &= L_G h^\top(\mathbf{x})\lambda_2 \\ &= -L_G h^\top(\mathbf{x})\|L_G h(\mathbf{x})\|^{-2} F_h(\mathbf{x})\end{aligned} \tag{A.24}$$

Finally just with the **CLF active** :

$$\mathcal{L}(\mathbf{x},\mathbf{u},\delta,\lambda_1) = f(\mathbf{u},\delta) + \lambda_1^\top g_1(\mathbf{x},\mathbf{u},\delta) \tag{A.25}$$

According with the stationarity condition:

$$\nabla(\mathcal{L}(\mathbf{x},\mathbf{u},\delta,\lambda_1)) = 0 \tag{A.26}$$

$$\begin{aligned}\frac{\partial \mathcal{L}(\mathbf{x},\mathbf{u},\delta,\lambda_1)}{\partial \mathbf{u}} = 0 &\iff \mathbf{u}^\top R + \lambda_1^\top L_G h(\mathbf{x}) = 0 \\ &\iff \mathbf{u} = -L_G V^\top \lambda_1 \quad (R = \mathbf{I}_{m\times m})\end{aligned} \tag{A.27}$$

$$\begin{aligned}\frac{\partial \mathcal{L}(\mathbf{x},\mathbf{u},\delta,\lambda_1)}{\partial \delta} = 0 &\iff p\delta - \lambda_1 = 0 \\ &\iff \delta = \frac{\lambda_1}{p}\end{aligned} \tag{A.28}$$

$$\begin{aligned}\frac{\partial \mathcal{L}(\mathbf{x},\mathbf{u},\delta,\lambda_1)}{\partial \lambda_1} = 0 &\iff F_V(\mathbf{x}) + L_G V(\mathbf{x})\mathbf{u} - \delta = 0 \\ &\iff F_V(\mathbf{x}) - L_G V(\mathbf{x}) L_G h^\top(\mathbf{x})\lambda_1 - \delta = 0 \\ &\iff F_V(\mathbf{x}) - L_G V(\mathbf{x}) L_G h^\top(\mathbf{x})\lambda_1 - p^{-1}\lambda_1 = 0 \\ &\iff \lambda_1 = (\|L_G V(\mathbf{x})\|^2 + p^{-1})^{-1} F_V(\mathbf{x})\end{aligned} \tag{A.29}$$

Replacing into the input equation A.27 the KKT multiplier formula A.29:

$$\begin{aligned}k_1(\mathbf{x}) &= -L_G V^\top(\mathbf{x})\lambda_1 \\ &= -L_G V^\top(\mathbf{x})(\|L_G V(\mathbf{x})\|^2 + p^{-1})^{-1} F_V(\mathbf{x})\end{aligned} \tag{A.30}$$

Syntethizing like this the controller $k(\mathbf{x})$ that complies all the necessary conditions:

$$\mathbf{k}(\mathbf{x}) = \begin{cases} \mathbf{k}_1(\mathbf{x}), & (\mathbf{x}) \in \mathcal{S}_1 \\ \mathbf{k}_2(\mathbf{x}), & (\mathbf{x}) \in \mathcal{S}_2 \\ \mathbf{k}_3(\mathbf{x}), & (\mathbf{x}) \in \mathcal{S}_3 \\ \mathbf{0}_{m\times 1}\ , & (\mathbf{x}) \in \mathcal{S}_4 \end{cases} \tag{A.31}$$

A.2 Closed-Form Ellipsoide Tangent Point

A.3 Multiple CLF Transition Formulation

From each equilibrium points is defined a CLF, $V_{N_{j-1}}$ stabilizing in $\bar{\mathbf{x}}_{N_{j-1}}$, $j \in \{1, ..., K+1\}$, beeing j referent to the in the moment next (after the current) equilibrium state which is expected the system to follow and $K+1$ the total equilibrium points:

$$V_{C_{j|j}}(\mathbf{x}) = V_{N_{j-1}}(\mathbf{x}) \quad j \in \{1, ..., K+1\} \tag{A.32}$$

$$V_{C_{j|i+1}}(\mathbf{x}) = \begin{cases} \sigma_{j|i}(\mathbf{x}) V_{C_{j|i}}(\mathbf{x}) + (1 - \sigma_{j|i}(\mathbf{x})) V_{N_i}(\mathbf{x}) & i \in \{j, ..., K\} \\ \sigma_{j|i}(\mathbf{x}) = \frac{1}{1+e^{-\zeta V_{C_{j|i}}(\mathbf{x})}} \end{cases} \tag{A.33}$$

$$V(\mathbf{x}) = \begin{cases} V_j(\mathbf{x}) = V_{C_{j|K+1}}(\mathbf{x}) & \mathbf{x} \in \mathcal{S}_j \\ V_{K+1}(\mathbf{x}) = V_{N_K}(\mathbf{x}) & \mathbf{x} \in \bigcup_{j=0}^{K} \bar{\mathcal{S}}_j \end{cases} \tag{A.34}$$

$$\mathcal{S}_j = \{\mathbf{x} \in \mathbb{R}^n : V_{C_{j|j}}(\mathbf{x}) \geq tol \cap \dot{V}_{C_{j|j}}(\mathbf{x}, \mathbf{u}) \leq 0 \cap \delta \leq tol_2\} \tag{A.35}$$

Where $\sigma(V_{C_{j|i}}(\mathbf{x}))$ is a sigmoide function responsible to the transition between the CLF $V_{C_{j|i}}$ and V_{N_i}, $\zeta \in \mathbb{R}_{\geq 0}$ is its slope and $\mathcal{S}_j$ the just one time activation set of the respective CLF V_j, with δ referent to the CLF-CBF QP optimized relaxation variable.

The sets of possible control inputs, given the new CLF V_j and assuming a a high slope ζ ($\dot{\sigma}(\mathbf{x}, \mathbf{u}) \approx 0$), is approximately:

$$\begin{aligned} K_{V_j}(\mathbf{x}) = \Big\{ \mathbf{u} \in \mathbb{R}^m : \dot{V}_j(\mathbf{x}, \mathbf{u}) = & \Big(\dot{V}_{N_{j-1}}(\mathbf{x}, \mathbf{u}) \prod_{i=j}^{K} \sigma_{j|i}(\mathbf{x}) \Big) + \Big((1 - \sigma_{j|K}(\mathbf{x})) \dot{V}_{N_K}(\mathbf{x}, \mathbf{u}) \Big) \\ & + \Big(\sum_{i=j}^{K-1} \big[(1 - \sigma_{j|i}(\mathbf{x})) \dot{V}_{N_i}(\mathbf{x}, \mathbf{u}) \prod_{k=i+1}^{K} \sigma_{j|k}(\mathbf{x}) \big] \Big) \\ & \leq -\gamma(\mu_j \sigma(\mathbf{x}) V_{C_{j|K}}(\mathbf{x}) + (1 - \sigma(\mathbf{x})) V_{N_K}(\mathbf{x})) \Big\} \end{aligned} \tag{A.36}$$

With μ_j as a parameter with default value as $\frac{V_{N_K}(\mathbf{x}_0)}{V_{C_{j|K}}(\mathbf{x}_0)}$, with $\mathbf{x}_0$ equal to the considered initial system state. The set $K_{V_{K+1}}(\mathbf{x})$ is follows the same structure as 2.5.

If $\zeta \to \infty$, according to equations A.32, A.33 and A.34:

$$V(\mathbf{x}) = V_{N_{j-1}}(\mathbf{x}) \quad \mathbf{x} \in \mathcal{S}_j \tag{A.37}$$

$$\mathcal{S}_j = \{\mathbf{x} \in \mathbb{R}^n : V_{N_{j-1}}(\mathbf{x}) \geq tol \cap \dot{V}_{N_{j-1}}(\mathbf{x}, \mathbf{u}) \leq 0 \cap \delta \leq tol_2\} \tag{A.38}$$

And if $\mu = \frac{V_{N_K}(\mathbf{x})}{V_{C_{j|K}}(\mathbf{x})}$ then:

$$K_{V_j}(\mathbf{x}) = \Big\{ \mathbf{u} \in \mathbb{R}^m : \dot{V}_{N_{j-1}}(\mathbf{x}, \mathbf{u}) \leq -\gamma(V_{N_K}(\mathbf{x})) \Big\} \tag{A.39}$$

2000 A Very Long and Impressive Thesis Title with a Forced Line Break John Doe