



# Diamond · 50 cm · Headwind · Level 2


**P1 / D1 · B11**

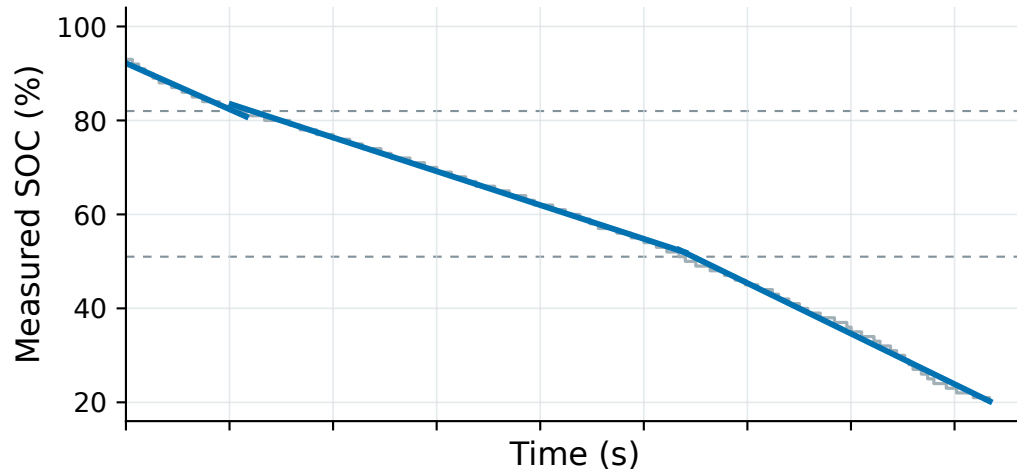


**P2 / D2 · B10**

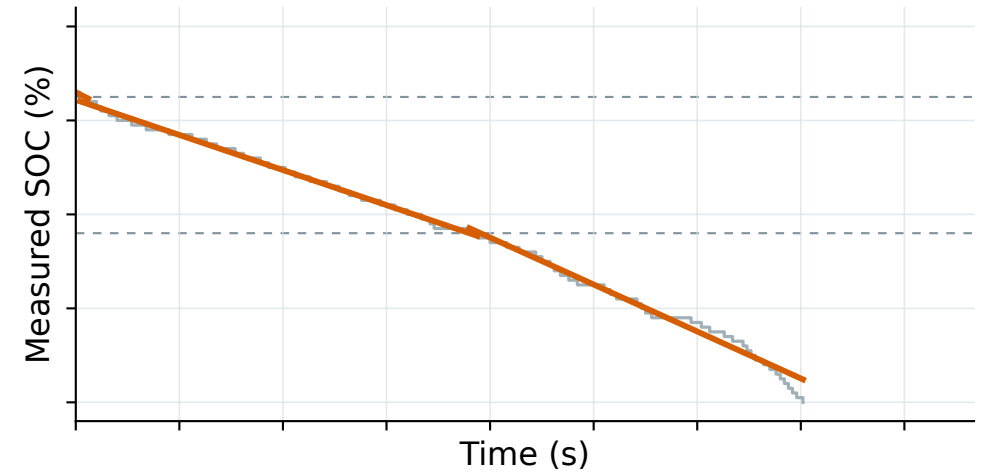


**P3 / D3 · B13**

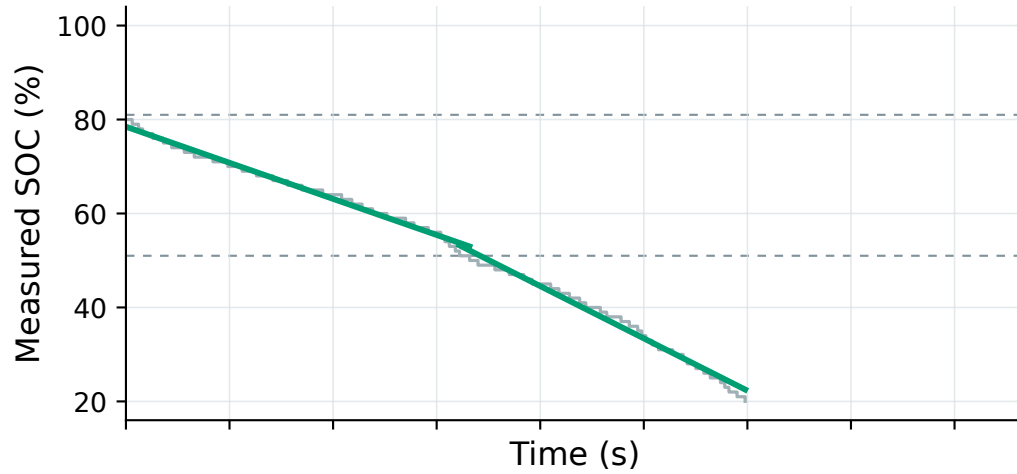

**P4 / D4 · B14**

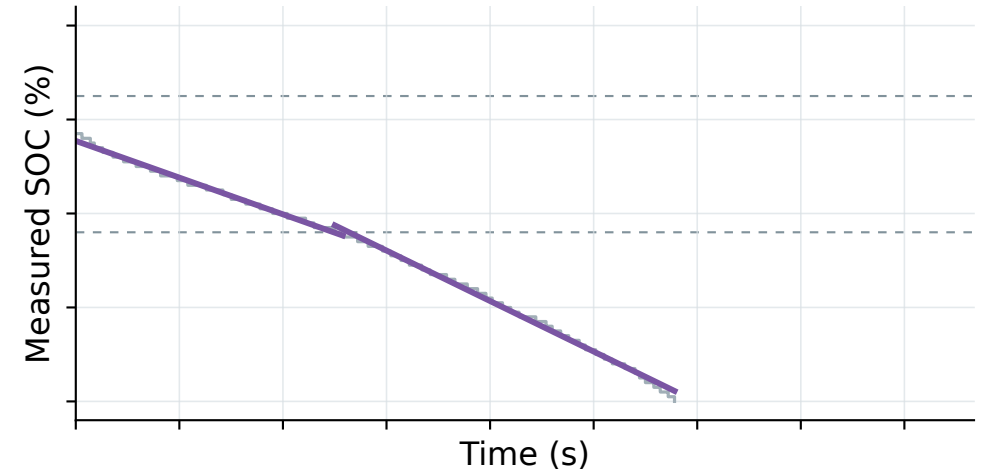

**P5 / D5 · B12**

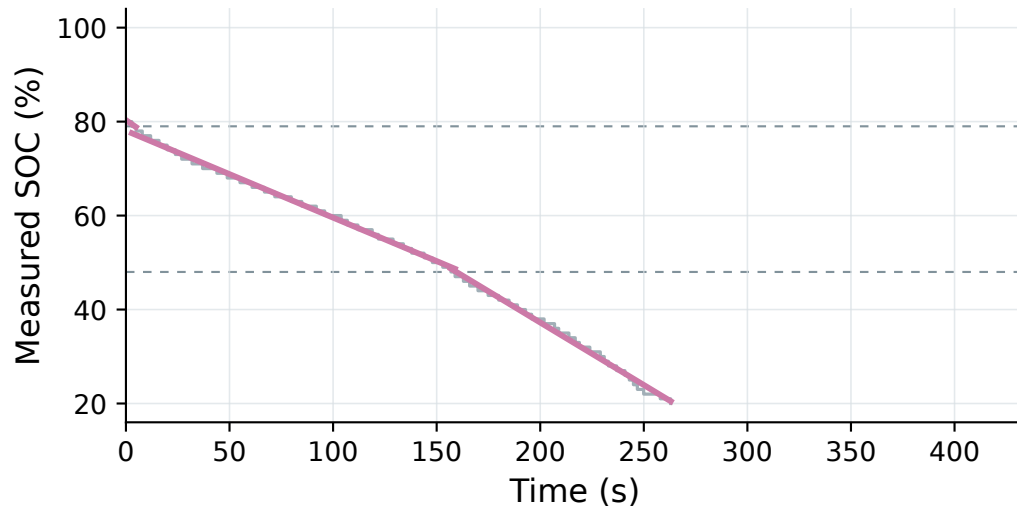

## Fit stages first, then calculate time

Each drone retains its own hovering record.

The initial unchanged-SOC period is removed.

Raw SOC stage slopes are fitted independently.

Rates are normalized with the existing battery baseline.

Full-reference stage time = SOC drop / stage rate.

— Measured SOC    — Independent stage fits