



Monitor Accessory User Manual

Single Arm | BSL series

V 1.00

Copyright & disclaimer

Copyright

Copyright © 2026 by BenQ Corporation. All rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise, without the prior written permission of BenQ Corporation.

All other logos, products, or company names mentioned in this manual may be the registered trademarks or copyrights of their respective companies, and are used for informational purposes only.

Disclaimer

BenQ Corporation makes no representations or warranties, either expressed or implied, with respect to the contents hereof and specifically disclaims any warranties, merchantability or fitness for any particular purpose. Further, BenQ Corporation reserves the right to revise this publication and to make changes from time to time in the contents hereof without obligation of BenQ Corporation to notify any person of such revision or changes. This user manual aims to provide the most updated and accurate information to

customers, and thus all contents may be modified from time to time without prior notice. Please visit <http://support.benq.com> for the latest version of this manual.

It is the sole responsibility of the user if problems (such as data loss and system failure) occurred due to non-factory installed software, parts, and/or non-original accessories.

Product support

This document aims to provide the most updated and accurate information to customers, and thus all contents may be modified from time to time without prior notice. Please visit the website for the latest version of this document and other product information. Available files vary by model.


1. Make sure your computer is connected to the Internet.
2. Visit the local website from Support.BenQ.com.
The website layout and content may vary by region/country. Look for the following regularly to get the most up-to-date information.
 - User manual and related document
 - Frequently asked questions

Safety instructions

Safety precautions

To ensure safe use of this product, it is important that you follow the instructions mentioned in this manual and marked on the product.

- Read this user manual before installation.
- Install the product on a desk with flat surface.
- Ensure the desk and the tabletop are stable enough to support the weight of the monitor. Refer to the monitor specifications for weight information.
- Turn off the monitor and the power before mounting to the ergo arm.
- Keep the monitor within the range of your desk to ensure stability.

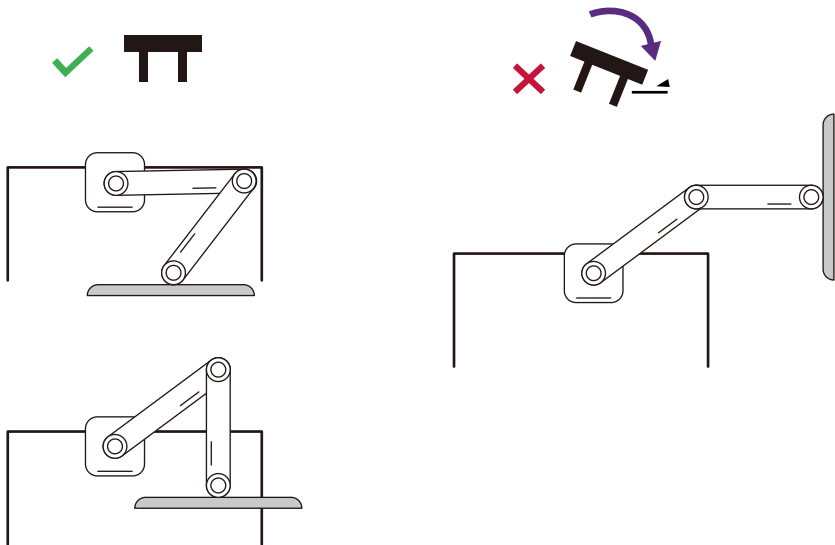

Disposal

To dispose of the product, consult your local environment authorities for regulations.

Servicing

Scan the QR code on your product or visit the local website from Support.BenQ.com for more support.



Support.BenQ.com

① Note


The illustrations and the images shown in this document are for your reference. They may differ from the actual contents and the product supplied for your region.

Table of Contents


Copyright & disclaimer.....	2
Copyright.....	2
Disclaimer	2
Product support	3
Safety instructions.....	4
Safety precautions.....	4
Disposal.....	5
Servicing.....	5
Package contents	7
Introduction	9
Product overview.....	9
Installation requirements	11
Installation.....	12
Mounting options	12
Prior to assembling	13
Checking where to install the arm.....	13
Installing mount base for clamp mounting.....	14
Installing mount base for grommet mounting..	16
Installing the lower arm.....	18
Installing the display bracket and upper arm....	20
Installing the monitor	24
Tension adjustments.....	26
Adjusting lift strength.....	26
Adjusting tilt strength.....	27
Managing the cables.....	28

Package contents

Carefully unpack and verify that you have all of the items shown below. Some of the items may not be available depending on your region of purchase. If any of these items are missing, please contact your place of purchase.

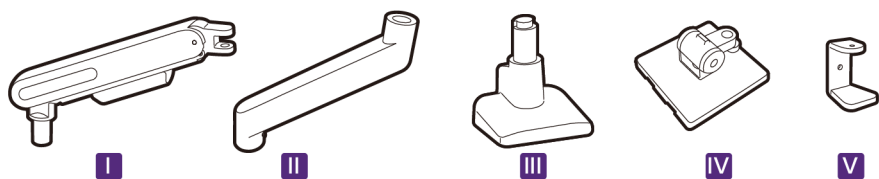

No.	Descriptions
I.	Upper arm
II.	Lower arm (with 2 stop screws and 1 thumbscrew for swivel adjustment)
III.	Mount base
IV.	Display bracket
V.	C-clamp

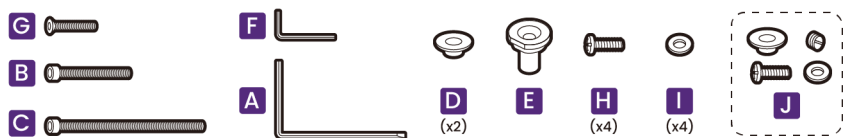

No.	Descriptions
A.	5 mm Allen key

No.	Descriptions
B.	Screw for clamp x 1 (M8 x 90)
C.	Screw for grommet x 1 (M8 x 130)
D.	Hinge washer x 2
E.	Hinge joint
F.	3 mm Allen key
G.	Hinge screw (M5 x 30)
H.	Screw x 4 (M4 x 12)
I.	Washer x 4 (D5)
J.	Spare parts (stop screw, hinge washer, M4 screw, D5 washer, one for each) Keep them properly for future use.

① **Note**


- Actual product's features and specifications are subject to change without notice.
- The warranty card is only supplied in some specific regions. Please consult your dealer for detailed information, or check warranty information online.
- Use original accessories to ensure compatibility.

① **Warning**

Always keep the product, the packaging, and accessories out of reach of small children.

Introduction

Product overview

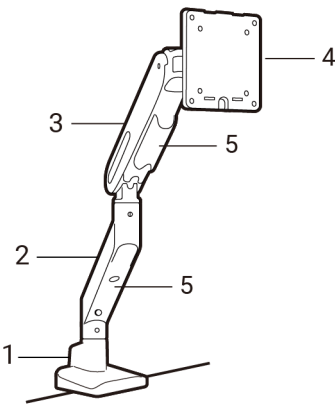

No.	Descriptions
1.	Mount base See Installing mount base for clamp mounting on page 14 / Installing mount base for grommet mounting on page 16 for details.
2.	Lower arm See Installing the lower arm on page 18 for details.
3.	Upper arm See Installing the display bracket and upper arm on page 20 for details.
4.	Display bracket and VESA plate See Installing the display bracket and upper arm on page 20 for details.

No.	Descriptions
5.	Cable cover See Managing the cables on page 28 for details.

Installation requirements


- A VESA-compliant monitor
Compatible VESA mounting patterns: 75x75 mm, 100x100 mm
- Weight capacity: 2 ~ 11 kg (4.4 ~ 24.2 lbs)
Apart from the monitor weight, additional weight from peripherals such as a web cam or a monitor light should be considered as well.
Note that a curved monitor can be heavier than rated due to different weight distribution.
- Desk thickness: 10 ~ 50 mm
- 10 cm between the desk edge and the wall behind the monitor, or limit the swivel range to 180°
- A desk of at least 100 cm in width and 55 cm in depth to ensure stability. Consider how far the arm can be extended. Do not extend the monitor beyond the edges of the desk.
- Enough room for height and articulation adjustments
Maximum height: 70 cm from the desk surface
Extension: 55 cm
- Additional tool you may need: a cross-pointed screwdriver (not included in the package) to secure your monitor to the VESA plate

Installation

Mounting options

Depending on your desk type, follow the steps below to assemble your monitor.

A. Clamp mounting

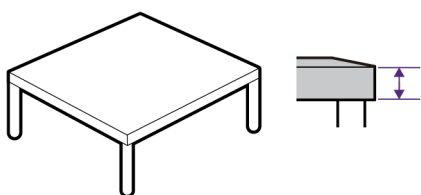


Desk thickness: 10 ~ 50 mm

Procedures:

1. Prior to assembling
2. Installing mount base for clamp mounting
3. Installing the lower arm
4. Installing the display bracket and upper arm
5. Installing the monitor

B. Grommet mounting

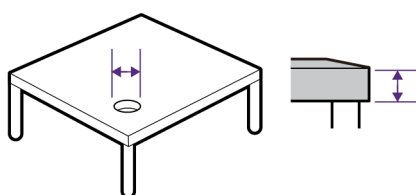

- $\Phi = 10 \sim 50$ mm
- Desk thickness: 10 ~ 50 mm

Procedures:

1. Prior to assembling
2. Installing mount base for grommet mounting
3. Installing the lower arm
4. Installing the display bracket and upper arm
5. Installing the monitor


Prior to assembling

Checking where to install the arm

The desk should be placed on a flat even area and should be stable enough to hold the weight of the ergo arm stand and the monitor.

The ergo arm stand works for clamp and grommet mounting to suit your need.


Make sure the mount base is fixed to a flat desk area without a protrusion or a grommet ring.

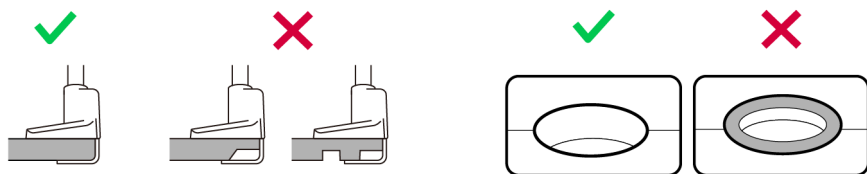




Installing mount base for clamp mounting


1. Attach c-clamp to the mount base.

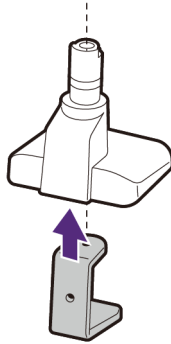


2. Fix c-clamp and the mount base with the clamp screw (B) and the 5 mm Allen key (A). Do not tighten the screw all the way down at this moment. Keep the c-clamp adjustable to fit your desk later.

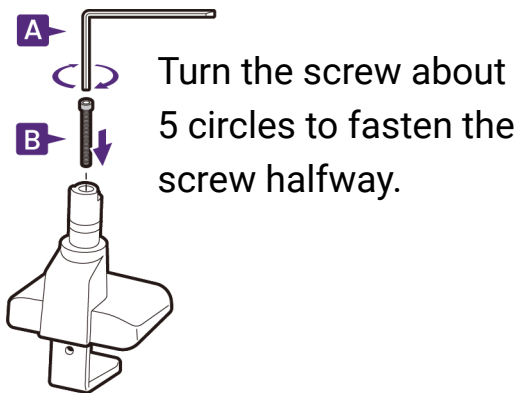

3. Attach the mount base together with the c-clamp to your desk. Hold the parts carefully and keep them from falling. Keep them as close to the desk edge as possible to ensure stability.

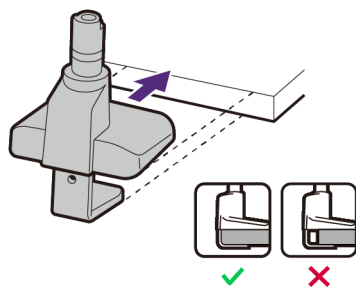

4. Fully tighten the screw to secure all parts together by the 5 mm Allen key (A).

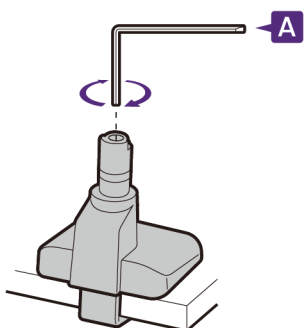





Installing mount base for grommet mounting

① Note

In some cases you can mount the base and route the cable through the same grommet hole. Evaluate the hole size first. If the grommet hole is not big enough to pass through the cable connectors after the mount base is installed, route the cable through the hole before mount base installation.

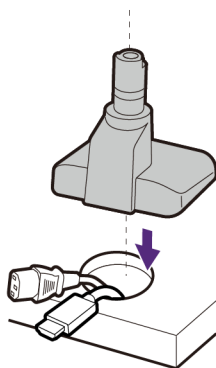


Turn the c-clamp and fix it and the mount base with the grommet screw (C) and the 5 mm Allen key (A) as illustrated. Align all parts properly. Fully tighten the grommet screw (C) to secure all parts together by the 5 mm Allen key (A).

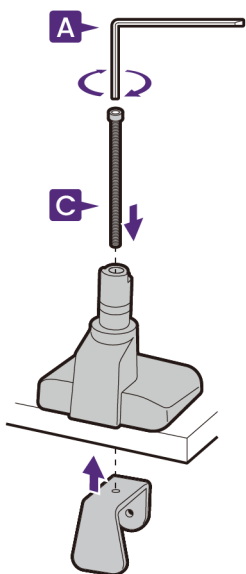




Installing the lower arm

1. Align the lower arm with the mount base and place it properly without the metal part being seen. Make sure the cable management faces down.

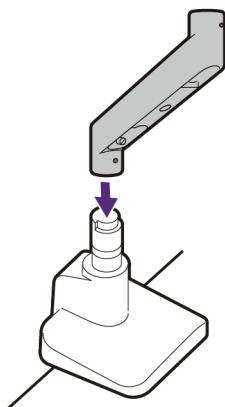


2. Decide the swivel range by the thumbscrew on the inner side of the lower arm. If there is no space behind the monitor, you should limit the swivel range to 180°. Turn the thumbscrew clockwise until you cannot go further.

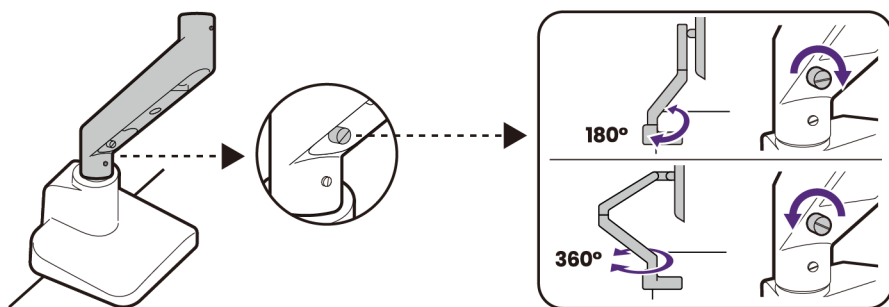

3. There is a stop screw attached to each side of the lower arm. Use the 5 mm Allen key (A) to


secure the lower arm and the mount base by the stop screw. Do not overtighten the screw.

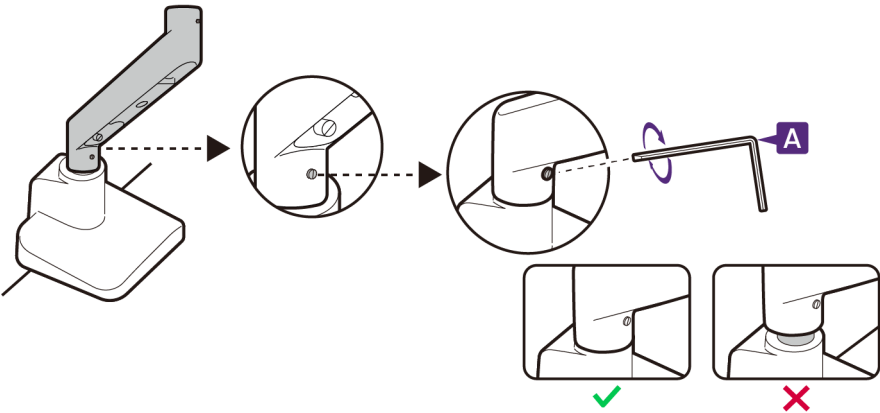



Installing the display bracket and upper arm


1. Move the hinge on the display bracket away from the thumbscrew.




2. Secure the hinge with the display bracket using the 5 mm Allen key (A).




3. Insert the hinge washers (D) to the display bracket.




4. Pay attention to the direction of the display bracket and make sure the thumbscrew is facing upward. Attach the display bracket to the upper arm. Align the holes properly.

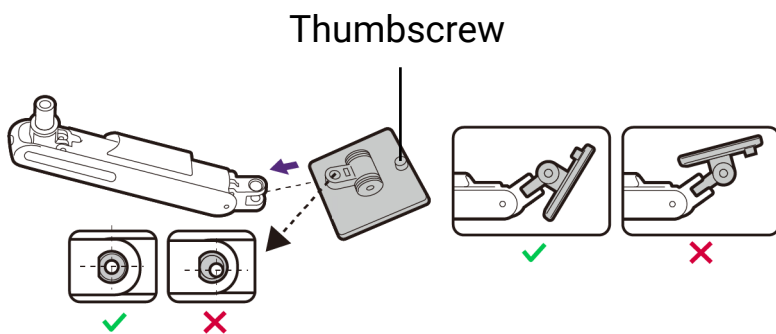


5. Align the hinge joint (**E**) with the holes properly.

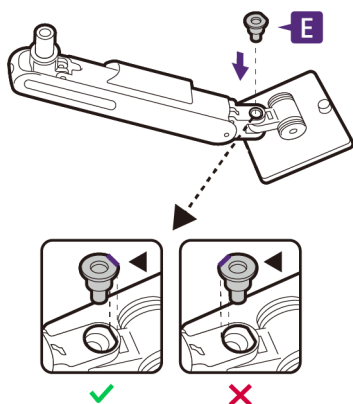


6. Fasten it with the hinge screw (**G**). Secure them with the 3 mm Allen key (**F**). Check if all parts are secured. The hinge joint and its screw should be flat without protrusions.

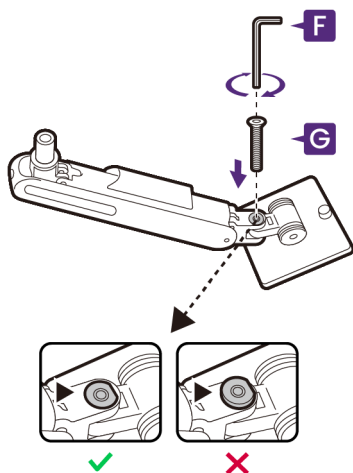


7. Align the upper arm with the lower arm and place it properly without the metal part being seen.

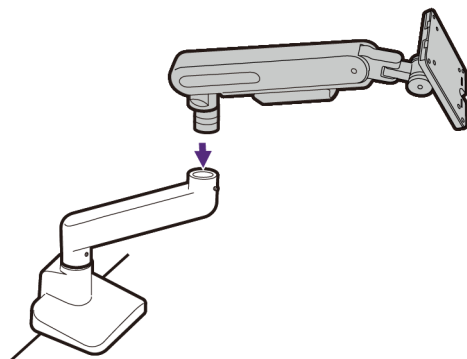

8. Use the 5 mm Allen key (A) to secure the arm by the stop screw. Do not overtighten the screw.

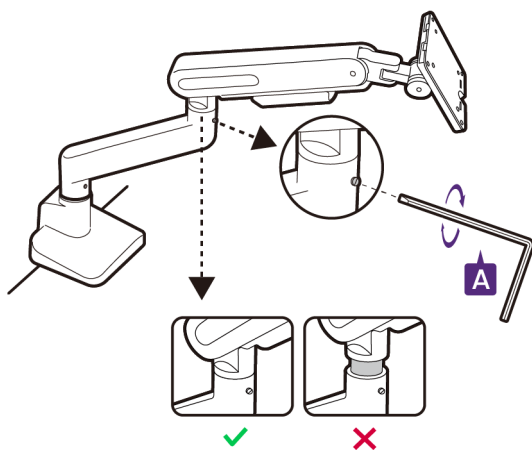


9. Check the swivel range before installing the monitor.

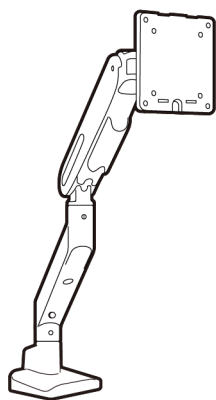


Installing the monitor

1. Release the thumbscrew on the display bracket and detach the VESA plate.

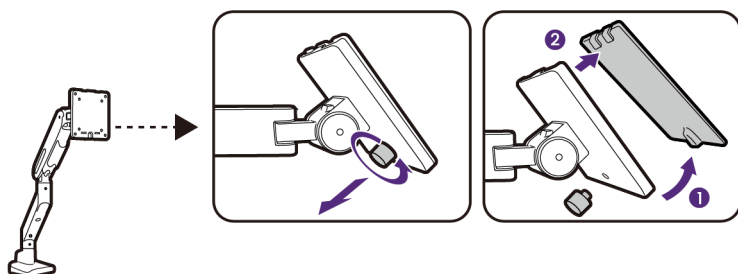


2. Attach the VESA plate to the VESA holes on the rear of your VESA-compliant monitor and fasten it with washers (I) and screws (H) by a cross-pointed screwdriver (not included in the package). Make sure the arrow on the VESA plate faces upward as illustrated.

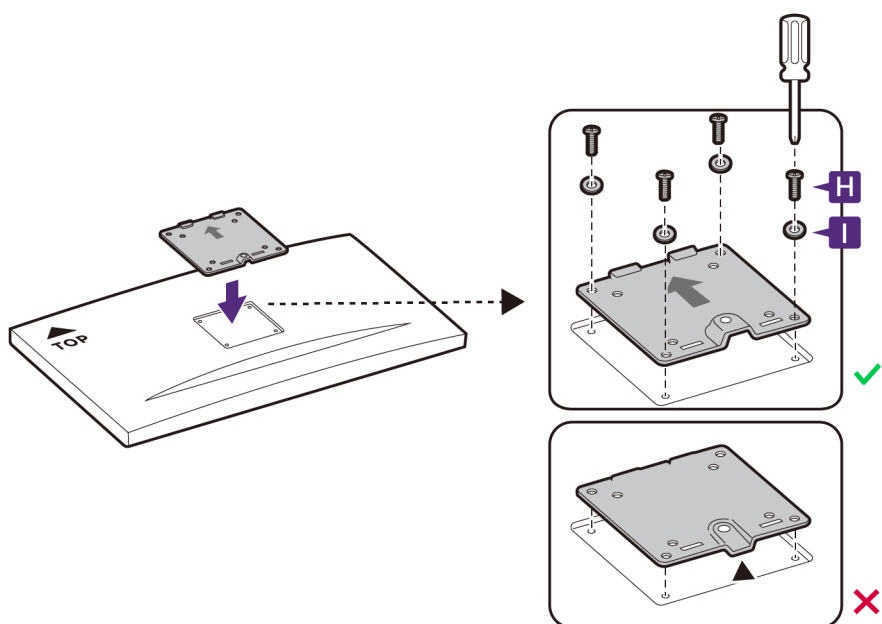

i Note

- The provided VESA mounting screws (**H**) are M4 x 12. As the monitor designs vary, you might need longer mounting screws (purchased separately) to fix the VESA plate to your monitor to keep it stable. Check the monitor's user manual for mounting screw information.
- An additional VESA adapter may be required for a curved monitor. Check with the monitor manufacturer.

3. Align to hook the monitor up on the display bracket. You might need assistance to hold the monitor together if the monitor is heavy or wide. Do not let go of your hands immediately after the monitor is hooked up. Secure the monitor and the bracket with the thumbscrew while holding the monitor with another hand. Make sure the monitor is properly installed and the arm is not drooping.

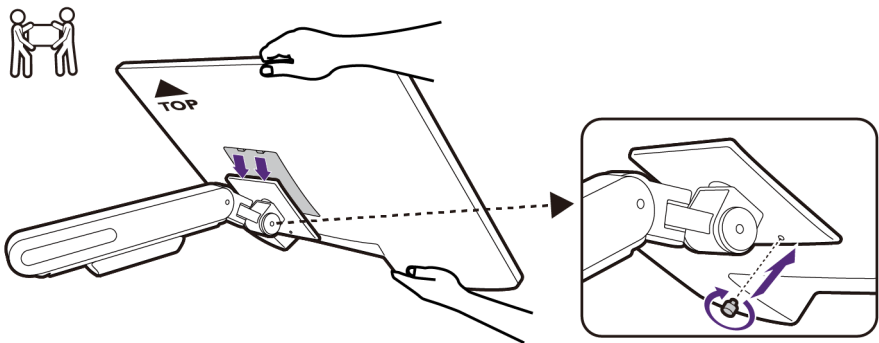

Tension adjustments

The supported mounting weight of the arm is from 2 to 11 kg (4.4 ~ 24.2 lbs).

The arm should be able to hold the mounting weight between 4 to 6 kg without further adjustment. Try to lift, lower, or tilt the monitor after the monitor installation. If the monitor does not stay at the preferred height/angle, you can adjust the tensions, which determine the lift strength or tilt strength. Use the 5 mm Allen key (**A**) to adjust the screws. Do not over or under tighten an adjustment screw.


Adjusting lift strength

If the mounted weight is heavier than expected, the ergo arm goes lower than desired. Increase lift strength by turning the tension adjustment screw clockwise to **+**.

If the mounted weight is lighter than expected, the ergo arm goes higher than desired. Decrease the lift strength by turning the tension adjustment screw counterclockwise to **-**.

You can tell the screw adjustment direction by the tension viewing window on the upper arm.


Tension viewing window

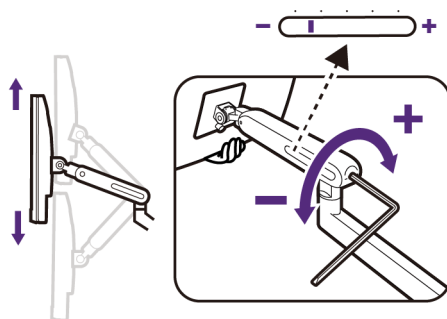

Adjusting tilt strength


If the monitor keeps rising or drooping, increase tilt strength by turning the tilt adjustment screw clockwise to **+**.

If the monitor can hardly be tilted, decrease the tilt strength by turning the tilt adjustment screw counterclockwise to **-**.

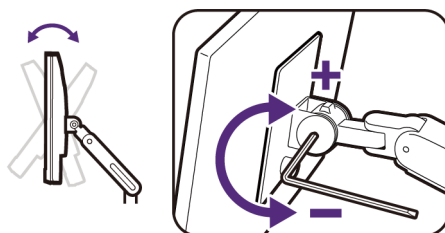


Managing the cables

1. Remove the cable covers on the arm. Slide the covers toward the monitor carefully to detach them from the arm.

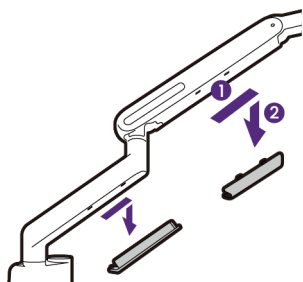

2. Route the cables properly as illustrated. Remember to leave slack in cables (near the monitor) to prevent connectors from being pulled out inappropriately during monitor angle adjustments (tilt, swivel, and rotation) or arm moves.

Re-install the cable covers after the cables are routed. Attach and slide the covers toward the mount base carefully. Alternatively, check the marks inside the cable covers to find out the correct direction of installation.

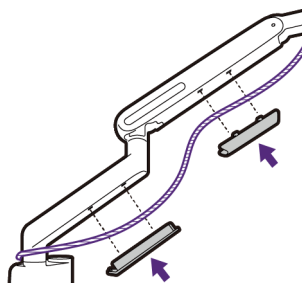

© 2026 BenQ Corporation.
All rights reserved.
Rights of modification reserved.