



Ultimate USB4 Mobile Dock User Manual

Copyright and disclaimer

Copyright

Copyright 2024 BenQ Corporation. All rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise, without the prior written permission of BenQ Corporation.

Disclaimer

BenQ Corporation makes no representations or warranties, either expressed or implied, with respect to the contents of this document. BenQ Corporation reserves the right to revise this publication and to make changes from time to time in the contents thereof without obligation to notify any person of such revision or changes.

This document aims to provide the most updated and accurate information to customers, and thus all contents may be modified from time to time without prior notice. Please visit the website for the latest version of this document.

Product support

This document aims to provide the most updated and accurate information to customers, and thus all contents may be modified from time to time without prior notice. Please visit the website for the latest version of this document and other product information. Available files vary by model.

1. Make sure your computer is connected to the Internet.
2. Visit the local website from Support.BenQ.com. The website layout and content may vary by region/country.

Search for your model's user manual and related document.

Servicing


- If misuse or other accident occurs, contact qualified service personnel for servicing.
- Contact your place of purchase or visit the local website from Support.BenQ.com for more support.

Table of contents

Copyright and disclaimer.....	i
Product support.....	ii
Overview.....	1
Package contents.....	1
Compatibility.....	1
Safety precautions.....	1
Mobile Dock overview	2
Setting up your Mobile Dock	3
Choosing the right power adapter	3
Connecting with laptop	3
Connecting with smartphone	4
Connecting with handheld gaming console	5
Notes on HDMI port and cable	6
Supported max resolution.....	6
Product information	7
Specifications	7
Troubleshooting	7

Overview

Package contents



GR10 Mobile Dock



Quick start guide



Safety statements



Warranty card

Compatibility

Operating system requirements

- Windows: 10+
- macOS: 13.0+
- SteamOS: 3.0+
- Android: 13.0+
- iOS: 17.0+
- iPadOS: 17.0+


Mobile Dock compatibility list

To ensure that your device is compatible with the Mobile Dock, check the Mobile Dock compatibility listed on the product page.

Safety precautions

1. Avoid dropping this product.
2. This product is not fully sealed; avoid contact with liquids.
3. Do not disassemble this product.
4. For the safest and fastest charge, use certified cables.
5. The ambient temperature during use must not exceed 40°C/104°F.
6. Keep this product away from open flames.
7. Clean this product only with a dry cloth or brush.

Mobile Dock overview



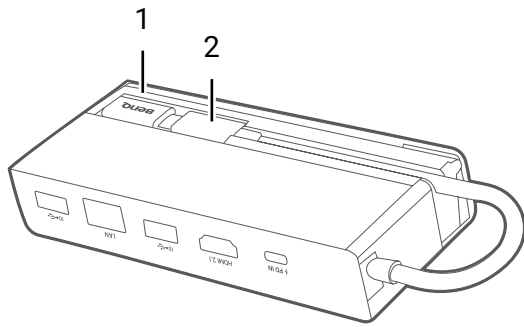


1. 90 degree USB-C adapter

2. USB4 cable

Warning

Avoid pulling the cable forcefully or swirling the product through the cable to prevent it from breaking accidentally.

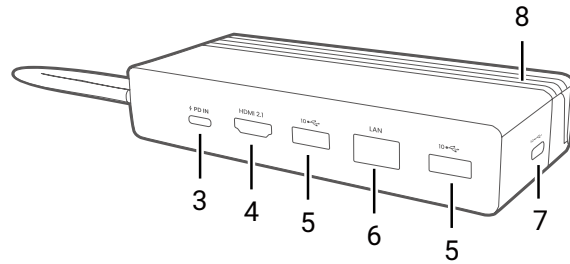

3. USB PD IN

PD charger input max 100W

4. HDMI 2.1 OUT

5. USB-A 3.2 Gen2

- 10 Gbps data transfer
- 4.5W charging
- Connect the USB devices such as keyboard and mouse.

6. Gigabit Ethernet

- Supports speed of 2.5 Gbps.
- Connect a router.

7. USB-C 3.2 Gen2

- 10 Gbps data transfer.
- 7.5W charging
- Connect any USB-C compatible devices.

8. Foldable stand base

Setting up your Mobile Dock

See how to set up your Mobile Dock according to your input device.

- [Connecting with laptop](#)
- [Connecting with smartphone](#)
- [Connecting with handheld gaming console](#)

Choosing the right power adapter

With different input devices, the suggested watts of the power adapter is listed as below.

- Laptop: Up to 100W
- Handheld gaming device: At least 45W

Notes: A 100W+ power adapter is required for ROG Ally 30W Turbo mode.


- Smartphone: At least 20W

Please note that the Mobile Dock has a power consumption of 15W.

- The USB-C port supports pass-through charging up to 100W. For an adapter greater than or equal to 100W, it provides charging for your input device at up to 85W.
- If no adapter is used or the adapter provides charging less than 15W, the Mobile Dock will consume power from your input device.


Connecting with laptop

1. Use the USB-C cable from the Mobile Dock to connect your laptop.

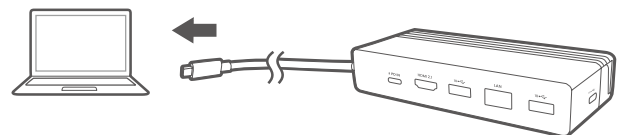


2. Plug one end of your power adapter into the PD-IN port and the other into a power outlet.

See [Choosing the right power adapter on page 3](#) for charging details.

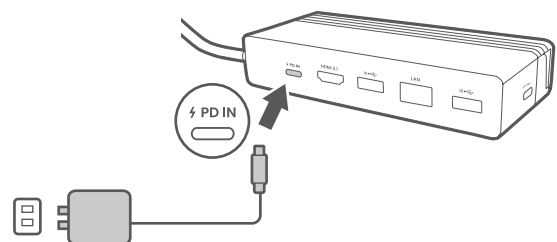


3. Connect your display to the HDMI 2.1 port with an HDMI cable.

See [Notes on HDMI port and cable on page 6](#) for details.

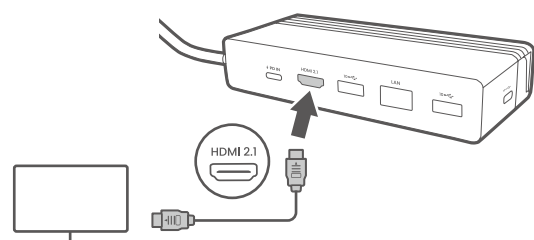


Connecting with smartphone

1. Unfold the stand base.




2. Place your phone on the Mobile Dock.

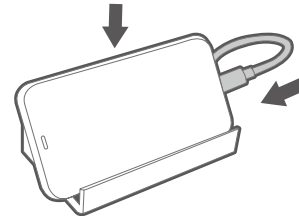

3. Use the USB-C cable from the Mobile Dock to connect your phone.


4. Plug one end of your power adapter into the PD-IN port and the other into a power outlet.

See [Choosing the right power adapter on page 3](#) for charging details.

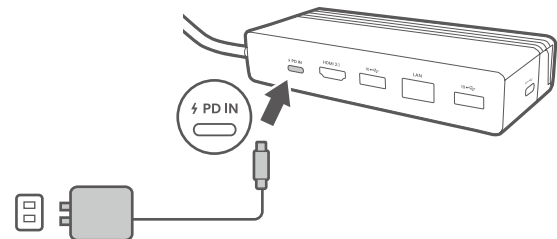


5. Connect your display to the HDMI 2.1 port with an HDMI cable.

See [Notes on HDMI port and cable on page 6](#) for details.

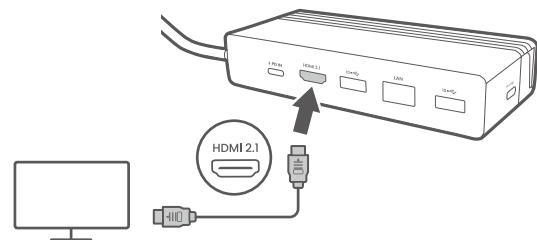


Connecting with handheld gaming console


1. Take out the USB-C cable from the Mobile Dock and attach the 90° USB-C adapter.

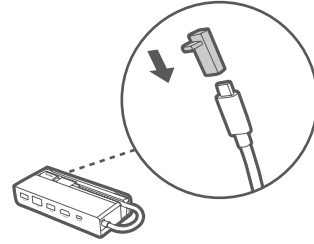

2. Unfold the stand base.




3. Place your console on the Mobile Dock.

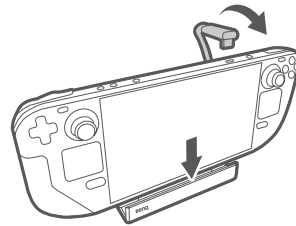

4. Connect the USB-C cable from the Mobile Dock to the console.


5. Plug one end of your power adapter into the PD-IN port and the other into a power outlet.

See [Choosing the right power adapter on page 3](#) for charging details.

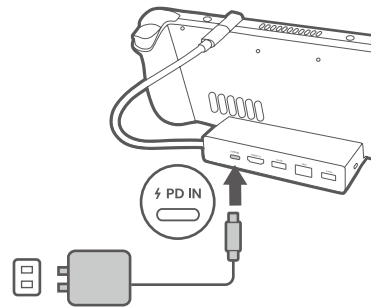

6. Connect your display to the HDMI 2.1 port with an HDMI cable.

See [Notes on HDMI port and cable on page 6](#) for details.

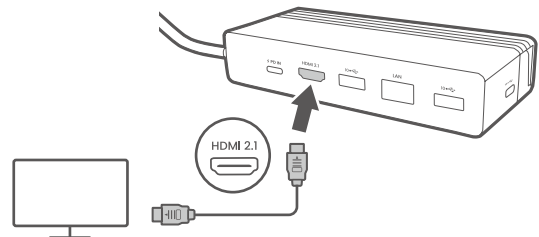

Notes on HDMI port and cable

1. Supported max resolution: 8K 60Hz / 4K 120Hz. See [Supported max resolution on page 6](#) for details.
2. Supports single monitor connection.
3. Do not use HDMI to DisplayPort cables or adapters.
4. Do not use HDMI switch.

Supported max resolution

The Mobile Dock's supported max resolution is 8K 60Hz / 4K 120Hz. Make sure all of the following conditions are met to reach the max resolution:

Device	Requirements
Laptop	• Use an HDMI 2.1 cable shorter than 15 feet in length. • Make sure both your input and output device support HDMI 2.1. • The resolution and refresh rate vary depending on your laptop specifications.
Smartphone	• Make sure that your device's USB-C port supports DP Alt mode. • Use an HDMI 2.1 cable shorter than 15 feet in length. • Make sure both your input and output device support HDMI 2.1. • The resolution and refresh rate vary depending on your phone specifications.
Handheld gaming console	• Use an HDMI 2.1 cable shorter than 15 feet in length. • Make sure both your input and output device support HDMI 2.1. • Manually set your gaming console at 8K@60Hz or 4K@120Hz output. • The resolution and refresh rate vary depending on specific requirements of different games.

Product information

Specifications

GR10	
Dimension & Weight	
USB Type-C Upstream Cable length (mm)	200 mm
Dimension (mm)	130*54.5*25.5
Weight (g)	188 g
Power mode	
Self-powered	By USB Bus power
PD charging to Host	By external PD charger. 100W max USB-C PD IN Note • Connect to a Power Delivery charger to charge a compatible connected host. • USB-C charging port do not support data transfer or video output.
Upstream Ports	
USB4 Type-C cable	1
Downstream Ports	
USB-A Connector (10 Gbps, 4.5W charging)	2
USB-C Connector (10 Gbps, 7.5W charging)	1
Video Output	
HDMI 2.1 (4K 120Hz/8K 60Hz)	1
Networking	
2.5 Gigabit Ethernet RJ-45	1
Requirements	
System	• Windows: 10+ • macOS: 13.0+ • SteamOS: 3.0+ • iOS: 17.0+ • Android: 13.0+ • iPadOS: 17.0+

Notes

Specifications and functions are subject to change without notice

Troubleshooting

If your problems remain after checking this manual, please visit the local website from [Support. BenQ.com](#) for more support and local customer service.