Potentiometer

DETECT PICO INPUT

What does it do?

A potentiometer lets your code read how far a knob has been turned.

This small version is called a trimpot. Turning the blue knob moves a contact called the wiper, changing the voltage your board reads.

Use it to choose a speed, a brightness or a sound. Turn gently and stop at the ends. The marking 103 means 10 kΩ.

Uses



Security-light adjustment

DETECT Read sensitivity setting → DECIDE Is movement strong enough? → DO Switch the light on



Alien voice tuner

DETECT Knob position → DECIDE Should it rumble or squeak? → DO Rumble or squeak



Knob	Outer pair	Wiper
Turn to adjust	Pins 1 and 3	Pin 2, offset

Raspberry Pi Foundation

Code

Raspberry Pi Pico

```
from picozero import Pot


pot = Pot(26)

setting = pot.value
```

`setting` runs from 0 to 1. Read `pot.value` again after turning; `pot.voltage` gives volts. Power the trimpot from **3V3**.

Wiring

PICO

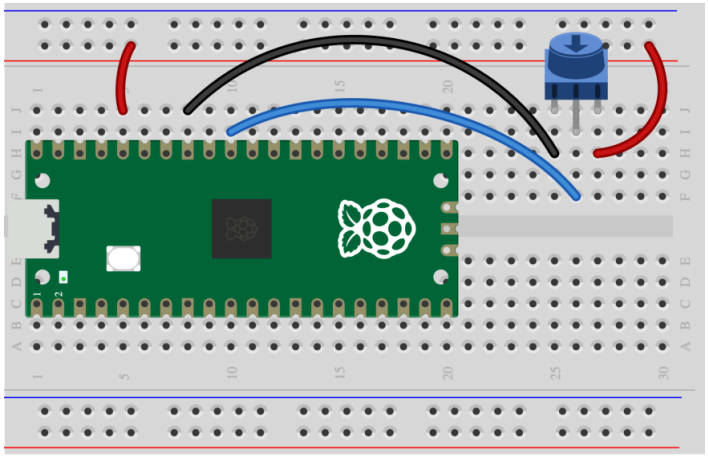

Trimpot pin **1** → **GND** (pin 33) · **2** (wiper) → **GP26** (pin 31) · **3** → **3V3 OUT** (pin 36). Each pin has its own breadboard row.