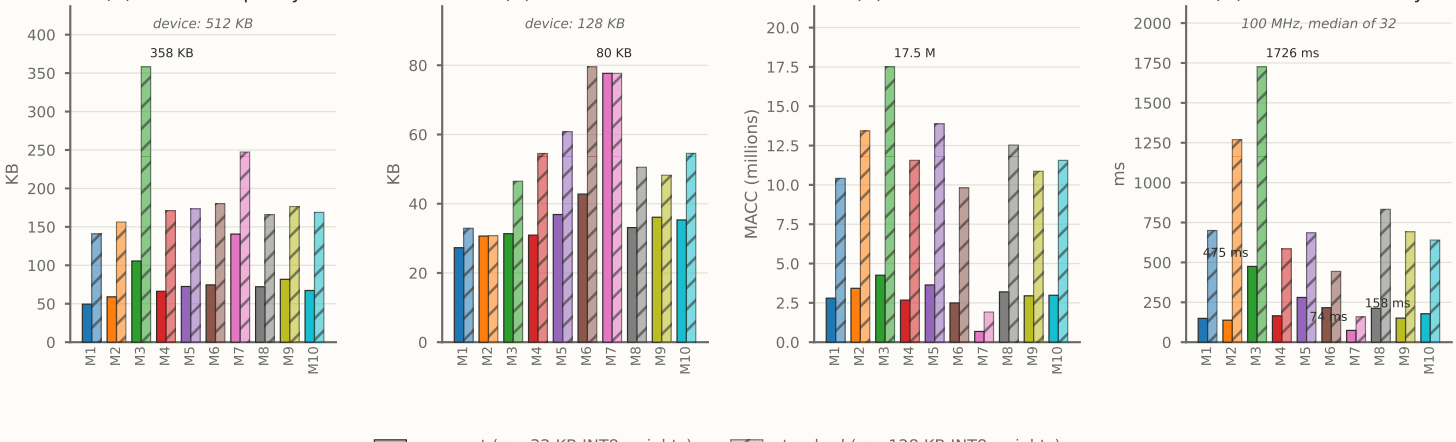
(A) Flash occupancy
device: 512 KB
358 KB
KB
(B) Peak SRAM
device: 128 KB
80 KB
KB
(C) Arithmetic cost
17.5 M
MACC (millions)
(D) Measured latency
100 MHz, median of 32
1726 ms
475 ms
74 ms
153 ms
ms
M1
M2
M3
M4
M5
M6
M7
M8
M9
M10
compact (<= 32 KB INT8 weights)
standard (<= 128 KB INT8 weights)
M1 FCN-1D
M2 ResNet-1D
M3 TCN
M4 MobileNetV2
M5 ShuffleNetV2
M6 GhostNet
M7 MobileNetV3
M8 FasterNet
M9 RepViT
M10 MobileNetV4-Conv