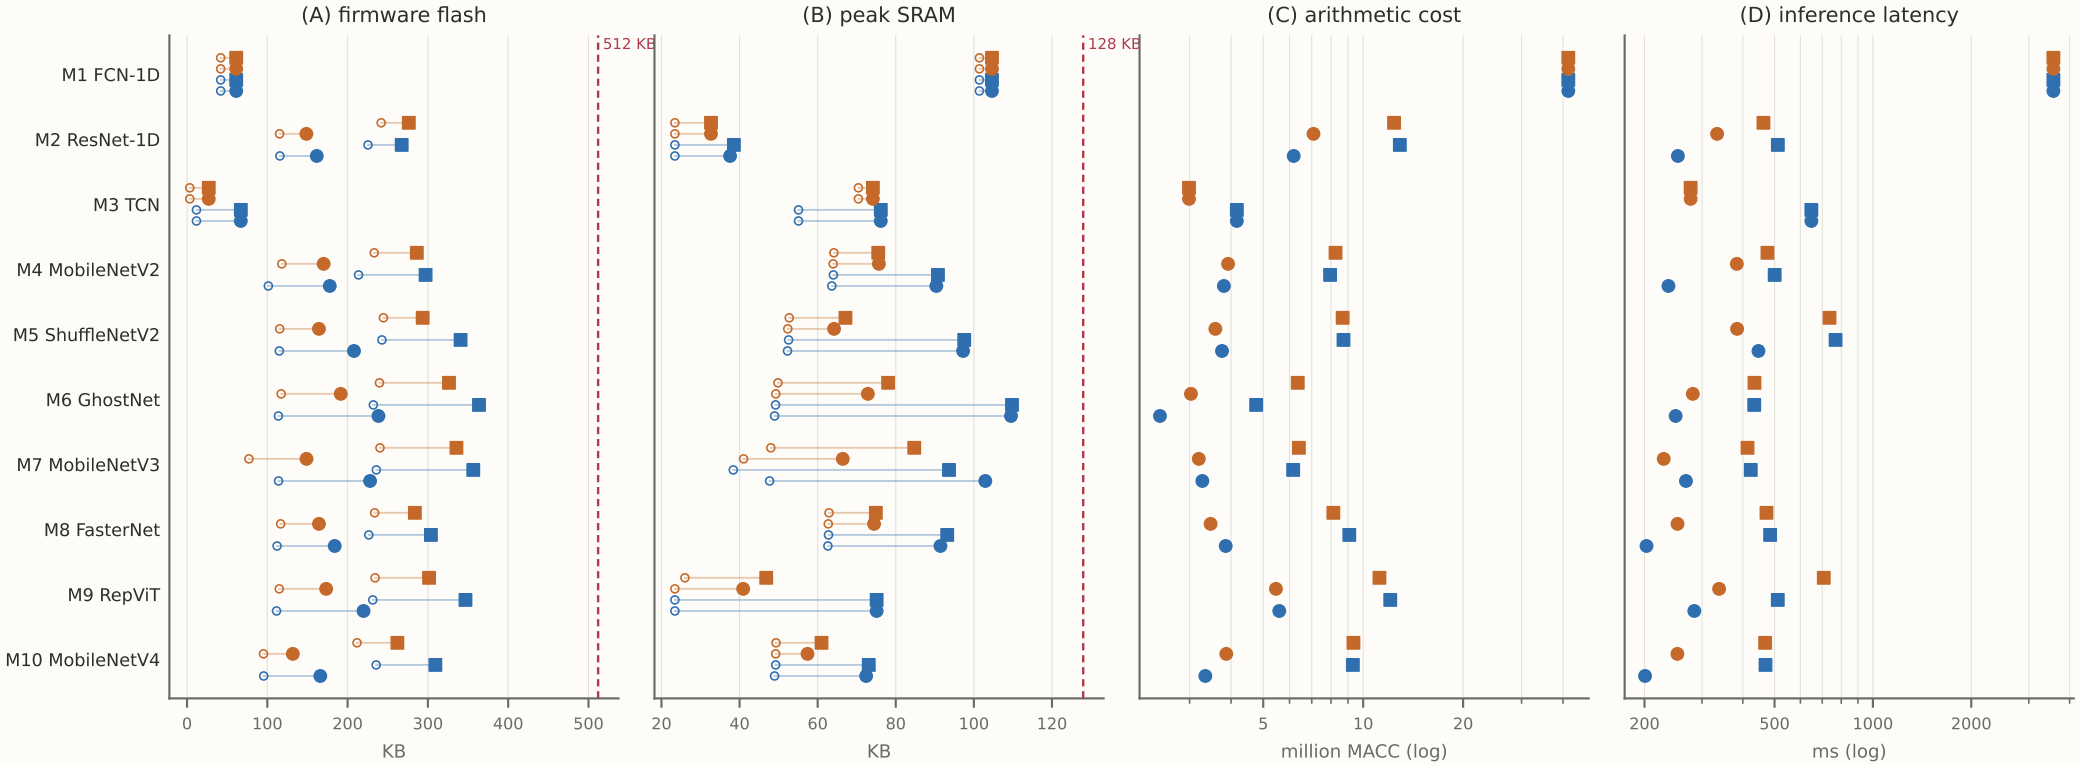
(A) firmware flash
(B) peak SRAM
(C) arithmetic cost
(D) inference latency
M1 FCN-1D
M2 ResNet-1D
M3 TCN
M4 MobileNetV2
M5 ShuffleNetV2
M6 GhostNet
M7 MobileNetV3
M8 FasterNet
M9 RepViT
M10 MobileNetV4
512 KB
128 KB
0
100
200
300
400
500
KB
20
40
60
80
100
120
KB
5
10
20
million MACC (log)
200
500
1000
2000
ms (log)
filled marker = linked firmware (includes the ST runtime); open marker = the model's own weights / activations; x = did not deploy
uniform UC-128
uniform C-256
joint UC-128
joint C-256