




(a) high-frequency noise >40 Hz

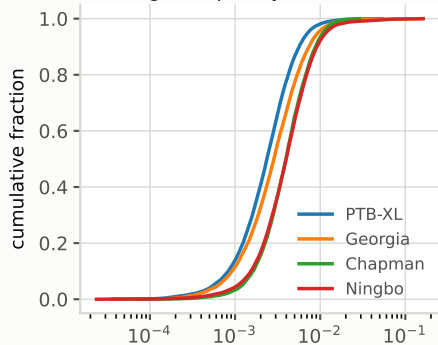


(b) baseline wander <0.5 Hz

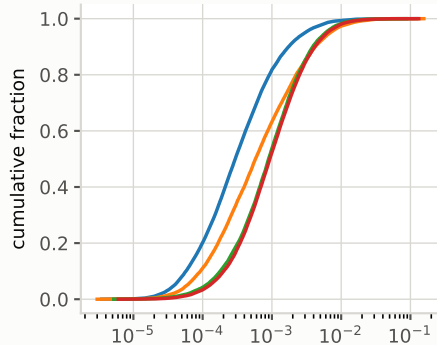


(c) mains 50/60 Hz

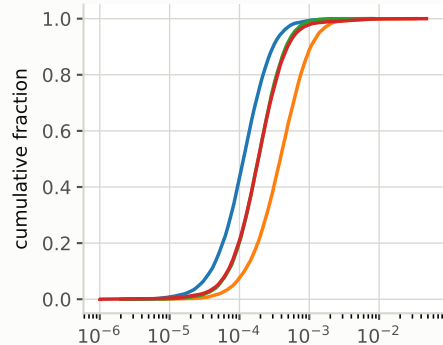

(d) flat or clipped lead

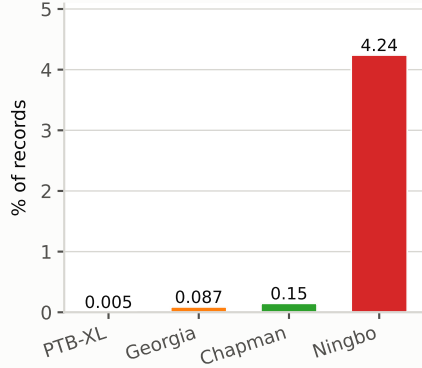

(e) QRS detectability failure

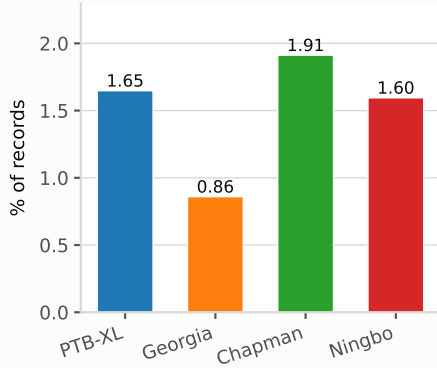

(f) any implausible RR interval

