

# Effect of Nanovoid on Fracture Process of Two-Phase $\alpha(\text{TiAl})+\gamma(\text{Ti}_3\text{Al})$ Alloy

<sup>a</sup>*School of Mechanical and Electronical Engineering, Lanzhou University of Technology. Lanzhou 730050, China*

---

## Abstract

The fracture processes of nanocrystalline metallic material is affected by dislocation, nanovoid and other defects. Existing studies of defect evolution in titanium-aluminum alloy cover the case that voids located in single crystals, inside grain in polycrystals and at the grain boundaries. Molecular dynamics simulation was performed to study the evolution of a spherical nanovoid in  $\alpha+\gamma$  two-phase titanium-aluminum alloy under uniaxial tension. The results show that voids located at the  $\alpha/\gamma$  phase boundary have significant detract to strength of Ti-Al polycrystalline.

**Keywords:**  $\alpha+\gamma$  two phase TiAl alloy; void; molecular dynamics

---

## 1. Introduction

TiAl alloy has been used as structural material in aviation industry because its inherent advantages such as low density and self-diffusion rates, high elastic module and high strength [1]. However, single phase  $\gamma$  – TiAl generally brittle at room temperatures and this limits their use in many other fields. Two-phase titanium aluminum alloys with proper phase distribution and grain size exhibit better mechanical performance compared with monolithic constituents  $\gamma(\text{TiAl})$  and  $\gamma(\text{Ti}_3\text{Al})$  alloy [2].

Two phase titanium aluminide alloys exhibit a much better mechanical performance than their monolithic constituents  $\gamma(\text{TiAl})$  and  $\alpha_2(\text{Ti}_3\text{Al})$ , provided that the phase distribution and grain size are suitably controlled. Two-phase titanium aluminide alloys with proper phase distribution and grain size exhibit better mechanical performance compared with monolithic constituents  $\gamma$  and  $\alpha$  [3]. Brittle fracture in TiAl alloy strongly affects the safety of structure like turbo of aircraft engine and combustion generator. [4]. Defects such as dislocation, void and segregation plays an significant role in the process of fracture [5]. In order to understanding the mechanism of brittle fracture, multiscale methods from micro to macro scale have been applied to investigate the behavior of fracture. It's necessary to carefully examine the evolution of defects and its influence on the fracture process at atomic scale. A previous study on void growth in  $\gamma$ -TiAl single crystal has reveals that void with high volume fraction detracts incipient yield strength [6]. Molecular dynamics (MD) method has been use to investigate the evolution of void in materials in nano- scale [7]. The fracture mechanisms in the duplex micro-structure are plasticity-induced grain bound-

ary de-cohesion and cleavage, while those in the lamellar microstructure are interface delamination and crack-ing across the lamellae[R].

## 25 2. Molecular Dynamics Simulation

### 2.1. Atomic Potential

The interaction of particle in the material is determined by interatomic potential. Many reported examples of crack propagation in metal materials were performed with embedded atomic method due to is better accuracy in metal lattice compare with F-S and L/J []. The embedded atom method (EAM) potential developed by Zope  
30 and Mishin by [] was used in the study. The simulation is submitted by MD simulations with the Large-scale Atomic/Molecular Massively Parallel Simulator (LAMMPS) open-source code []. We performed constant-pressure and constant-temperature (NPT) molecular dynamics simulation.

$$E = \sum \quad (1)$$

### 35 2.2. Model Creation of Crystalline

$\gamma$  TiAl has a fcc-centered tetragonal with an  $L1_0$  structure [], and  $\alpha$ TiAl is hcp structure, the structure of the two initial cells are shown in Fig. [], and the constructing parameters are given by Table. []. The simulation cells of two phase polycrystalline with an initially spherical void at different position are shown in figure []. Periodic boundary  
40 conditions (PBC) are applied along all three directions, that makes poly crystal with periodic nanovoid structures. The initial dimension of simulation cell is  $L_x = \text{nm}$ ,  $L_y = \text{nm}$ ,  $L_z = \text{nm}$ , and each model contains about 4.6 million atoms. The grain orientation and size were randomly created with Voronoi method with code ATOMSK [], and resulting in the arbitrary shape and orientation of the grains. Only one spherical void  
45 defect was placed intragranularly or intergranularly within each simulation model void within each simulation model. The intragranular spherical void was located in grain interior of the largest grain of the simulation model, as shown in Fig. []. The intergranular spherical void was at the center of the simulation cell, as shown in Fig. [].

**Table 1**  
Parameters of nanocrystalline

Phase	Space group	Designation	Parameters
$\alpha_2$	P6 <sub>3</sub> /mmc	0 <sub>19</sub>	$a = 0.5765$ $c = 0.46833$
$\gamma$	tP4	L1 <sub>0</sub>	$a = 0.3997$ $c = 0.4062$

### 50 2.3. Analysis method

*CSP.* The centrosymmetry parameter is defined as follow:

$$P = \sum_{i=1}^6 |\vec{R}_i + \vec{R}_{i+6}|^2 \quad (2)$$

where  $\vec{R}_i$  and  $\vec{R}_{i+6}$  are the vectors corresponding to the six pairs of opposite nearest neighbors in the fcc lattice. The centrosymmetry parameter(CSP) is zero for atoms in a perfect lattice. In other words, if the lattice is distorted the value of P will not be zero. Instead, the parameter will have a value within the range corresponding to a particular defect. By removing all the perfect and surface atoms within the bulk, the existence of dislocation atoms become visible.

*Virial Stress.* The atomic stress is calculated using the virial definition :

$$\sigma_t(i) = -$$

$$\sigma_t(i) =$$



### 2.4. Fracture Process

*initiation of crack.*

*fracture process.* The existence of void detract the strength, and the void inside  $\alpha$  phase grain have most significant impact on the strength, however the void on the grain boundary have little impact on incipient strength of the material. Detailed observation of specimen with void inside the grain is shown in Figure []. 1. In many cases the orientation of slip slip is changed because the crystallographically available slip and directions are not continuous across the interface. This may significantly reduce the Schmid factor and thus impede slip transfer. At the  $\gamma/\gamma$  interfaces the orientation of the slip plan could change through a relevantly large angle of about 90 degree. Reorientation of slip is always required at the  $\alpha_2/\gamma$  interface; the smallest angle between the corresponding slip planes  $111_\gamma$  and  $10-10_{\alpha_2}$  is about 19 degree [].

The core of a dislocation intersecting an interface often needs to be transformed. For example, an ordinary  $1/2[110]$  dislocation gliding in one  $\gamma$  grain has to be converted in to a  $[101]$  super dislocation with the double Burgers vector gliding in an adjacent  $\gamma$  grain. At the  $\alpha/\gamma$  interface the dislocations existing in the  $D0_{19}$  structure have to be transformed into dislocations consistent with the  $L1_0$  structure. These core transformations are associated with a change of the dislocation line energy because the lengths of the Burgers vectors and the shear module are different.

Dislocations crossing semi-coherent boundaries have to intersect the misfit dislocations, a process that involves elastic interaction, jog formation and the incorporation of gliding dislocations into the mismatch structure of the interface. When the slip is forced to cross  $\alpha_2$  lamellae, pyramidal slip of the  $\alpha_2$  phase is required, which needs an extremely high shear stress.

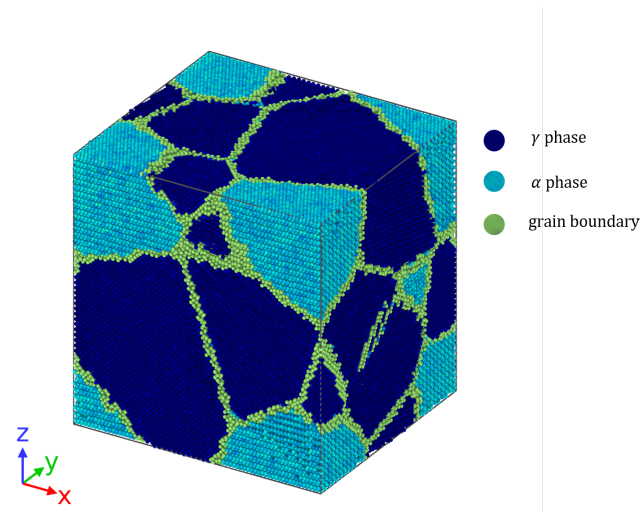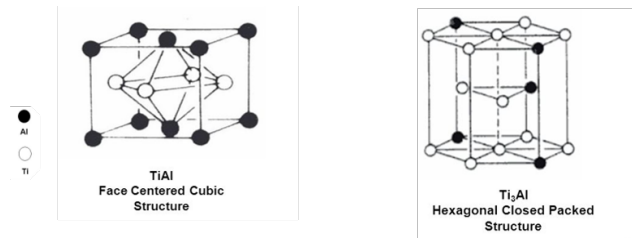

## 2.5. Evolution of spherical void in the simulation with intragranular spherical voids


A step, of the width of a burgers vector, will be generated at both sides of a crystal along the direction of the burgers vector after dislocation traversing the entire crystal, as is shown in ???. A small step will be formed at spherical void surface toward the void interior after dislocation absorption at spherical void surfaces, as is shown in ???. If a great number of dislocation slip along their respective system towards the spherical nanovoid in all directions, and are absorbed at spherical void surfaces, the spherical nanovoid will eventually shrink from the dashed circle to

## 3. Results and Discussion


### 3.1. Effect of Void Size

size.


position.

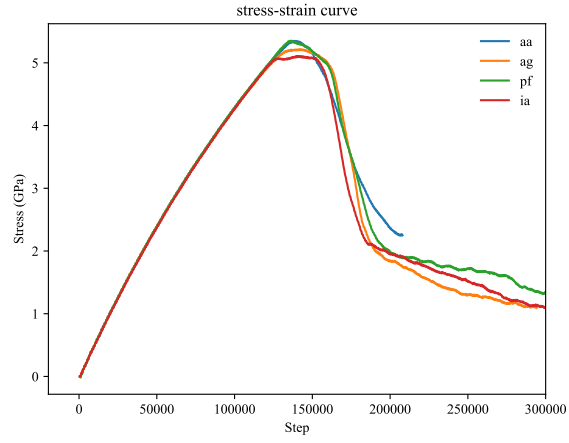


**Fig. 3.** Fracture process of specimen with void in  $\alpha$  phase

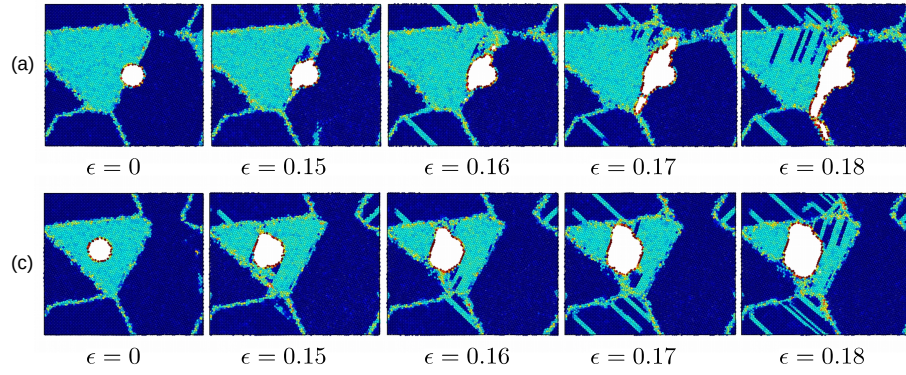


**Fig. 4**

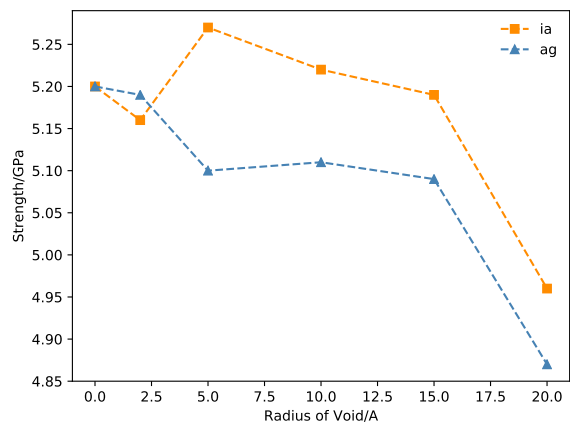


**Fig. 5**

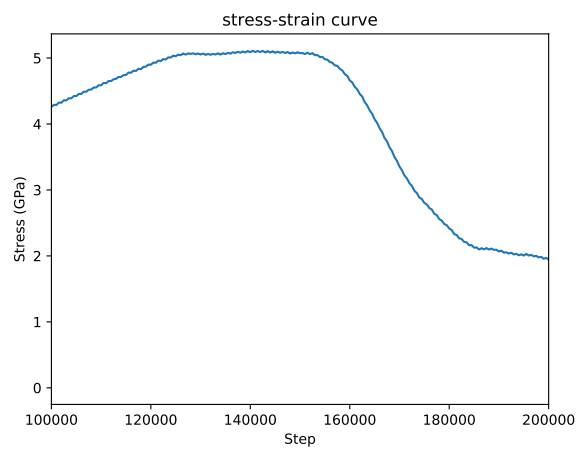

**Fig. 6. stress-strain curve**

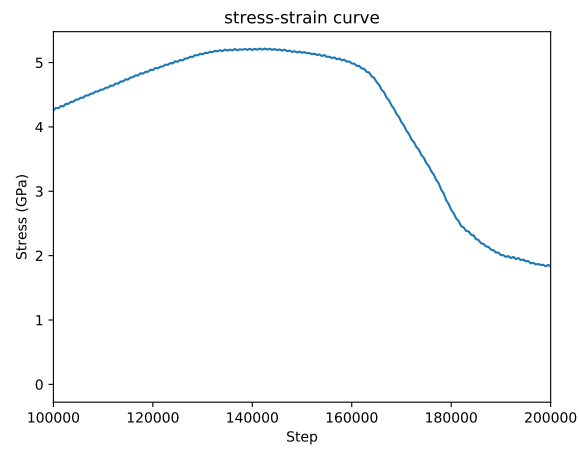

**Fig. 7.** stress-strain curve

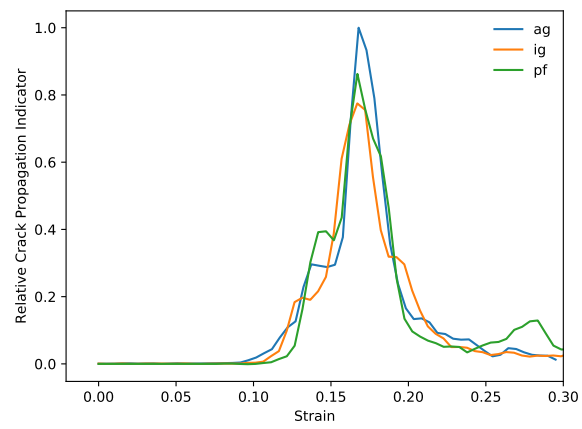

**Fig. 8.** stress-strain curve

#### **4. Conclusion**

#### **95 References**