# **CBT-420 Accelerometer**

4-20mA velocity output via 2 Pin MS Connector


### **Key Features**

- · For use with PLC/DCS systems
- · Customisable features

### Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical



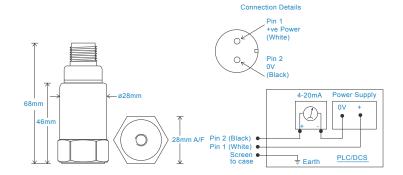

### **Technical Performance**

Mounted Base Resonance 5kHz min Velocity Ranges see: 'How To Order' table ±10% Nominal 80Hz at 22°C Frequency Response 10Hz (600cpm) to 1kHz (60kcpm) ± 5% - ISO10816 Isolation Base isolated Range 50g peak Transverse Sensitivity Less than 5%

### Mechanical

Stainless Steel Case Material Sensing Element/Construction PZT/Compression Mounting Torque 8Nm Weight 150gms (nominal) Screened Cable Asssembly see: www.hansfordsensors.com for options HS-AA004 - non-booted Connector HS-AA053 or HS-0054 - booted Mounting Threads see: 'How To Order' table


# Electrical

**Current Output** 4-20mA DC proportional to Velocity Range Supply Voltage 15-30 Volts DC (for 4-20mA) Settling Time 2 seconds Output Impedance Loop Resistance 600 Ohms max. at 24 Volts Case Isolation >108 Ohms at 500 Volts

### Environmental

-25 to 90°C Operating Temperature Range Sealing IP68 Maximum Shock 5000g **EMC** EN61326-1:2013

### Typical Frequency Response

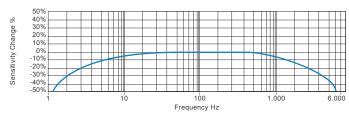


### **Applications**

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



# How To Order

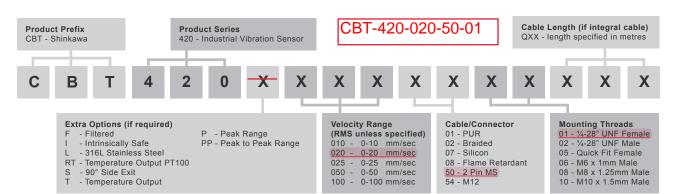



Shinkawa Electric Co., Ltd. 4-3-3 Kojimachi Chiyoda-ku Tokyo 102-0083, Japan Tel: 81-3-3263-4417 Fax: 81-3-3262-2171

