Pi carrier TH PCB (hw/pi-carrier, rev 2.0): 52 x 22 mm board on a 2 x 20 stacking header between the Pi 3B and the CAN HAT.

Pi carrier

File: carrier.kicad_sch

5 V from power module J4 (J40 screw terminal) to header pins 2/4, GND 6/9. Handshake J41 (JST XH-4) to the dash PCB J23.
SHUTDOWN_REQ = GPIO17 (pin 11, active low, R70 10k pull-up to Pi 3V3 pin 1), POWEROFF_DONE = GPIO26 (pin 37),
PI_ALIVE = GPIO27 (pin 13), GND pin 39. GPS/IMU moved to the main node (D46).


Embedded symbols (lib PERF): generated by scripts/gen-perfboards
Source: docs/design-pi-carrier.md (2026-10-29, arch rev 4.3)
Miata NA hardware — TH PCB (owner-fitted TH, JLC SMD)

Sheet: /
File: pi-carrier.kicad_sch

Title: Pi carrier (root)

Size: A3	Date: 2026-10-29	**Rev: 2.0**
KiCad E.D.A. 10.0.7		Id: 1/2

5 V entry (J40 from power module J4), 100 uF reserve, handshake to the dash (J41)

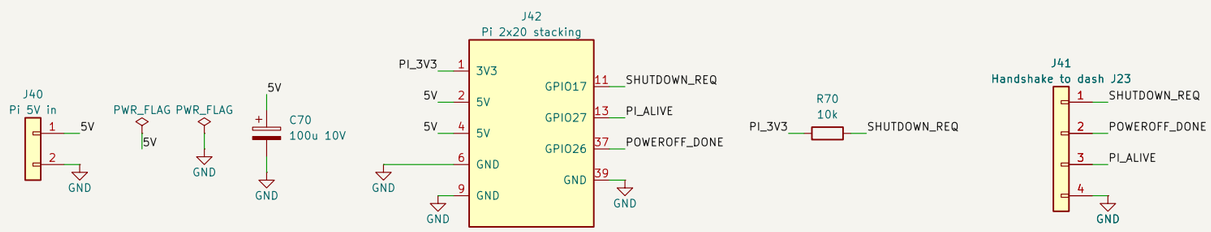

Key values (docs/design-pi-carrier.md)

SHUTDOWN_REQ: Q11 on the dash sinks 3.3 V / 10k = 0.33 mA; active low
/boot/config.txt: dtoverlay=gpio-poweroff,gpiopin=26,active_low=0

Embedded symbols (lib PERF): generated by scripts/gen-perfboards
Source: docs/design-pi-carrier.md (2026-10-29, arch rev 4.3)
Miata NA hardware — TH PCB (owner-fitted TH, JLC SMD)

Sheet: /Pi carrier/
File: carrier.kicad_sch

Title: Pi carrier — 5 V entry and supervisor handshake

Size: A3	Date: 2026-10-29	**Rev: 2.0**
KiCad E.D.A. 10.0.7		Id: 2/2