Shortdescribtion

Doepke Residual current circuit-breakers 2-pole, 16 A, 0.01 A, Type A, N left or right, HD

Function


Residual current circuit-breakers (RCCB) switch the power supply off if dangerous high residual currents occur. DFS 2 are two-terminal residual current circuit-breakers for single-phase networks. In the standard design, the compact devices are just two module widths wide. They are available with many different residual current types and variants for rated currents up to 125 A. The large two-tier terminals can also accommodate large conductor cross-sections. The trip position of the multi-function toggle switch simplifies fault-finding. The free label software helps in the labelling process. Type A switches are sensitive to pulsating and alternating currents. This function is independent of the mains voltage. Devices in the standard design are intended for monitoring circuits with a rated voltage of 230 V and a rated frequency of 50 Hz. With an airtight, encapsulated tripping mechanism from a special alloy and the stainless steel latch, residual current circuit-breakers in HD design are protected, in particular from corrosion, corrosive gases, moisture and extreme temperature fluctuations. Properties: tripping not dependent on mains and auxiliary voltage; sensitive to AC residual currents and pulsating DC residual currents (type A) compact design for all rated currents; high short-circuit resistance; double-sided two-tier terminals for large conductor cross-section and busbar; switch position indicator; viewing window for labels; multifunction switch toggle with three positions: "on", "off" and "tripped"; Connector C1 Neutral conductor position left or right; Mounting: quick fastening to mounting rail; any installation position; supply from any direction; Application areas: Power supplies to residential and purpose-built buildings as well as industrial facilities with TN-S, TT and TN-C-S networks. In IT networks. the residual current circuit-breakers of this series can be set to switch off in the event of a second fault; Excluded is the application in TN-C systems and for the protection of installations in which electronic equipment could generate smooth DC currents or residual currents with frequencies other than 50 Hz. Comprehensive protection is not provided in this case. For these applications we recommend our AC/DC sensitive residual current circuit-breakers (Type B or B+).

Table Information


Product number of the Manufacturer	09112601HD
Manufacturer Type Description	DFS2 016-2/0,01-A HD
International product number	4014712243286
Manufacturer Name	Doepke Schaltgeräte GmbH
Delivery Time	10
Customs tariff number	85363010
Country of origin	DE
Number of poles	2
Rated voltage [V]	230
Rated current [A]	16
Rated fault current [mA]	0.01
Rated insulation voltage Ui [V]	400
Rated impulse withstand voltage Uimp [kV]	4
Mounting method	DIN rail
Leakage current type	A
Selective protection	false
Rated switching capacity [kA]	
Short-time delayed tripping	false
Short-circuit breaking capacity (Icw) [kA]	10
Frequency [Hz]	
Surge current capacity [kA]	0.25
Additional equipment integrated	
Voltage type	AC
With interlocking device	true
Additional equipment attached at delivery	
Frequency	50 Hz
Rated switch current auxiliary device [A]	

Additional equipment possible	true
Rated voltage auxiliary device [V]	
Control voltage type auxiliary equipment	
Degree of protection (IP)	IP20
Width in number of modular spacings	2
Ambient temperature during operating [°C]	-25 - 60
Built-in depth [mm]	69
Construction size (according to DIN 43880)	
Pollution degree	2
Connectable conductor cross section multi-wired [mm²]	1.5 - 50
Connectable conductor cross section solid-core [mm²]	1.5 - 50
Explosion-proof	false
Weight [kg]	0.250
Length [mm]	85.000
Width [mm]	36.000
Depth [mm]	75.000
Certificate RoHS	true
Certificate CE	true
Certificate REACH	true
Website	Website
Power loss [W]	
RAL-number (similar)	

3D-вид

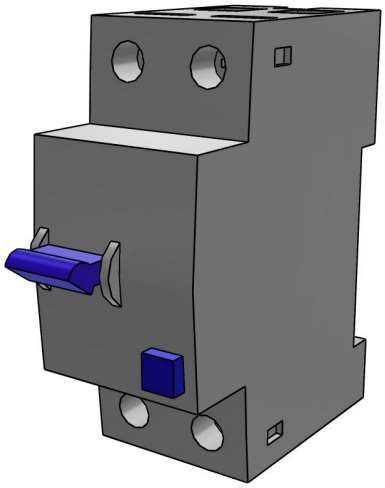

Technical drawing

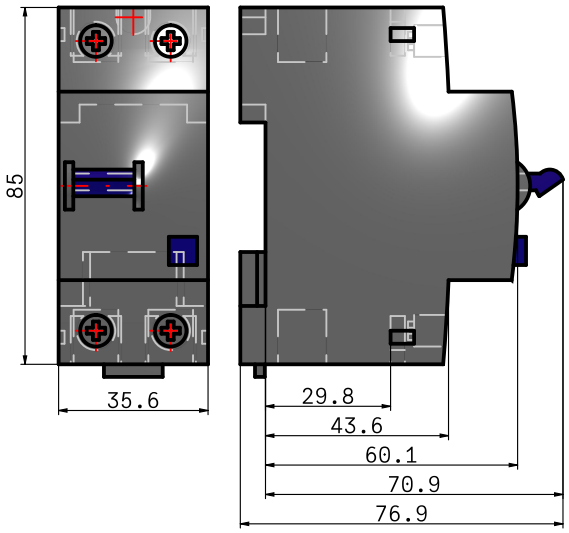

Electric circuit

