

Information Socket User Manual

Product Models: E08TA102, E08TA222, E08TA230, E08TA103

Product Name: VOLTEROOM

Product Series - E Series

Product Type: Mechanism for single RJ45 socket CAT 6 / Class E-8, Mechanism for double RJ45 socket CAT 6 / Class E-8, Mechanism for RJ45 CAT.6 / TV Male socket

I. Scope of Application

For indoor use only

Belongs to household products

10A

The applicable diameter range of the wire $\varnothing 1-4\text{mm}^2$

Computer module:

1. YD/T926.3-2024 information communication integrated wiring system - Part 3: General technical requirements for symmetrical cable wiring and connectors
2. ANSI/TIA-568.2-D American standard (is published by the American National Standards Institute (ANSI) and the Telecommunications Industry Association (TIA) Standard)
3. ISO/IEC 11801 European standard
4. GB/T 2099.9-2017 China national standard information socket special requirements

TV:

1. GY/T 140-1999 China Radio, Film and Television industry standard
2. IEC EN 62368:2020 is an international standard called "Safety Requirements for Audio and Video, Information and Communication technology Equipment".

It was developed by the International Electrotechnical Commission (IEC) and adopted as a European Standard (EN) by the European Committee for Standardization (CEN).

The standard applies to the safety requirements of audio and video equipment, information

technology equipment and communication technology equipment, and is intended to replace the original IEC 60065 (Safety Standard for Audio and Video Equipment) and IEC 60950-1 (Safety Standard for Information Technology Equipment)

II. Functions

Terminal access for voice, data, image and multimedia signals

III. Connection and Installation

Important Safety Notice!

All installation work must be carried out by qualified professionals in accordance with the electrical installation standards.

Before installation, the power supply must be cut off. The power supply should be turned off by the corresponding automatic circuit breaker.

It is prohibited to use the equipment when it is damaged or the power supply lines are broken.

Unit	Description
a	Plastic decoration panel
b	Socket structure / Function module (Internal signal connection)
c	Back box / Installation base box, embedded in the wall
d	Decorative frame (needs to be purchased separately)

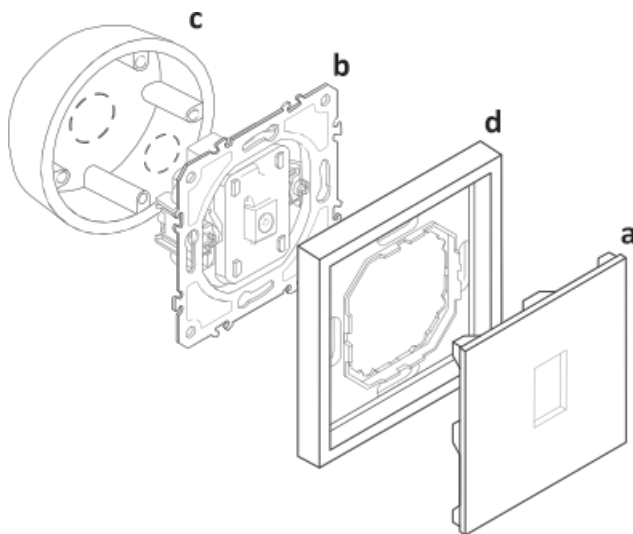


Figure 1

Installation sequence: c → b → d → a (from inside to outside)

Installation procedure:

1. Strip the wire

Remove the outer insulation layer of the cable and flip it over. Then remove the inner insulation layer, revealing the central conductor.

2. Remove the panel

Separate the plastic panel (a) from the socket component (b)

3. Connect wires

Insert the center conductor into the corresponding terminal and press it in the specified direction onto the functional component (b).

4. Install the functional components


Insert the connected functional component (b) into the pre-drilled base box (c), level it with a level gauge, and secure it with self-tapping screws or expansion clips.

5. Install decorative frame


Install the decorative frame (d) and finally press the plastic panel (a) onto the frame (d) to hear the "click" locking sound.

6. Test:


Connect the tester and confirm that the signal is operating stably.

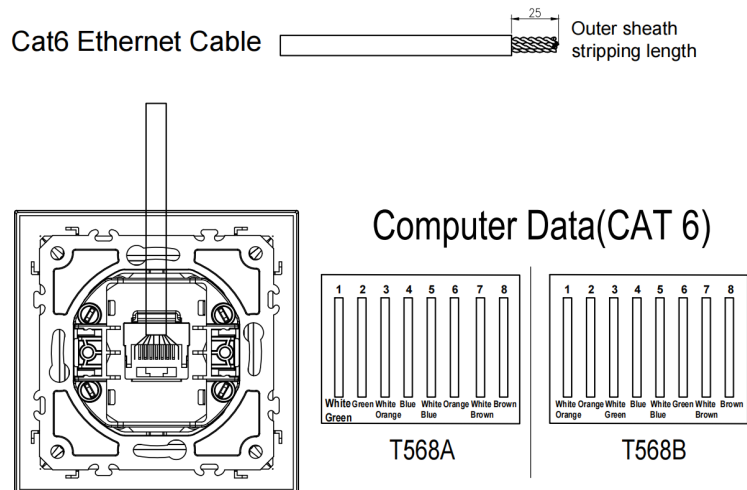


① Singel computer socket

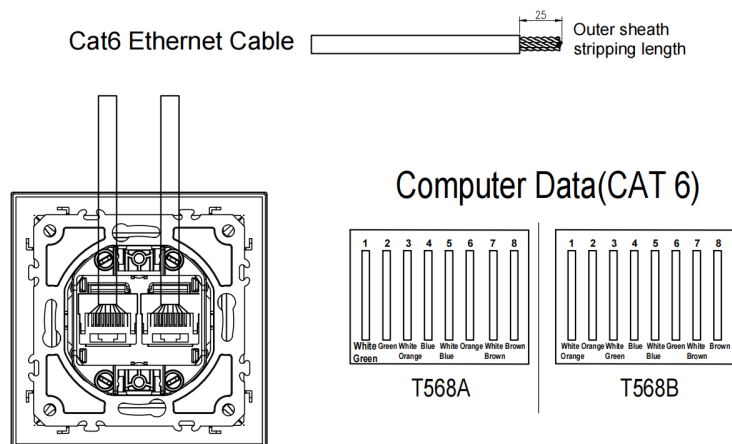


② Double computer socket




TV coaxial cable



Cat6 Ethernet Cable




Computer Data(CAT 6)

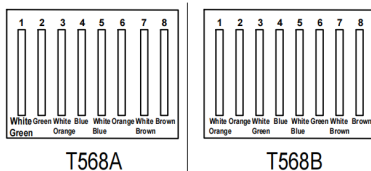

③TV + Computer Socket


Cat6 Ethernet Cable




CAT3 telephone cable



Computer Data(CAT 6)



Tel Socket



Two core wiring

When using a two core telephone cable connection, insert the telephone cable core into 2 or 3



Four core wiring

When using a four core telephone cable connection, insert the telephone cable cores into 1,2,3 and 4 card slots in black, red, green and yellow, respectively

④Tel + Computer Socket

IV. Technical Specifications

Environmental temperature: -10°C to +60°C

Relative humidity: 40 - 90% RH

Contact resistance $\leq 20 \text{ m}\Omega$

Insulation resistance $\geq 500 \text{ M}\Omega$

Withstand voltage DC 1000V/AC 707V/Min

V. Storage Conditions

Store in a dry and well-ventilated room

Avoid direct sunlight

Storage temperature range: -25° C to +50° C

Relative humidity: no more than 80%

VI. Information of Importer

Brand: 
Origin: Made in China
Company name: Volteroom s.r.o.
Address: Znievska 3060/8, 851 06 Bratislava, Slovakia
Contact Number: +421 947 116 106
Email address: info@volteroom.com

VII. Quality Guarantee

Warranty period	5 years
Warranty scope	Technical components of Volteroom series products, ensuring their normal functionality
Warranty replacement conditions	Product loses working ability, and there is no mechanical damage, no traces of incorrect installation, no signs of third-party disassembly or overheating (color change)
Replacement requirements	Products need to be returned in their complete packaging, with the packaging undamaged (not losing the appearance of the product)
Warranty certificate	Correctly filled out warranty card (must include sales date, product name, warranty expiration date, signature and seal of the seller) + sales receipt
Invalid situations	Unfilled warranty cards will exempt the seller from the warranty responsibility
Warranty prerequisites	Compliance with usage rules, transportation and storage safety measures
Non-warranty situations	For production, profit purposes, or other non Volteroom product direct household use
Exemption clauses	Not liable for compensation for damage to other equipment connected to the socket