
CE



Dimmer User Manual

Product Model: E08DA102

Product Name: VOLTEROOM
Product Series - E Series

Product Type: Mechanism for Triac rotary dimmer, 200W LED, used for adjusting the brightness of the lights

I. <u>Scope of Application</u>

For indoor use only
Belongs to household products
250~/50Hz, 2A
Incandescent lamp: AC 250V, 500W.; LED lamp load: 200W.

II. <u>Functions</u>

Used for controlling electrical equipment and regulating the output power of the electric lights

III. <u>Connection and Installation</u>

Important Safety Notice!
All installation work must be carried out by qualified professionals in accordance with the electrical installation standards.
Before installation, the power supply must be cut off. The power supply should be turned off by the corresponding automatic circuit breaker.
It is prohibited to use the equipment when it is damaged or the power supply lines are broken.

Unit	Description
a	Plastic panel/cover
b	Dimmer structure/function module (Internal electrical connection)
c	Back box / Installation base box, embedded in the wall
d	Decorative frame (needs to be purchased separately)

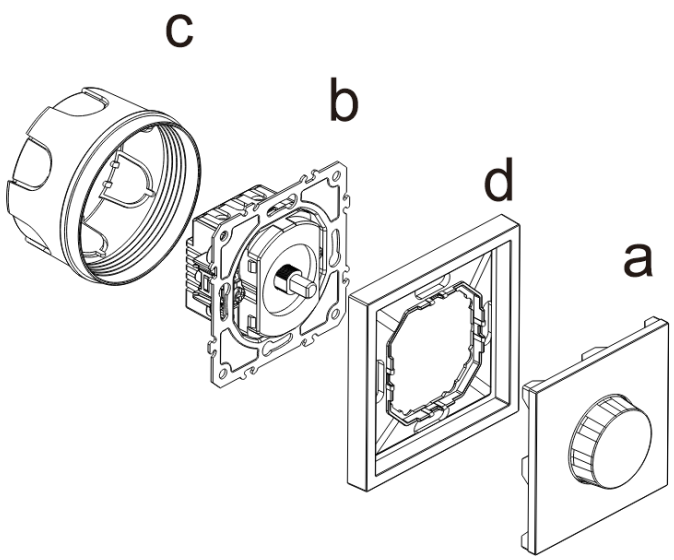


Figure 1

Installation sequence: c → b → d → a (from inside to outside)

Installation procedure:

1. Remove the panel

Remove the panel (a) from the dimmer function component (b) (as shown in Figure 1)

2. Connect wires:

Connect the pre-prepared wires to the dimmer

3. Install the functional components:

Insert the connected dimmer function component (b) into the pre-installed mounting box (c)
Adjust the position of the component using a level gauge. Fix the mechanism in the box (c) using screws or expansion clips

4. Install decorative frame:


Install the decorative frame (d) (which needs to be purchased separately). Make sure the frame is tightly attached to the support surface of the mechanism

5. Install the key panel:

Install the key panel (a) onto the functional piece (b). Press until you hear a clicking sound for fixation

6. Test:

Turn on the power supply and test whether the dimmer is functioning properly

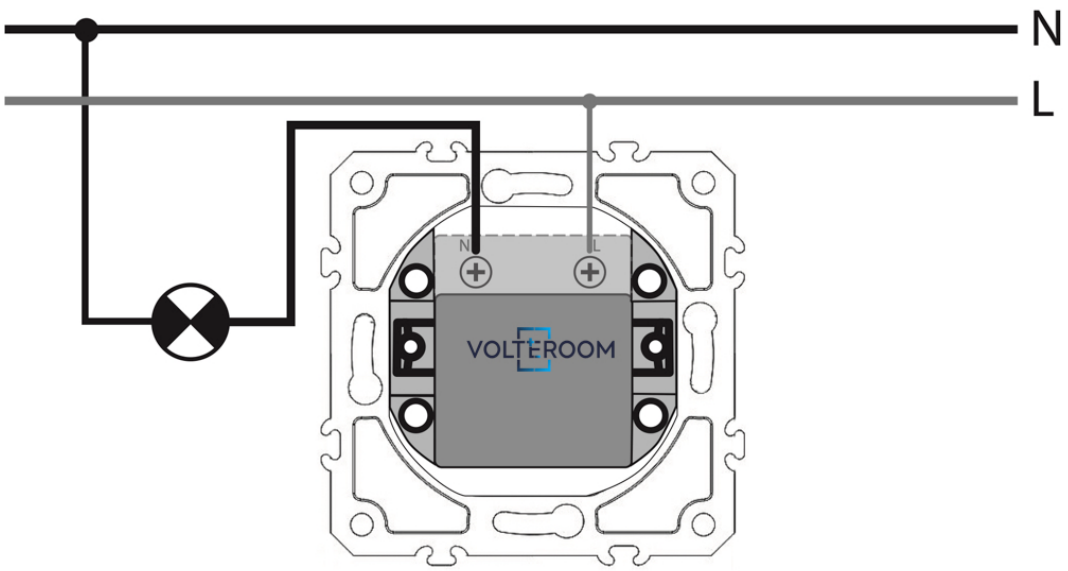

IV. <u>Technical Specifications</u>

Input voltage: AC230V ± 10%, 50Hz

Maximum load power: Incandescent lamp AC230V, 500W; LED lamp load 200W

Maximum output power: Not less than 90% of the rated power (for example, a 100W bulb adjusted to the brightest state, the power should not be less than 90W)

Minimum starting power: AC230V 5W

Applicable temperature range: -15℃ - +45℃

V. <u>Storage Conditions</u>

Store in a dry and well-ventilated room

Avoid direct sunlight

Storage temperature range: -25° C to +50° C

Relative humidity: no more than 80%

VI. <u>Information of Importer</u>

Brand: VOLTEROOM

Origin: Made in China

Company name: Volteroom s.r.o.

Address: Kopčianska 63, 851 01 Bratislava, Slovakia

Contact Number: +421 947 116 106

Email address: info@volteroom.com

VII. Quality Guarantee

Warranty period	5 years
Warranty scope	Technical components of Volteroom series products, ensuring their normal functionality
Warranty replacement conditions	Product loses working ability, and there is no mechanical damage, no traces of incorrect installation, no signs of third-party disassembly or overheating (color change)
Replacement requirements	Products need to be returned in their complete packaging, with the packaging undamaged (not losing the appearance of the product)
Warranty certificate	Correctly filled out warranty card (must include sales date, product name, warranty expiration date, signature and seal of the seller) + sales receipt
Invalid situations	Unfilled warranty cards will exempt the seller from the warranty responsibility
Warranty prerequisites	Compliance with usage rules, transportation and storage safety measures
Non-warranty situations	For production, profit purposes, or other non Volteroom product direct household use
Exemption clauses	Not liable for compensation for damage to other equipment connected to the mechanism