



FPVspeed™

DIY Module Series

FPV Video Receiver

FS3364R

3060~3500MHz -95dBm

KEY FEATURES

- Power Supply: 5.0V
- Current Consumption: 380±30mA
- Operating Temperature: -10~+65°C
- Storing Temperature: -30~+85°C
- Operating Humidity: 85% RH
- Receiving Frequency Range: 3060~3500MHz
- Voltage Standing Wave Ratio: 2:1
- Demodulation System: FM/PLL
- IF: 480MHz
- ANT.Input Impedance: 50Ω, Typ.
- LO Frequency Stabilization: ±200kHz
- LO Frequency Precision: ±200kHz
- LO Control: PLL
- Input LO Leak: -65dBm
- Receiving Sensitivity: -95dBm±2
- Input Level Range: -95dBm~+5dBm
- Video Output Impedance: 75Ω, Typ.
- Video Output Level: 1±0.2Vp-p, Typ.
- Video Polarity: Negative
- Video Frequency Response: ±5dB, Max. 50Hz~6MHz
- Differential Gain: ±5%, Max
- Differential Phase: ±5Deg., Max
- 3Db IF WIDEBAND: 16.5MHz
- S/N: 38dB, Min
- RSSI Slope: 22mv/dBm or 45mv/dBm
- Weight: 5.3g
- Dimensions: L37 x W26.3 x H4.5mm



APPLICATIONS

- FPV Drone Racing
- UAV Communication Systems
- Remote Vehicle Monitoring
- Wireless Video Transmission Systems

DISCLAIMER



This product is intended for civilian and commercial use only. It is strictly prohibited from being used for any military purposes or activities.



FPVspeed™

DIY Module Series


FPV Video Receiver

FS3364R

3060~3500MHz -95dBm

Pin No.	Function
1	+5V IN
2	S1, Frequency SEL.
3	GND
4	S2, Frequency SEL.
5	S3, Frequency SEL.
6	Video Out
7	CS3: Refer to Table1
8	CS2: Refer to Table1
9	CS1: Refer to Table1
10	NC
11	GND
12	GND
13	GND
14	ANT IN
15	GND

PAD No.	Function
2	Connected with S1
4	Connected with S2
5	Connected with S3
7	Connected with CS3
8	Connected with CS2
9	Connected with CS1
0	Connected with GND

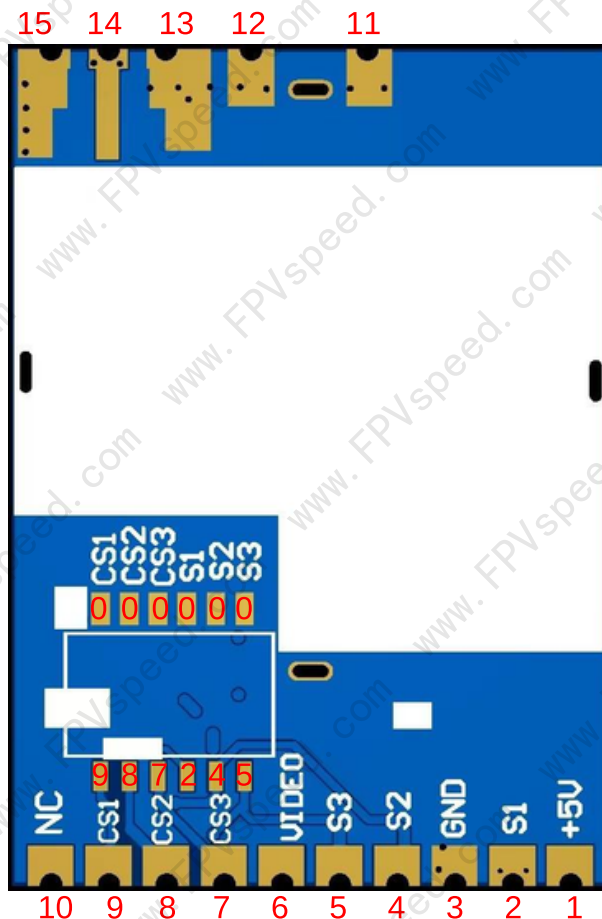



DIY Module Series

FPV Video Receiver

FS3364R

3060~3500MHz -95dBm

THE CHANNEL TABLE

FS3364R Receiver Module Channel Setting Table										
0 represents ground or low level, 1 represents floating or high level.			CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8
			CS3/CS2/CS1	CS3/CS2/CS1	CS3/CS2/CS1	CS3/CS2/CS1	CS3/CS2/CS1	CS3/CS2/CS1	CS3/CS2/CS1	CS3/CS2/CS1
			0/0/0	0/0/1	0/1/0	0/1/1	1/0/0	1/0/1	1/1/0	1/1/1
FR 1	S3/S2/S1	0/0/0	3360	3380	3400	3420	3440	3460	3480	3500
FR 2	S3/S2/S1	0/0/1	3200	3220	3240	3260	3280	3300	3320	3340
FR 3	S3/S2/S1	0/1/0	3330	3350	3370	3390	3410	3430	3450	3470
FR 4	S3/S2/S1	0/1/1	3170	3190	3210	3230	3250	3270	3290	3310
FR 5	S3/S2/S1	1/0/0	3320	3345	3370	3395	3420	3445	3470	3495
FR 6	S3/S2/S1	1/0/1	3310	3330	3355	3380	3405	3430	3455	3480
FR 7	S3/S2/S1	1/1/0	3220	3240	3260	3280	3300	3320	3340	3360
FR 8	S3/S2/S1	1/1/1	3060	3080	3100	3120	3140	3160	3180	3200



FPVspeed™

DIY Module Series

FPV Video Receiver

FS3364R

3060~3500MHz -95dBm

APPLICATION CIRCUIT

