Resource-Efficient and Explainable AI for Photovoltaic Anomaly Detection Under Sparse Sensing Constraints

Phase 2: Experimental Evaluation and Engineering Trade-offs

Ruganji Prince · Carnegie Mellon University Africa
04-652 Artificial Intelligence System Design · Assignment 2 · October 2026

Abstract

This study evaluates whether photovoltaic operating-state classification can retain useful fault sensitivity with fewer physical measurement channels and limited computational resources. Training-only preprocessing, bounded model selection and seven predeclared sensor configurations compare Logistic Regression (LR), Random Forest (RF) and LightGBM. The frozen RF E4 candidate achieves test macro-F1 0.9505 from four electrical channels, with each hardware-state recall above 0.99, but exceeds latency and artifact-size limits. LightGBM E4 meets both resource limits but achieves short-circuit classification recall 0.4994, despite aggregate hardware-alert recall 0.9969. No evaluated configuration satisfied all predeclared engineering criteria. The results identify a measured sensing–prediction–computation trade-off. Prior test exposure and absent explicit timestamps limit interpretation.

1. Introduction and Phase 2 objective

The engineering objective is to identify a practically useful sensing and computational configuration for PV anomaly detection rather than maximize one aggregate score. Reliable electricity and affordable monitoring motivate the application in relation to SDG 7 [1]. Evidence derives from one controlled Brazilian PV installation [2,3]; Rwanda or other field generalization is not established. The task is observation-level multiclass classification, not forecasting or detection-delay estimation.

2. Phase 1 decisions carried forward

The approved Phase 1 PDF, raw export, labels, buffered split, seven sensor sets and engineering thresholds remain unchanged. Training-fitted median contingency imputation and retained-channel availability indicators are used; LR receives StandardScaler and trees retain native scale. Statistical outliers are retained. The 62 paired irradiance/temperature zeros remain suspicious observations rather than confirmed missing values. Slightly negative irradiance is clamped under the predeclared near-zero convention; negative Celsius values remain valid. Neither source index nor block identity is a predictor.

3. Professor feedback and Phase 2 extensions

The implementation addresses the row-count discrepancy, class imbalance, hardware-fault versus environmental-shade distinction and timestamp limitations. A bounded LightGBM comparison extends the linear/tree references. Explicit physical-feature dependencies, fixed-setting sensor ablation, alert thresholds, single-observation resource measurements and validation explanations support the sensing/resource question. All outcomes derive from approved frozen evidence without post-test tuning.

4. Dataset and row-count investigation

Table 1. Dataset and task summary

Property	Frozen definition
Source	Original-author PV Fault Dataset [2,3]; pinned commit e9ed8ad8072dcb3ffc643b0f3604219798708551
Dimensions	N = 1,373,798 source positions; P = 7 variables (6 predictors + 1 target)
Predictors	vdc1, vdc2 (DC RMS voltage, V); idc1, idc2 (DC RMS current, A); irr (plane-of-array irradiance, W/m^2); pvt (module temperature, °C)
Target	f_nv: five nominal labels; integer codes are neither ordinal nor continuous
Class counts (0–4)	1,162,931; 5,999; 10,371; 6,024; 188,473
States	0 normal; 1 short circuit; 2 resistive degradation; 3 open circuit; 4 natural building shade
Missingness	0 conventional missing cells; 62 paired irr = 0 / pvt = 0 observations retained
Time metadata	No explicit timestamp; source order preserved

The complete released arrays/export contain 1,373,798 positions, whereas the paper-reported class counts total 515,958. The irr $\geq$ 100 W/m^2 subset contains exactly 515,958 positions and reproduces every paper-reported count: 309,253 normal; 5,999 short circuit; 10,371 degradation; 6,024 open circuit; 184,311 shade. Exact numerical agreement is verified. An irradiance-qualified published population is plausible, but the inspected source does not explicitly establish use of that filtering operation. The primary experiment retains the approved full population; low irradiance is not automatically interpreted as nighttime.

The study describes nominal 1 Hz acquisition, per-second electrical RMS calculations, one-second irradiance/temperature averages and a 16-day experiment [2]. No timestamp variable exists in the released MAT/CSV data. Absolute timestamps and uninterrupted one-second spacing throughout the export cannot be verified; no synthetic timestamps are assigned.

5. Experimental methodology

5.1 Leakage-safe ordered split

Sixteen signal-defined blocks use irr $<$ 100 W/m^2 for at least 3,600 consecutive source positions. Blocks are not verified days, sessions or hours. Adjacent-position dependence motivates ordered buffered splitting instead of naive random rows. TRAIN: blocks 1–12, [0,1006129), N = 1,006,129. VALIDATION: [1056990,1173967), N = 116,977; block 13, [1056990,1089790), N = 32,800, selects model settings; block 14, [1140571,1173967), N = 33,396, selects alert thresholds. TEST: blocks 15–16, [1227337,1373798), N = 146,461. Two separator regions exclude 104,231 positions. Validation separator positions outside the designated selection blocks are not additional selection data.

5.2 Physical feature engineering

LightGBM uses P1 = vdc1 $\times$ idc1; P2 = vdc2 $\times$ idc2; P_total = P1 + P2; V_diff = $|$vdc1 $-$ vdc2$|$; I_diff = $|$idc1 $-$ idc2$|$. A feature requires every parent channel. P1/P2 are RMS-product proxies, not independently measured power sensors. Derivatives do not reduce physical sensing requirements. LR/RF use retained raw channels plus availability indicators. No additional ratios are introduced.

5.3 Training-only imbalance handling and preprocessing

Normal comprises approximately 84.65% of the full export; hardware states are rare. Weights follow $w_k = N_{train} / (K \times n_k)$, $K = 5$, from TRAIN only. Training class counts are 844,805; 1,226; 5,695; 1,204; 153,199. Corresponding weights are 0.238192; 164.131974; 35.333766; 167.131063; 1.313493. One explicit class-weight mechanism is used. No SMOTE or synthetic oversampling is applied; validation/test distributions are not rebalanced.

Pipeline-owned medians and LR scaling are fitted only on TRAIN. Isolated one-channel unavailability permits imputation for the first two consecutive source positions; sustained or multichannel loss abstains. Runs reset across source gaps/block boundaries and separate batches. Removed channels are never reconstructed. Correlation/VIF warnings motivate regularization and physical ablation rather than automatic sensor deletion. No statistical winsorization, log transform or PCA is added to the frozen primary pipelines. PCA would reduce mathematical dimension, not physical sensor requirements.

5.4 Models and bounded selection

Sixteen F6 trials compare weighted/unweighted LR ($C = 0.1$ or 1.0), RF (depth 6 or 10), and LightGBM (15 leaves/depth 4 or 31 leaves/depth 6; raw/engineered features). Block-13 selection freezes balanced LR $C = 1.0$ (lbfgs, $max_iter = 2{,}000$); balanced RF depth 10 (100 trees, $min_samples_leaf = 20$); and balanced engineered LightGBM (31 leaves, depth 6, 150 estimators, $learning_rate = 0.05$, $min_child_samples = 50$, $max_bin = 127$, $reg_lambda = 1$). Seed 42 and two-thread settings where applicable remain fixed. Sparse configurations receive no independent hyperparameter search. Complete parameters remain in machine-readable evidence.

5.5 Predeclared sensor configurations

Table 2. Physical channels retained

Set	Channels	Count
F6	vdc1, vdc2, idc1, idc2, irr, pvt	6
E5	vdc1, vdc2, idc1, idc2, irr	5
E4	vdc1, vdc2, idc1, idc2	4
C3	idc1, idc2, irr	3
C2	idc1, idc2	2
S4	vdc1, idc1, irr, pvt	4
S2	vdc1, idc1	2

Channel counts differ from mathematical feature counts and physical device counts.

5.6 Evaluation metrics

Macro-F1 is primary; weighted-F1 and classwise precision/recall/F1 and one-vs-rest average precision (AP) are complementary. Macro AP is the unweighted mean of five AP values, not trapezoidal PR integration. Hardware macro recall is $(R1 + R2 + R3)/3$. Hardware $H = \{1,2,3\}$; natural building shade is not hardware failure. Abstentions count as misses in all-row recall. Hardware-to-normal/shade confusions are explicit. Accuracy is not the selection objective.

5.7 Predeclared engineering criteria

Aspirations are macro-F1 ≥ 0.80; each hardware-class recall ≥ 0.90; same-family sparse $\Delta_s \leq 0.05$; at most four channels for sparse candidates; combined normal/shade alert FPR $\leq 1\%$; single-observation p95 ≤ 10 ms; complete artifact ≤ 10 MiB; isolated 1% dropout macro-F1 loss ≤ 0.05. These are project aspirations, not safety or certification thresholds.

6. Validation and sensor ablation

Each frozen family is trained on the same TRAIN population for all seven sets and evaluated on VALIDATION block 13. The 21 fits preserve settings and weights. Table 3 and Fig. 1 report validation macro-F1; no test score enters this comparison.

Table 3. VALIDATION block-13 macro-F1 with fixed family settings

Set	Channels	LR	RF	LightGBM
F6	6	0.8939	0.8658	0.8569
E5	5	0.8713	0.9571	0.8758
E4	4	0.5882	0.9563	0.8557
C3	3	0.5172	0.5854	0.6225
C2	2	0.1745	0.5899	0.6300
S4	4	0.1591	0.2748	0.3082
S2	2	0.1603	0.2916	0.2940

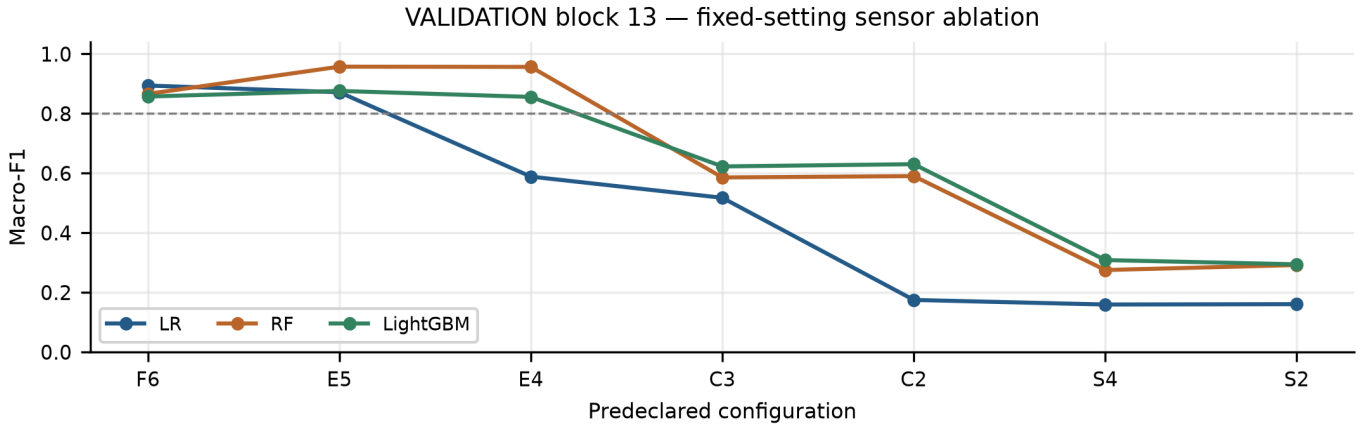


Fig. 1. VALIDATION block 13: fixed-setting sensor-ablation macro-F1. The horizontal line denotes the 0.80 aspiration.

RF E4 retains strong predictive performance and is the only configuration satisfying all four validation predictive/channel conditions: macro-F1, individual hardware recalls, family-specific degradation and at most four channels. Reductions below E4 generally cause substantial degradation. Removing voltage channels is particularly damaging in tested C2/C3 configurations. Environmental-channel removal does not universally reduce shade classification. These comparisons do not establish causal redundancy. Sparse engineered models do not isolate an engineering effect against matched raw-feature controls.

7. Frozen final candidates

LR F6 is the full-sensing lightweight reference. RF E4 is the sparse predictive-performance candidate and the minimum-channel qualifying candidate among the seven predeclared sensor configurations tested, based on the four validation predictive/channel conditions. This does not establish global minimum sensing or final engineering acceptance. LightGBM E4 remains the sparse resource-efficient candidate despite weak validation short-circuit classification. Candidates and settings were frozen before block-14 threshold selection and final TEST. No universal best model is asserted.

8. Final test results

Frozen candidates are evaluated on unchanged TEST without irradiance filtering or rebalancing. This partition had been evaluated in a legacy implementation and is not pristine or previously unseen. Revised model/sensor/feature decisions use training/validation evidence; no legacy test outcomes are loaded for revised selection. Earlier human exposure remains a limitation (Section 13).

Table 4. TEST classification of frozen candidates

Metric	LR F6	RF E4	LightGBM E4
Macro-F1	0.8984	0.9505	0.9021
Weighted-F1	0.9403	0.9572	0.9872
Macro AP	0.9174	0.9762	0.9936
Short-circuit recall R1	1.0000	0.9996	0.4994
Degradation recall R2	0.9978	0.9907	0.9930
Open-circuit recall R3	0.8519	1.0000	0.9992
Hardware macro recall	0.9499	0.9968	0.8305
Same-family TEST Δ_s	N/A	-0.006291	-0.002549

Sparse degradation uses frozen RF F6 / LightGBM F6 TEST references, never LR F6. Negative values are preserved.

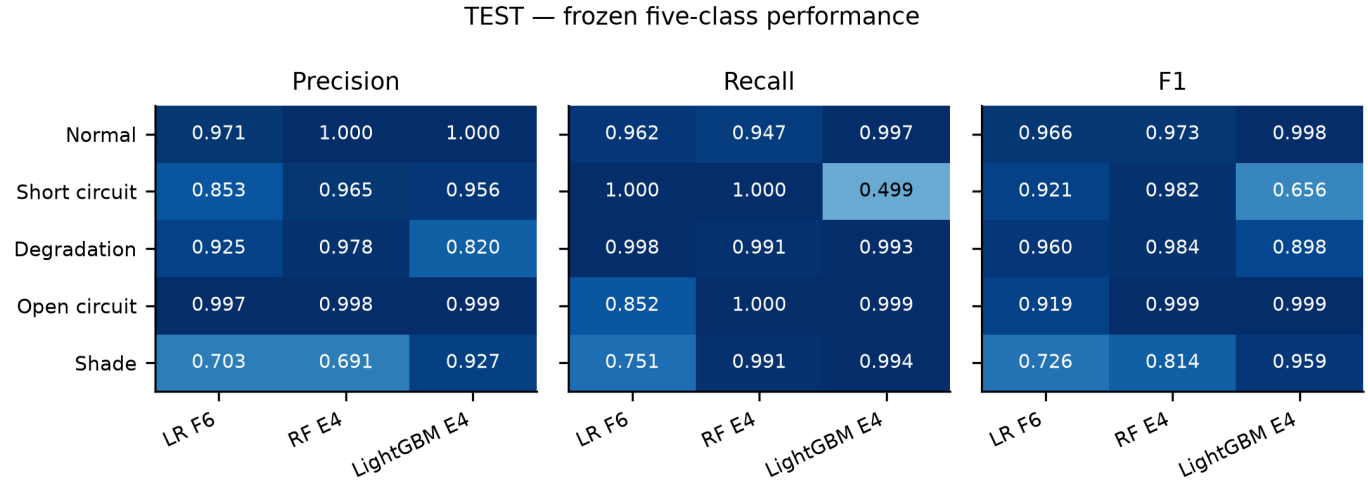


Fig. 2. TEST: per-class precision, recall and F1. Shade remains an environmental operating state.

RF E4 achieves the strongest macro-F1 among the frozen candidates and hardware macro recall 0.9968, but resource compliance is separate. LightGBM E4 has high weighted-F1 and macro AP while short-circuit recall remains low. Aggregate scores do not supersede the individual-class requirement. Shade recall is 0.7505 for LR F6, 0.9911 for RF E4 and 0.9937 for LightGBM E4.

Detailed evidence contains all class metrics/supports. Confusions (Fig. 3) include 357 LR open-circuit observations assigned to short circuit, rather than normal or shade. RF assigns six degradation observations to normal and one short-circuit observation to shade. LightGBM assigns 729 short-circuit observations to shade and 453 to degradation; five degradation observations are assigned to shade. No model or threshold change follows these findings.

8.1 Final test confusion diagnostics

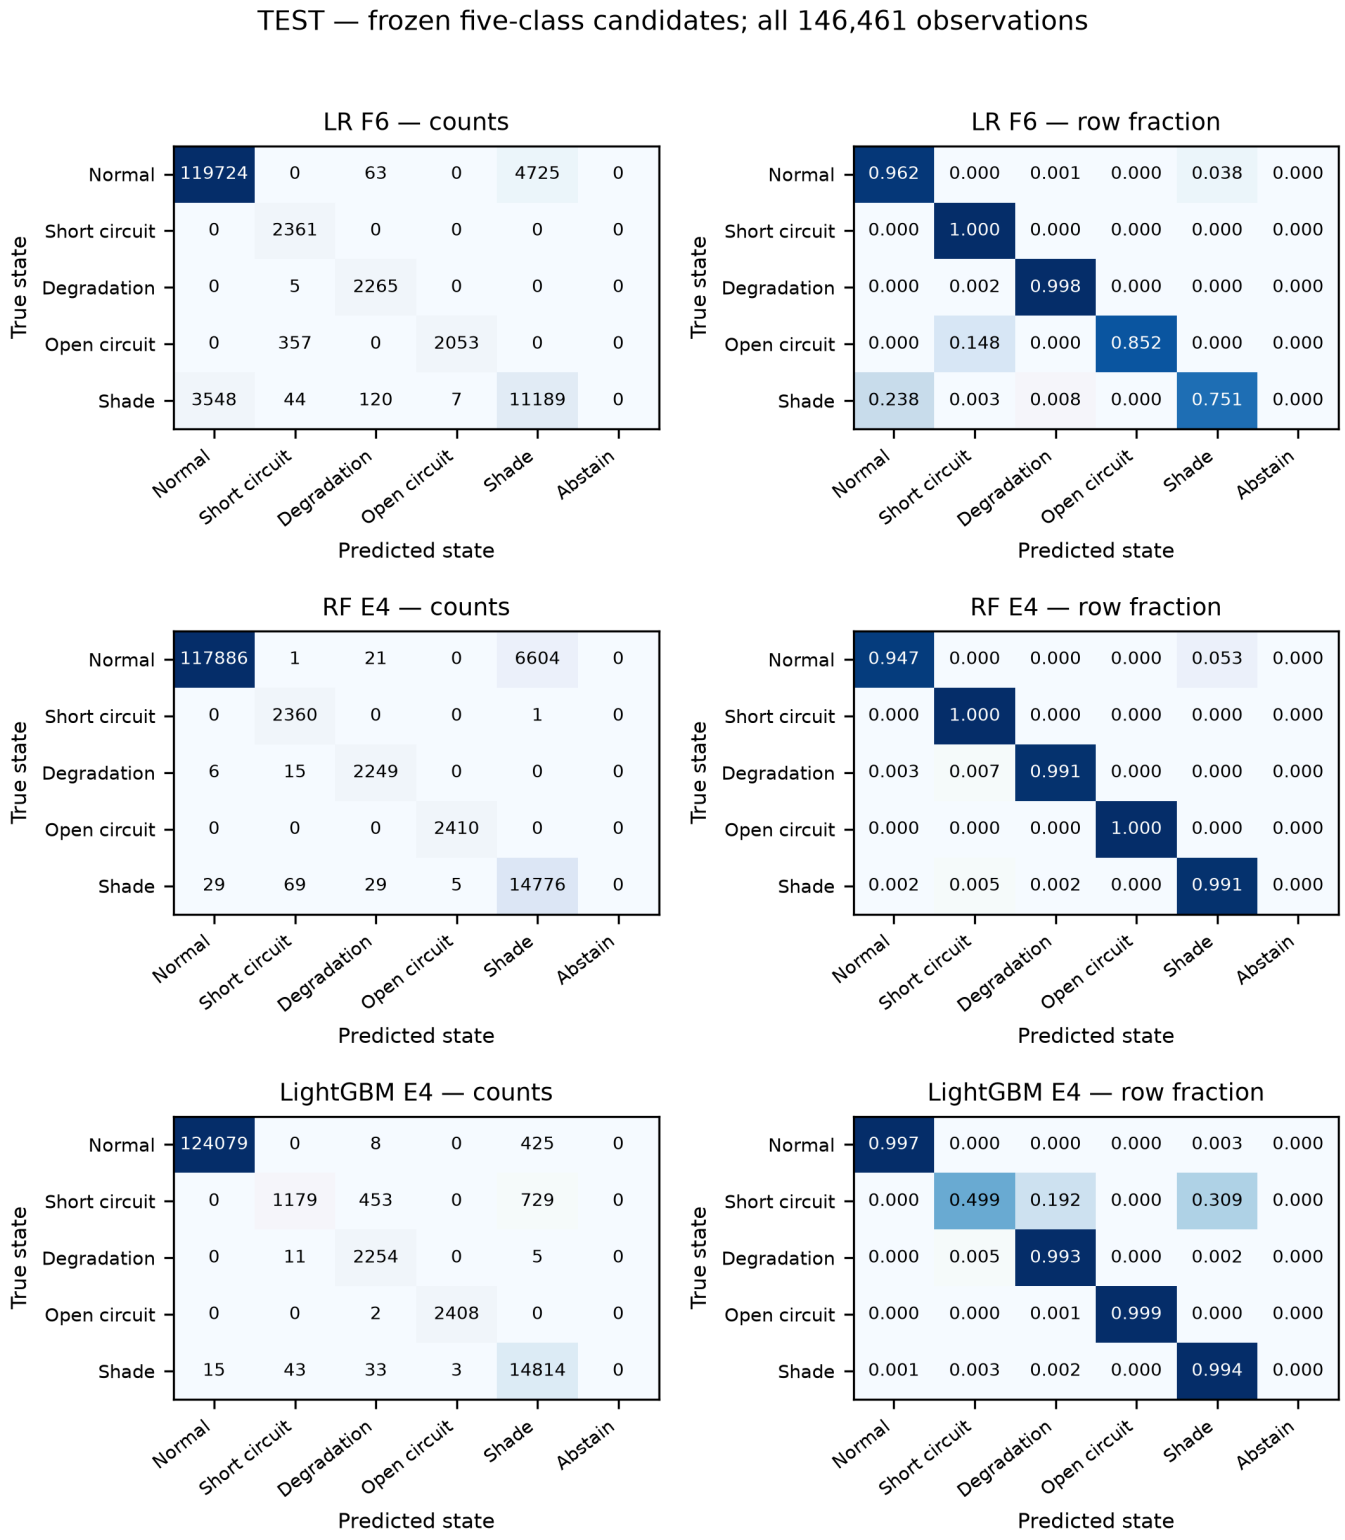


Fig. 3. TEST: counts and row-normalized confusions. Rows are true labels; columns are predictions, including abstention. Supports remain unchanged. Layout derives directly from frozen JSON; predictions are not regenerated.

All candidates have complete reference-test coverage. Aggregate hardware alerting remains separate from five-class diagnosis.

9. Hardware-alert evaluation

Hardware score s_H = p(class 1) + p(class 2) + p(class 3) alerts when s_H ≥ τ. VALIDATION block 14 alone selects τ to maximize alert recall subject to combined FPR ≤ 1% among Y ∈ {0,4}; equal-recall points prefer lower combined FPR, then higher τ. Distinct tied-score points and a no-alert sentinel are enumerated. Thresholds, model hashes and a freeze receipt precede revised test access. No threshold is adjusted after TEST.

Table 5. VALIDATION block-14 threshold selection

Candidate	Frozen τ	Recall	Precision	Combined FPR
LR F6	0.41938211	1.0000	0.9622	0.4694%
RF E4	0.59135587	1.0000	0.9765	0.2883%
LightGBM E4	0.13860002	1.0000	0.9770	0.2816%

Exact thresholds remain in JSON. All candidates achieve 1.0000 validation alert recall without selecting the zero-alert sentinel.

Table 6. TEST hardware alerts with frozen thresholds

Metric	LR F6	RF E4	LightGBM E4
Alert recall	1.0000	0.9955	0.9969
Alert precision	0.9578	0.9837	0.9836
Alert F1	0.9785	0.9896	0.9902
Hardware AP	0.9896	0.9934	0.9948
Normal FPR	0.1084%	0.0161%	0.0088%
Shade FPR	1.1739%	0.6439%	0.7110%
Combined FPR	0.2223%	0.0832%	0.0839%

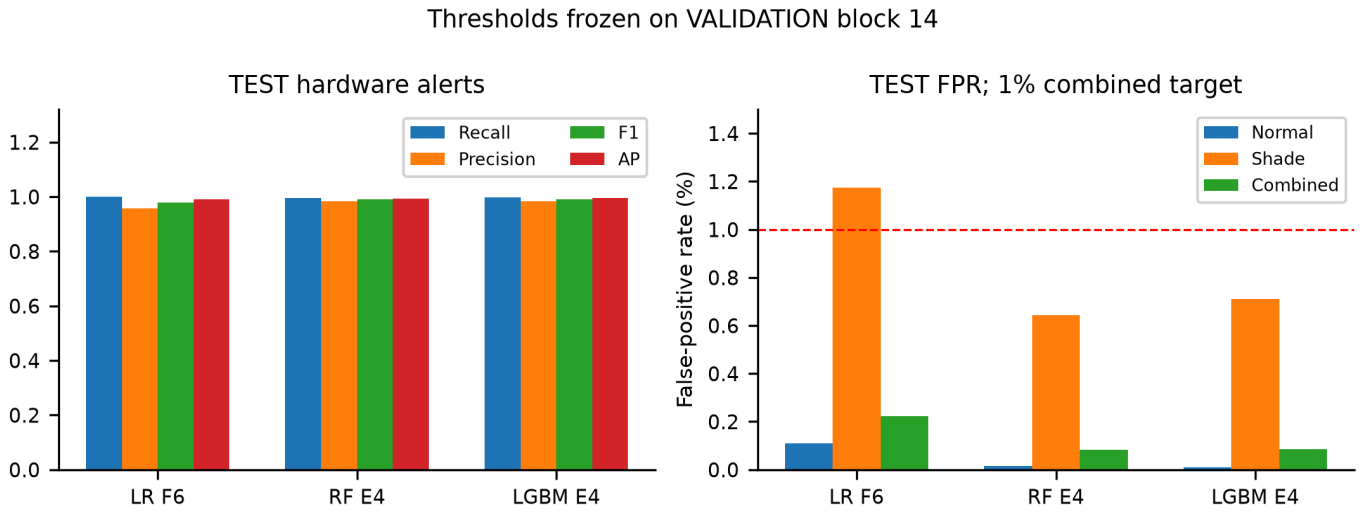


Fig. 4. TEST: hardware-alert performance and separate FPRs. Thresholds originate only from VALIDATION block 14. The 1% target applies to combined FPR.

All combined TEST FPRs satisfy 1%. LR shade-only FPR exceeds 1% and remains visible. LightGBM alert recall 0.9969 alongside short-circuit classification recall 0.4994 is not contradictory: summed hardware probability can exceed τ even when another state has the largest individual probability. Some short-circuit observations are classified as degradation; others are labeled shade despite a sufficient summed hardware score. Strong aggregate detection therefore does not establish reliable fault-type diagnosis.

10. Explainability

Explanations use a seeded, balanced sample of 1,000 VALIDATION block-13 observations, 200 per class (seed 42). This supports class comparison but does not represent natural prevalence. LR standardized coefficients, RF impurity importance and LightGBM split gain describe fitted models. Three raw-channel permutation repeats rerun the complete pipeline and regenerate every dependent feature. Correlation disruption can create implausible combinations; losses describe model associations, not causal sensor effects.

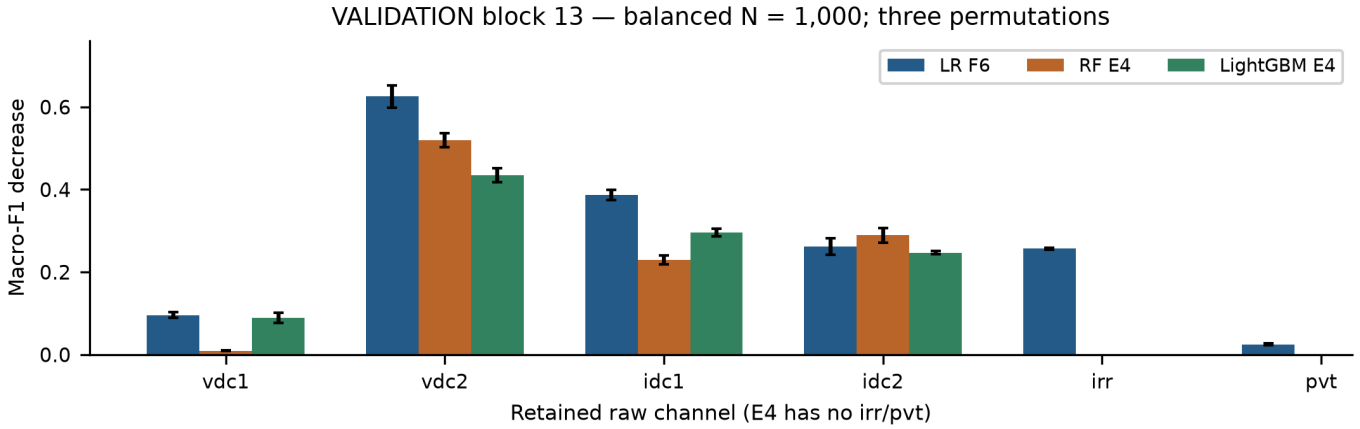


Fig. 5. VALIDATION block 13, balanced N = 1,000: raw-channel permutation macro-F1 losses (three repeats); dependent features are regenerated.

vdc2 has the largest raw-channel permutation loss in every candidate; current channels also contribute substantially. LR additionally relies on irradiance. RF E4 retains useful electrical information without irr/pvt, but environmental sensing is not proved universally unnecessary. Aggressive validation sensor reduction is consistent with lost predictive information, not a unique physical mechanism.

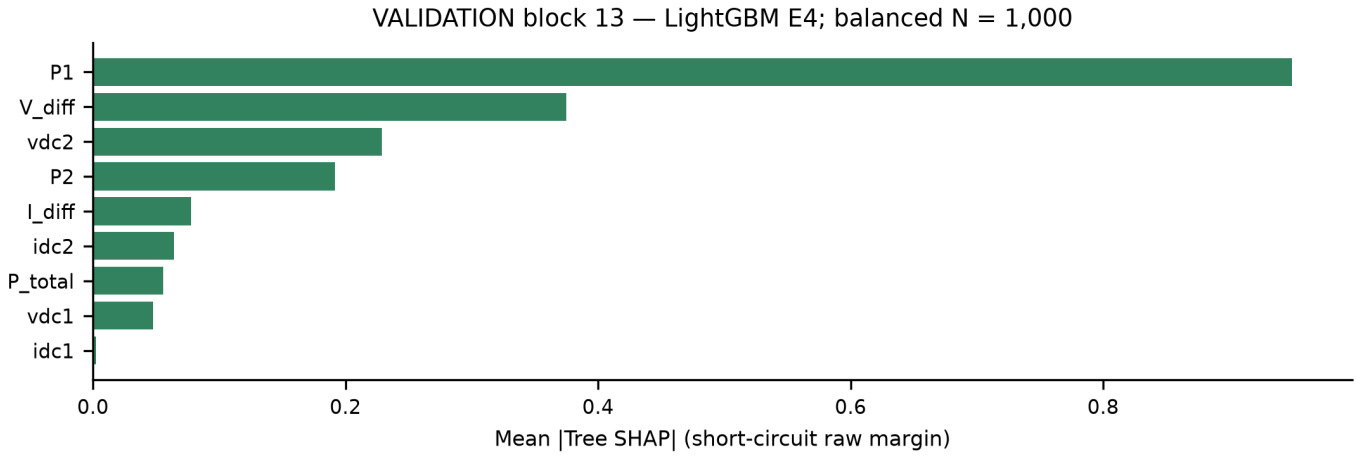


Fig. 6. VALIDATION block 13, balanced N = 1,000: LightGBM E4 short-circuit Tree SHAP for nine numerical features in raw-margin units; availability indicators have zero contribution. Derived features are not independent sensors.

Native LightGBM Tree SHAP [4,5] emphasizes P1, V_diff and vdc2 for short circuit; vdc2/idc1 for degradation; and V_diff/I_diff for open circuit. Raw-margin additivity is verified to maximum error 6.13×10^{-14}. These associations are not causal explanations of errors. Deterministic dependencies/correlation limit unique attribution. Optional RF SHAP was not run; RF native and raw-channel permutation analyses are provided.

11. Computational and sensing trade-offs

Corrected VALIDATION block-13 measurements use 100 warm-up calls and 2,000 timed single-observation calls through the complete wrapper/pipeline, including quality checks, imputation, derivatives and scaling where applicable. Data loading/input-frame construction are outside timing. Applicable estimators and numerical pools use two threads. Artifact size is the uncompressed complete fitted wrapper/pipeline pickle, excluding dependencies. These host-dependent results are not hard real-time guarantees. Host: Windows 11; Intel Family 6 Model 170; 16 physical/22 logical cores; Python 3.14.7.

Table 7. Sensing, resource and robustness comparison

Metric / population	LR F6	RF E4	LightGBM E4
Physical channels	6	4	4
Mathematical inputs	12	8	13
p95 (ms), VALIDATION	14.72	36.81	6.12
Fitted artifact (MiB)	0.0037	11.6654	1.5692
1% dropout loss, VALIDATION	0.014986	0.008163	0.010639

LR/RF dropout evidence is unchanged; LightGBM uses the identical frozen E4 mask. Every loss satisfies 0.05.

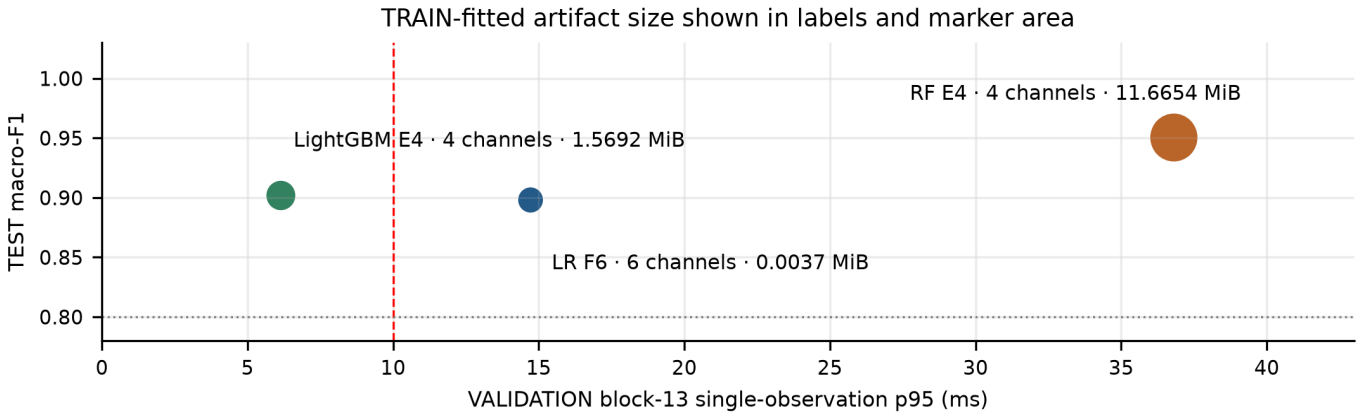


Fig. 7. Explicitly mixed quantities: TEST macro-F1; VALIDATION block-13 p95; TRAIN-fitted artifact size. Labels identify physical-channel counts; marker area indicates fitted artifact size.

12. Engineering criteria assessment

Table 8. Frozen engineering criteria: no complete passing configuration

Criterion	LR F6	RF E4	LightGBM E4
TEST macro-F1 $\geq$ 0.80	PASS	PASS	PASS
Every hardware-class recall $\geq$ 0.90	FAIL	PASS	FAIL
Same-family TEST $\Delta_s \leq$ 0.05	N/A	PASS	PASS
Sparse physical channels $\leq$ 4	N/A	PASS	PASS
Combined TEST alert FPR $\leq$ 1%	PASS	PASS	PASS
VALIDATION p95 $\leq$ 10 ms	FAIL	FAIL	PASS
Artifact $\leq$ 10 MiB	PASS	FAIL	PASS
VALIDATION dropout loss $\leq$ 0.05	PASS	PASS	PASS

N/A means inapplicable to the full-sensing reference; no criterion was weakened.

No evaluated configuration satisfied all predeclared engineering criteria. LR fails hardware-class recall and latency; RF E4 fails latency and artifact size; LightGBM E4 fails short-circuit recall. This measured trade-off does not justify relabeling a failing system as accepted.

13. Limitations

No explicit timestamps or uninterrupted source continuity are verifiable. Ordered buffered splitting does not establish calendar intervals, verified days/sessions, alerts per hour or detection delay in seconds. The controlled installation contains induced electrical faults and natural shade; external field generalization and maintenance effectiveness remain untested. Severe class imbalance and neighboring-row dependence limit aggregate-score interpretation; no independent-site evaluation is available.

The approved test partition was evaluated in an earlier legacy implementation before the revised protocol. It is not described as pristine or previously unseen. Revised settings, sensor sets, feature policy and thresholds were frozen using training/validation evidence without using legacy test outcomes for revised decisions. Revised runners do not load legacy test metrics. Earlier human exposure cannot be removed; software cannot independently exclude all influence from that exposure.

Only seven predeclared sensor sets were tested; RF E4 is not established as globally minimum sensing. Fixed settings avoid repeated sparse tuning but may not be optimal for each set. Engineered versus raw sparse LightGBM effects lack matched controls. Targets are project aspirations, not industry certification or safety thresholds. No temporal CNN/TCN is implemented because sufficient temporal continuity was not established for the minimum experiment. No unsupervised model is required for the primary supervised question. Explanations are non-causal, and balanced explanation samples do not represent natural prevalence.

14. Conclusion

Four electrical channels supported strong RF E4 classification among the seven tested sensor sets, but latency and artifact-size limits were exceeded. LightGBM E4 met computational/four-channel constraints while failing short-circuit classification recall. LR F6 provided a small full-sensing reference but failed latency and open-circuit recall. No evaluated configuration satisfied all predeclared engineering criteria. The experiment identifies a measurable sensing–prediction–computation trade-off rather than a universally best configuration.

15. Reproducibility and repository structure

The unchanged Phase 1 report/audit and immutable raw CSV remain the foundation. Experiment modules reside under src/phase2_stage1, src/phase2_stage2 and src/phase2_stage3, with compact CSV/JSON evidence in corresponding directories. The PDF, editable Markdown and evidence-only report builder are separate from experiment runners. phase2_implementation/README.md documents root-based setup, data hashes, split/weight/feature/model references, threshold chronology and resource protocol. Portable review: python -B phase2_implementation/verify_submission.py. Report rendering and verification do not fit models. Committed model binaries are unnecessary for evidence inspection.

References

[1] United Nations, Goal 7: Affordable and Clean Energy. https://sdgs.un.org/goals/goal7 (application motivation).

[2] A. E. Lazzaretti et al., “A Monitoring System for Online Fault Detection and Classification in Photovoltaic Plants,” Sensors, 20(17), 4688, 2020. https://doi.org/10.3390/s20174688.

[3] C. H. da Costa, PV Fault Dataset, original-author repository; pinned commit e9ed8ad8072dcb3ffc643b0f3604219798708551. https://github.com/clayton-h-costa/pv_fault_dataset.

[4] LightGBM, Booster.predict: pred_contrib contributions and expected-value term. https://lightgbm.readthedocs.io/en/latest/pythonapi/lightgbm.Booster.html.

[5] S. M. Lundberg et al., “From local explanations to global understanding with explainable AI for trees,” Nature Machine Intelligence, 2, 56–67, 2020. https://doi.org/10.1038/s42256-019-0138-9.

Appendix A. Strategy versus reality

The original ten pages retain the frozen experimental findings. This appendix records implementation choices and explicitly identifies the later compliance-only diagnostics. No model, sensor, threshold, split or final metric changed.

Table 9. Phase 1 plan, implementation and evidence

Phase 1 planned decision	Actual Phase 2 / compliance implementation	Status	Deviation / finding	Rationale / evidence
Missing-value strategy: TRAIN-median contingency plus availability indicators	Same median/indicator preprocessing; exported NaNs remain zero	IMPLEMENTED AS PLANNED	No missingness mechanism inferred from zero NaNs	final_model_specifications.json medians; Preprocessing_Evidence.json
Paired-zero handling: Annotate suspicious simultaneous irr/pvt zeros	All 62 paired-zero observations retained as observations	IMPLEMENTED AS PLANNED	Not relabeled as confirmed missing values	Phase1 primary_audit.json; compliance raw audit
Negative irradiance: Near-zero convention, with physical caution	Existing quality rule clamps -1 <= irr < 0; no new rule	IMPLEMENTED AS PLANNED	One released slightly negative observation; convention unchanged	src/phase2_stage2/models.py RetainedQuality
Negative temperature: Retain physically valid negative Celsius values	Negative Celsius values remain unchanged	IMPLEMENTED AS PLANNED	No automatic zero-floor on module temperature	RetainedQuality; compliance cleaning comparison
Outlier policy: Screen IQR/ Z values; retain plausible fault observations	No statistical capping or row deletion; raw/ reference boxplots	IMPLEMENTED AS PLANNED	Similar before/after plots reflect intentional retention	Training_Distributions.csv; diagnostic 3
Target encoding: Treat f_nv codes as five nominal labels	Nominal 0–4 labels retained; no categorical predictors encoded	IMPLEMENTED AS PLANNED	No artificial ordinal or continuous target interpretation	Variable_Inventory.csv; report Table 1
LR scaling: TRAIN-fitted StandardScaler for regularized LR	Six numerical channels standardized; indicators unchanged	IMPLEMENTED AS PLANNED	Frozen LR preprocessing reused without fitting a classifier	final_model_specifications.json; shared factory
RF scaling: Retain native numerical scale for trees	E4 electrical values plus availability indicators, no scaler	IMPLEMENTED AS PLANNED	No normalization forced on RF	final_model_specifications.json; shared factory
LightGBM preprocessing: Physically justified extension to initial LR/RF suite	Median + approved derivatives + indicators; native scale	REFINED	Boosted-tree extension approved after professor feedback	Professor_Feedback_Response.md; frozen specification
Class imbalance: Compare weighted/unweighted variants; weights from TRAIN	Frozen balanced winners use N_train/(5*n_k)	IMPLEMENTED AS PLANNED	Validation/test distributions not rebalanced	class_weights.json; validation_comparison.csv
SMOTE decision: Avoid initial row-level synthetic oversampling	No SMOTE or random oversampling in primary experiment	NOT REQUIRED	Dependent readings do not create independent fault episodes	Phase1 report p.3; Stage1 experiment configuration

Appendix A. Strategy versus reality — continued

Table 9 continued. TRAIN-only MI/PCA diagnostics complete assignment coverage after the final model decisions were frozen; these statistics did not select another model or sensor set.

Table 9 (continued). Phase 1 plan, implementation and evidence

Phase 1 planned decision	Actual Phase 2 / compliance implementation	Status	Deviation / finding	Rationale / evidence
Split strategy: Ordered 12/2/2 signal-block allocation with buffers	Same TRAIN/ VALIDATION/TEST bounds; 104231 separator rows	IMPLEMENTED AS PLANNED	Source-position order; no verified day/session claim	Phase1_Split_Manifest.json; compliance split checks
Leakage prevention: Fit learned preprocessing only on TRAIN	Medians/scalers fit on TRAIN; held-out arrays only transformed	IMPLEMENTED AS PLANNED	New diagnostic scalers/ PCA also train-only	Preprocessing_Evidence.json fit ledger; semantic tests
Correlation analysis: TRAIN Pearson screen |r| >= .85; no automatic deletion	Same six-predictor matrix and five flagged pairs; new plots	IMPLEMENTED AS PLANNED	Correlation is not proof of physical redundancy	Training_Correlation.csv; diagnostics 4–5
VIF: TRAIN VIF >10 warning; justify physical retention	Phase1 VIF audit retained: five warnings, not automatic drops	IMPLEMENTED AS PLANNED	No new VIF-based sensor selection after final evaluation	primary_audit.json training_vif; Phase1 report
Mutual information: TRAIN nonlinear association for nominal f_nv	k = 3 MI on seeded proportional TRAIN sample N = 50000	REFINED	Completed as compliance diagnostic after frozen experiments; no reselection	Preprocessing_Evidence.json; diagnostic 6
PCA: Exploratory TRAIN-scaled PCA; preserve sensor interpretation	TRAIN StandardScaler + full-SVD PCA; 90%/95% thresholds	REFINED	Completed for compliance; not deployed or equated to sensor reduction	Preprocessing_Evidence.json; diagnostic 8
Physical feature engineering: Domain-grounded derivatives with parent-channel constraints	Only P1/P2/P_total/ V_diff/I_diff where parents retained	REFINED	Bounded LightGBM branch; RMS products remain proxies	Feature_Dependencies.json; features.py
Sensor ablation: Compare F6/E5/E4/C3/C2/S4/S2 on identical partitions	21 fixed-setting runs; three candidates frozen before TEST	IMPLEMENTED AS PLANNED	Minimum qualifying tested set is not a global optimum	sensor_ablation_validation.csv; stage3_protocol.json
Explainability: Lightweight model/feature importance with physical caution	Native importance, raw-channel permutation and Tree SHAP	REFINED	Balanced validation sample; no causal physical claims	explainability_metadata.json; physical permutation CSV
Computational evaluation: Compare latency/footprint with predictive and sensing budgets	Corrected 100 warmups/2000 single-row calls; full pickle size	REFINED	Protocol correction preserved; no architecture change to force a pass	resource_benchmark_correction.json; portable resource view