SECTION B–B scale 1.75 : 1

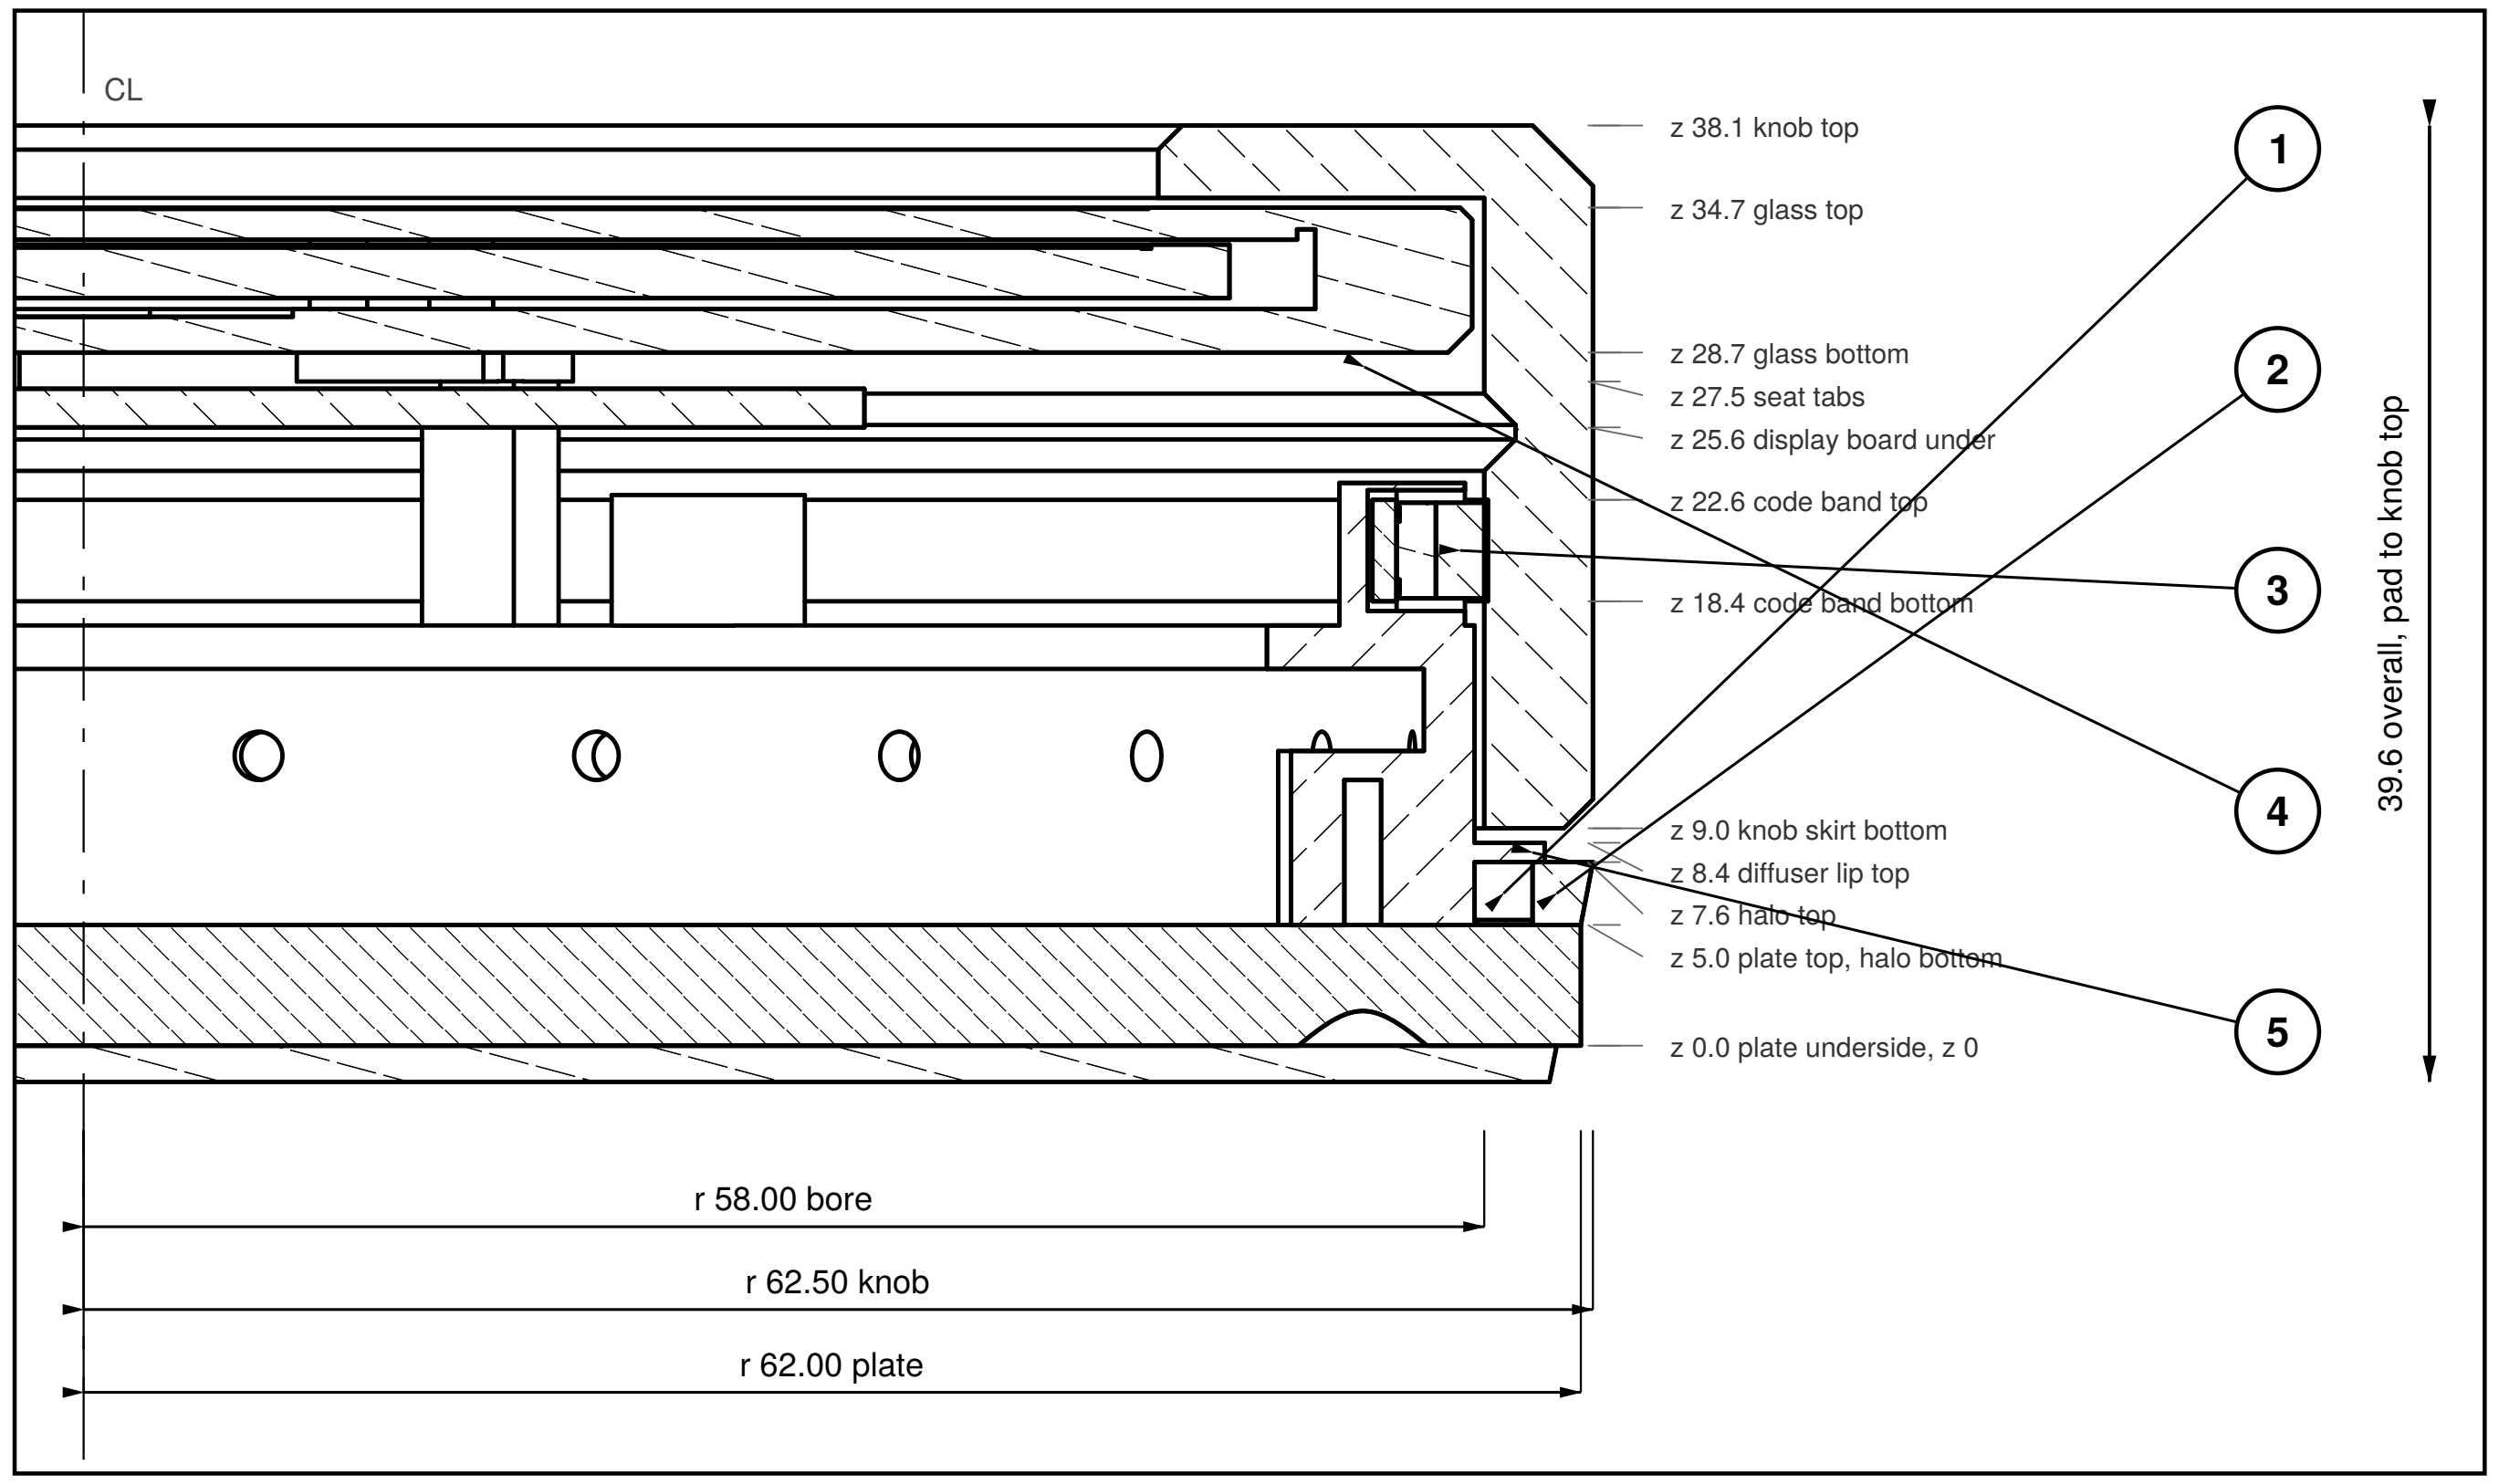

Right half, on the 330°–150° axis, through the encoder at 330°. The whole vertical stack, plate underside to knob top.

NOTES

1. 90 SK6812SIDE-A at r 58.80 on a 0.2 flex ring on the plate top (z 5.0–5.2); packages z 5.2–7.2, lit band z 5.0–7.6. v8 stood the ring on the wall, where a side-view LED fires up or down.
2. Diffuser r 60.0 inside, 62.0–62.5 outside (bottom to top, flush with the knob at r 62.5), 2.0–2.5 thick. Retained by a lip at r 60.5, z 7.6–8.4, with a 0.6 shadow gap under the knob skirt.
3. Continuous through 360°, motor at 90° included, only while the stator base is Ø34.4 or less: base centred at r 40.5, flex inner edge r 57.7. params ASSUMES Ø30 — measure it. At Ø35 the base cuts the ring over ±3.8°; the bell relief (Ø39) would cut it over ±10.9°.
4. AEDR-8300 at 330°, package face at r 54.37, nominal 2.00 gap to the code band. The band is the bore recessed 0.15 to r 58.15 over z 18.4–22.6. It is 4.2 tall because the package measures 3.96 across the strip.
5. Display fixing: four columns at 42° / 138° / 222° / 318° carrying 1.20 seat tabs that reach the M4 holes at 45° / 135° / 225° / 315° on a Ø106.07 PCD, in the 1.5 gap above the board. Columns sit 3° off the holes because two of the four are 0.5 from the board edge. M4 × 4 driven before the plate goes on.
6. The ambient-light sensor is NOT in this wall. v9 moved it into the port face at the back, looking rearward through a Ø4.80 hole below the halo — see D04.
7. OPEN — settle this before the flex is ordered. As modelled the package faces INWARD, at the wall, with its terminals outward: at 0° it spans r 58.0–59.6. The intent is the opposite; either the placement rotation in model.py or this note is wrong.

DETAIL P — HALO 8 : 1

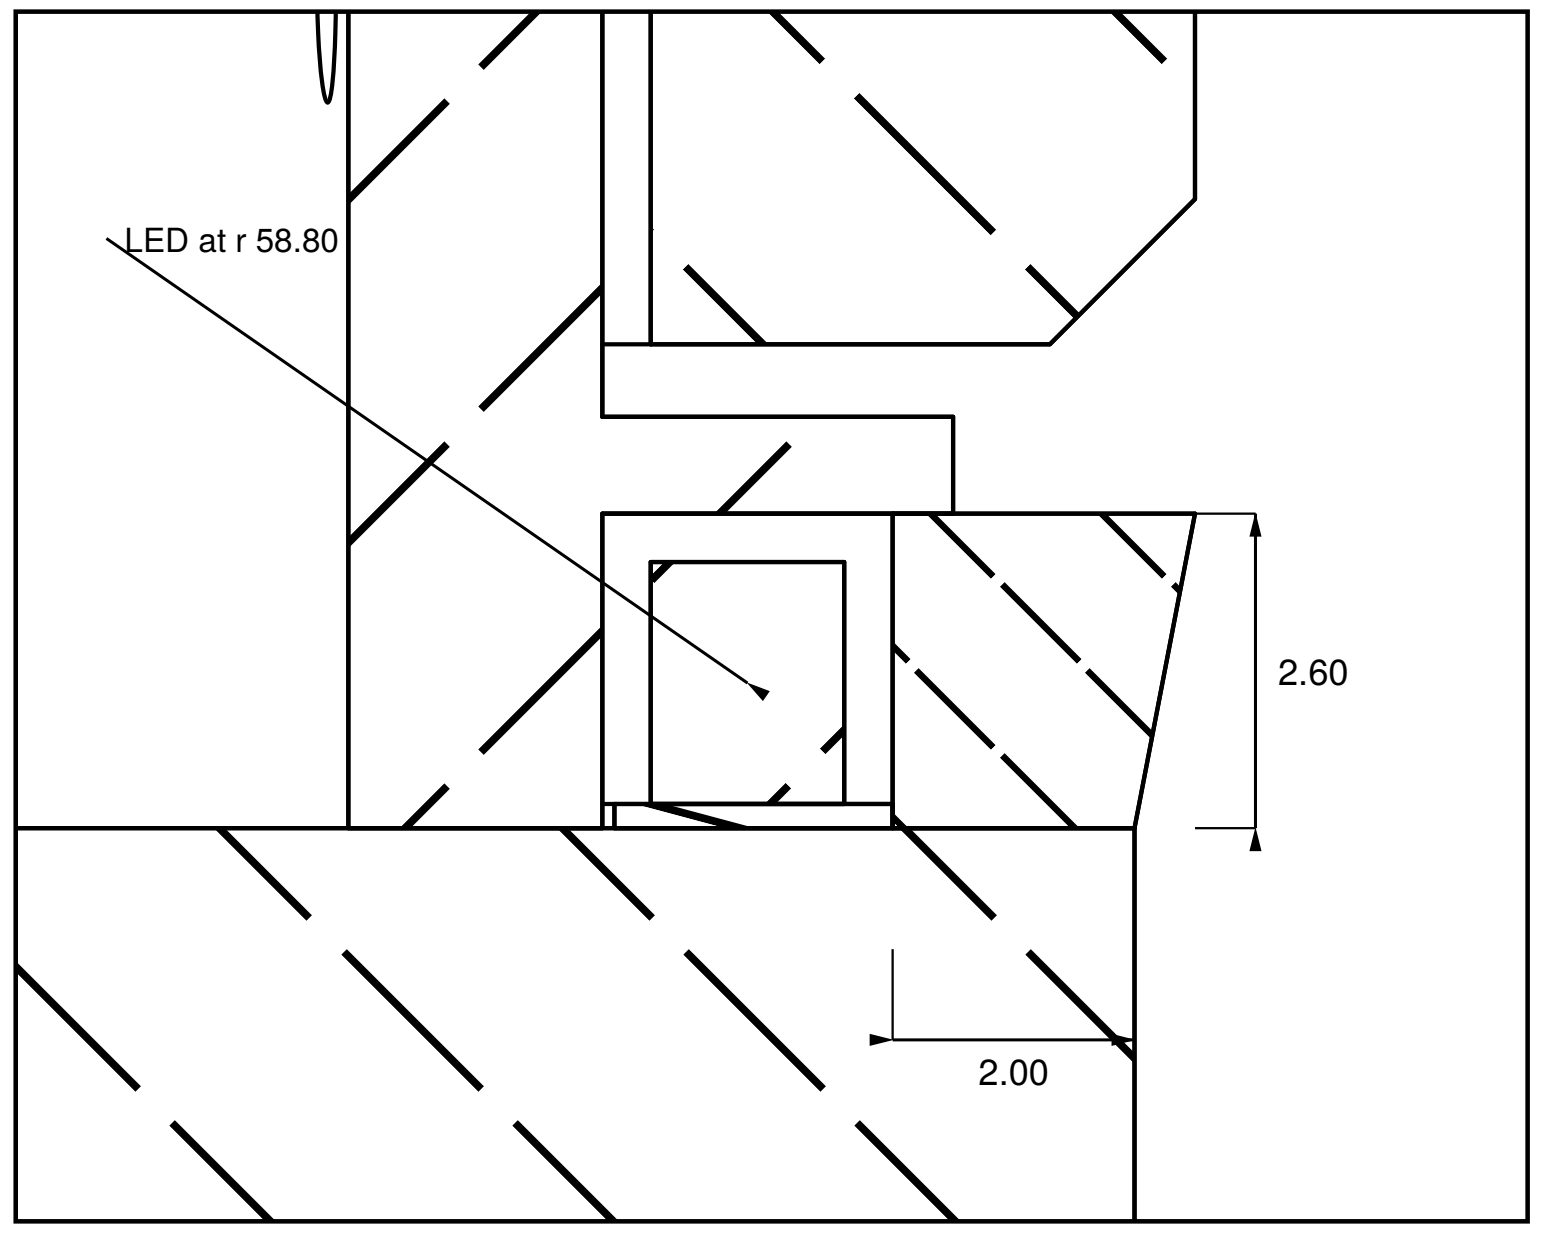

The section is on the 48° LED pitch. The flex ring is r 57.7–60.0 and 0.2 thick on the plate top; the package stands 2.0 tall on it. Which way it faces is note 7, still open.
Bench test the diffuser before committing: see docs HALO-BENCH-TEST.

PLAN — HORIZONTAL SECTION AT z 6.3 scale 0.78 : 1

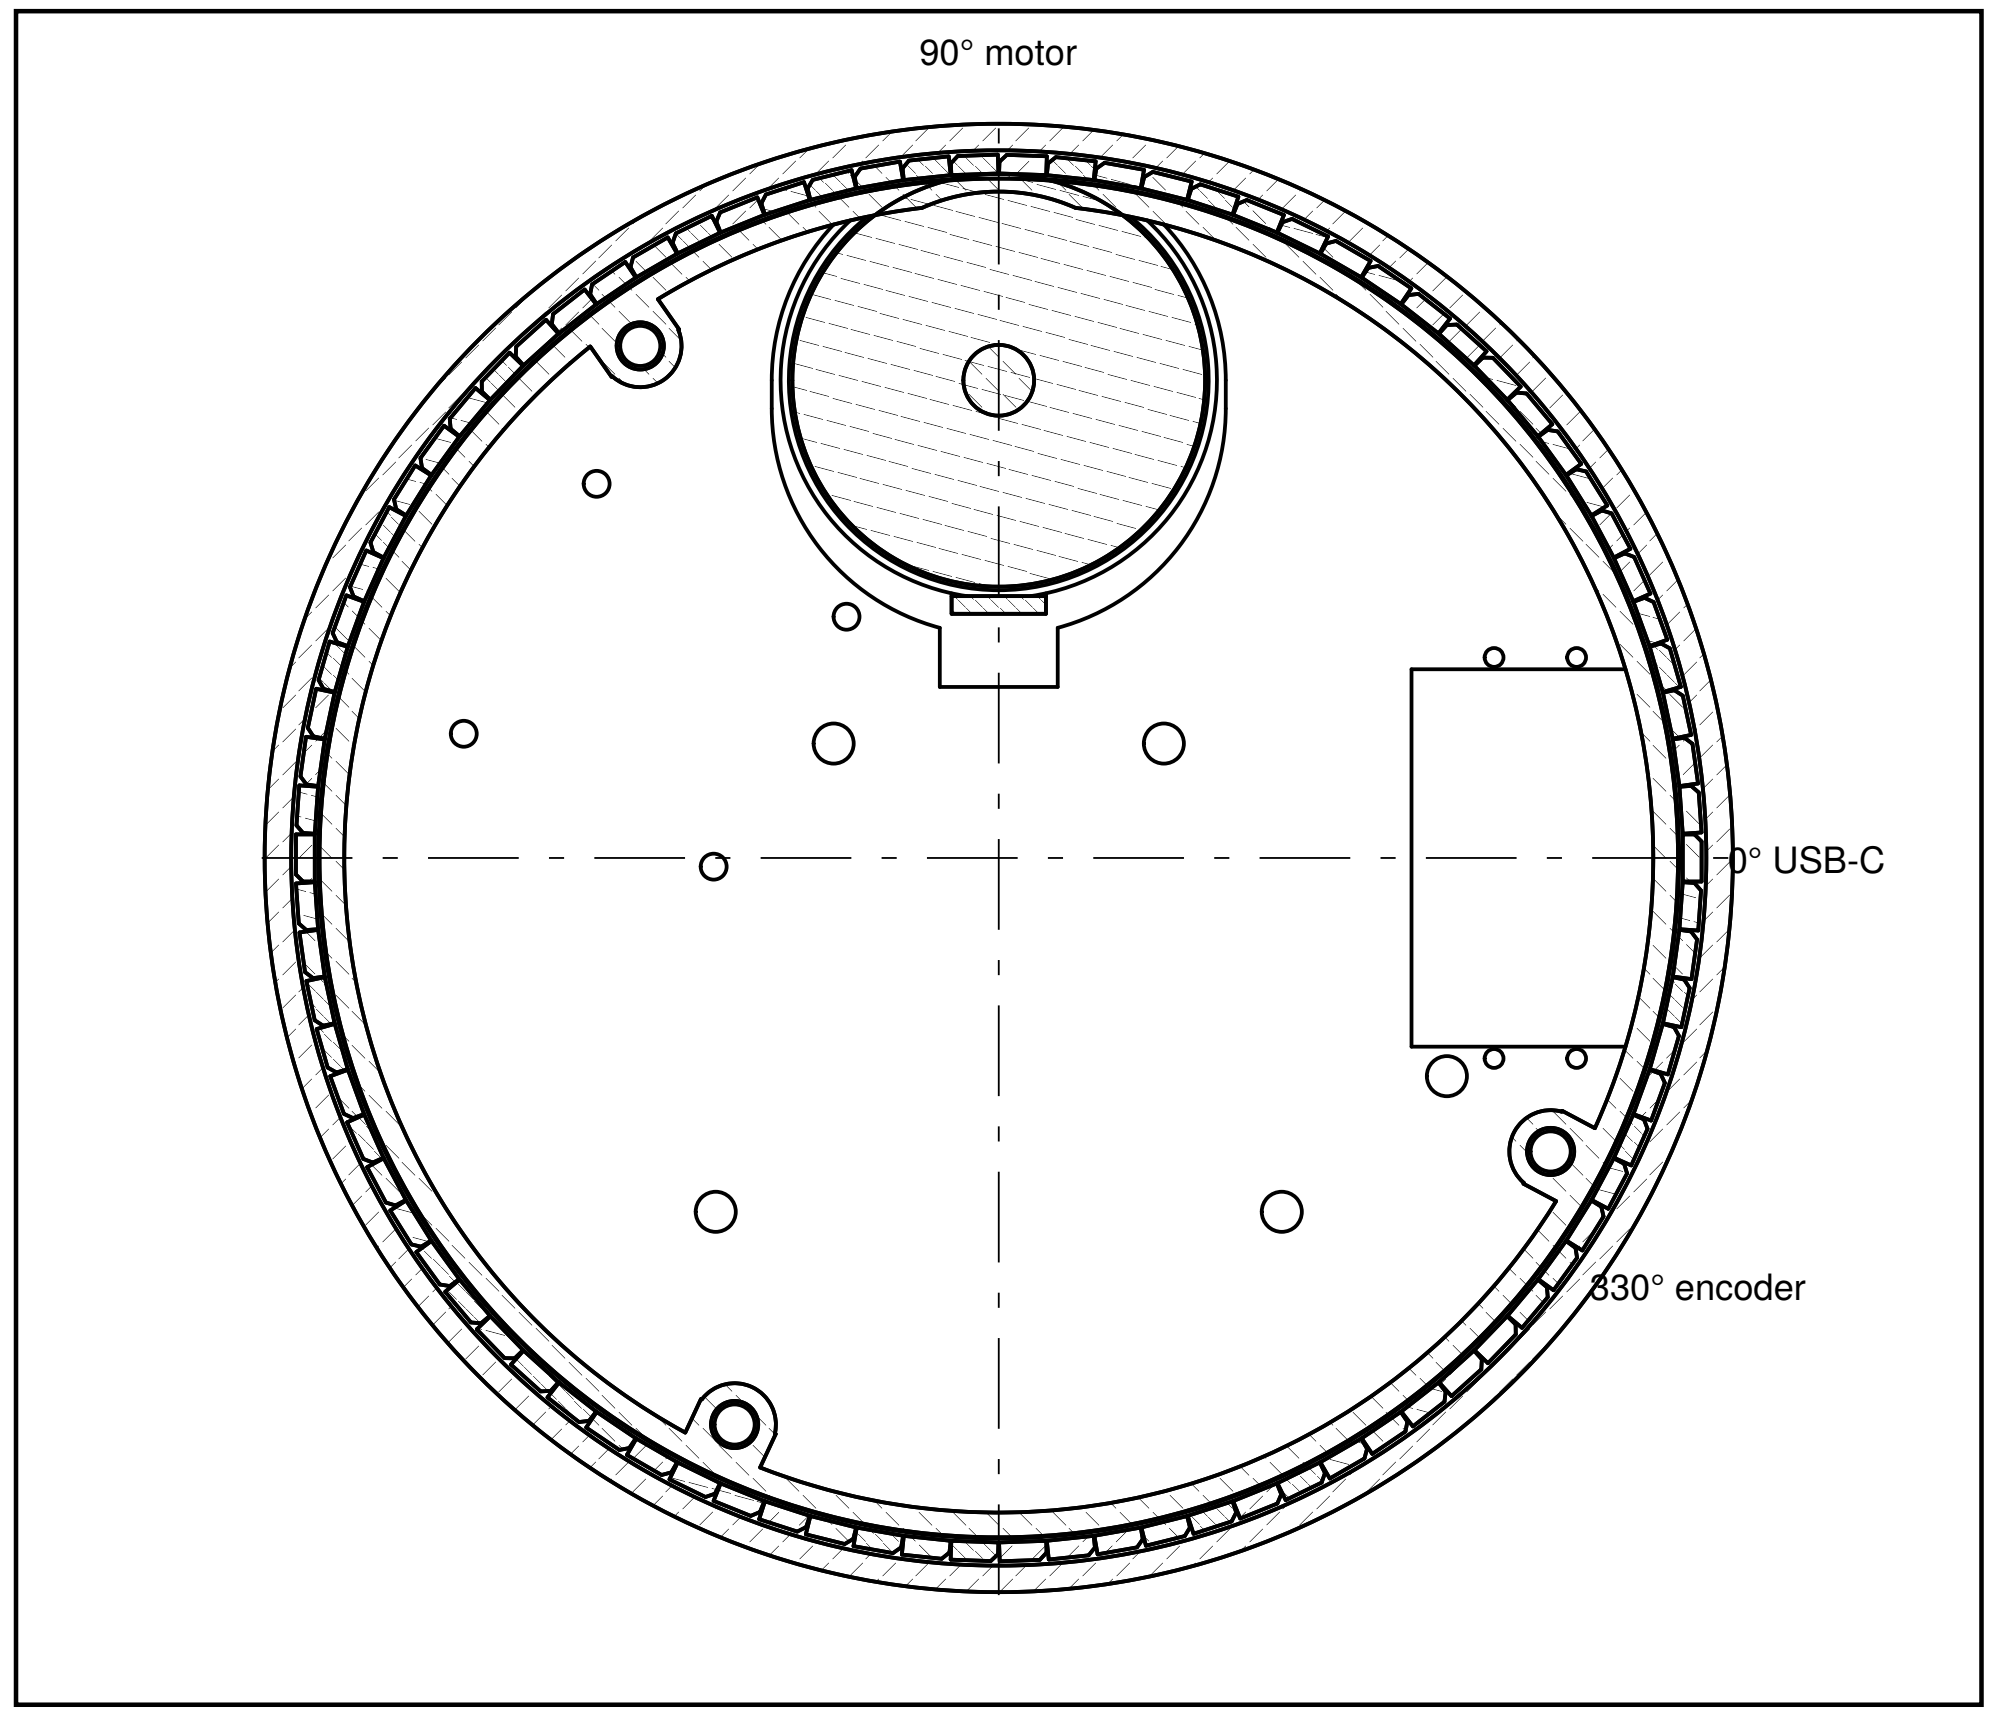

90 LEDs on a 4.0° pitch at r 58.80, unbroken all the way round. The port slot at 0° passes UNDER the halo, through the plate.
The only interruption to the ring's outer wall is the motor relief at 90°, and the ring itself runs on behind it.

DETAIL Q — ENCODER AND CODE BAND 8 : 1

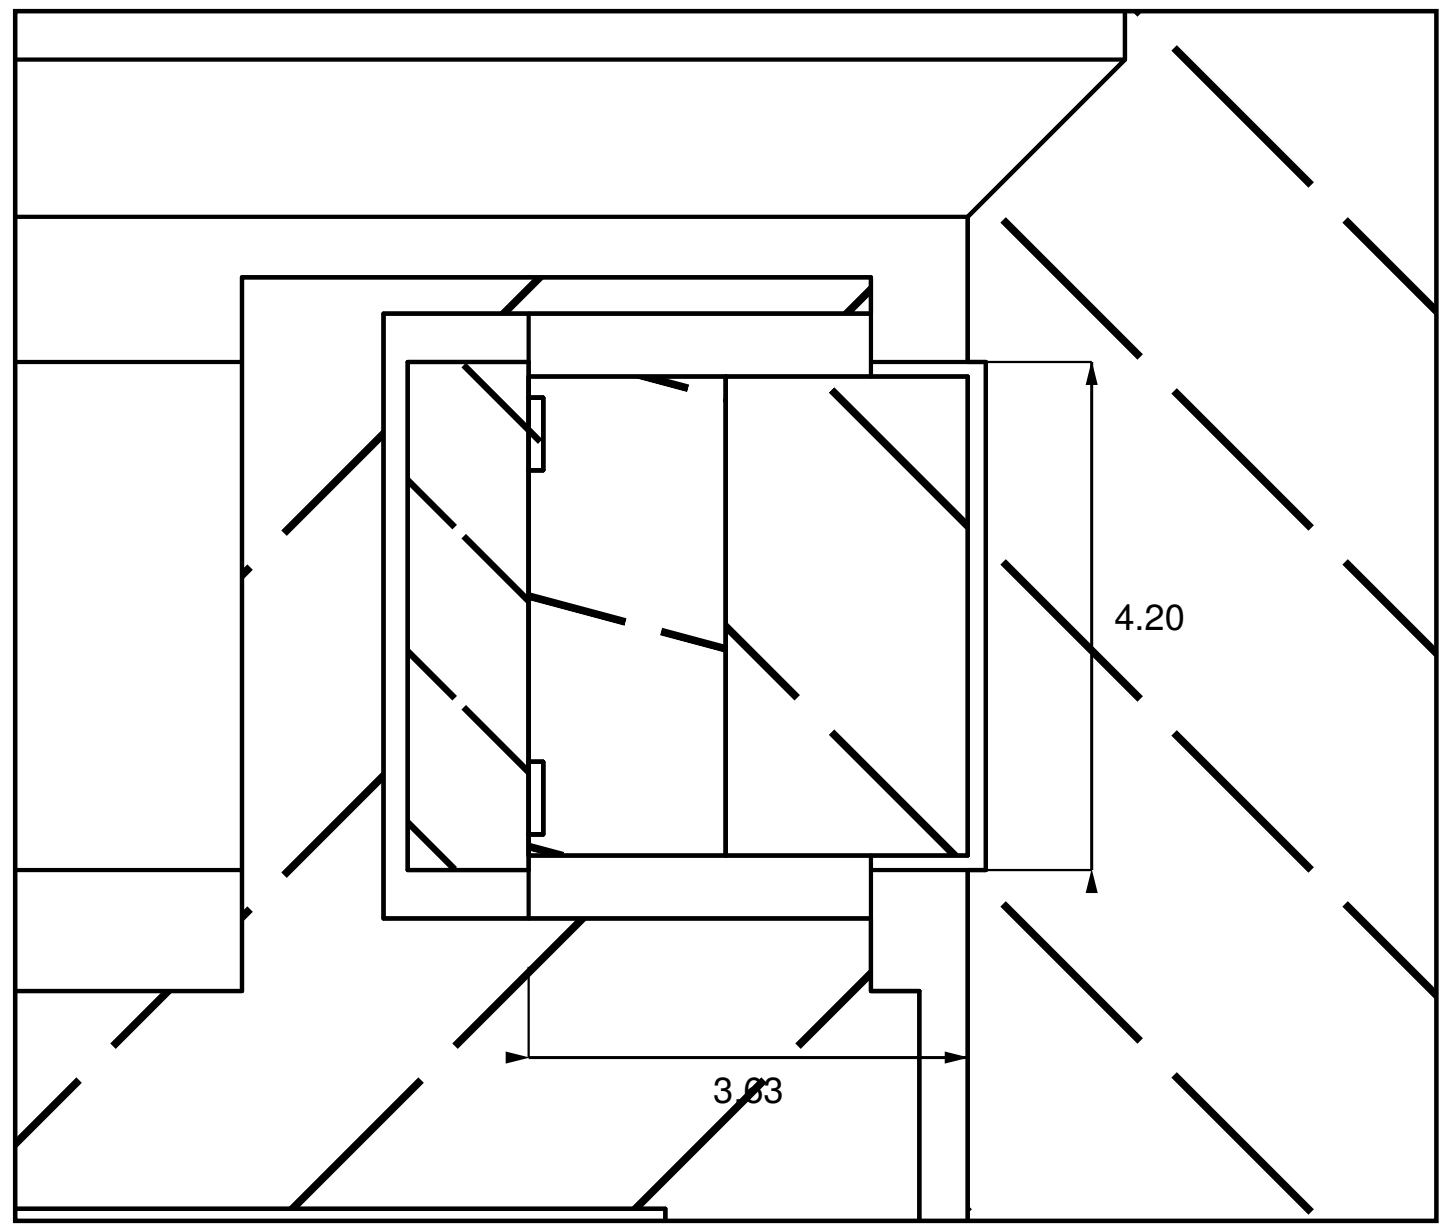

Package face to bore: 3.63, of which 2.00 is the AEDR-8300's nominal working gap. The strip is a 0.15 recess in the bore, so a printed knob and a stuck-on strip finish flush at r 58.00.

PLAN — HORIZONTAL SECTION AT z 28.1, THROUGH THE SEAT TABS scale 0.78 : 1

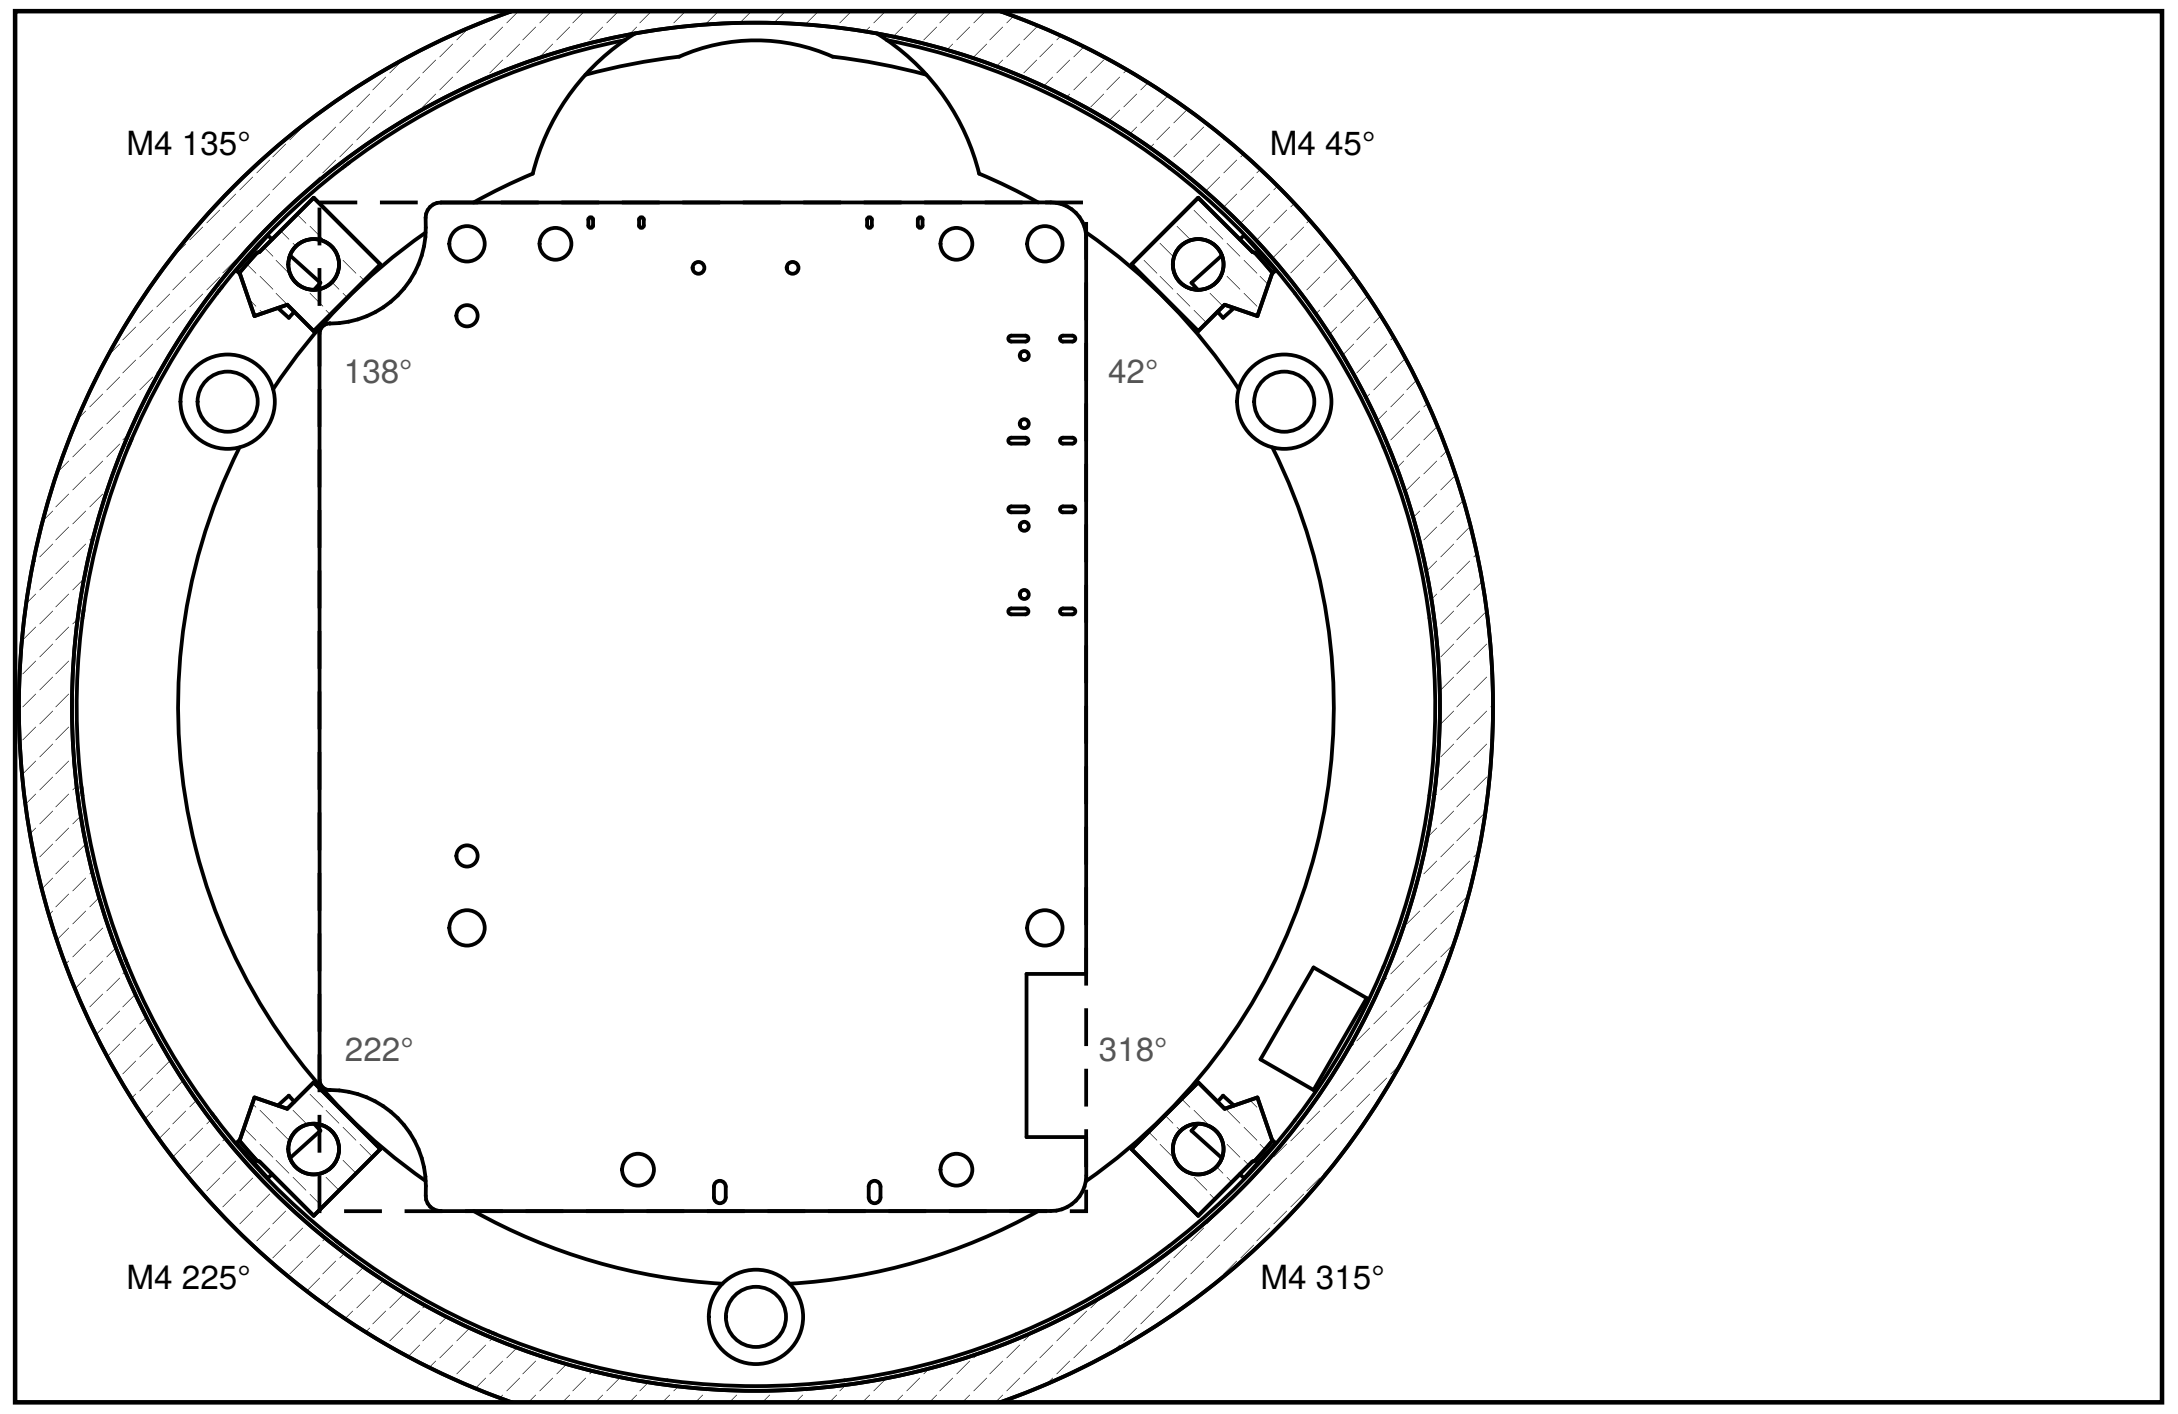

Columns (grey azimuths) sit 3° off the M4 holes; the tabs bridge across. Dashed rectangle: the board, below this cut.
The tabs stand 0.30 above the board and touch the glass back — they set the display's height, not the columns.

LIGHT BAND, DISPLAY FIXING AND ENCODER

the 60 (Cadrane) — desk dial	DRAWING 60-09-D02	REV v9
SCALE AS SHOWN	DATE 2026-09-04	UNITS mm

MODELLED, NOT PRINTED — no v9 part has been made. Dimensions are model values, not inspection results. Bodies tagged ENVELOPE or ASSUMED in the model are drawn as envelopes, not as the real part.

Projected from docs/v9/the60_v9/src/params.py + model.py (build123d) by hidden-line projection. No hand drafting; dimension text is written from the parameter values.