

STM32F4x1Cx v2.0+


Pinout Diagram

Legend

POWER
GROUND
CPU PIN
PIN NAME
CONTROL

ANALOG
TIMER & CHANNEL
USART
SPI / I2S
SDIO (F411 Only)
I2C
CAN BUS
USB
MISC
BOARD HARDWARE
5V Tolerant
3.3V (F411)
PWM Pin

PB10	SCL2	SD_D7	SCK2	T2_CH3
PB2	BOOT1			
PB1	ADC9			LSM9DS1 CSM
PB0	ADC8			LSM9DS1 CSAG
PA7	ADC7			LSM9DS1 SDO
PA6	ADC6			LSM9DS1 SDI
PA5	ADC5			LSM9DS1 SCL
PA4	ADC4	CK2	NSS1 NSS3	
PA3	ADC3	RX2		
PA2	ADC2	TX2		
PA1	ADC1	RTS2	MOSI4 (F411)	
PA0	ADC0	CTS2		Buzzer
	NRST			
PC15				OSC32 OUT
PC14				Green LED
PC13	LED BLUE			Red LED
	VBAT			

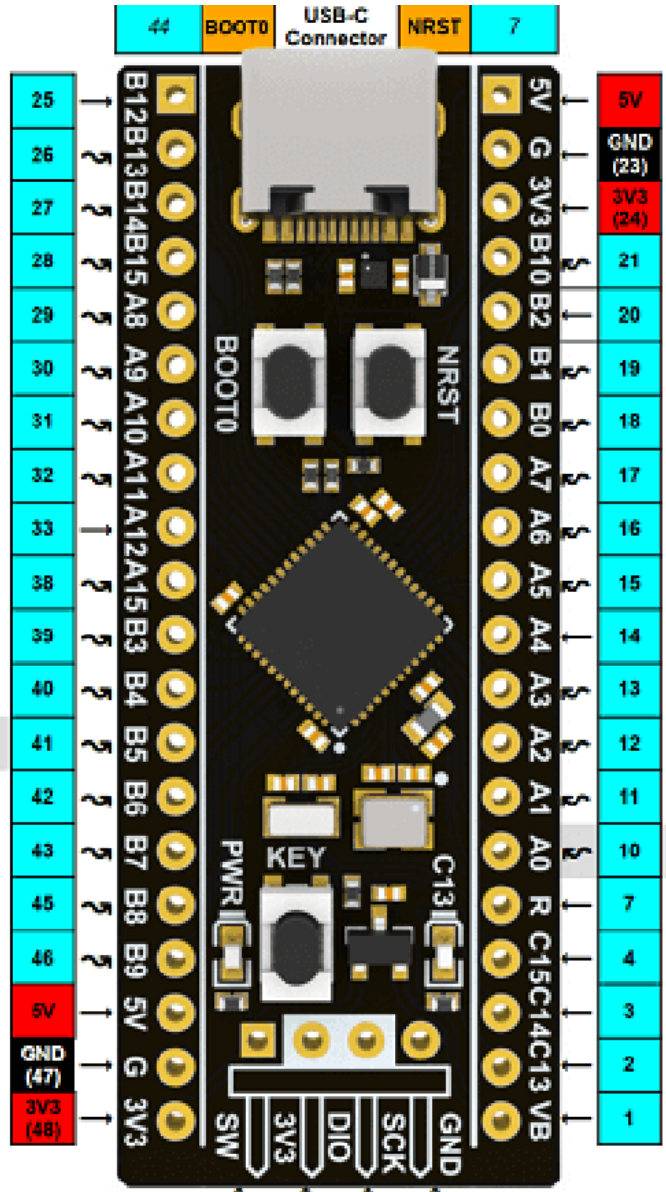

T1_BKIN	NSS2 NSS4	SCK3 (F411)	SMBA2
BME680 SCK			
BME680 SDI			
EXT_SD2			
RTC 50Hz RTC_REFIN	T1_CH3N	MOSI2	SD_CK
USB FS_SOF			
ESC PWM 1			
USB/OTG FS_VBUS			
ESC PWM 2			
USB FS_ID			
ESC PWM 3			
USB FS_DM(-)			
ESC PWM 4			
USB FS_DP(+)			
NRF24L01 CE			
JTDO-S			
NRF24L01 CSN			
JTR			
NRF24L01 SCK			
NRF24L01 MISO			
NRF24L01 MOSI			

T4_CH1		TX1	SCL1
T4_CH2	SD_D0	RX1	SDA1
T4_CH3 T10_CH1	MOSI5 (F411)	SD_D4	SCL1 (SDA3)
T4_CH4 T11_CH1	NSS2	SD_D5	SDA1 (SDA2)

Notes:
TIM6 & 7 are only used by DAC and don't have any pins
All pins are 5V tolerant on F401
Pins 10 and 41 on F411 are 3.3V only.