

IUS
INSTITUT
UNIVERSITAIRE
DES SCIENCES

FACULTÉ DES SCIENCES ET TECHNOLOGIES

(FST)

TROISIÈME ANNÉE

TD 3 – Réseaux

Étudiant : FELIX Loudhens Alexander

Professeur : Ismaël SAINT AMOUR

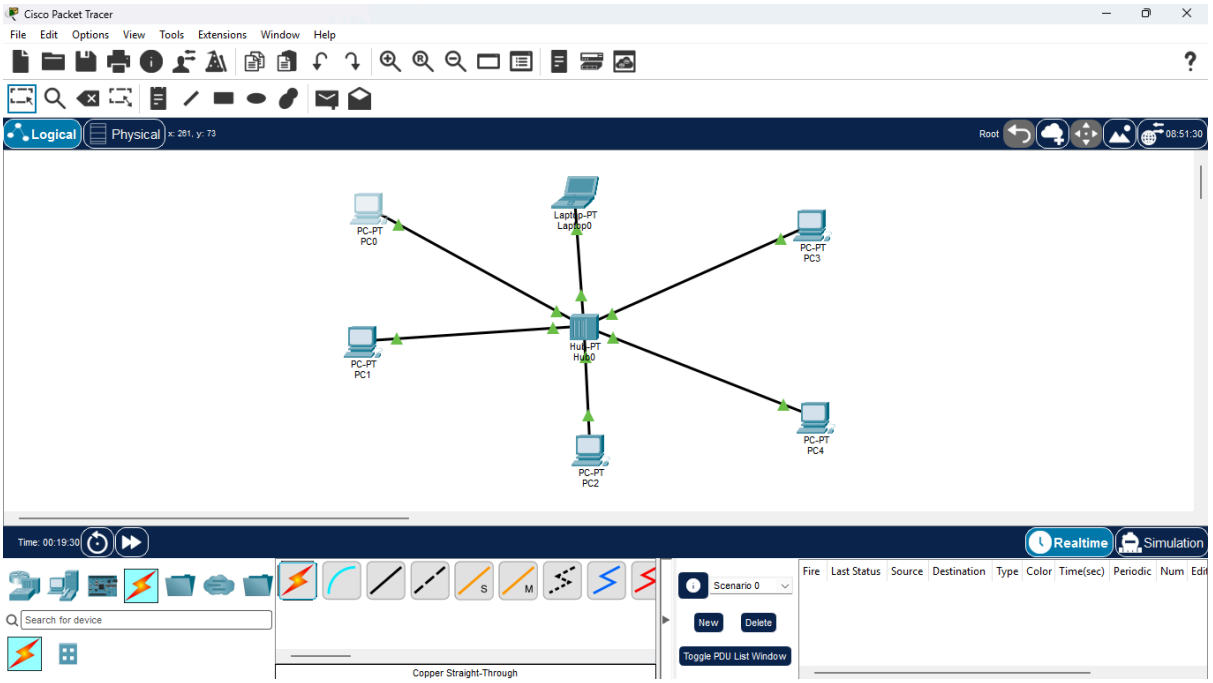
Le 2 Novembre 2026

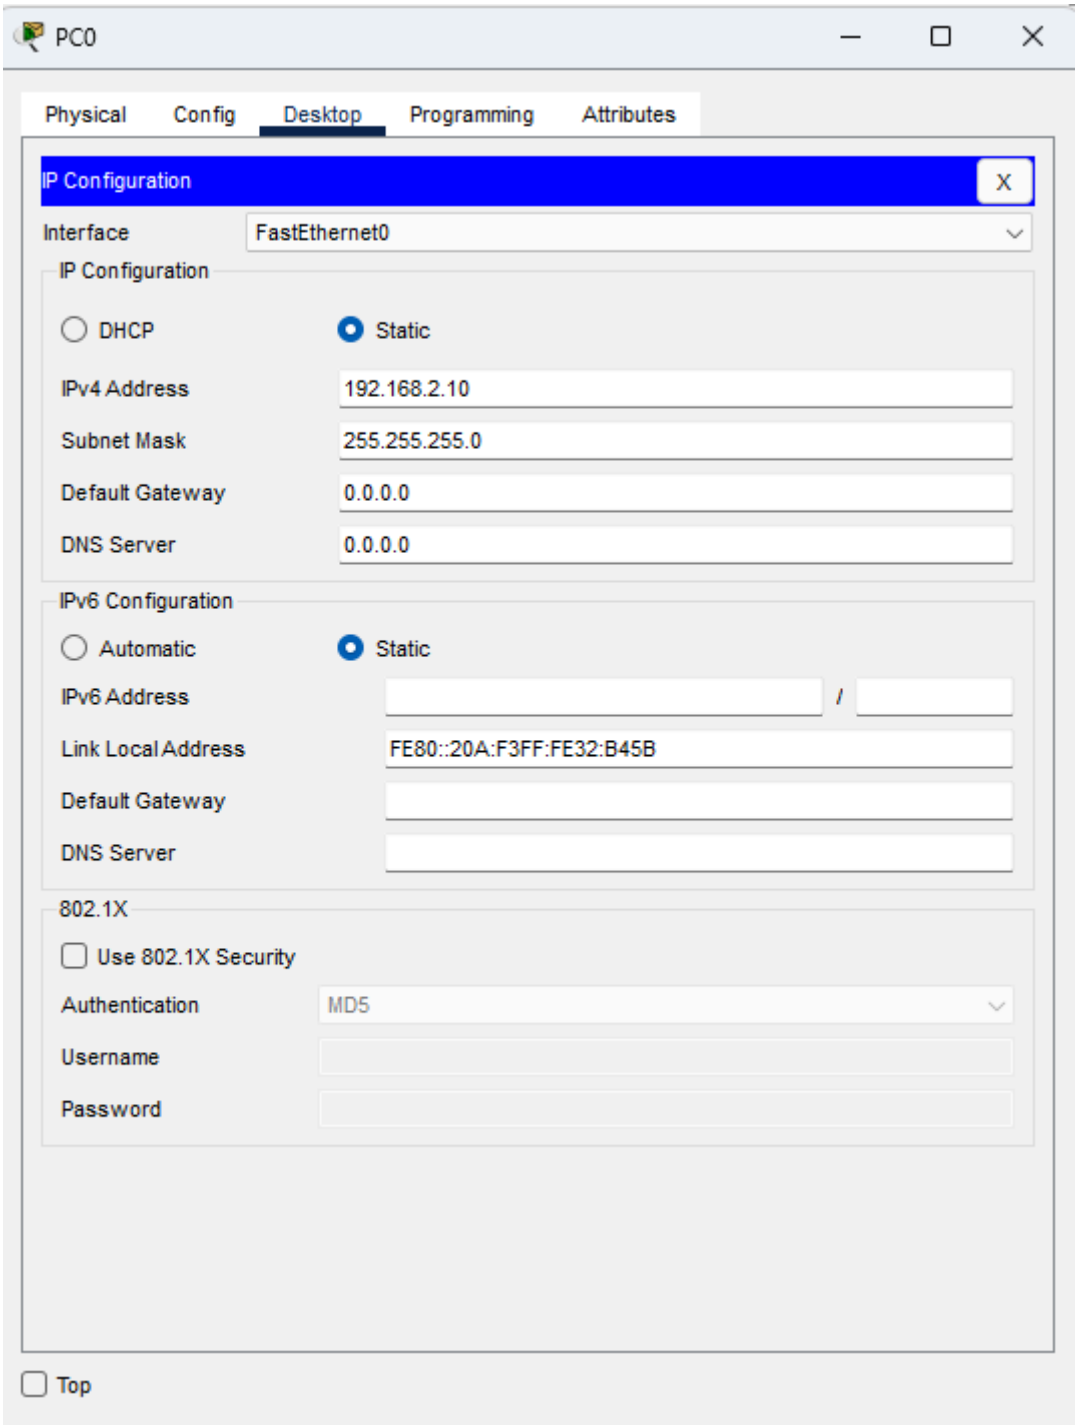
Objectif de ce TD

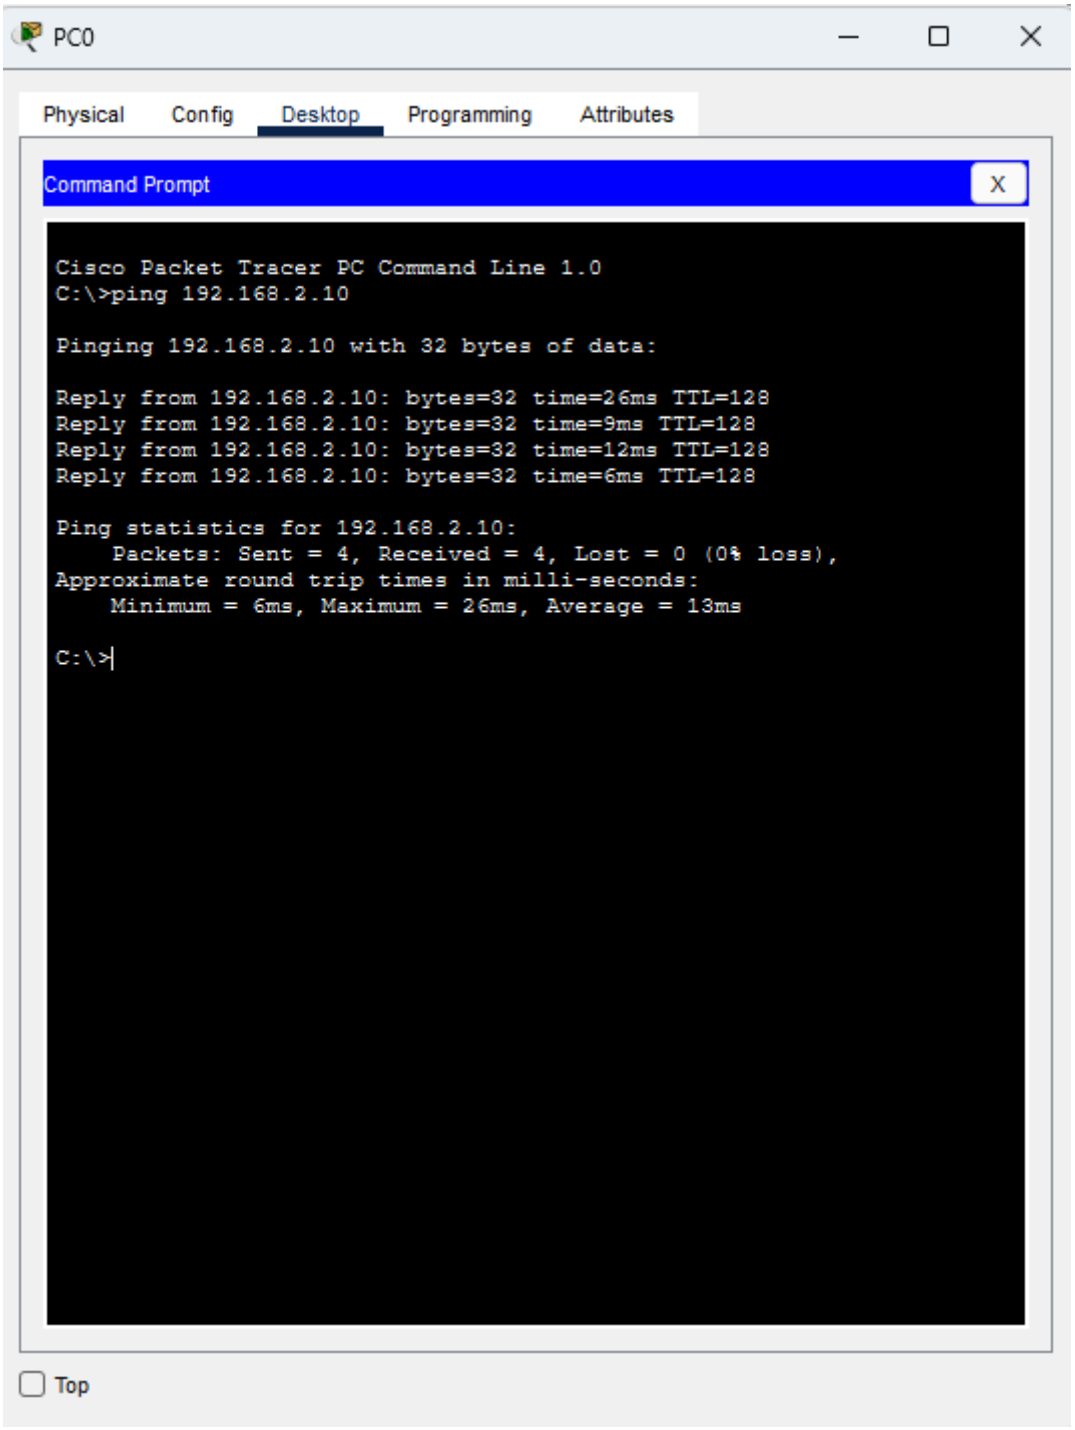
Dans ce TD je devais en utilisant Cisco Packet Tracer, reproduire les topologies données et de faire l'adressage IPV4 de certains et IPV6 des autres avec les tests de connectivité de chacun puis de concevoir moi même une des topologies connue et de faire son adressage ainsi que son test de connectivité.

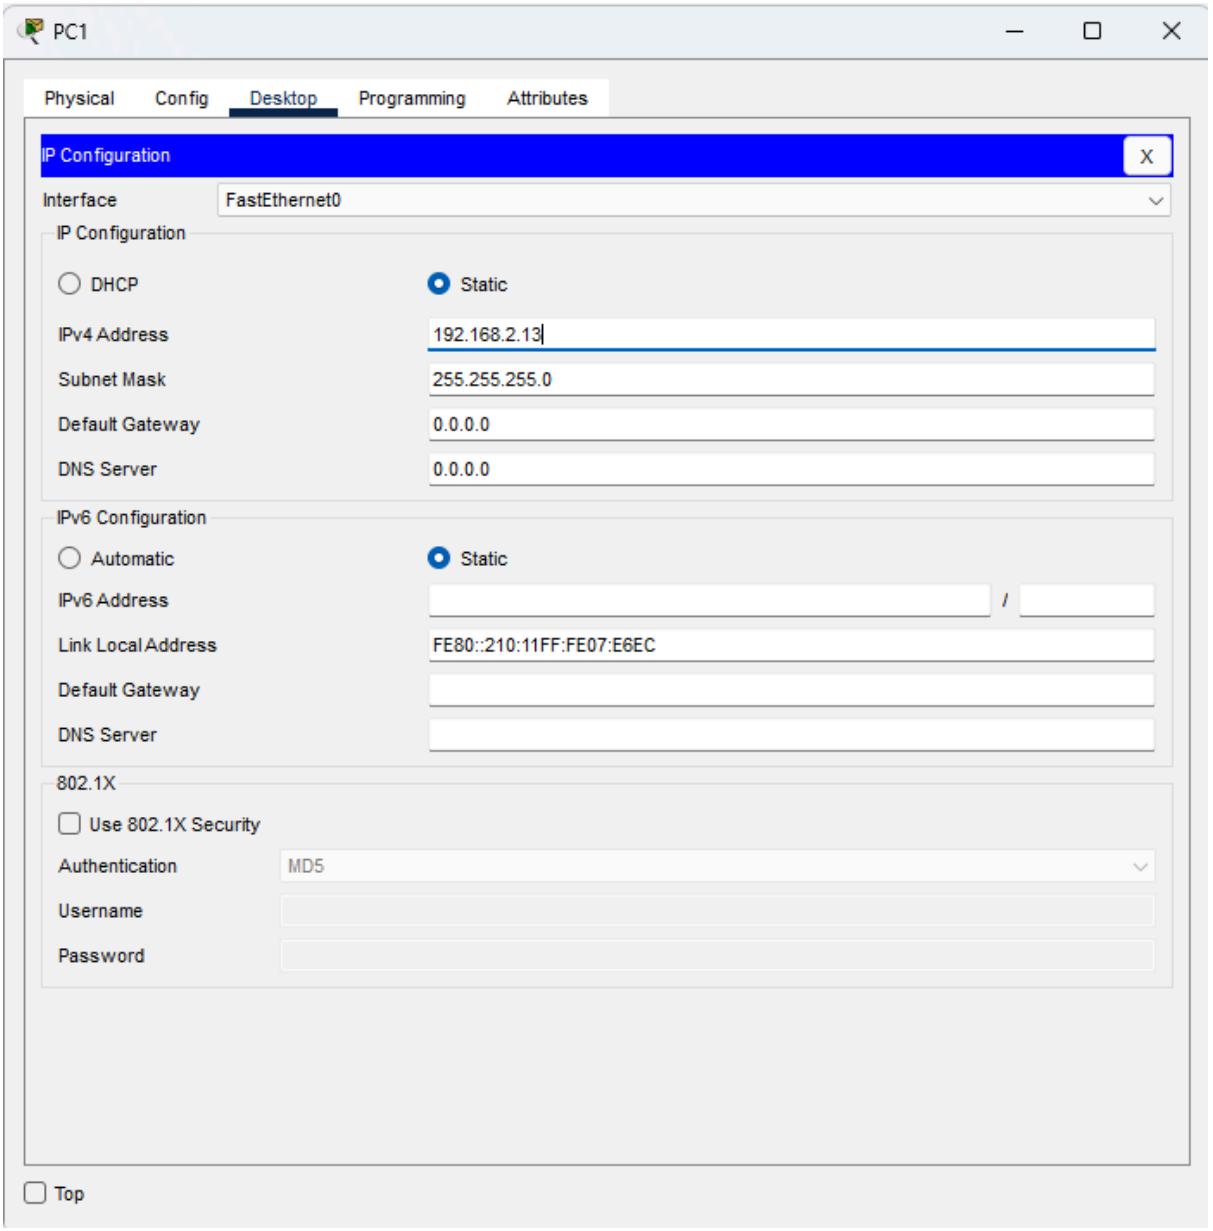
Dans ce TD j'ai organisé les 3 premiers exercices de façon à ce que chaque capture d'écran montrant une configuration d'adresse soit suivie de son test de connectivité puis les deux derniers exercices sont organisés de façon à montrer les configuration d'adresse de chaque appareil successivement puis les tests de connectivité des adresses. Et pour la liste d'adresse IPV6 que vous avez fourni il semble qu'une erreur ait été glissée dans le format d'écriture de l'adresse, de ce fait je me suis permis de ne pas utiliser celui que vous avez fourni car ca envoyait des messages d'erreurs.

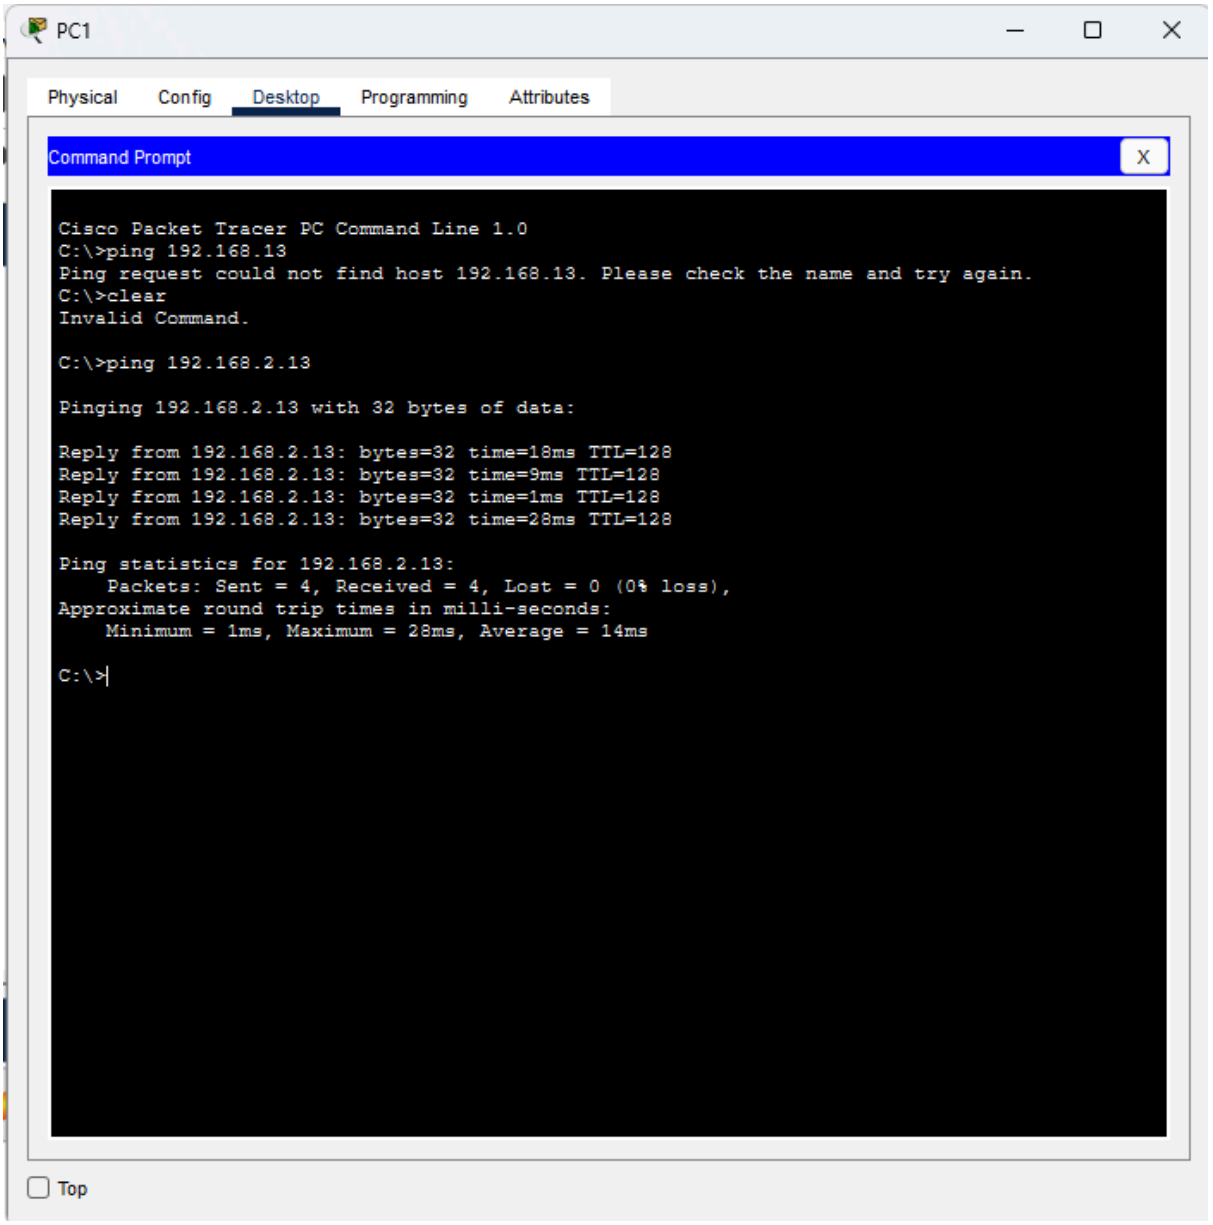
Topologie 1

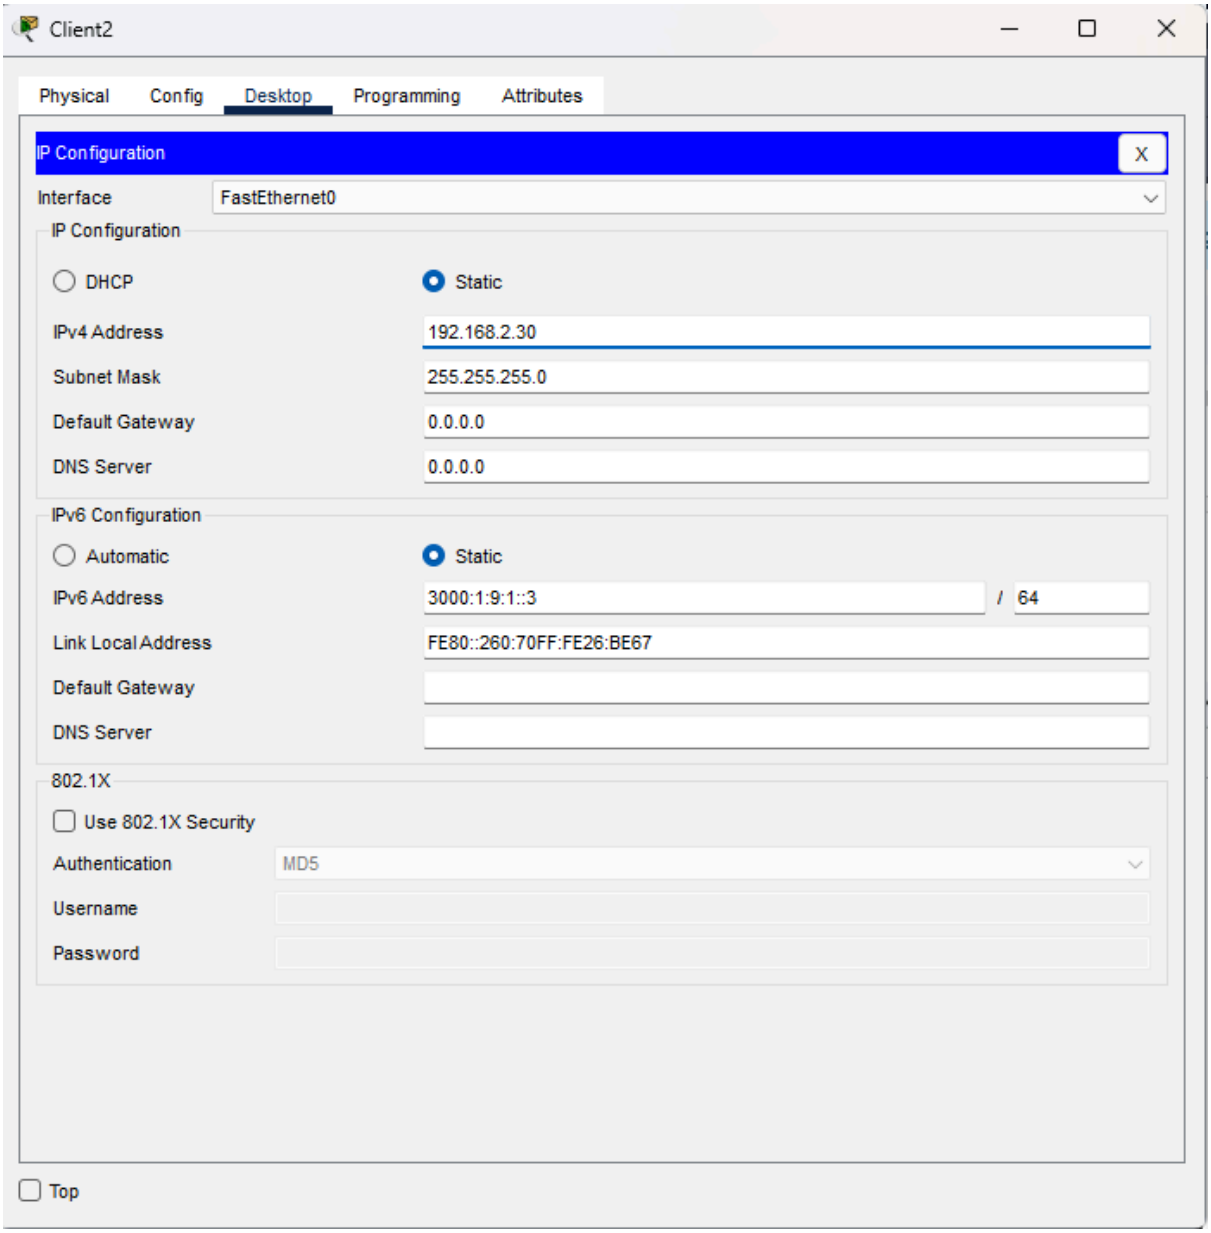


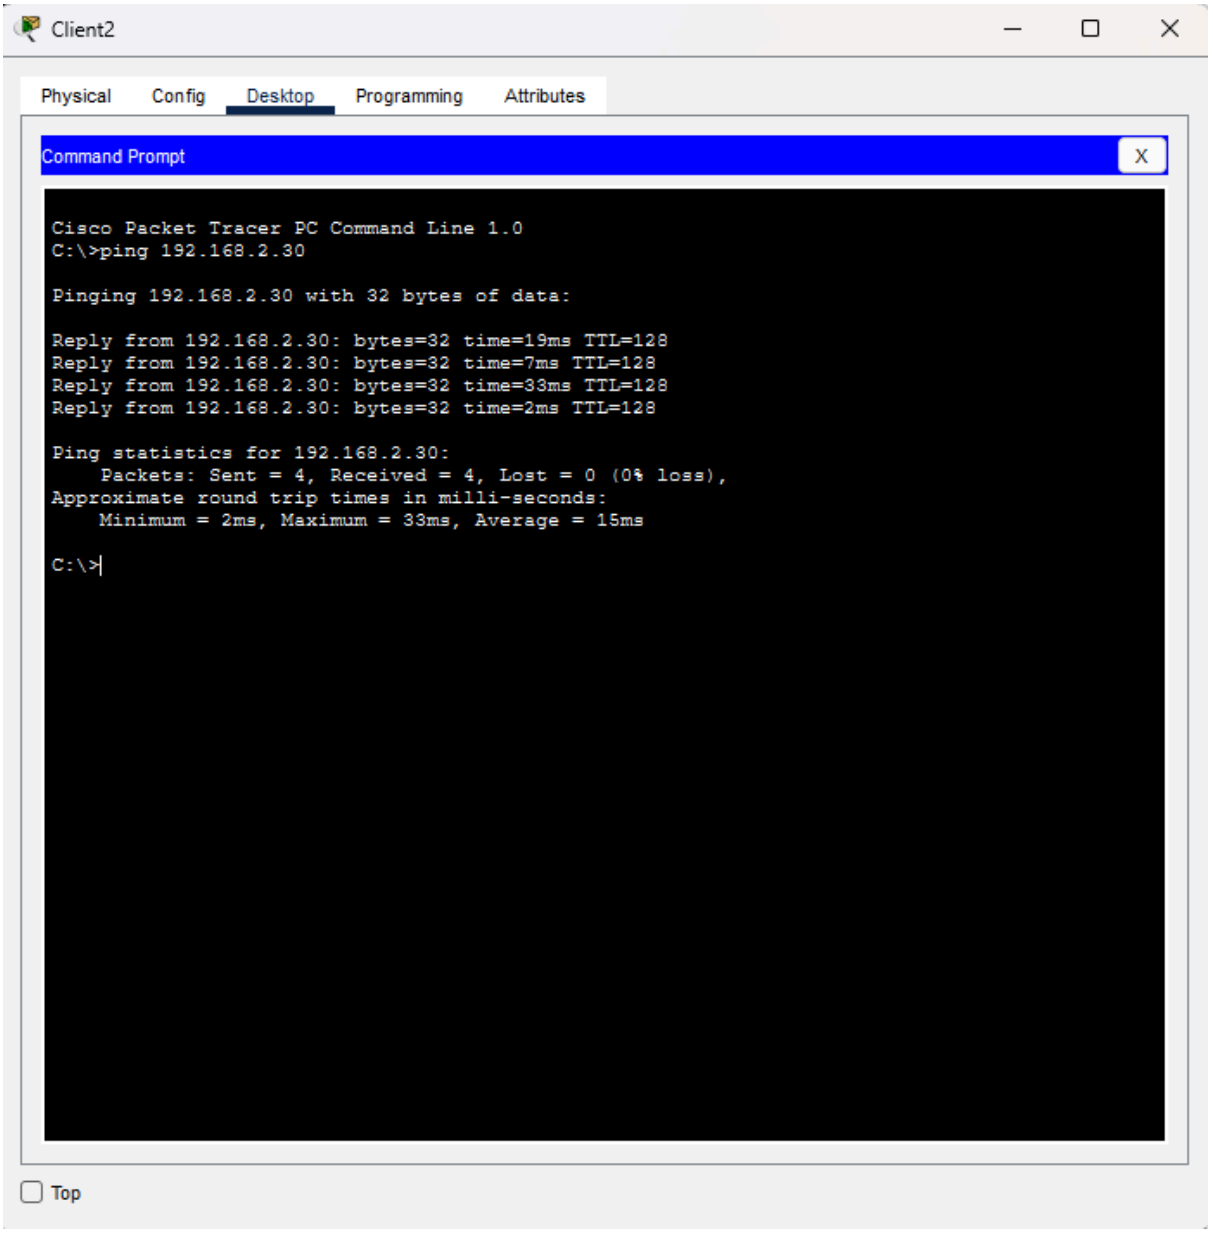

PC0
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.2.10
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::20A:F3FF:FE32:B45B
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

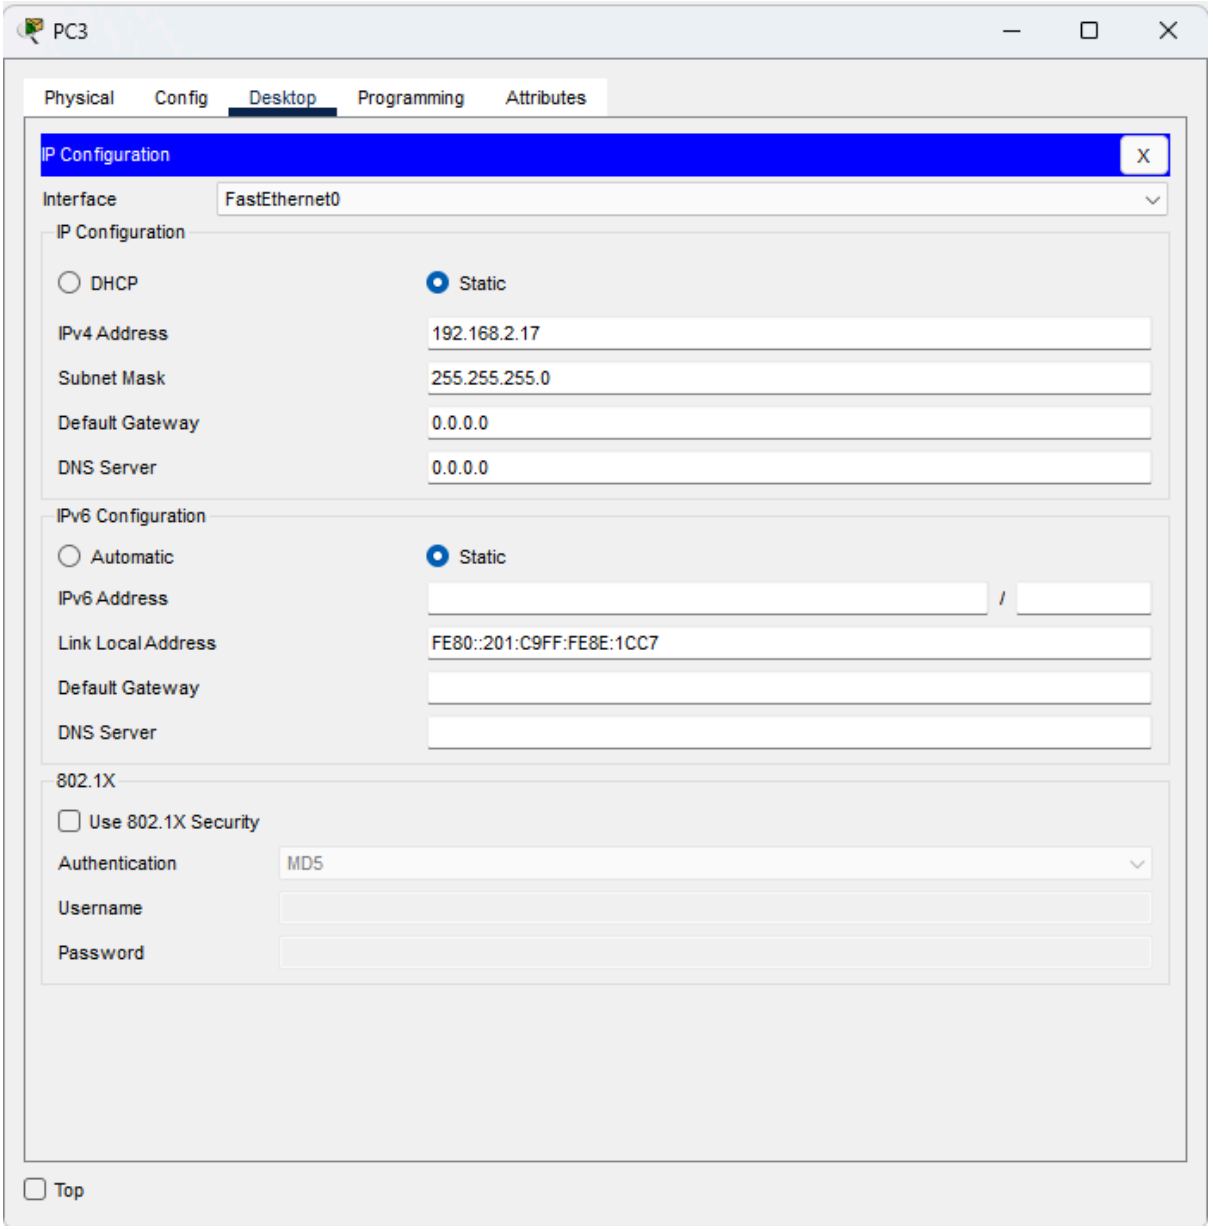

PC0
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.10
Pinging 192.168.2.10 with 32 bytes of data:
Reply from 192.168.2.10: bytes=32 time=26ms TTL=128
Reply from 192.168.2.10: bytes=32 time=9ms TTL=128
Reply from 192.168.2.10: bytes=32 time=12ms TTL=128
Reply from 192.168.2.10: bytes=32 time=6ms TTL=128
Ping statistics for 192.168.2.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 6ms, Maximum = 26ms, Average = 13ms
C:\>
Top

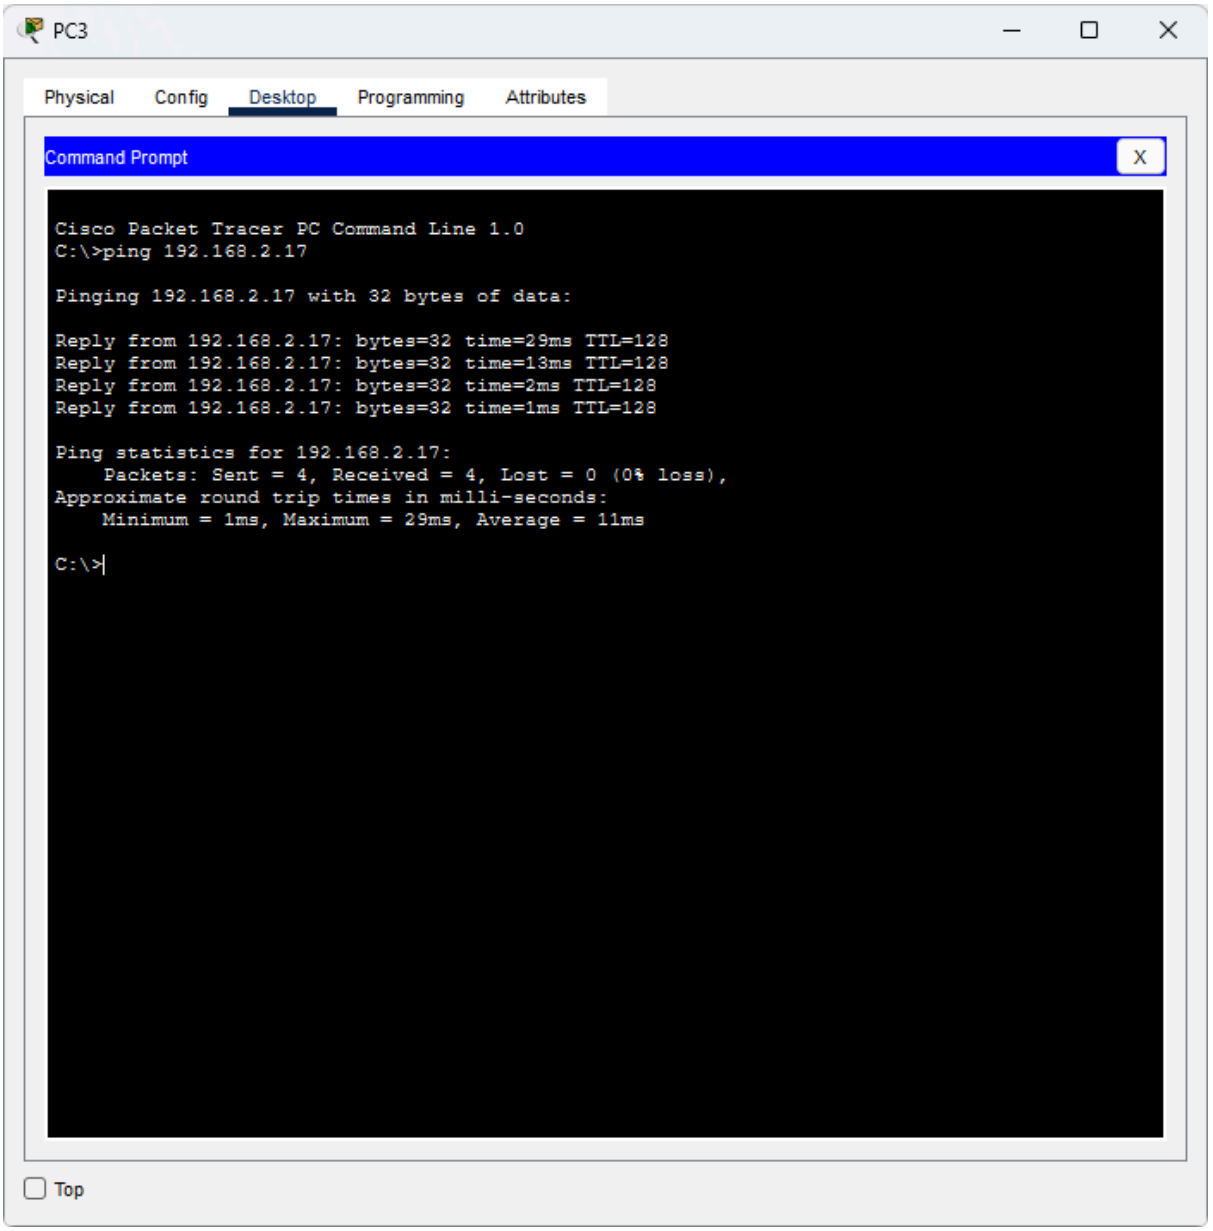

PC1
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.2.13
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::210:11FF:FE07:E6EC
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

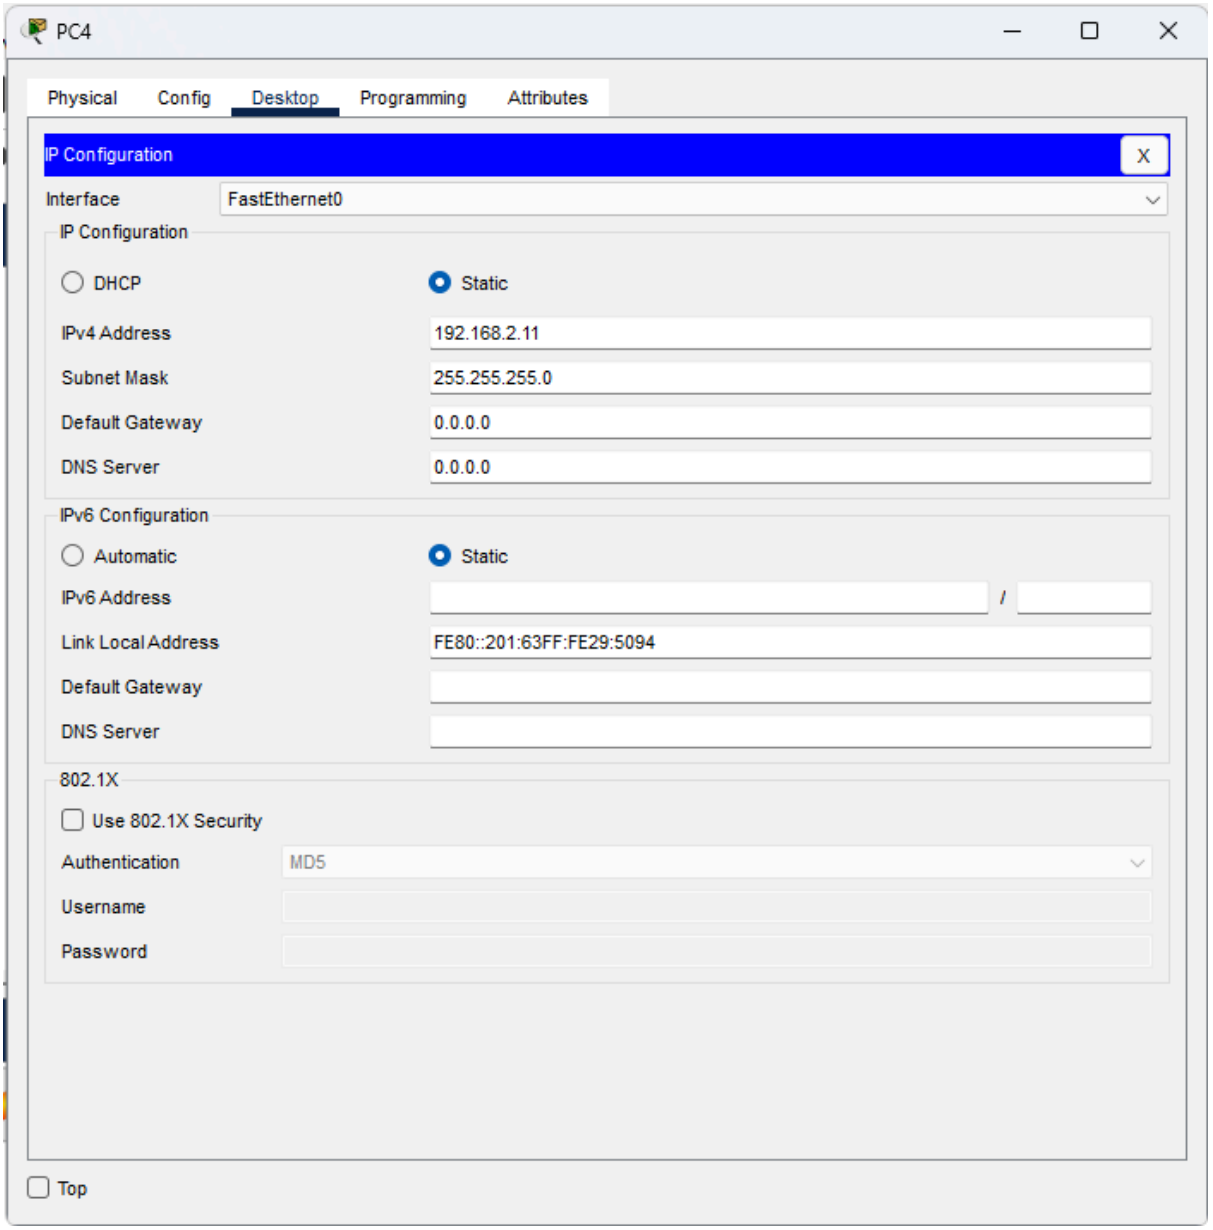

PC1
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.13
Ping request could not find host 192.168.13. Please check the name and try again.
C:\>clear
Invalid Command.
C:\>ping 192.168.2.13
Pinging 192.168.2.13 with 32 bytes of data:
Reply from 192.168.2.13: bytes=32 time=18ms TTL=128
Reply from 192.168.2.13: bytes=32 time=9ms TTL=128
Reply from 192.168.2.13: bytes=32 time=1ms TTL=128
Reply from 192.168.2.13: bytes=32 time=28ms TTL=128
Ping statistics for 192.168.2.13:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 28ms, Average = 14ms
C:\>
Top

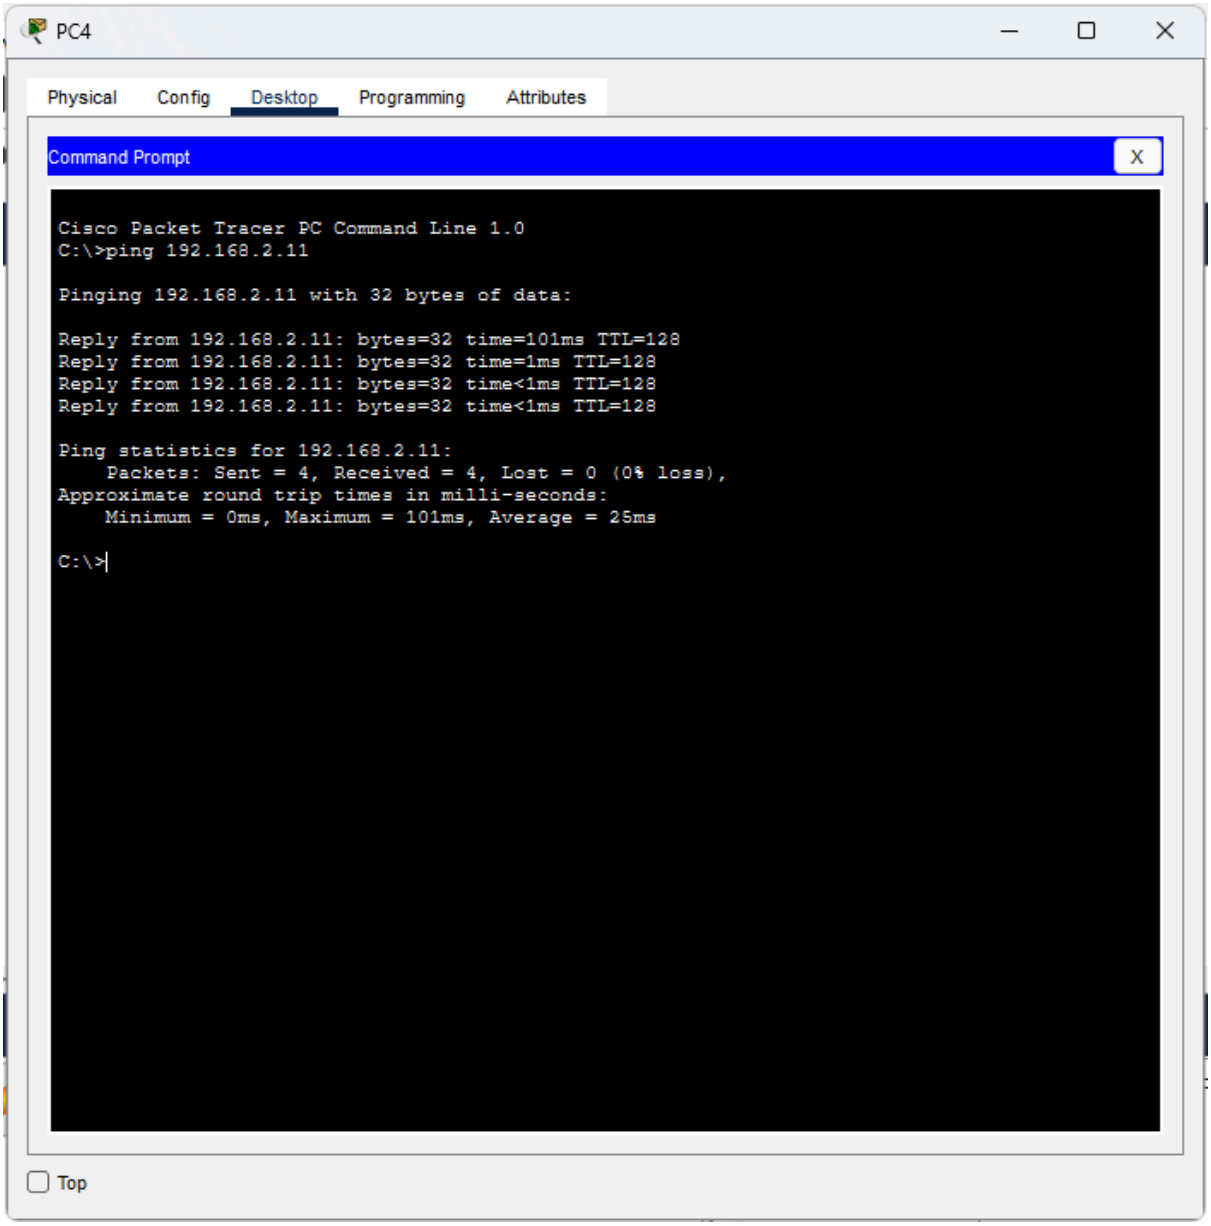

Client2
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.2.30
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:1:9:1::3
/ 64
Link Local Address
FE80::260:70FF:FE26:BE67
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

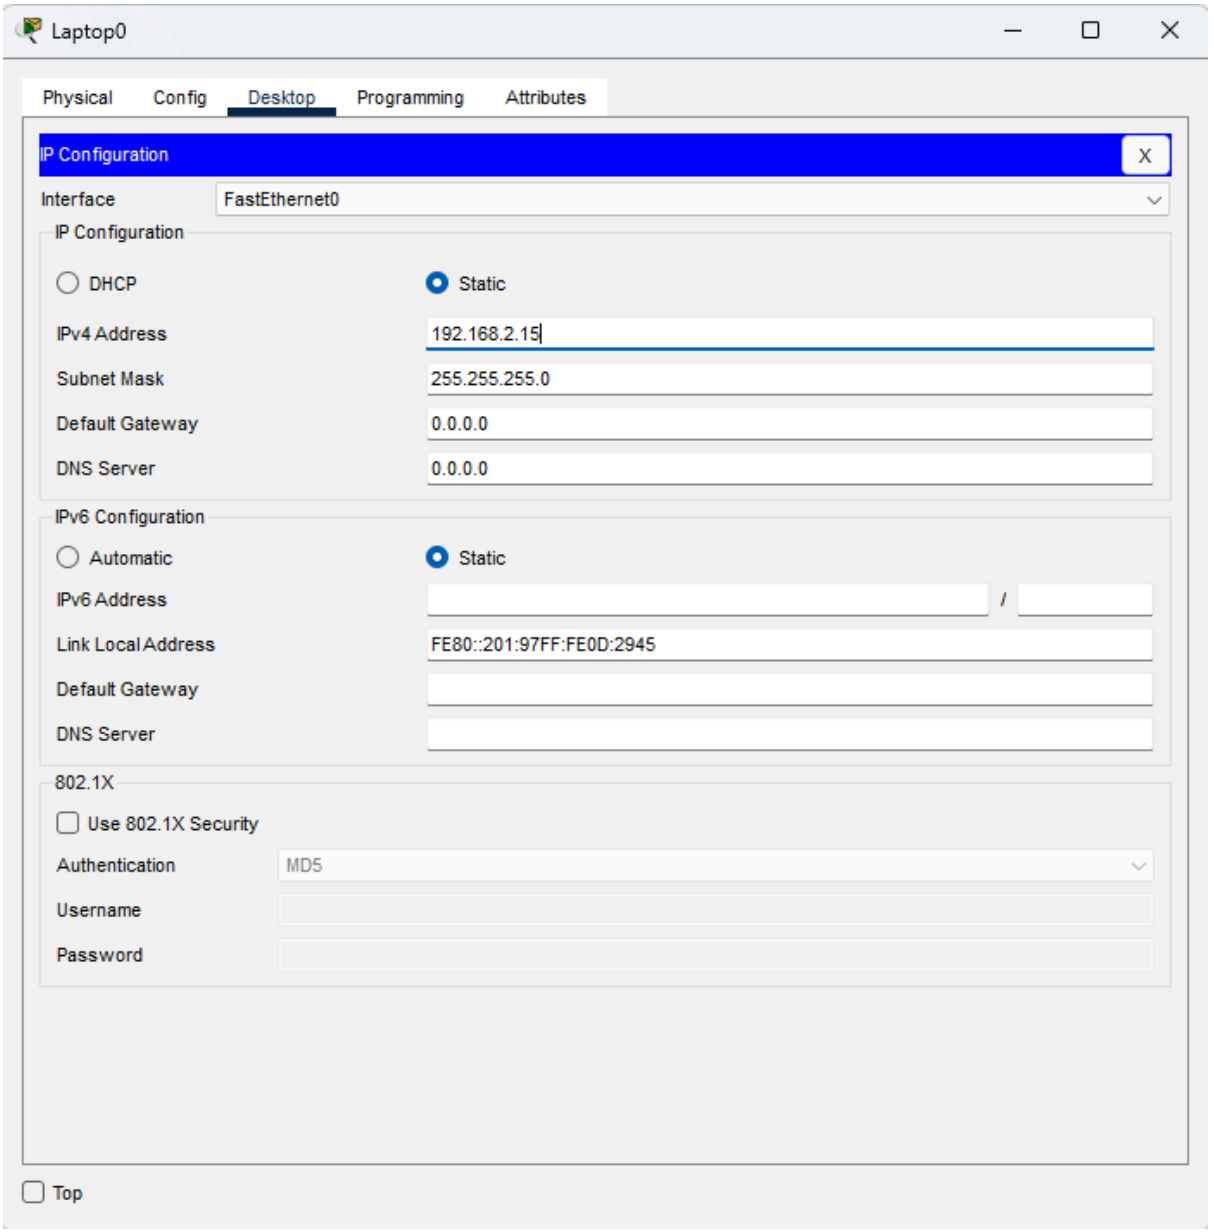

Client2
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.30
Pinging 192.168.2.30 with 32 bytes of data:
Reply from 192.168.2.30: bytes=32 time=19ms TTL=128
Reply from 192.168.2.30: bytes=32 time=7ms TTL=128
Reply from 192.168.2.30: bytes=32 time=33ms TTL=128
Reply from 192.168.2.30: bytes=32 time=2ms TTL=128
Ping statistics for 192.168.2.30:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 33ms, Average = 15ms
C:\>
Top


PC3
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.2.17
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::201:C9FF:FE8E:1CC7
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

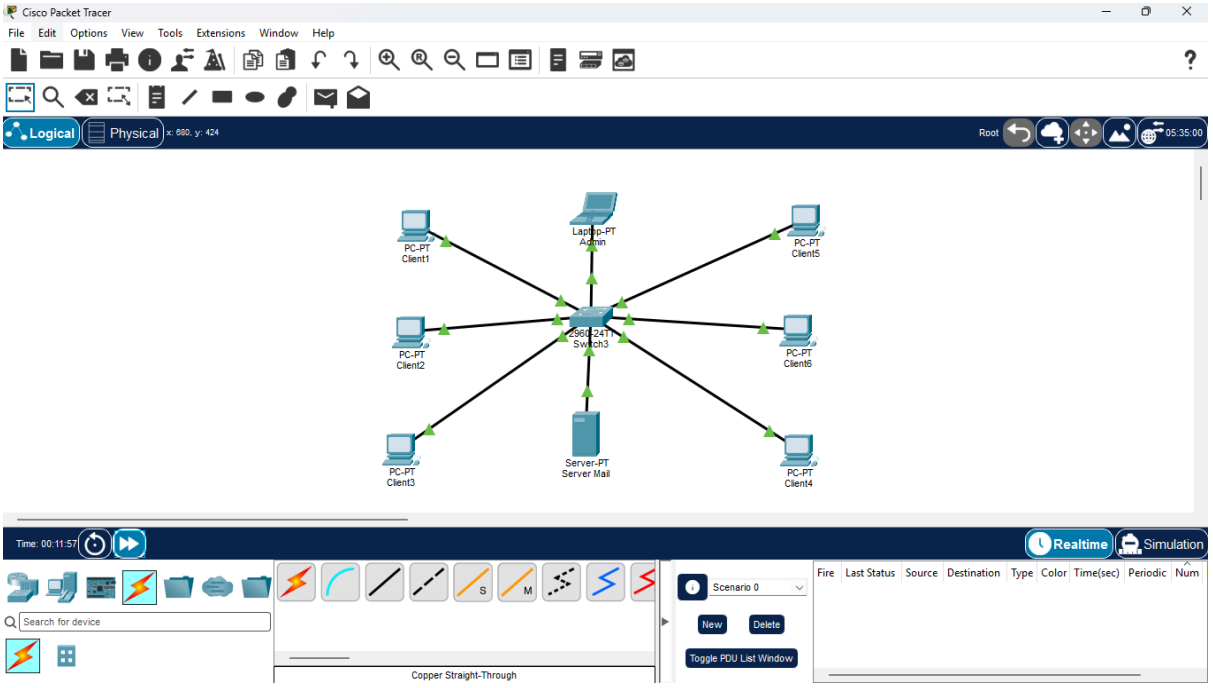

PC3
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.17
Pinging 192.168.2.17 with 32 bytes of data:
Reply from 192.168.2.17: bytes=32 time=29ms TTL=128
Reply from 192.168.2.17: bytes=32 time=13ms TTL=128
Reply from 192.168.2.17: bytes=32 time=2ms TTL=128
Reply from 192.168.2.17: bytes=32 time=1ms TTL=128
Ping statistics for 192.168.2.17:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 29ms, Average = 11ms
C:\>
Top

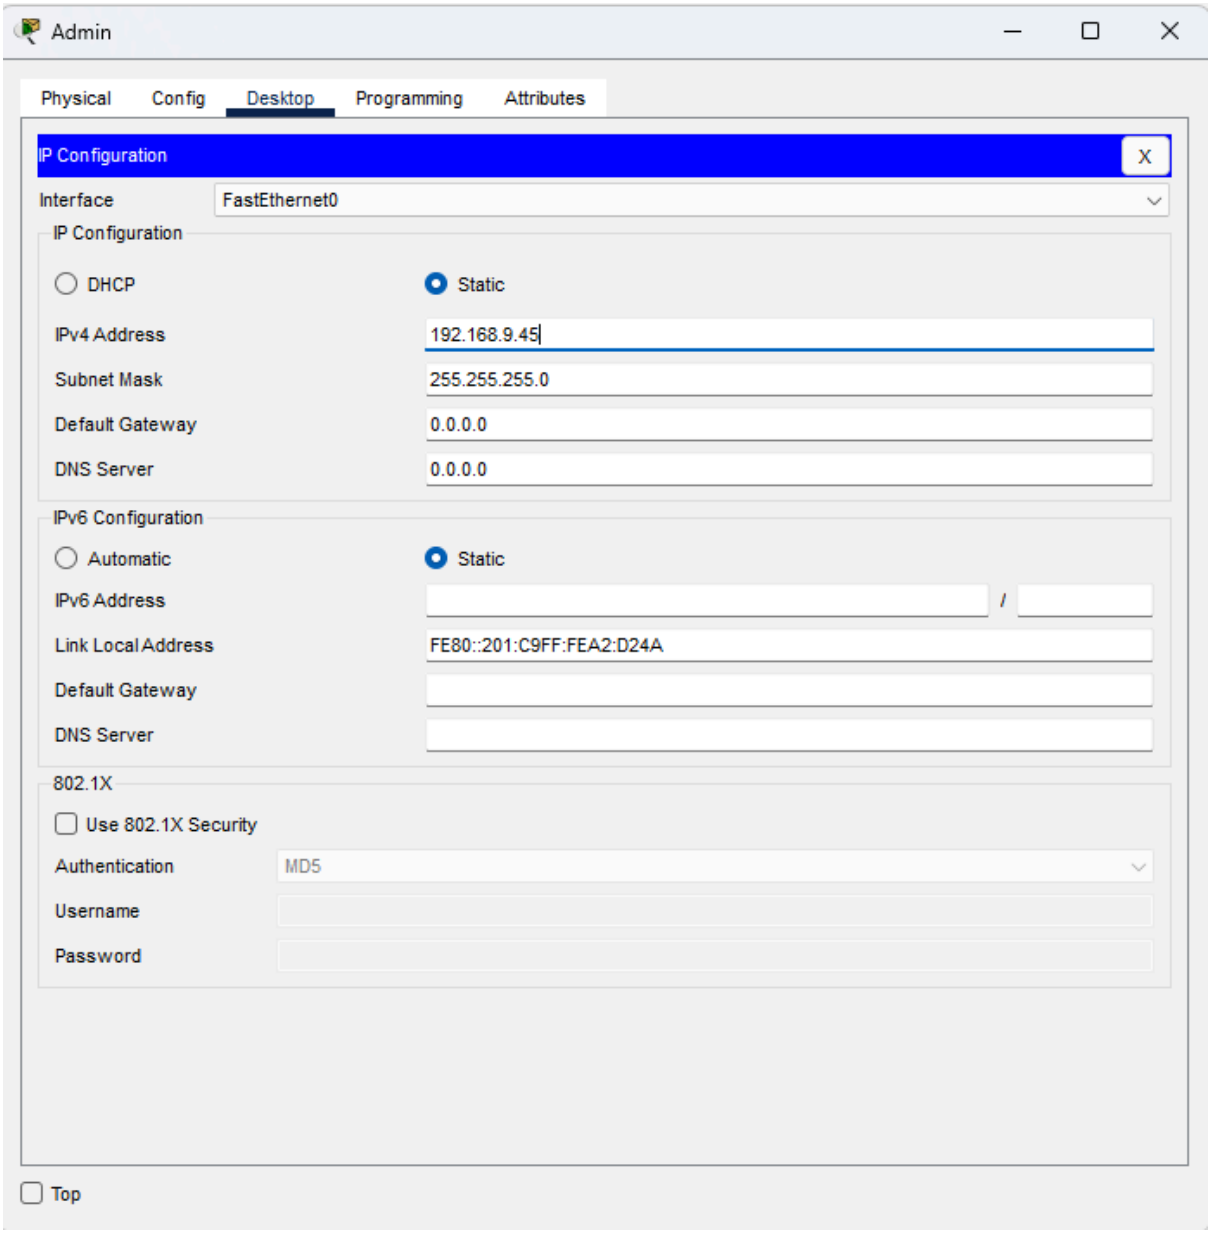

PC4
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.2.11
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::201:63FF:FE29:5094
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

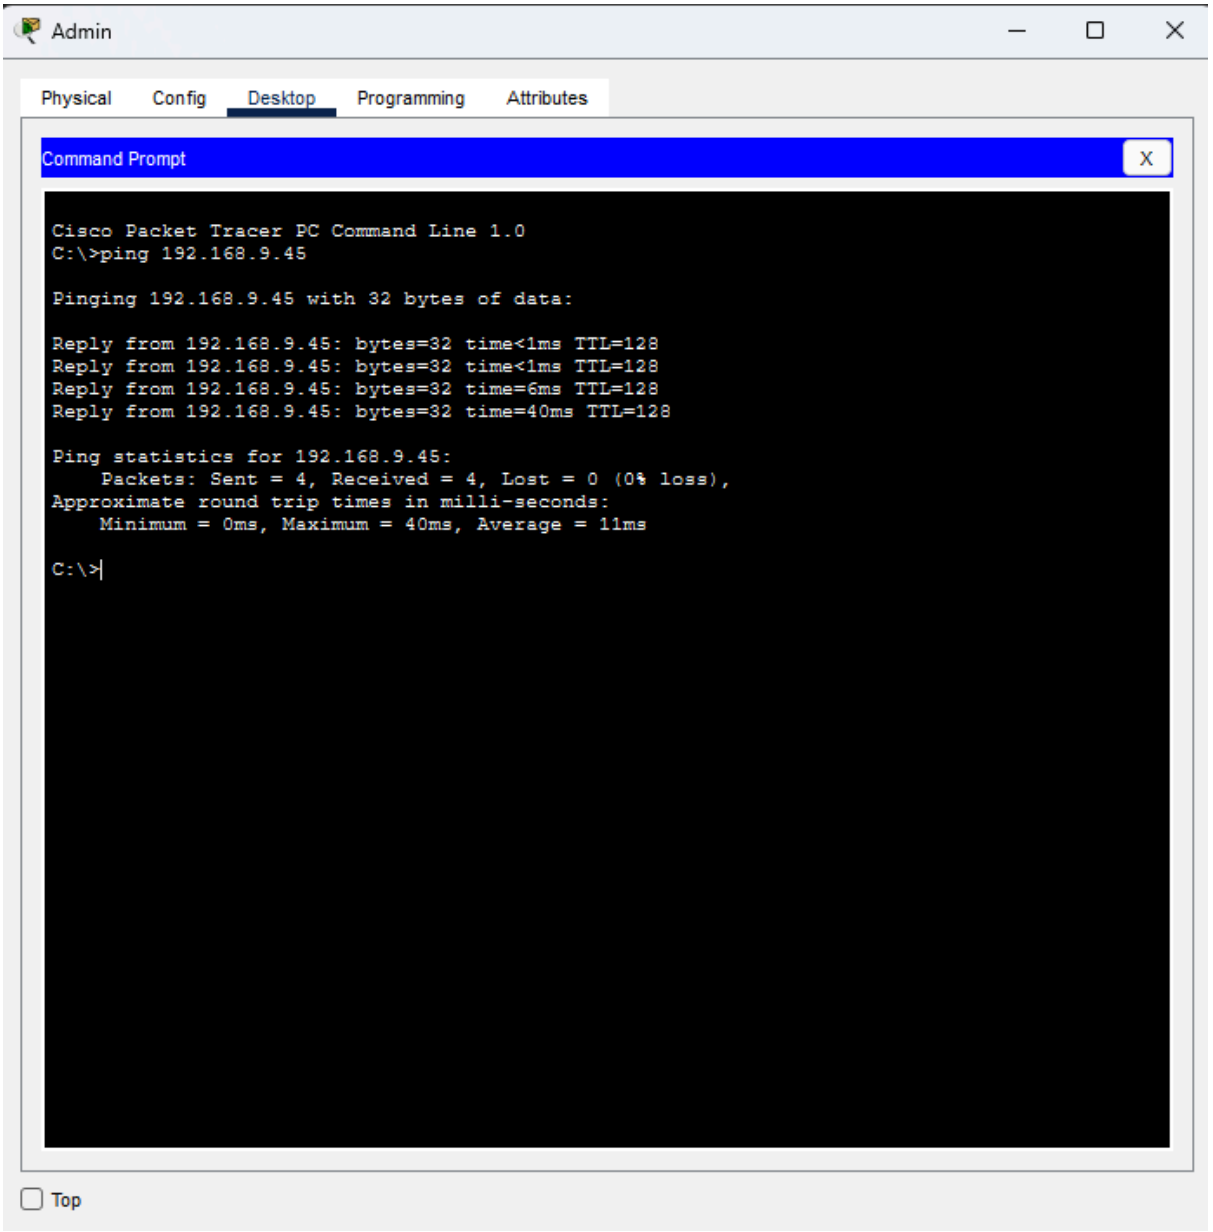

PC4
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.11
Pinging 192.168.2.11 with 32 bytes of data:
Reply from 192.168.2.11: bytes=32 time=101ms TTL=128
Reply from 192.168.2.11: bytes=32 time=1ms TTL=128
Reply from 192.168.2.11: bytes=32 time<1ms TTL=128
Reply from 192.168.2.11: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.2.11:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 101ms, Average = 25ms
C:\>
Top

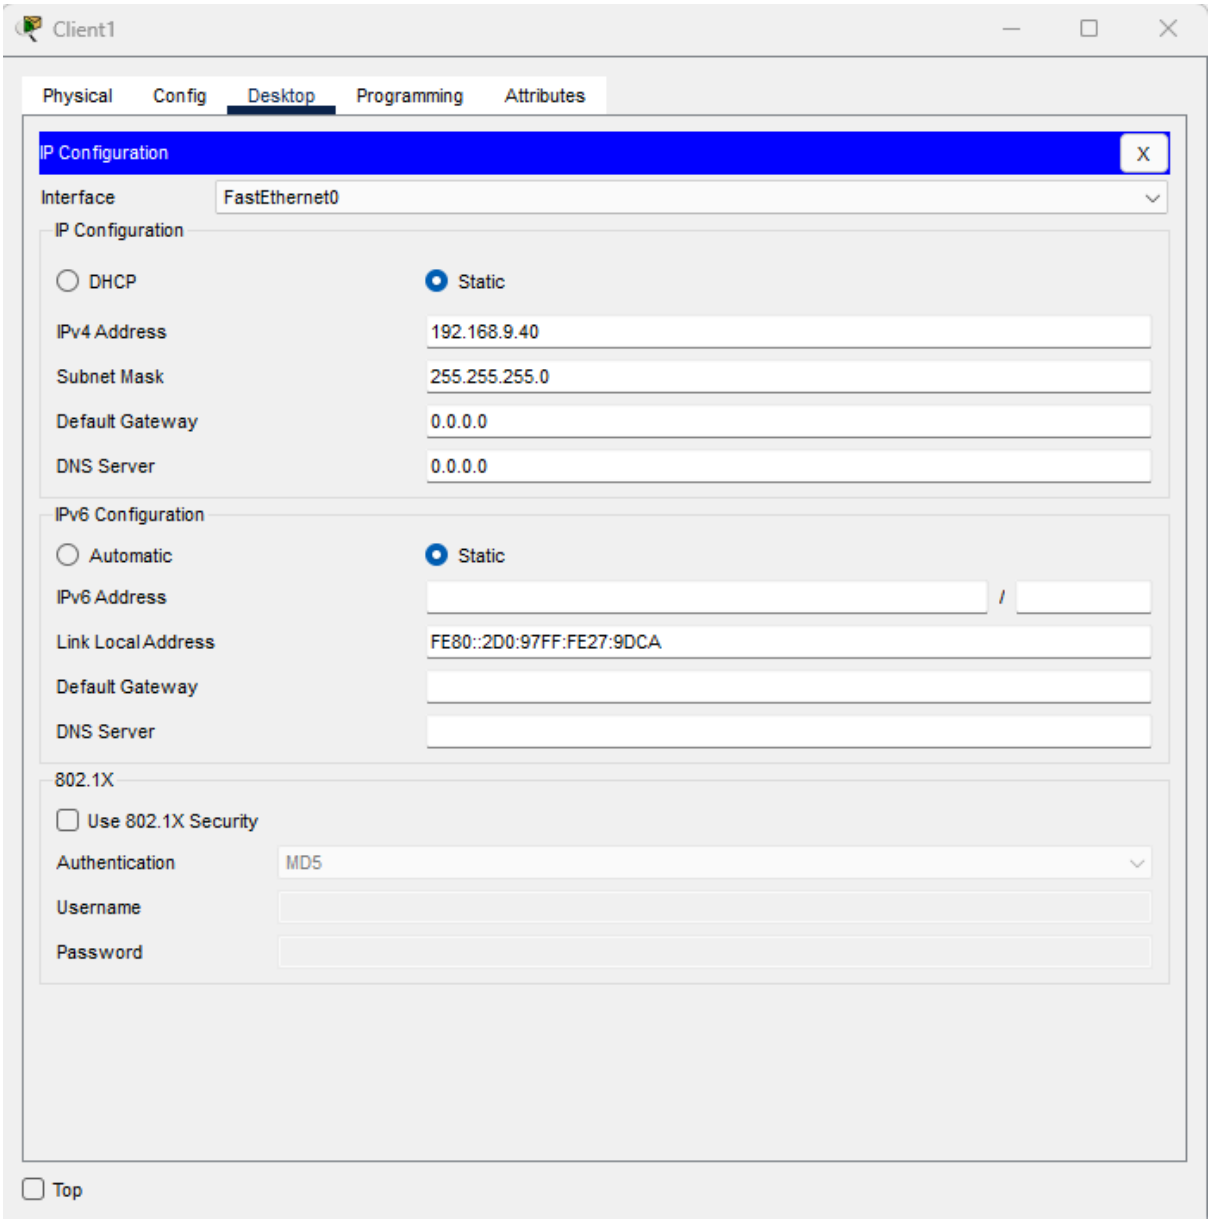

Laptop0
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.2.15
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::201:97FF:FE0D:2945
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

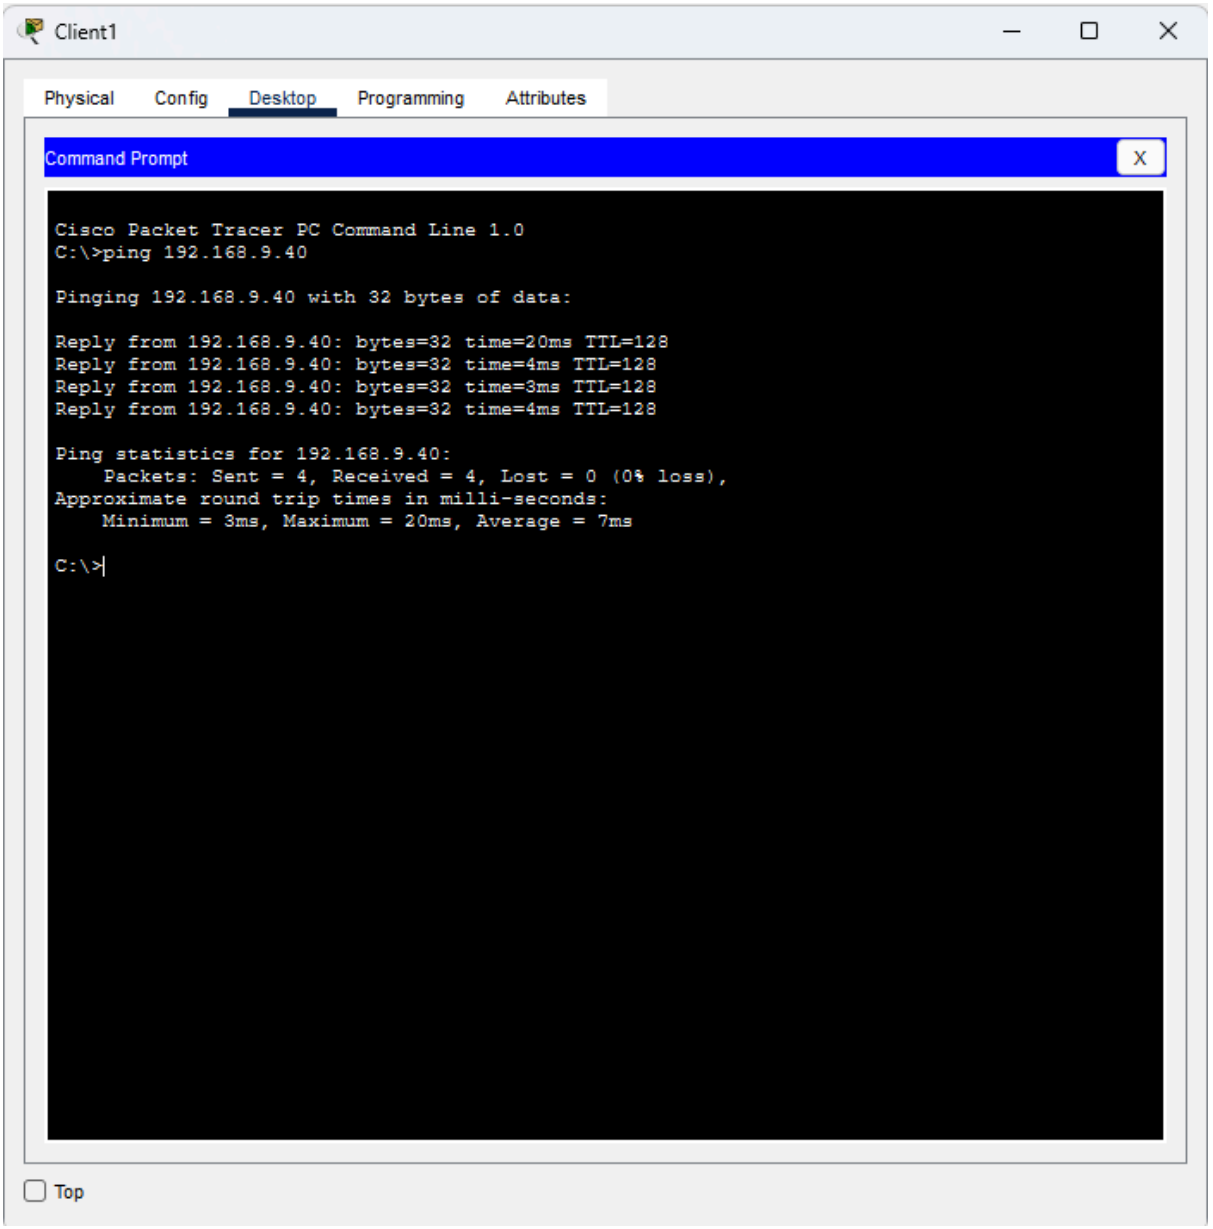
Topologie 2

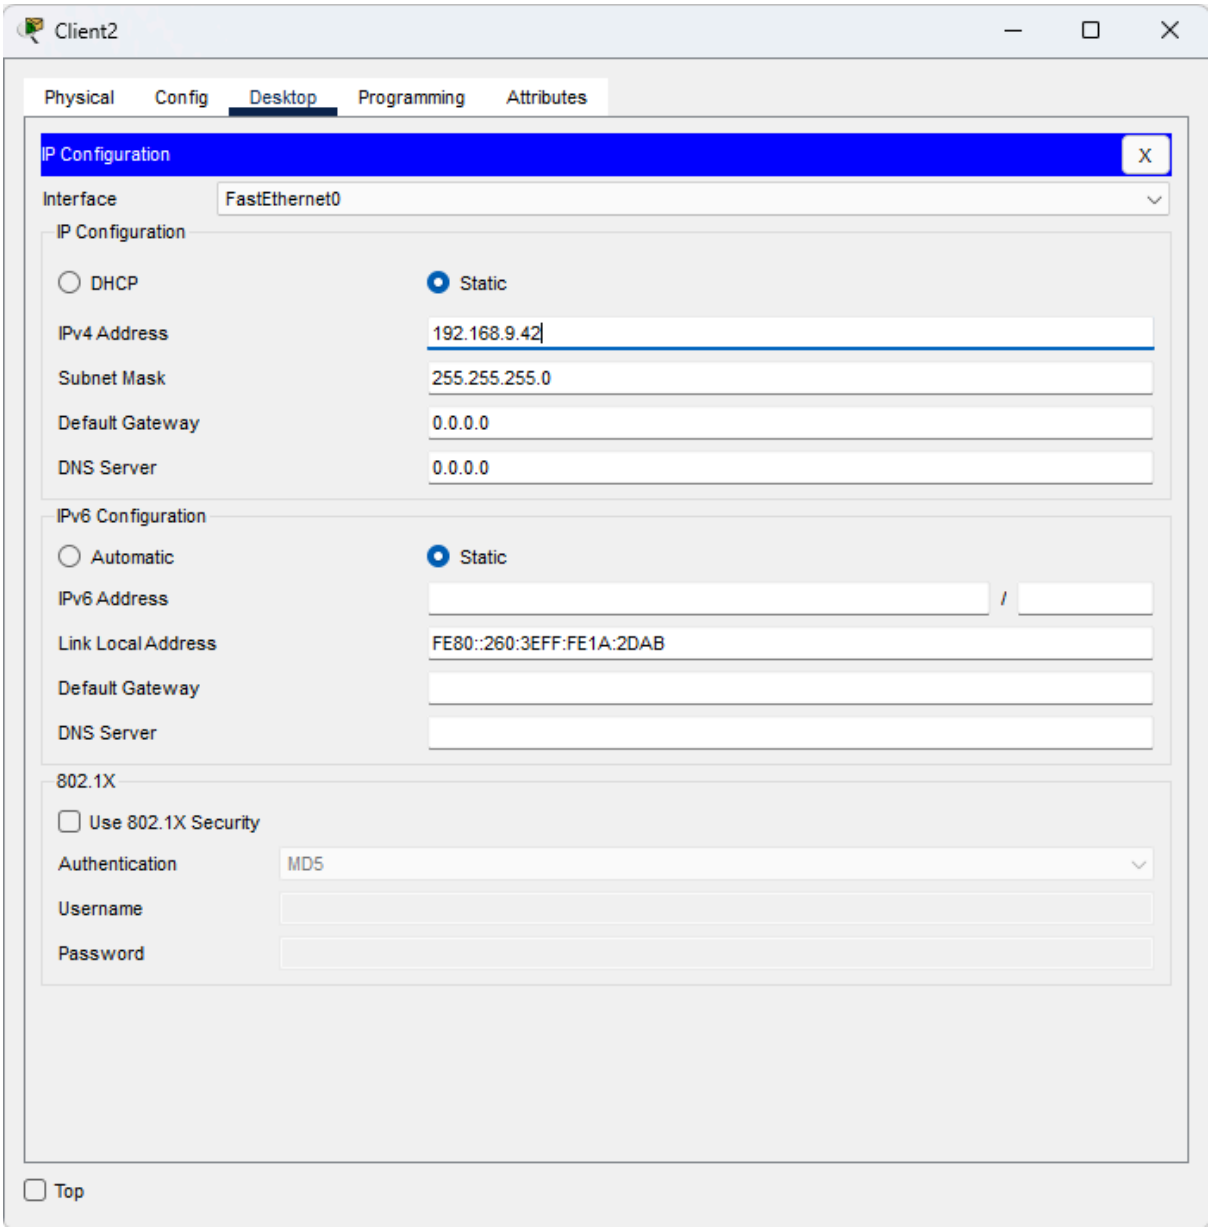

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
Root
05:35:00
PC-PT Client1
Laptop-PT Admin
PC-PT Client5
PC-PT Client2
2960-24TT Switch3
PC-PT Client6
PC-PT Client3
Server-PT Server Mail
PC-PT Client4
Time: 00:11:57
Realtime
Simulation
Search for device
Copper Straight-Through
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num

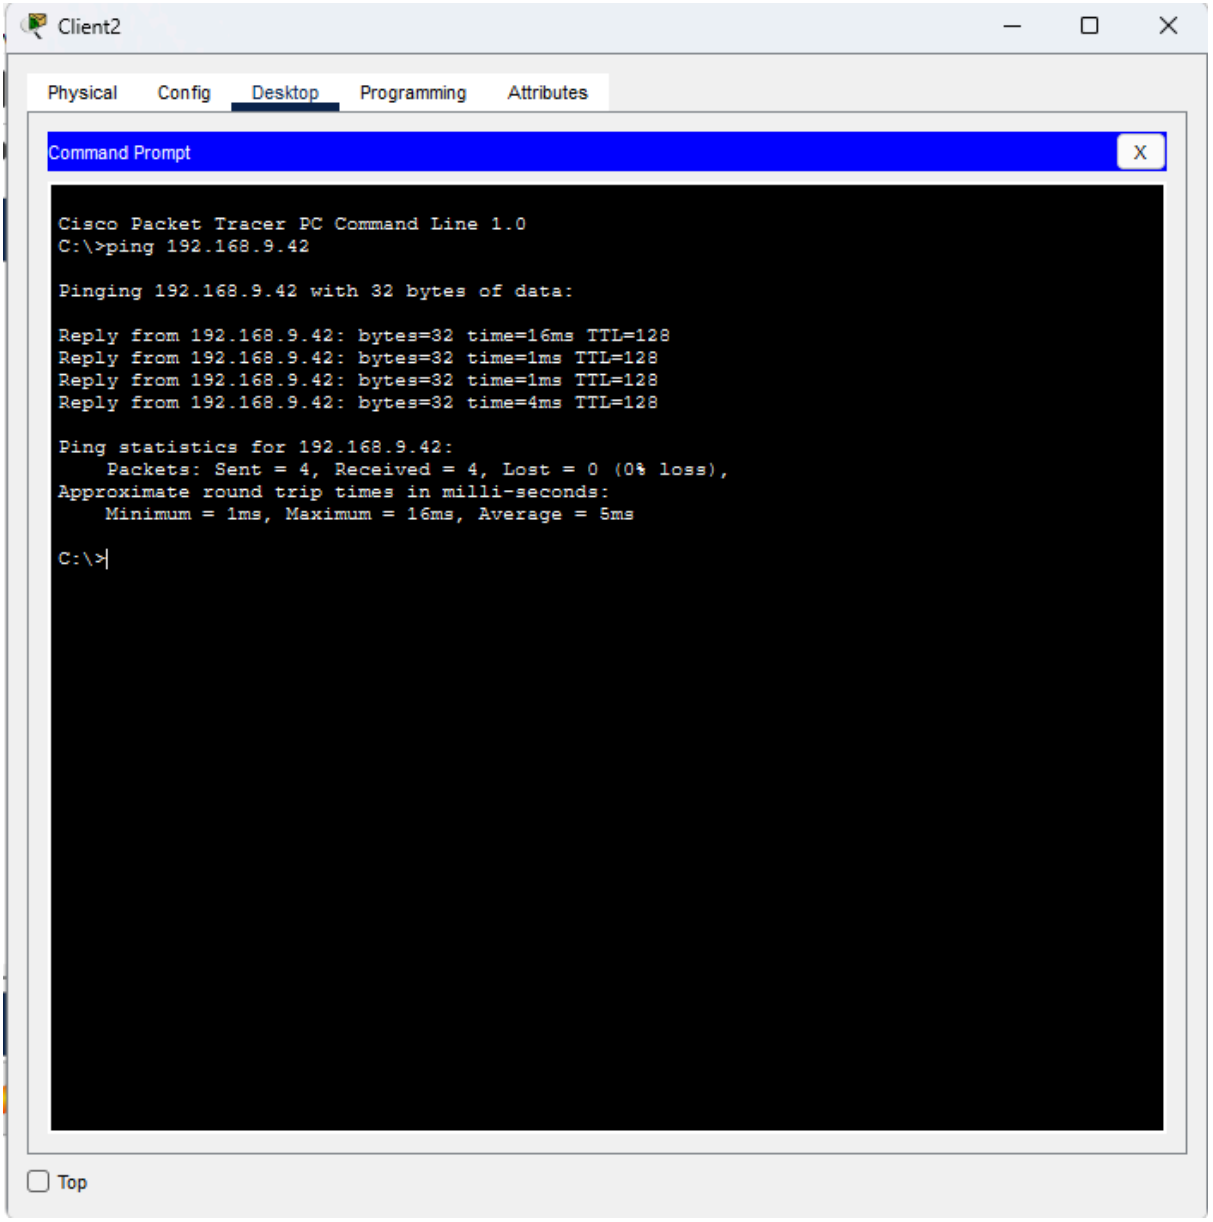

Admin
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.9.45
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::201:C9FF:FEA2:D24A
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

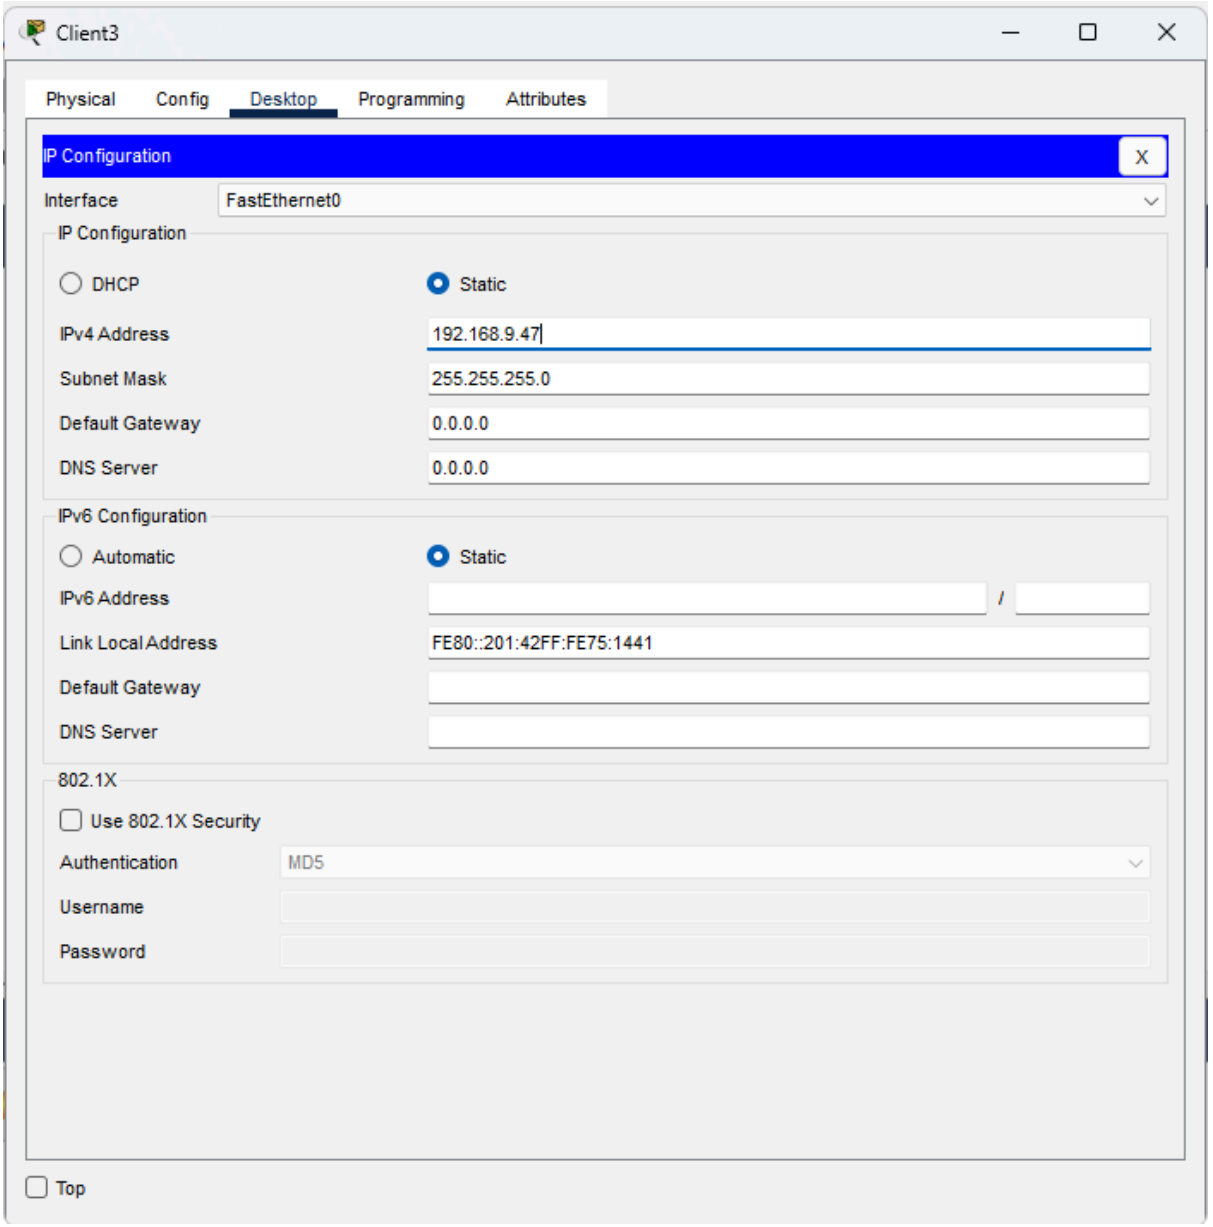

Admin
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.9.45
Pinging 192.168.9.45 with 32 bytes of data:
Reply from 192.168.9.45: bytes=32 time<1ms TTL=128
Reply from 192.168.9.45: bytes=32 time<1ms TTL=128
Reply from 192.168.9.45: bytes=32 time=6ms TTL=128
Reply from 192.168.9.45: bytes=32 time=40ms TTL=128
Ping statistics for 192.168.9.45:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 40ms, Average = 11ms
C:\>
Top

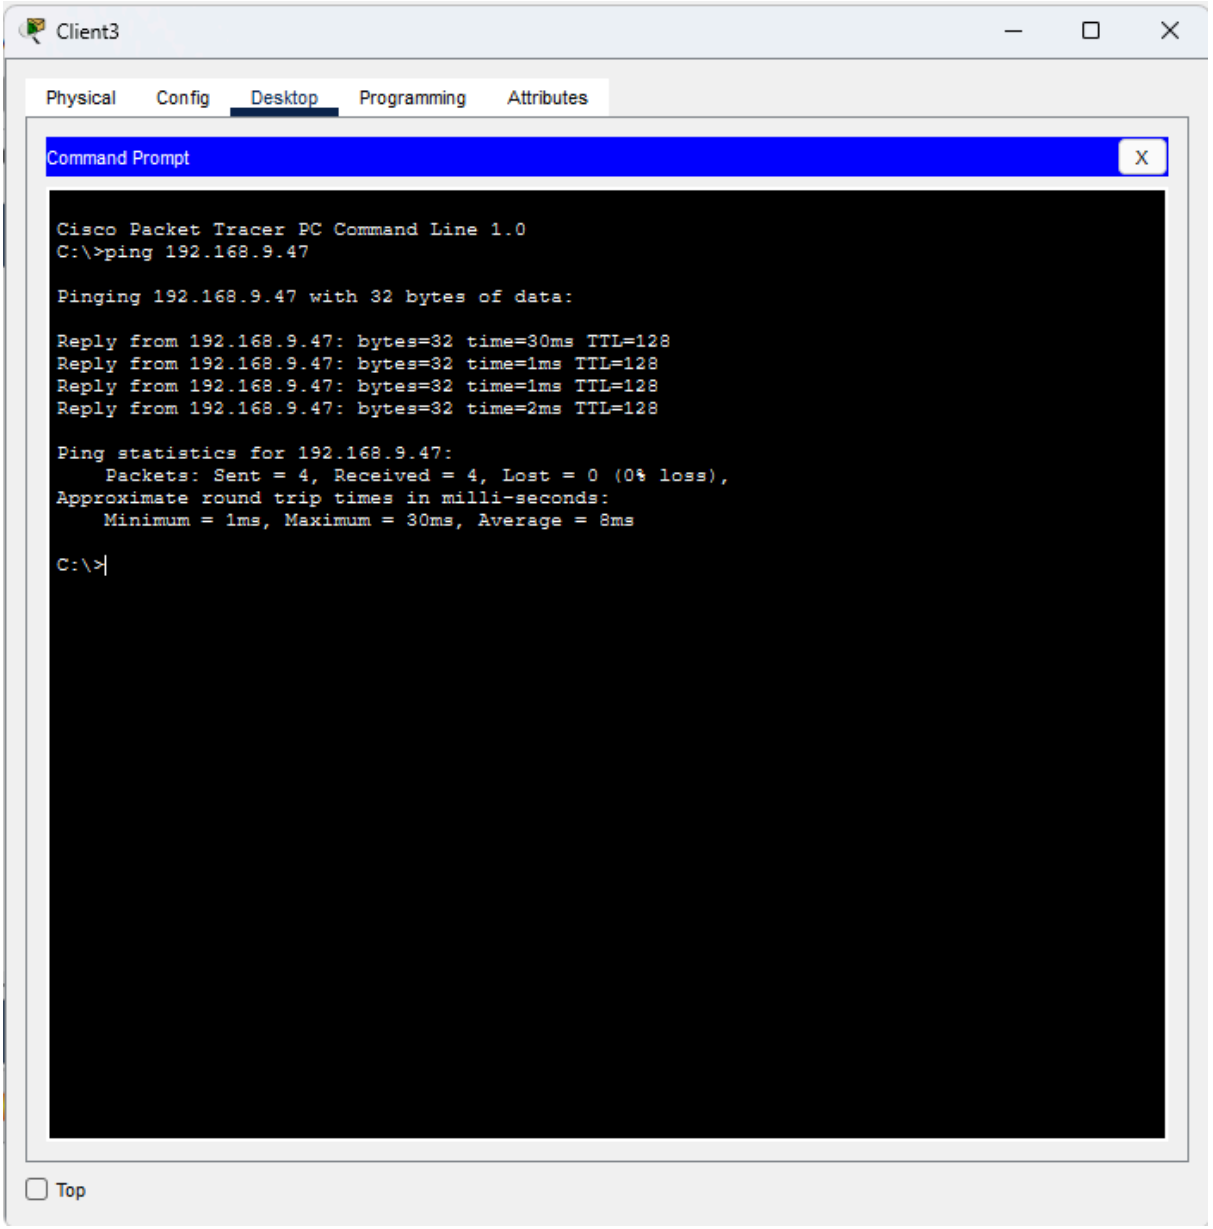

Client1
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.9.40
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::2D0:97FF:FE27:9DCA
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

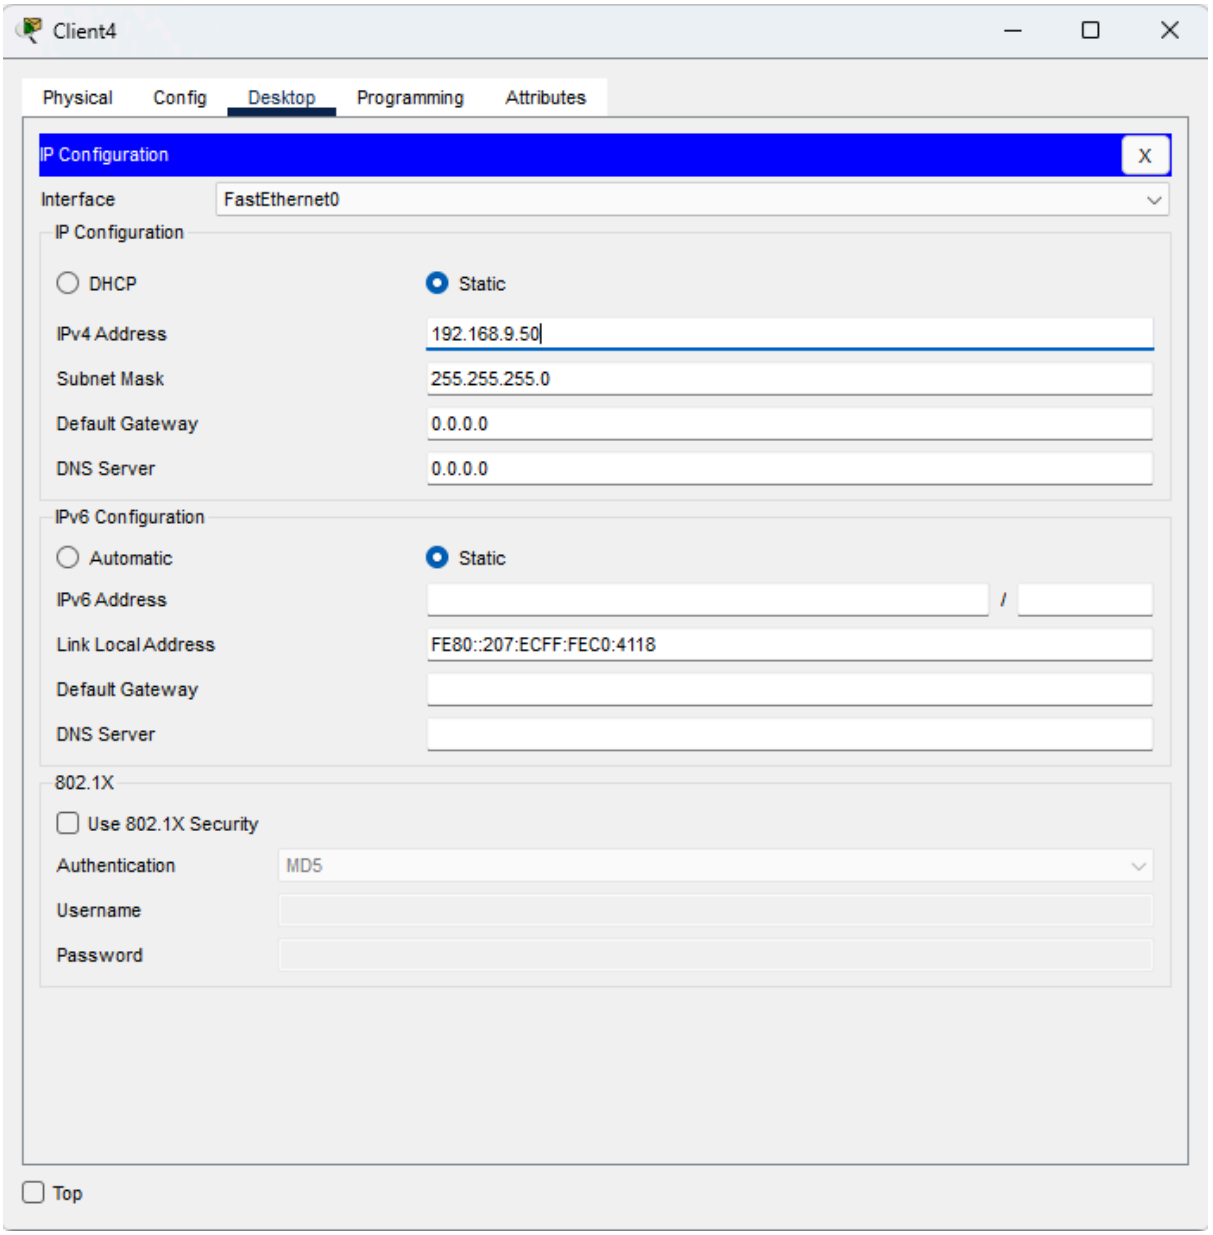

Client1
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.9.40
Pinging 192.168.9.40 with 32 bytes of data:
Reply from 192.168.9.40: bytes=32 time=20ms TTL=128
Reply from 192.168.9.40: bytes=32 time=4ms TTL=128
Reply from 192.168.9.40: bytes=32 time=3ms TTL=128
Reply from 192.168.9.40: bytes=32 time=4ms TTL=128
Ping statistics for 192.168.9.40:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 3ms, Maximum = 20ms, Average = 7ms
C:\>
Top

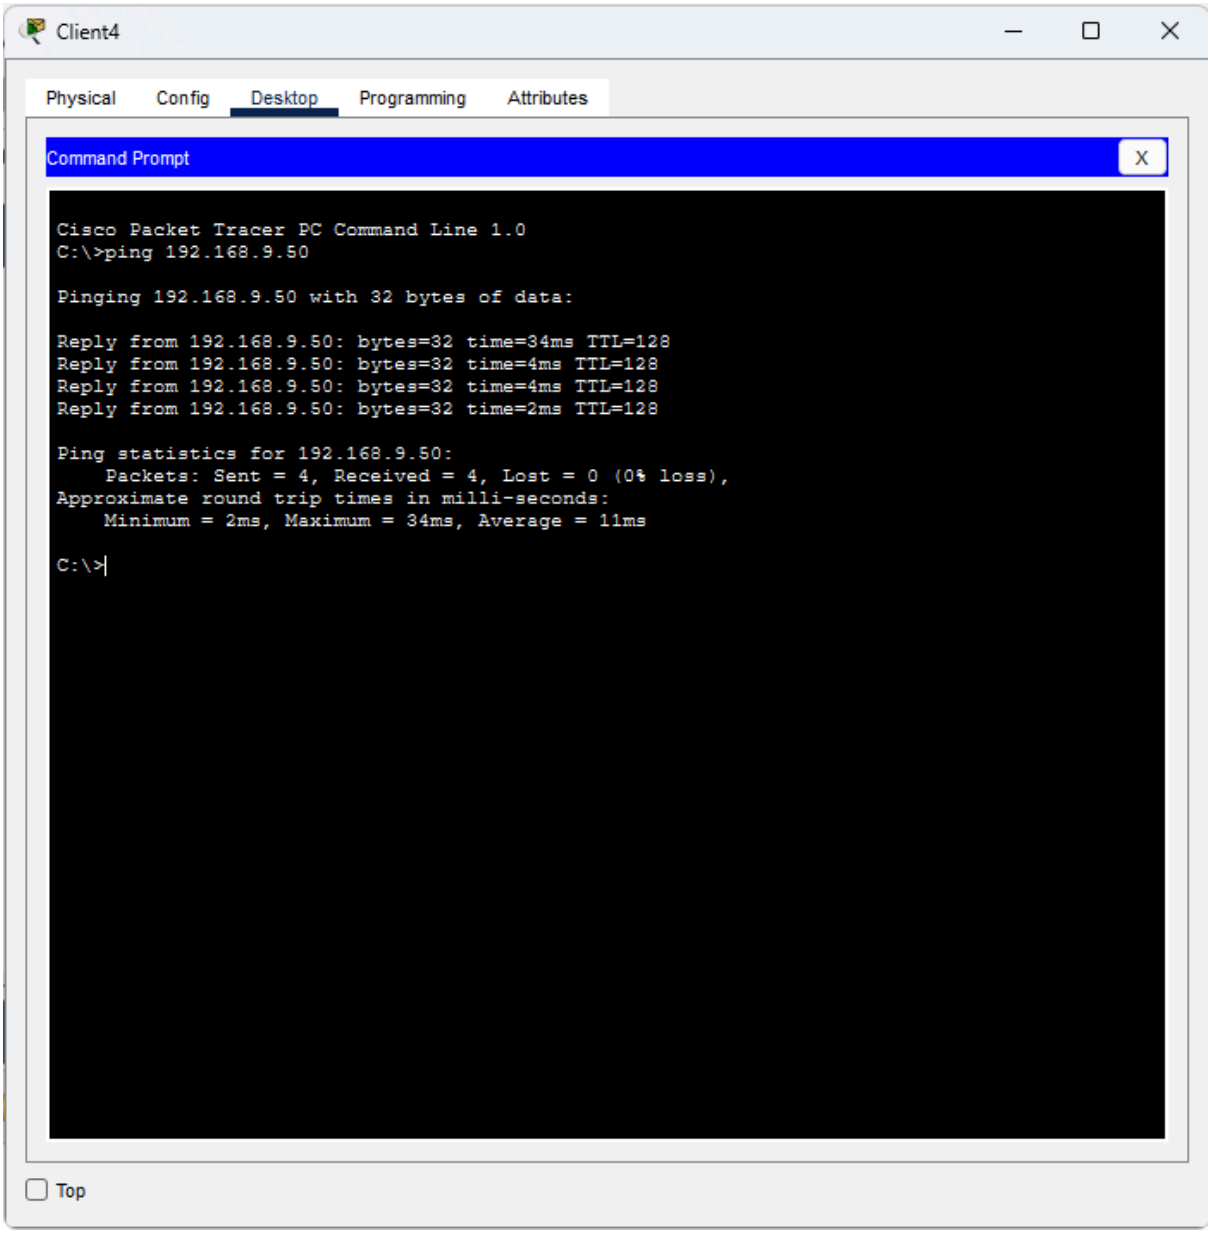

Client2
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.9.42
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::260:3EFF:FE1A:2DAB
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

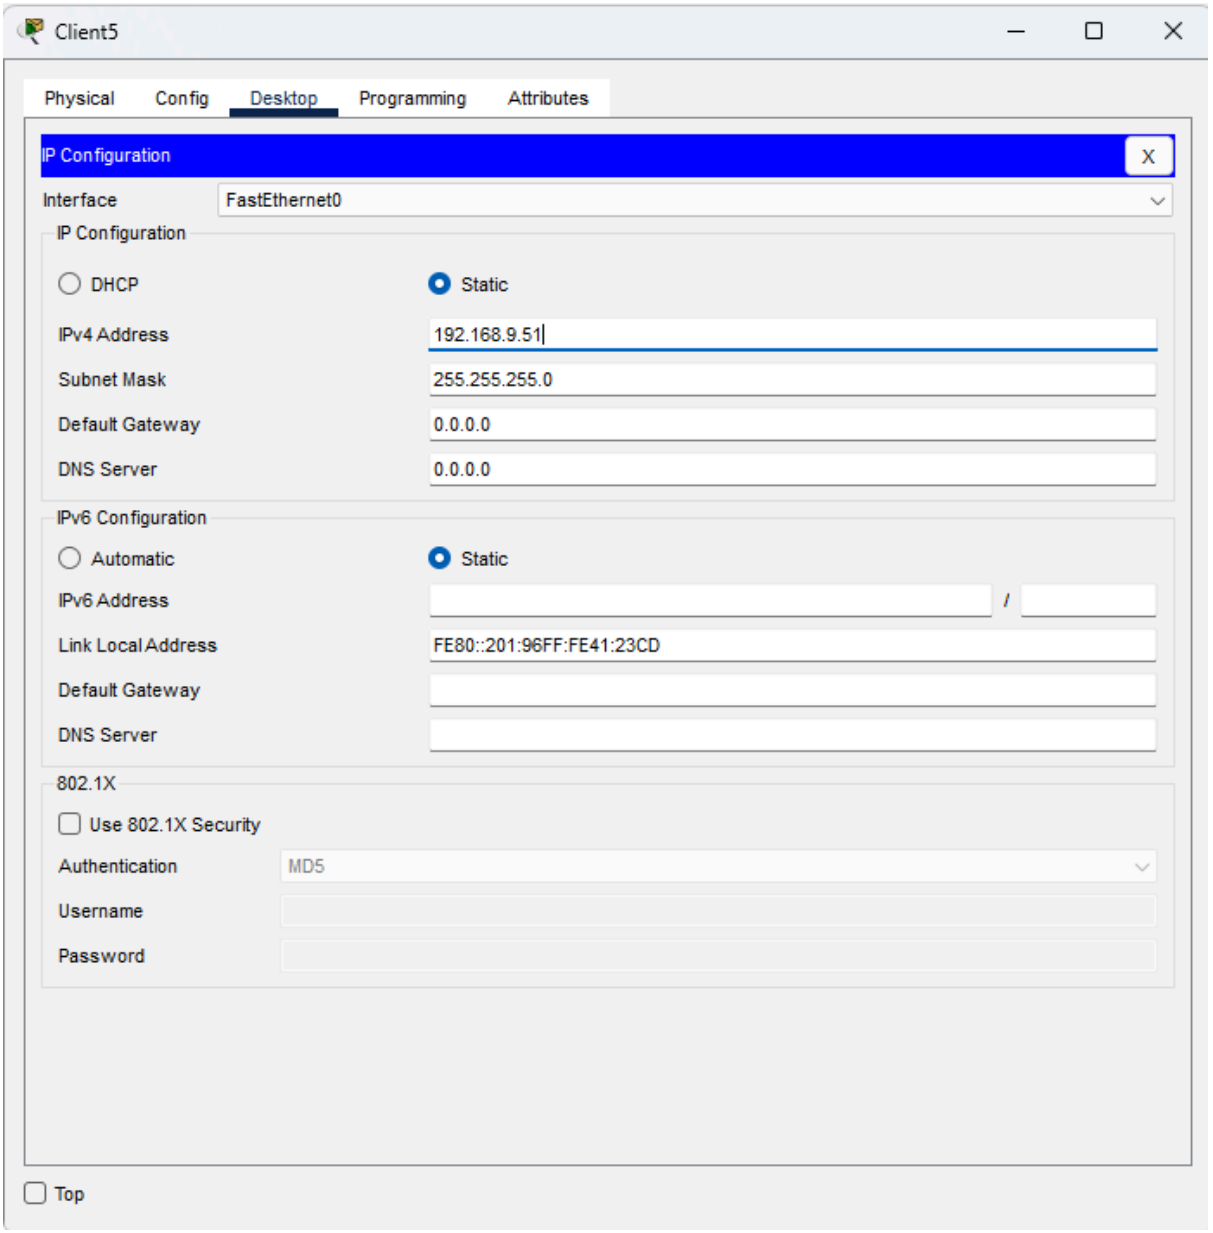

Client2
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.9.42
Pinging 192.168.9.42 with 32 bytes of data:
Reply from 192.168.9.42: bytes=32 time=16ms TTL=128
Reply from 192.168.9.42: bytes=32 time=1ms TTL=128
Reply from 192.168.9.42: bytes=32 time=1ms TTL=128
Reply from 192.168.9.42: bytes=32 time=4ms TTL=128
Ping statistics for 192.168.9.42:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 16ms, Average = 5ms
C:\>
Top

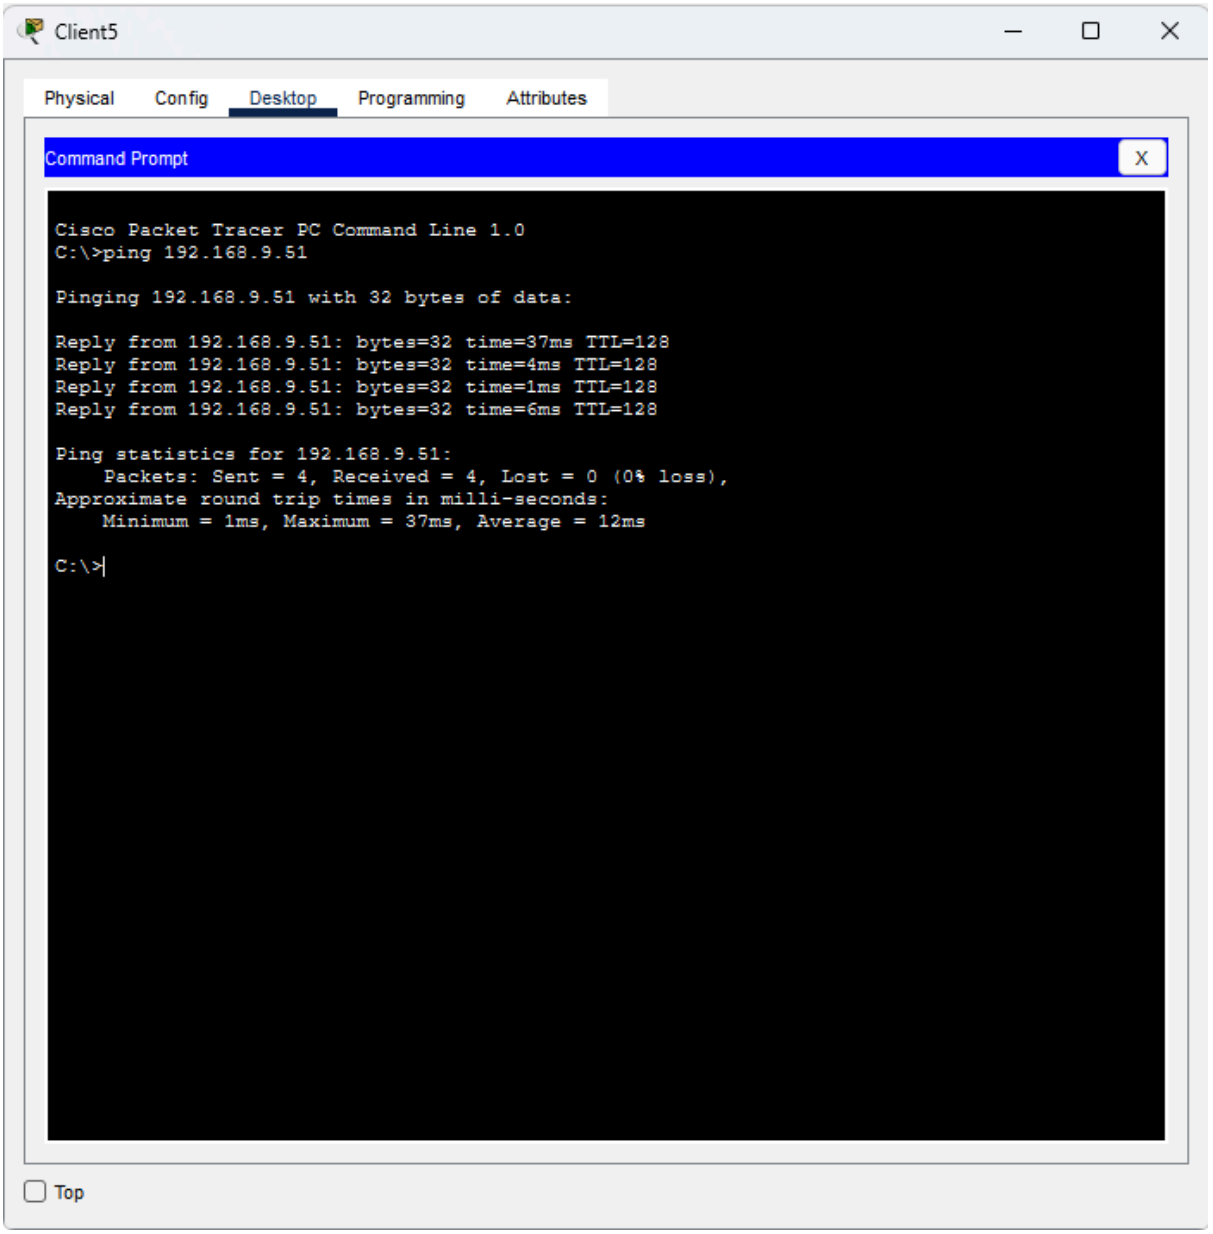

Client3
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.9.47
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::201:42FF:FE75:1441
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

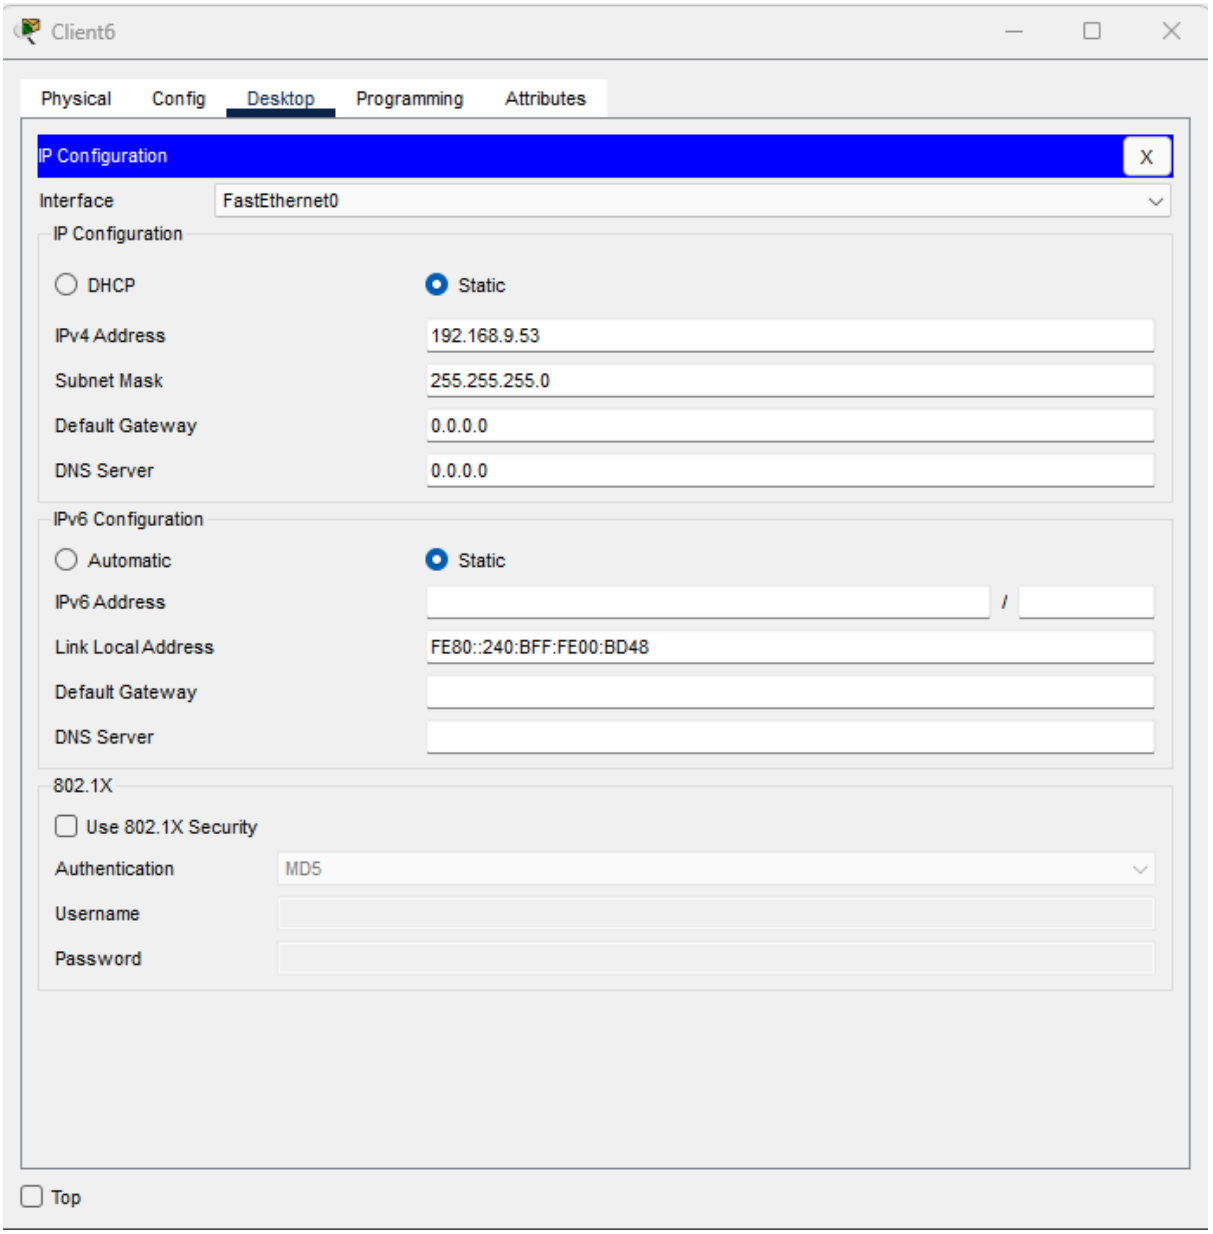

Client3
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.9.47
Pinging 192.168.9.47 with 32 bytes of data:
Reply from 192.168.9.47: bytes=32 time=30ms TTL=128
Reply from 192.168.9.47: bytes=32 time=1ms TTL=128
Reply from 192.168.9.47: bytes=32 time=1ms TTL=128
Reply from 192.168.9.47: bytes=32 time=2ms TTL=128
Ping statistics for 192.168.9.47:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 30ms, Average = 8ms
C:\>
Top

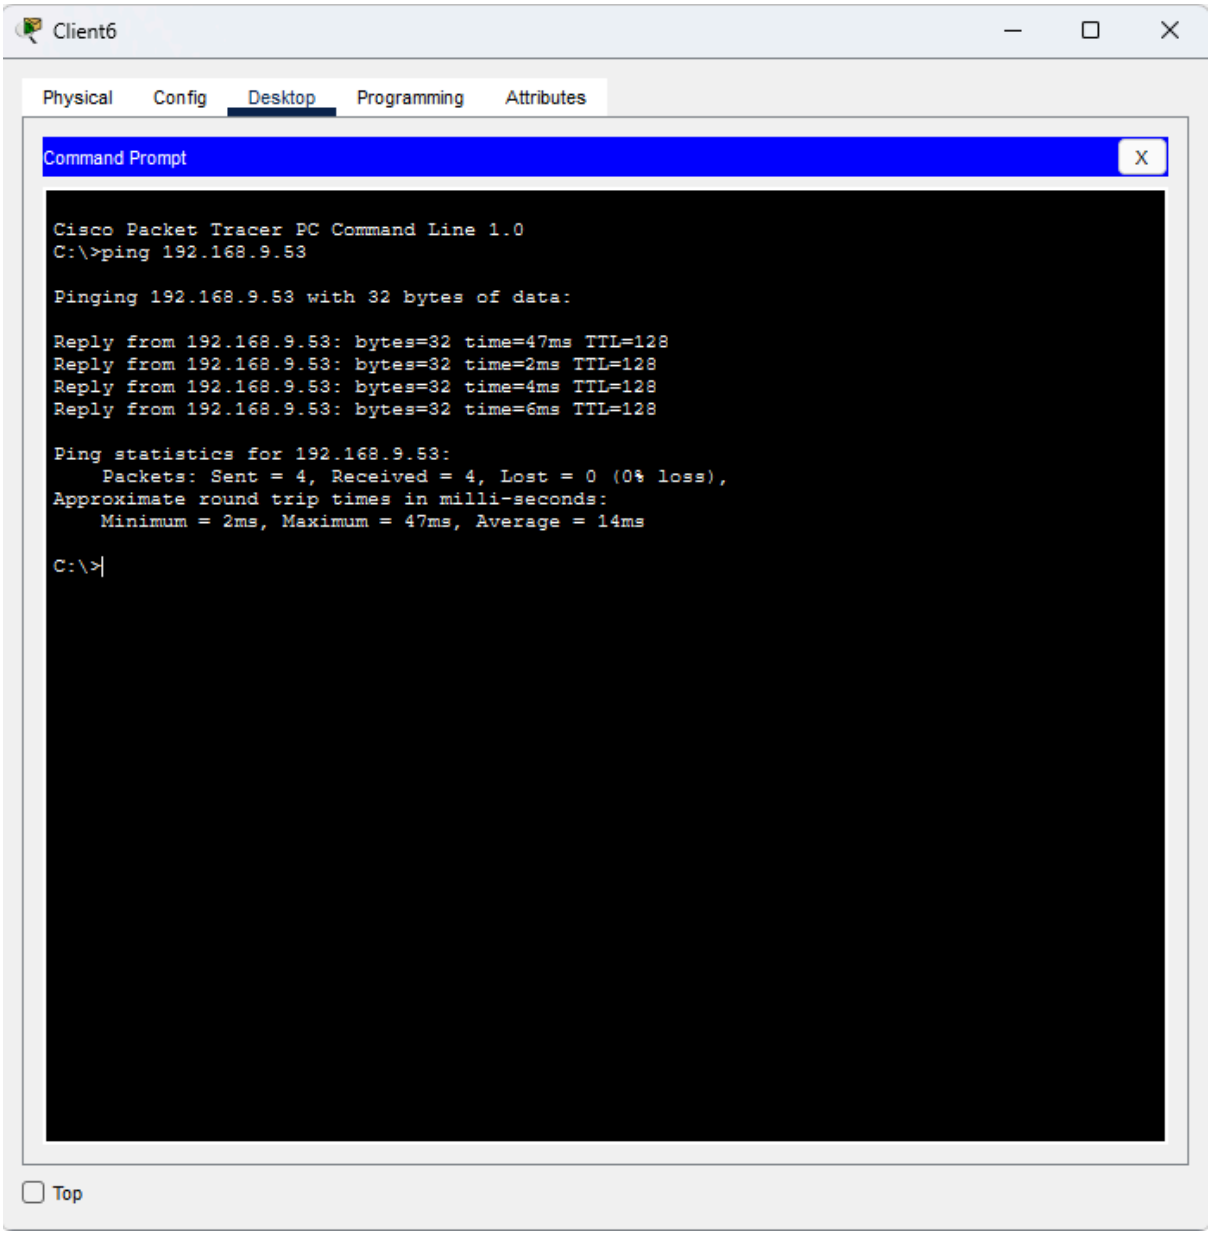

Client4
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.9.50
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::207:ECFF:FEC0:4118
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

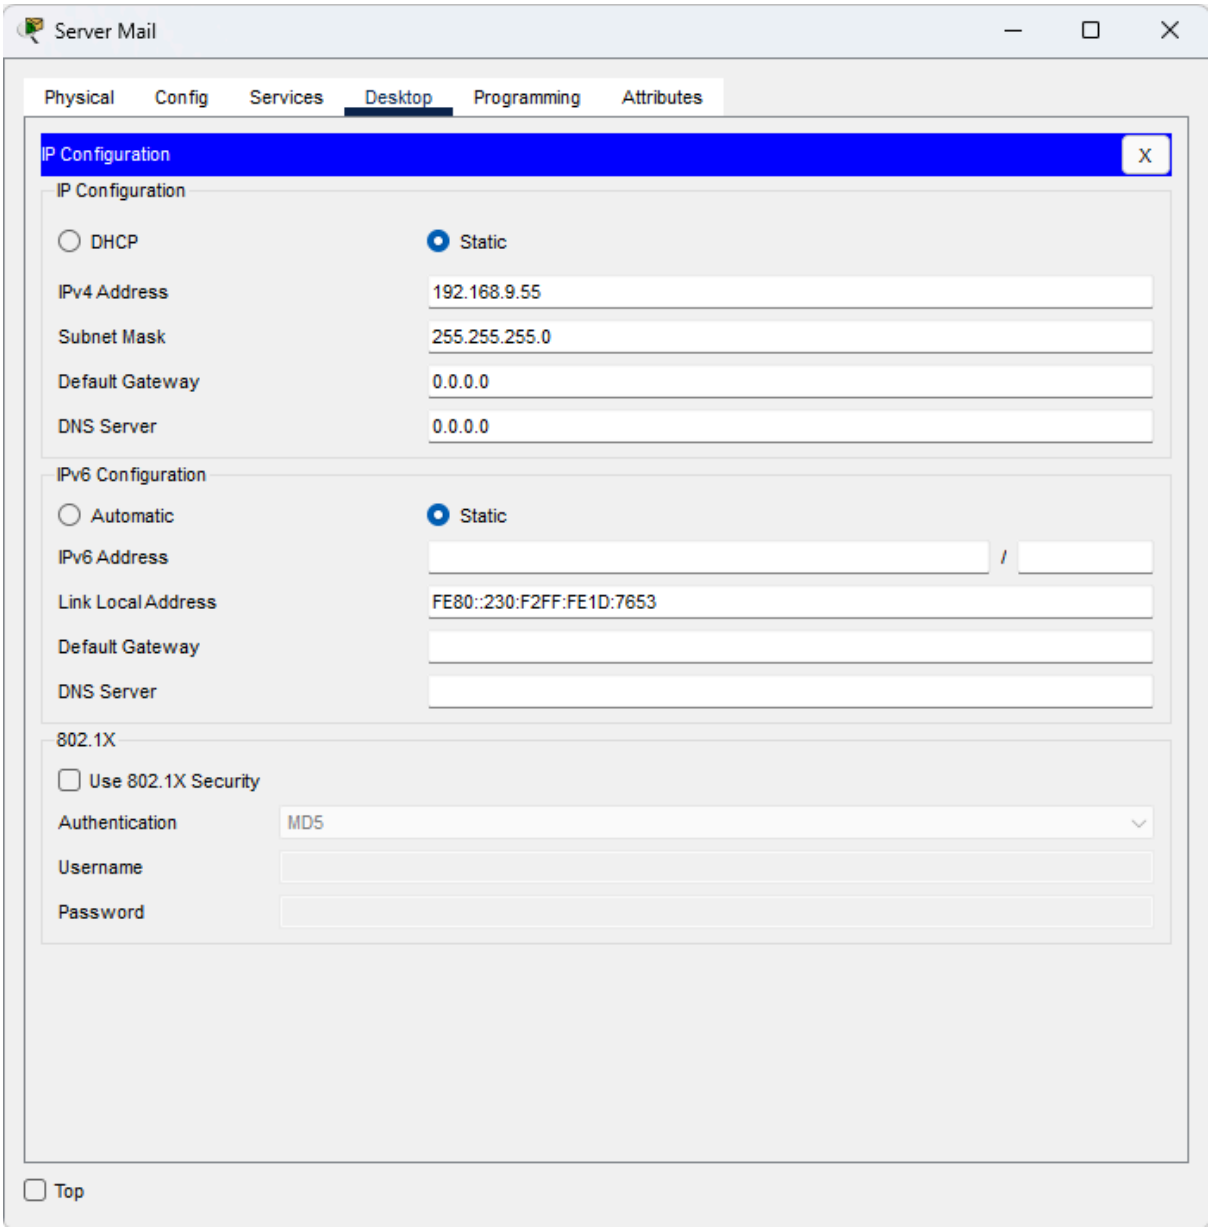

Client4
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.9.50
Pinging 192.168.9.50 with 32 bytes of data:
Reply from 192.168.9.50: bytes=32 time=34ms TTL=128
Reply from 192.168.9.50: bytes=32 time=4ms TTL=128
Reply from 192.168.9.50: bytes=32 time=4ms TTL=128
Reply from 192.168.9.50: bytes=32 time=2ms TTL=128
Ping statistics for 192.168.9.50:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 34ms, Average = 11ms
C:\>
Top

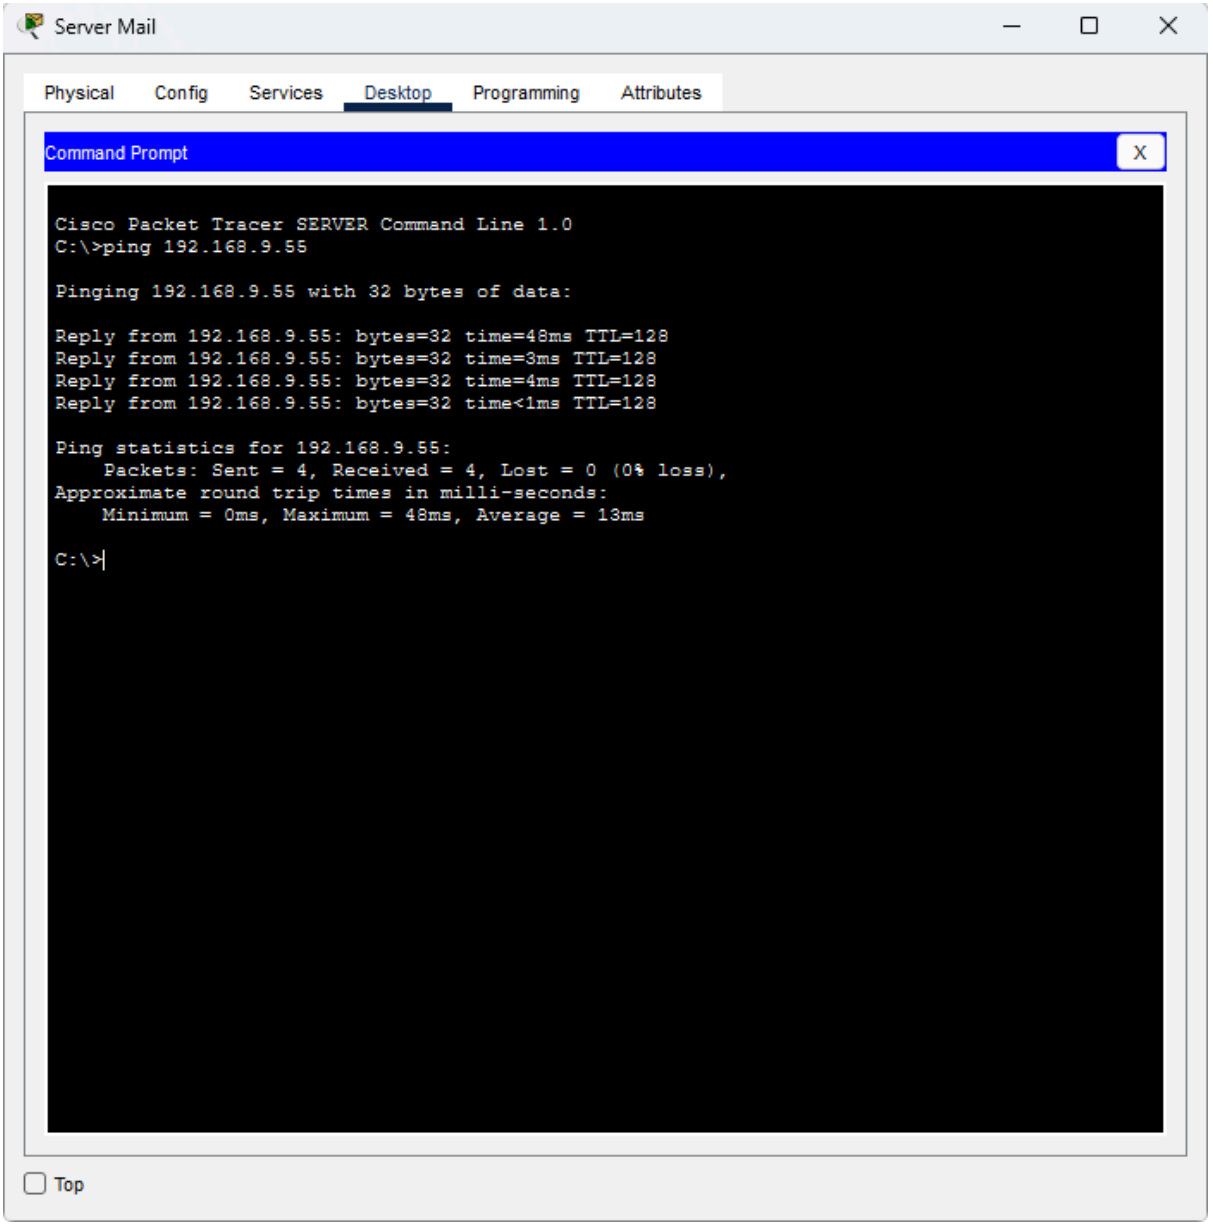

Client5
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.9.51
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::201:96FF:FE41:23CD
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top


Client5
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.9.51
Pinging 192.168.9.51 with 32 bytes of data:
Reply from 192.168.9.51: bytes=32 time=37ms TTL=128
Reply from 192.168.9.51: bytes=32 time=4ms TTL=128
Reply from 192.168.9.51: bytes=32 time=1ms TTL=128
Reply from 192.168.9.51: bytes=32 time=6ms TTL=128
Ping statistics for 192.168.9.51:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 37ms, Average = 12ms
C:\>
Top

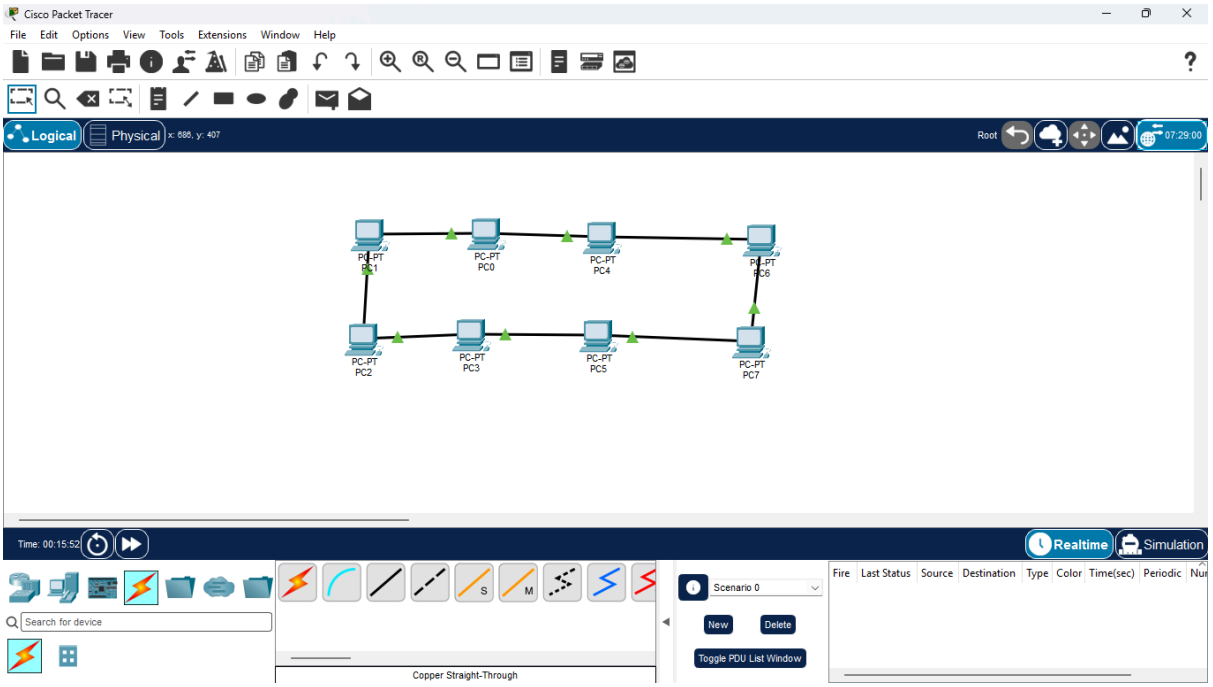

Client6
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.9.53
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::240:BFF:FE00:BD48
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

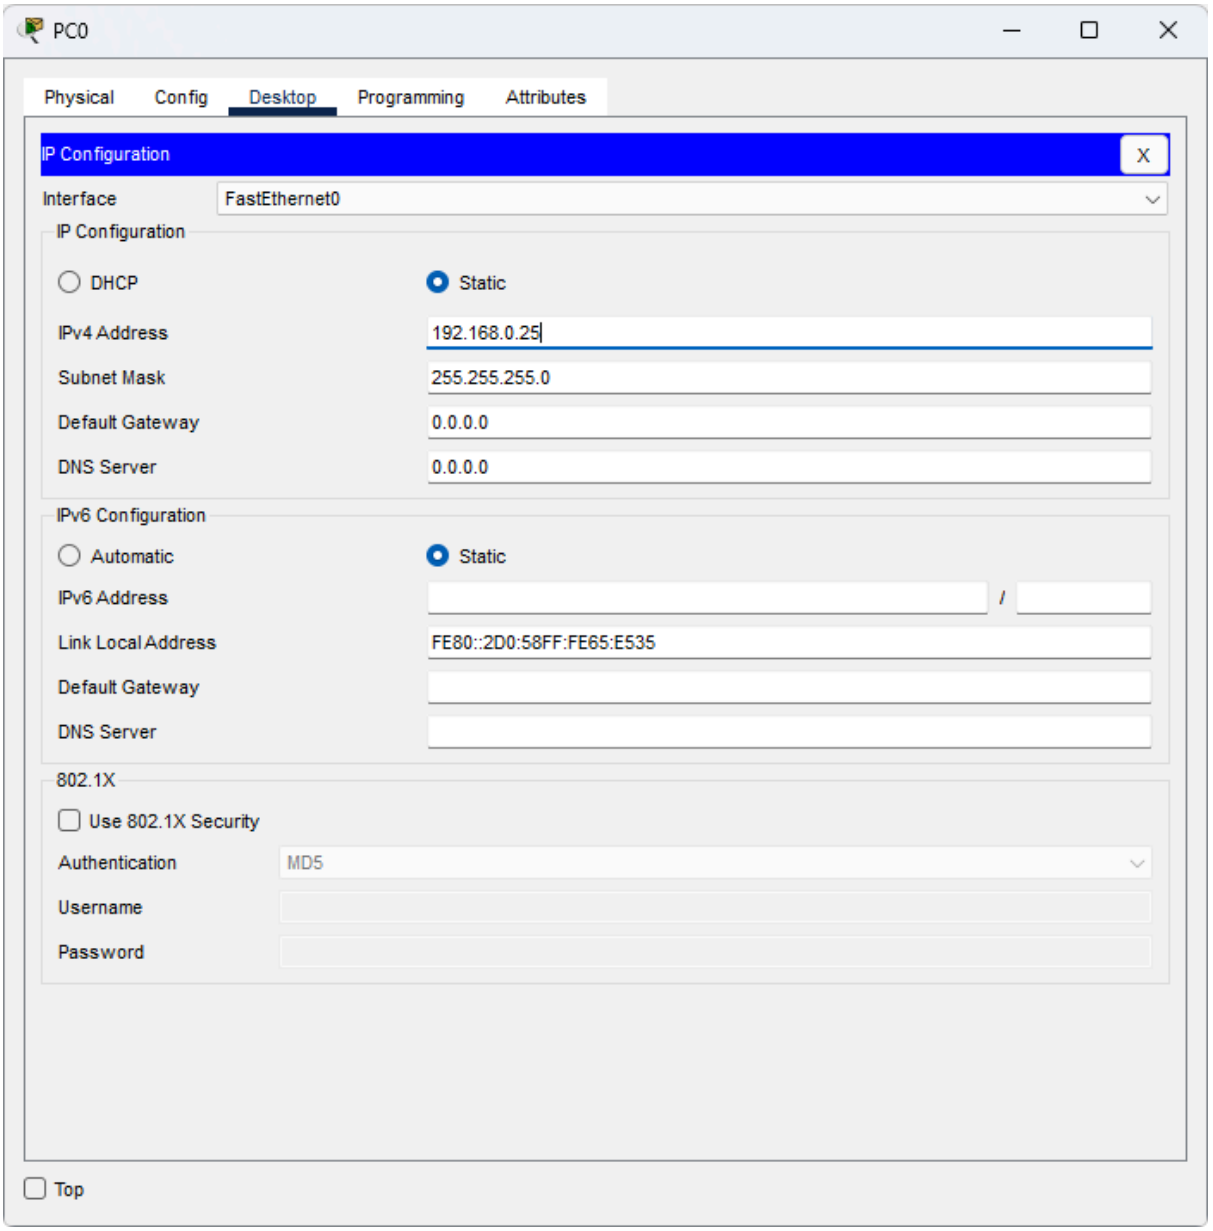

Client6
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.9.53
Pinging 192.168.9.53 with 32 bytes of data:
Reply from 192.168.9.53: bytes=32 time=47ms TTL=128
Reply from 192.168.9.53: bytes=32 time=2ms TTL=128
Reply from 192.168.9.53: bytes=32 time=4ms TTL=128
Reply from 192.168.9.53: bytes=32 time=6ms TTL=128
Ping statistics for 192.168.9.53:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 47ms, Average = 14ms
C:\>
Top

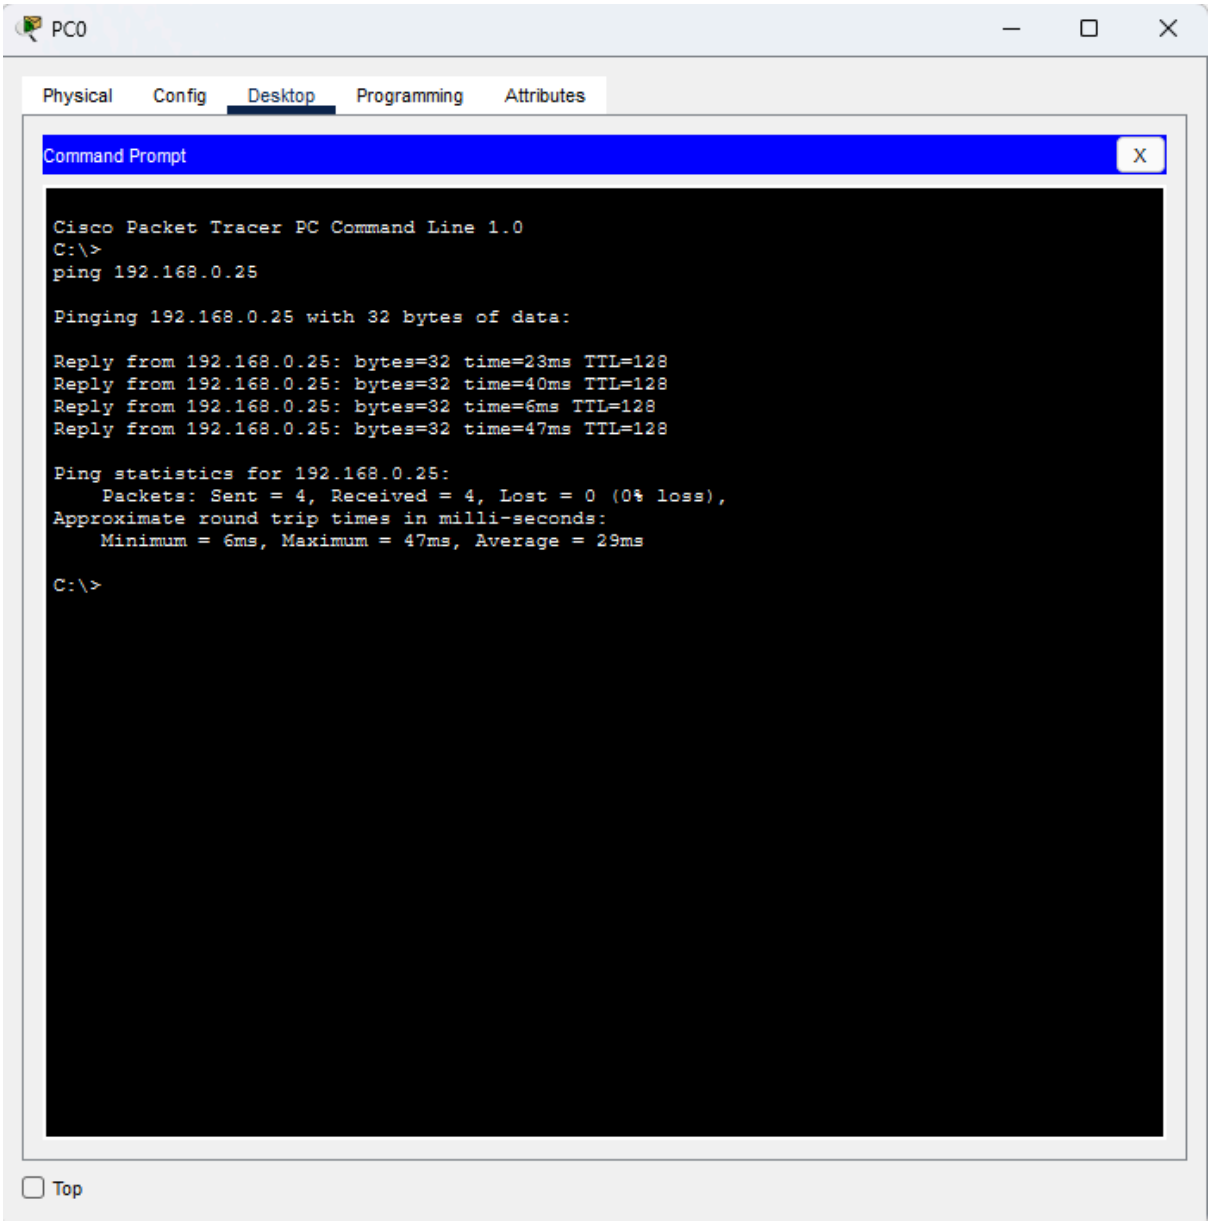

Server Mail
Physical
Config
Services
Desktop
Programming
Attributes
IP Configuration
X
IP Configuration
DHCP
Static
IPv4 Address
192.168.9.55
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::230:F2FF:FE1D:7653
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

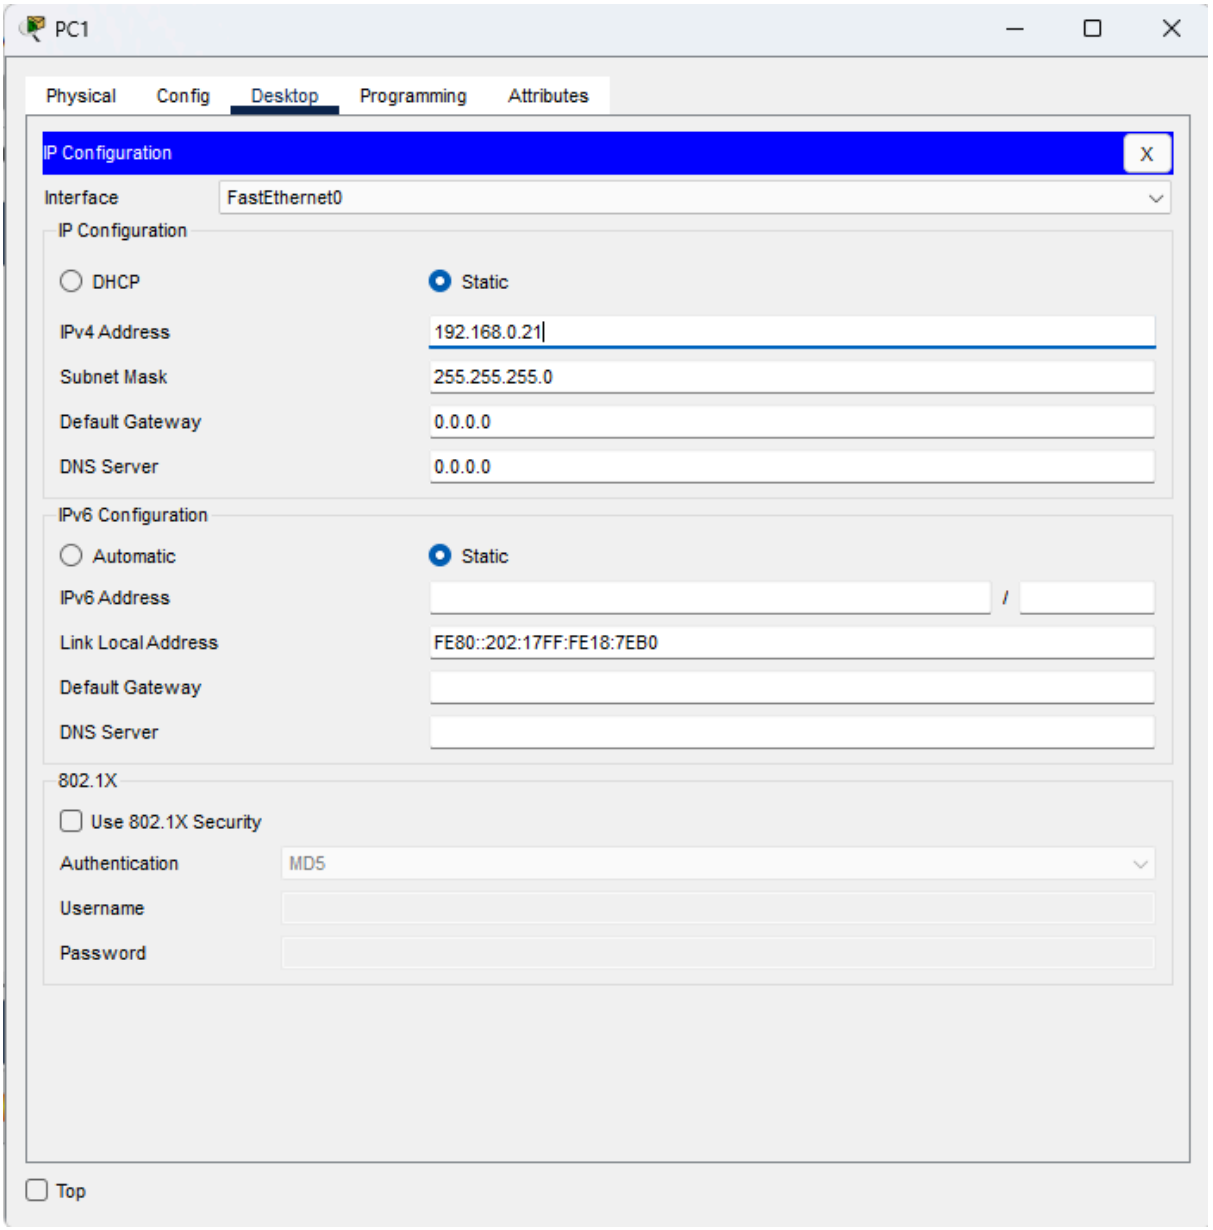

Server Mail
Physical
Config
Services
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer SERVER Command Line 1.0
C:\>ping 192.168.9.55
Pinging 192.168.9.55 with 32 bytes of data:
Reply from 192.168.9.55: bytes=32 time=48ms TTL=128
Reply from 192.168.9.55: bytes=32 time=3ms TTL=128
Reply from 192.168.9.55: bytes=32 time=4ms TTL=128
Reply from 192.168.9.55: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.9.55:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 48ms, Average = 13ms
C:\>
Top

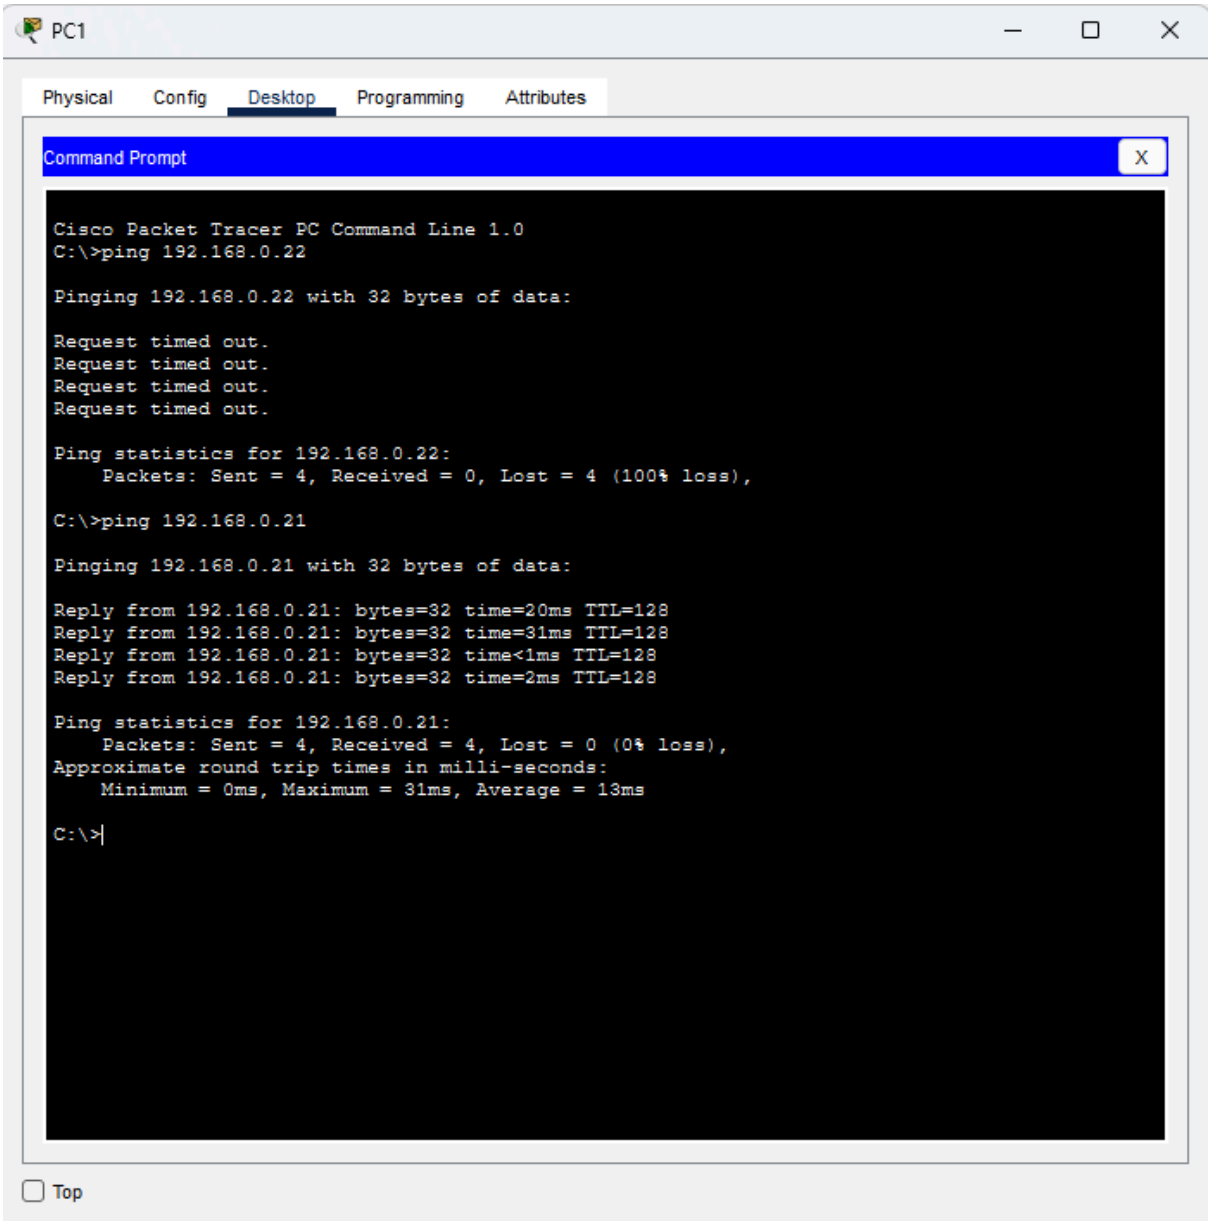
Topologie 3 - Anneaux

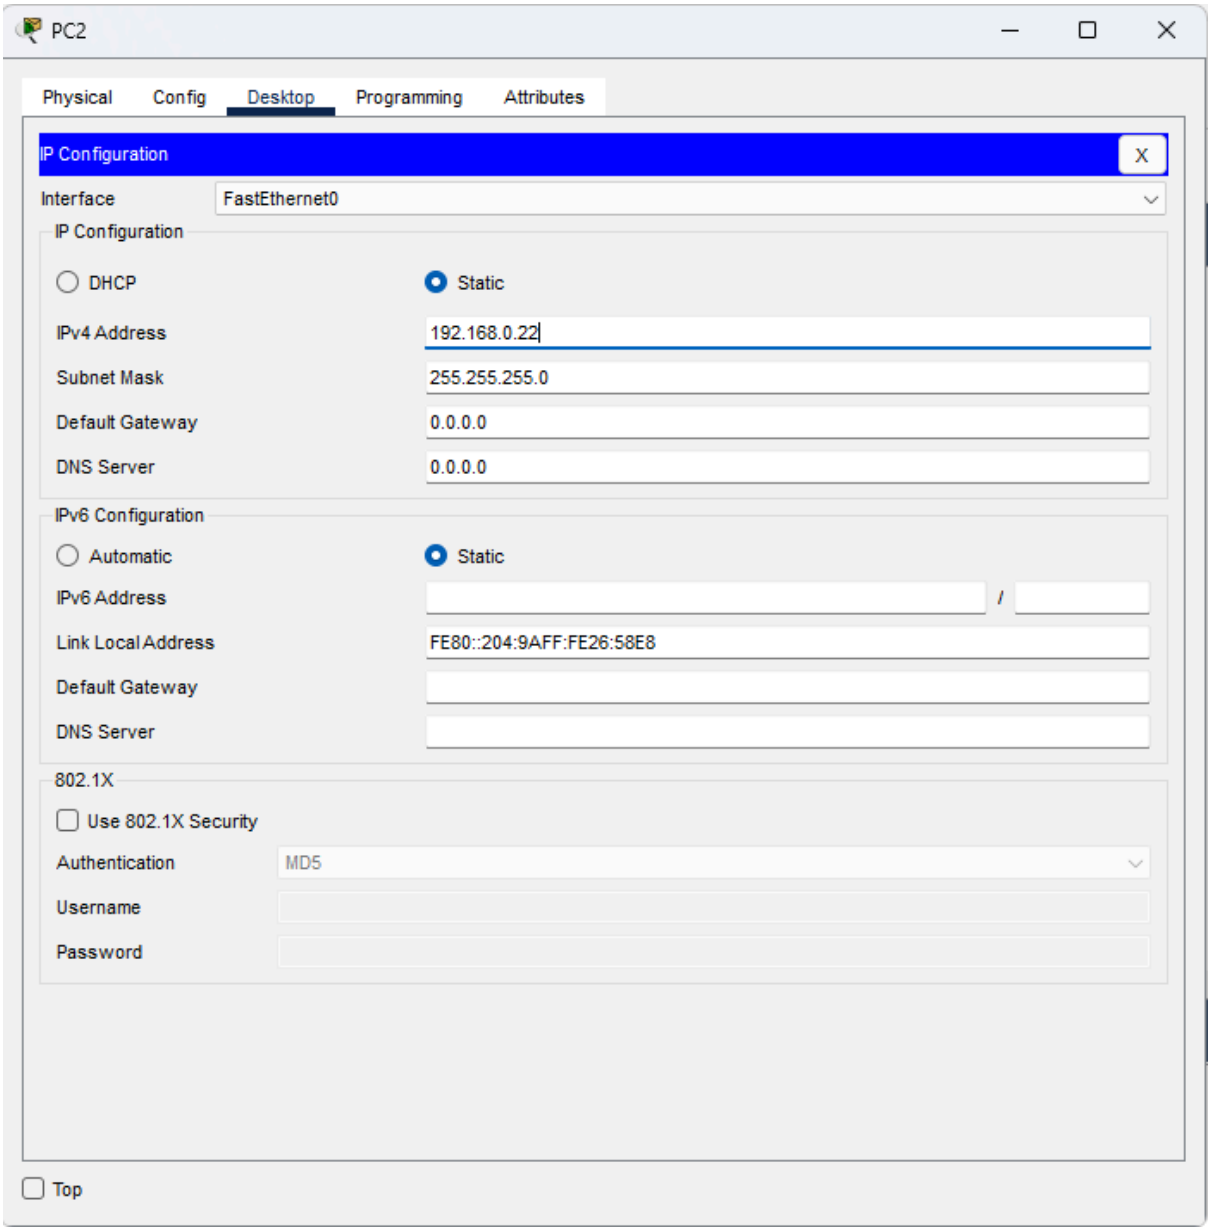


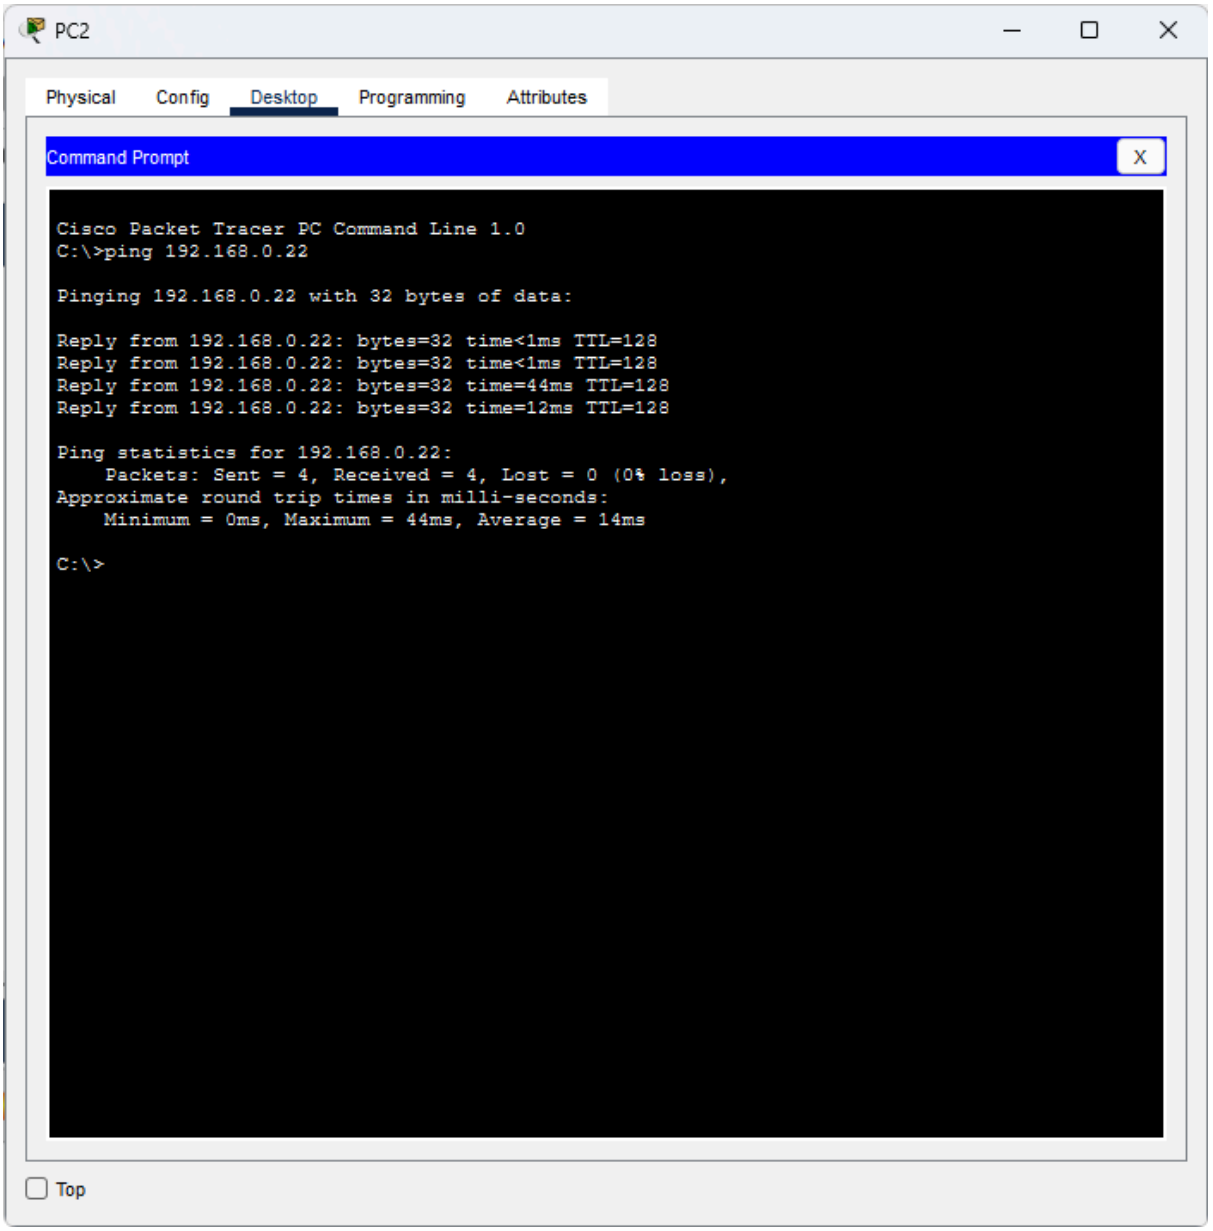

PC0
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.0.25
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::2D0:58FF:FE65:E535
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

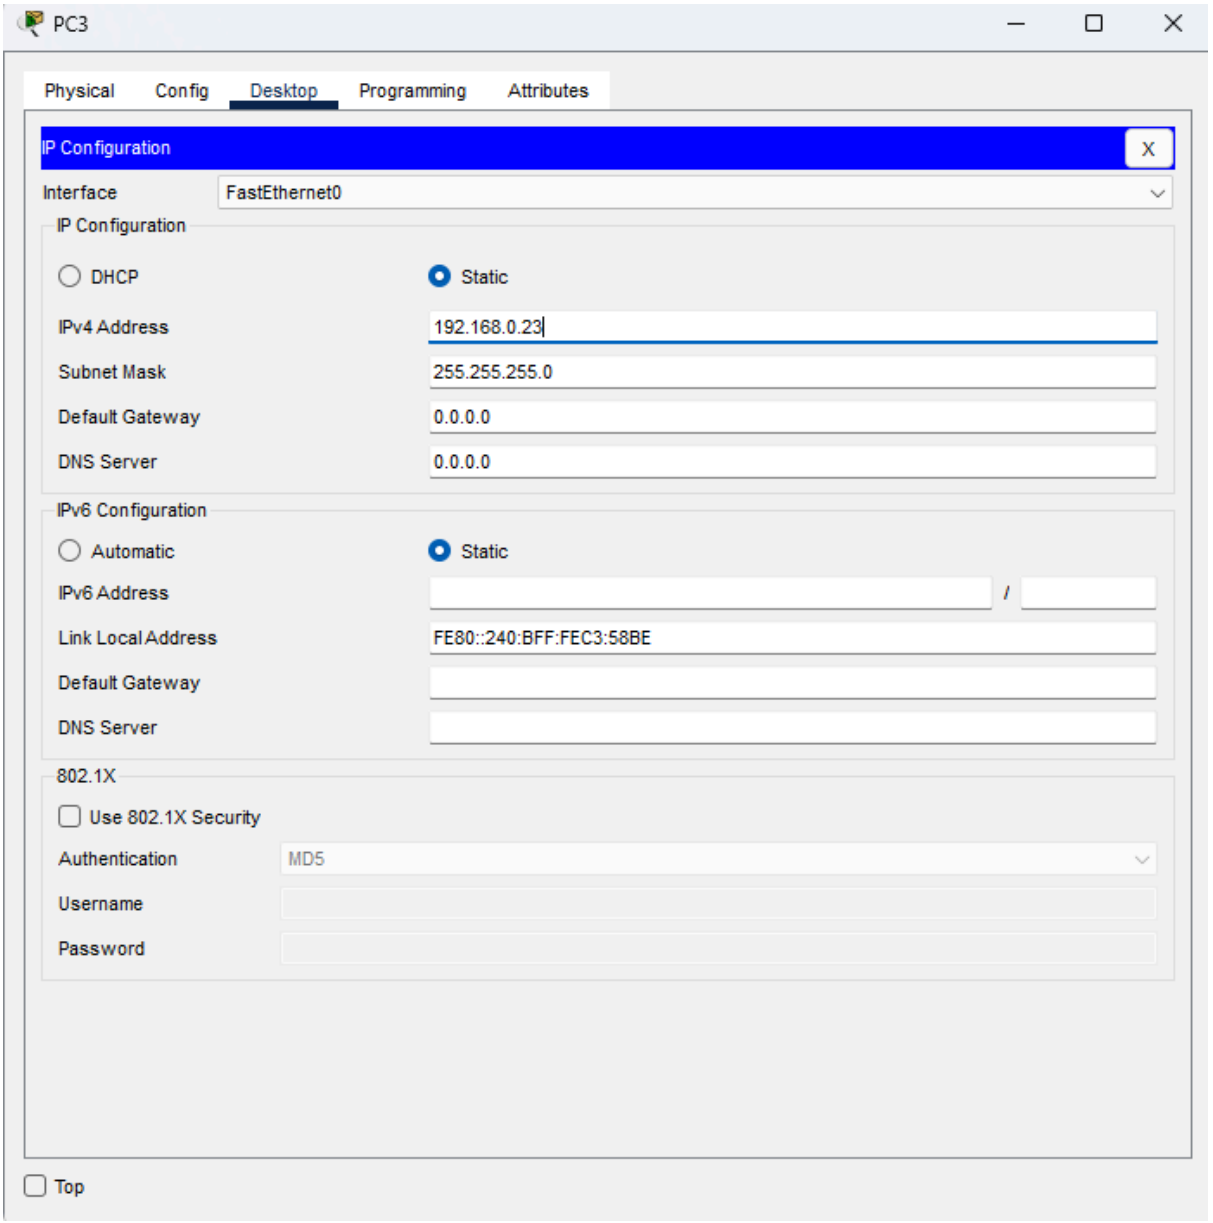

PC0
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>
ping 192.168.0.25
Pinging 192.168.0.25 with 32 bytes of data:
Reply from 192.168.0.25: bytes=32 time=23ms TTL=128
Reply from 192.168.0.25: bytes=32 time=40ms TTL=128
Reply from 192.168.0.25: bytes=32 time=6ms TTL=128
Reply from 192.168.0.25: bytes=32 time=47ms TTL=128
Ping statistics for 192.168.0.25:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 6ms, Maximum = 47ms, Average = 29ms
C:\>
Top

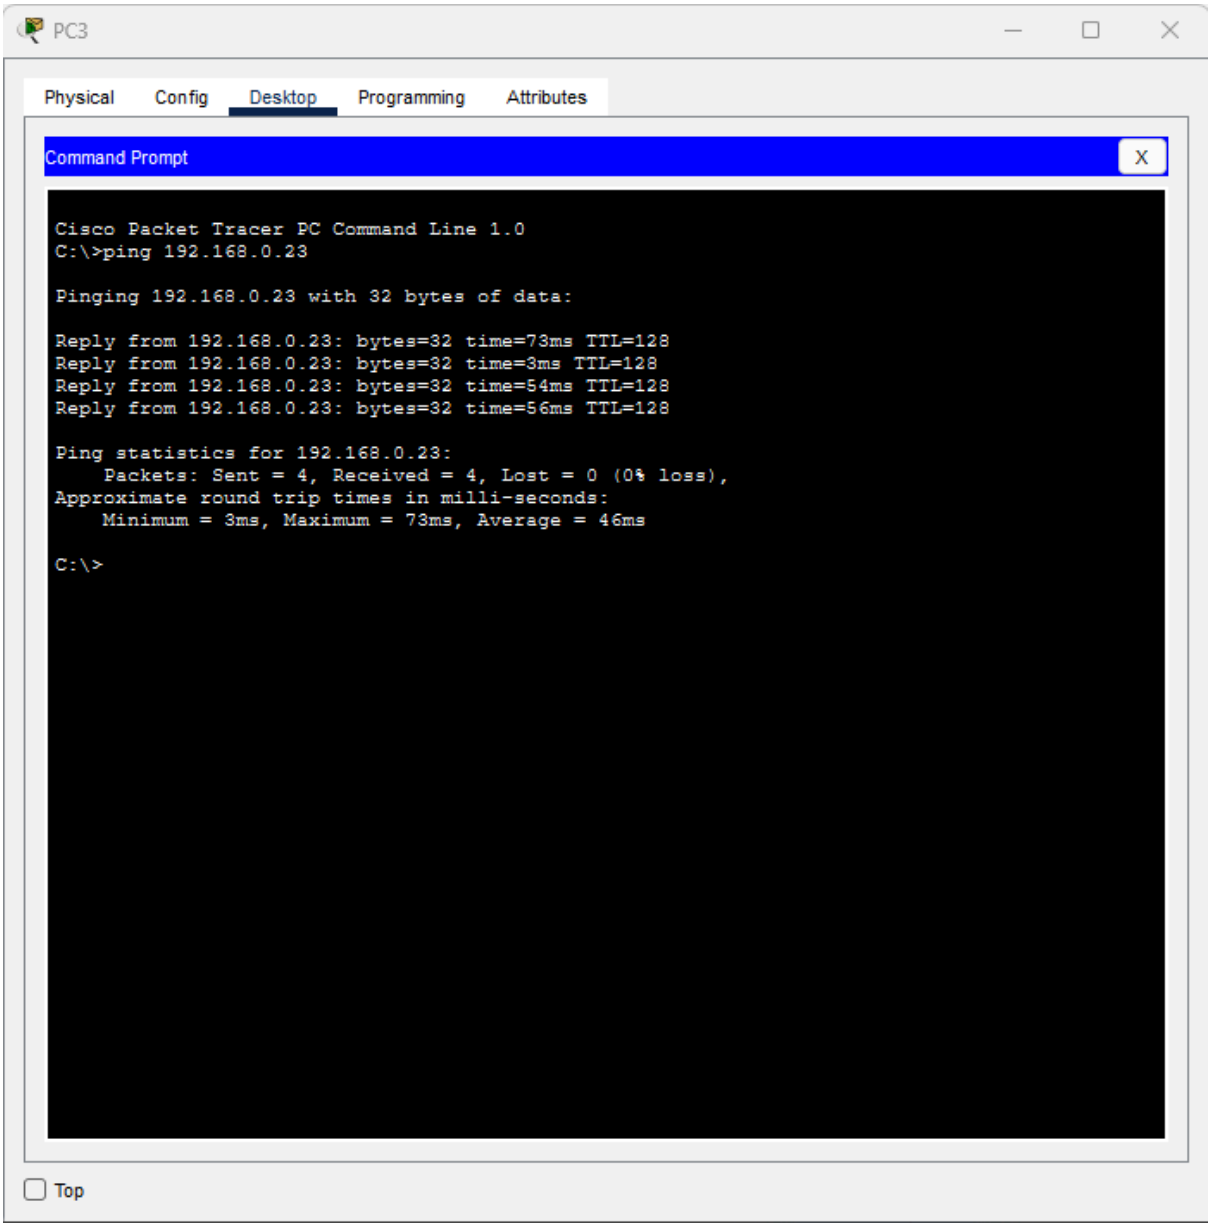

PC1
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.0.21
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::202:17FF:FE18:7EB0
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

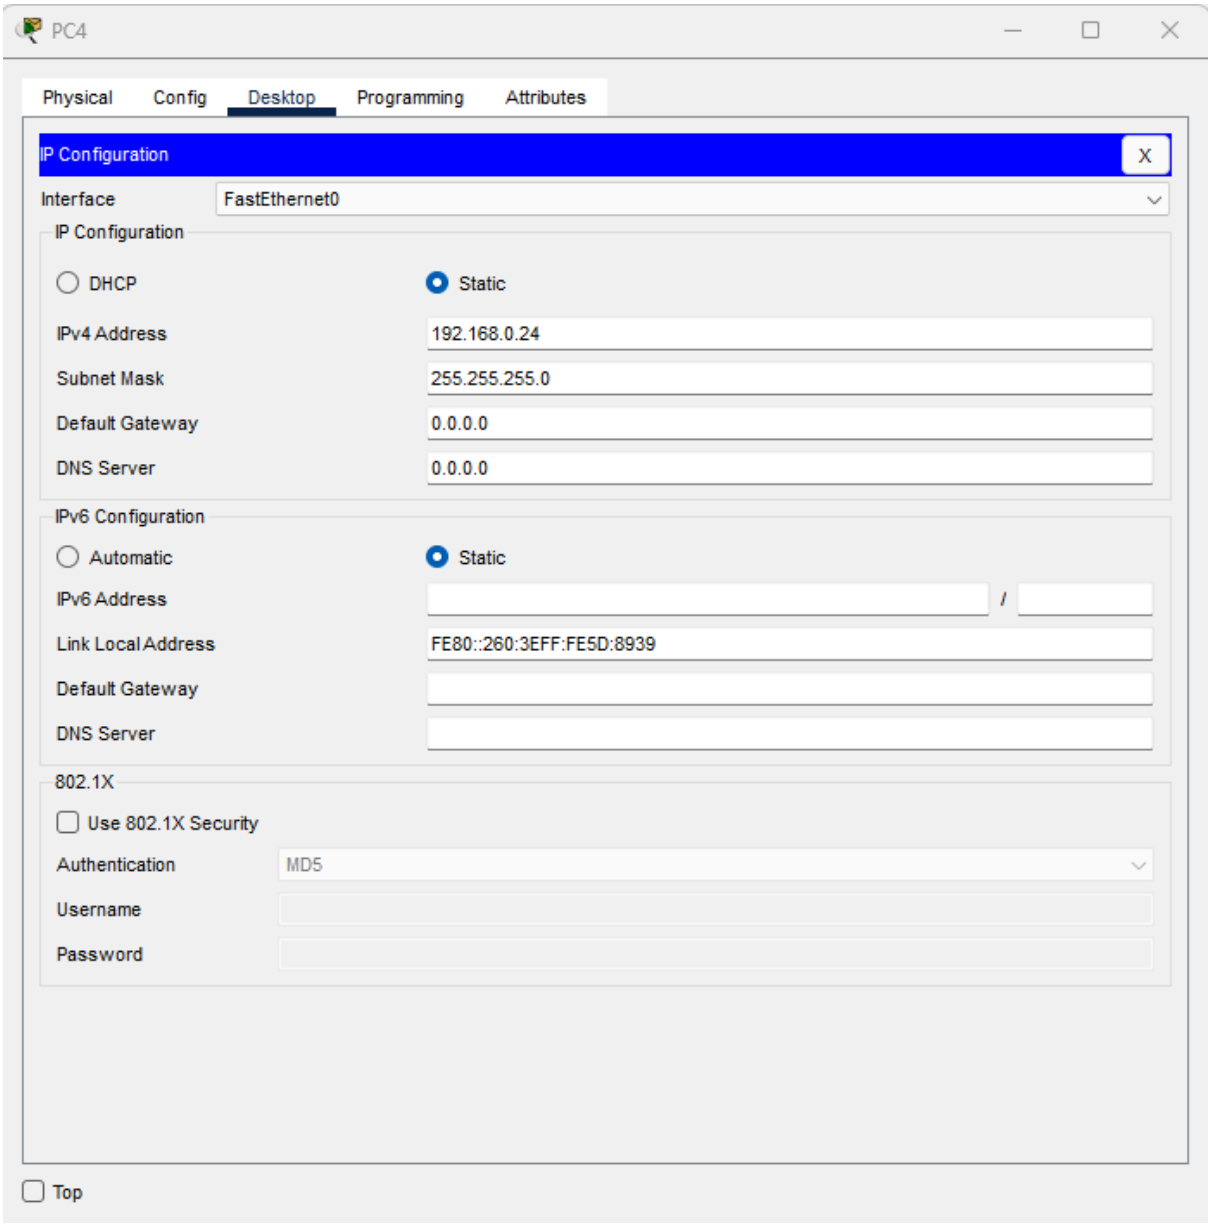

PC1
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.22
Pinging 192.168.0.22 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.
Ping statistics for 192.168.0.22:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>ping 192.168.0.21
Pinging 192.168.0.21 with 32 bytes of data:
Reply from 192.168.0.21: bytes=32 time=20ms TTL=128
Reply from 192.168.0.21: bytes=32 time=31ms TTL=128
Reply from 192.168.0.21: bytes=32 time<1ms TTL=128
Reply from 192.168.0.21: bytes=32 time=2ms TTL=128
Ping statistics for 192.168.0.21:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 31ms, Average = 13ms
C:\>
Top

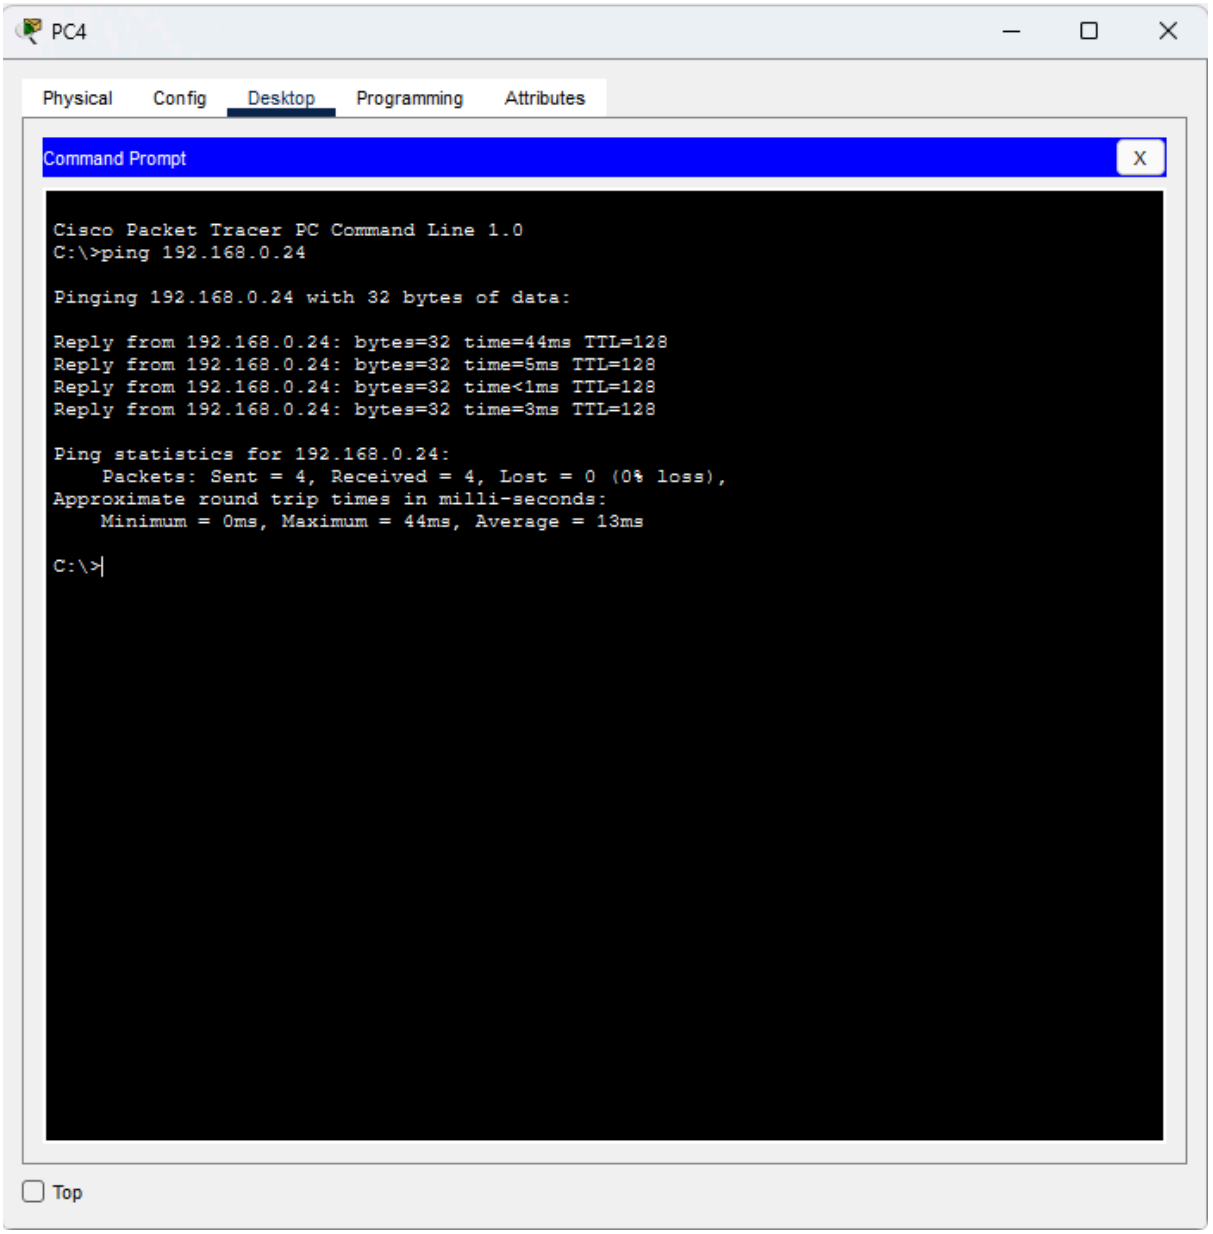

PC2
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.0.22
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::204:9AFF:FE26:58E8
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

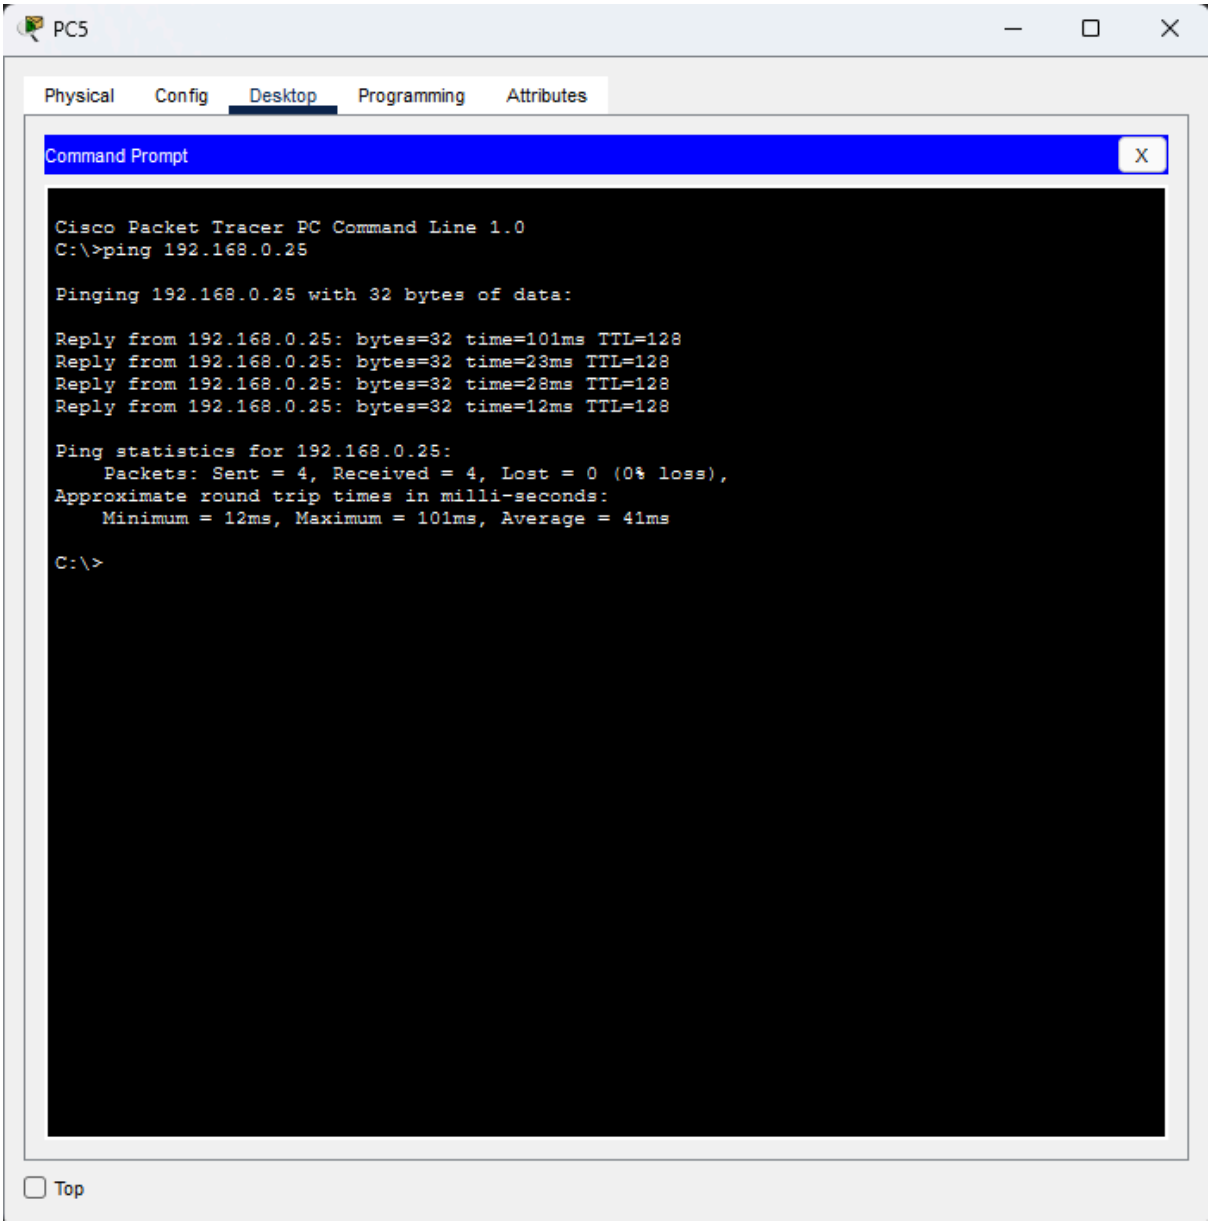

PC2
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.22
Pinging 192.168.0.22 with 32 bytes of data:
Reply from 192.168.0.22: bytes=32 time<1ms TTL=128
Reply from 192.168.0.22: bytes=32 time<1ms TTL=128
Reply from 192.168.0.22: bytes=32 time=44ms TTL=128
Reply from 192.168.0.22: bytes=32 time=12ms TTL=128
Ping statistics for 192.168.0.22:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 44ms, Average = 14ms
C:\>
Top

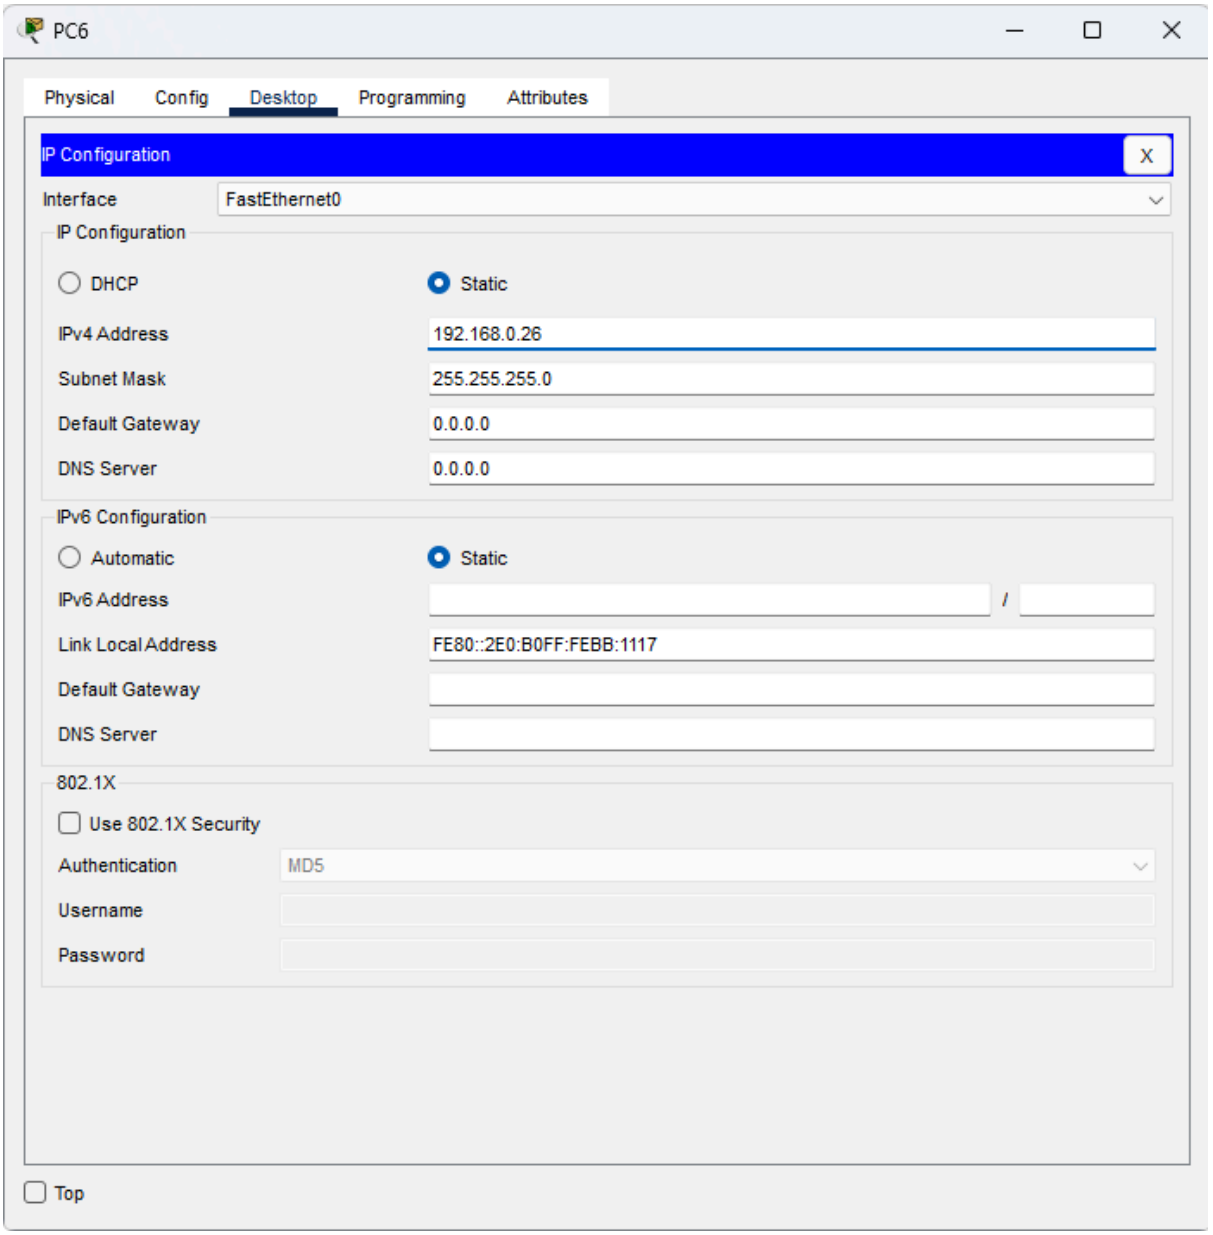

PC3
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.0.23
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::240:BFF:FEC3:58BE
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

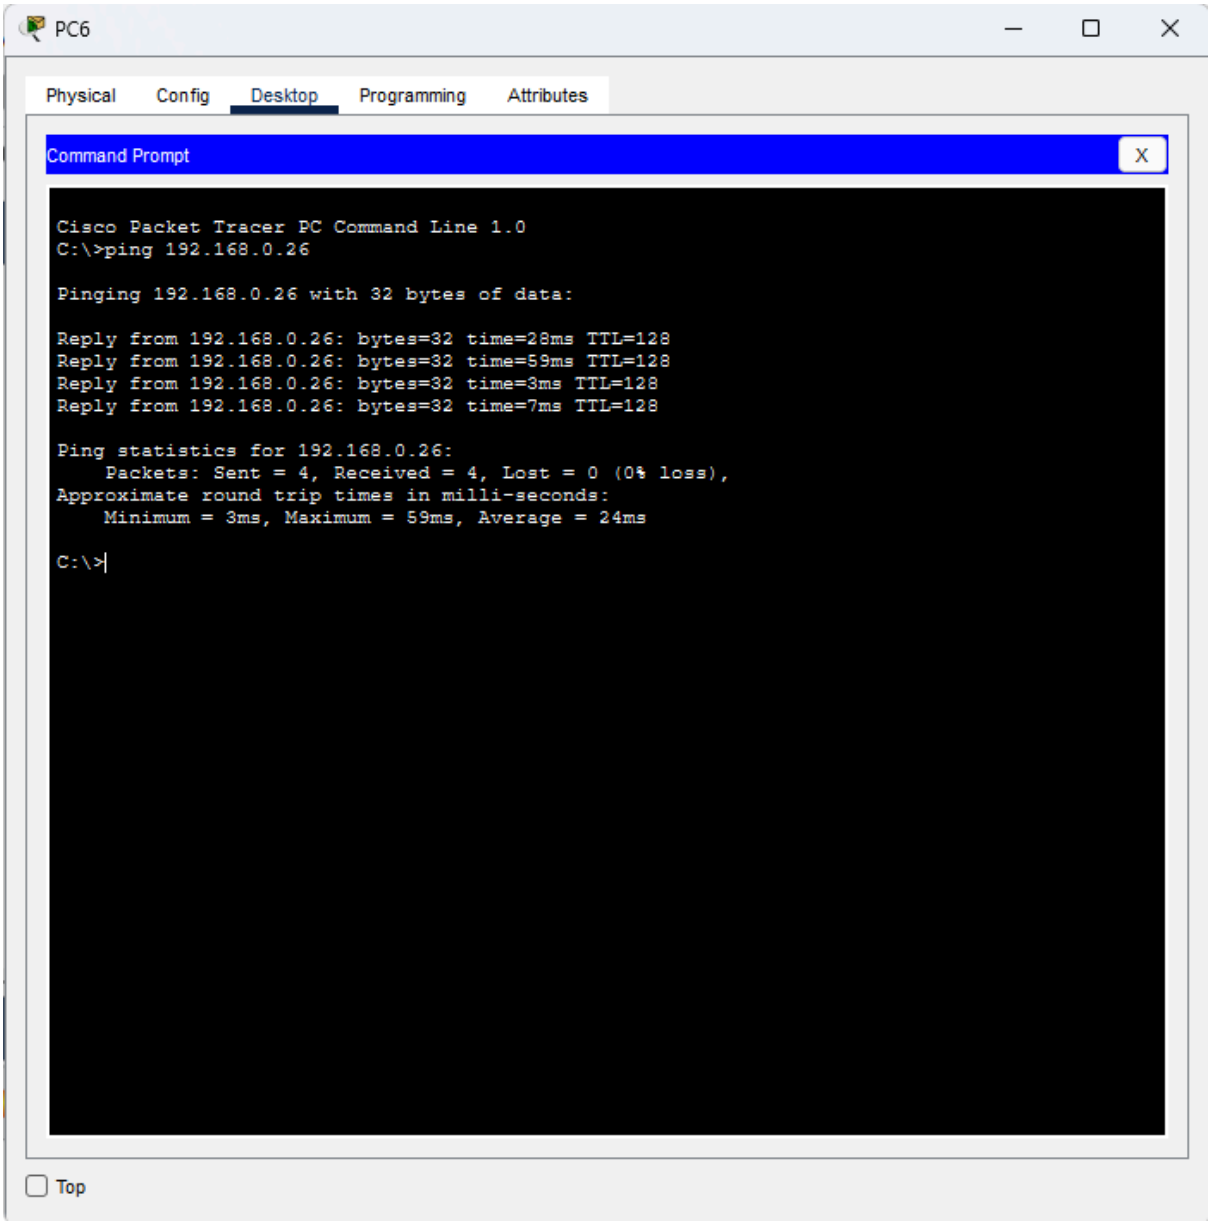

PC3
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.23
Pinging 192.168.0.23 with 32 bytes of data:
Reply from 192.168.0.23: bytes=32 time=73ms TTL=128
Reply from 192.168.0.23: bytes=32 time=3ms TTL=128
Reply from 192.168.0.23: bytes=32 time=54ms TTL=128
Reply from 192.168.0.23: bytes=32 time=56ms TTL=128
Ping statistics for 192.168.0.23:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 3ms, Maximum = 73ms, Average = 46ms
C:\>
Top

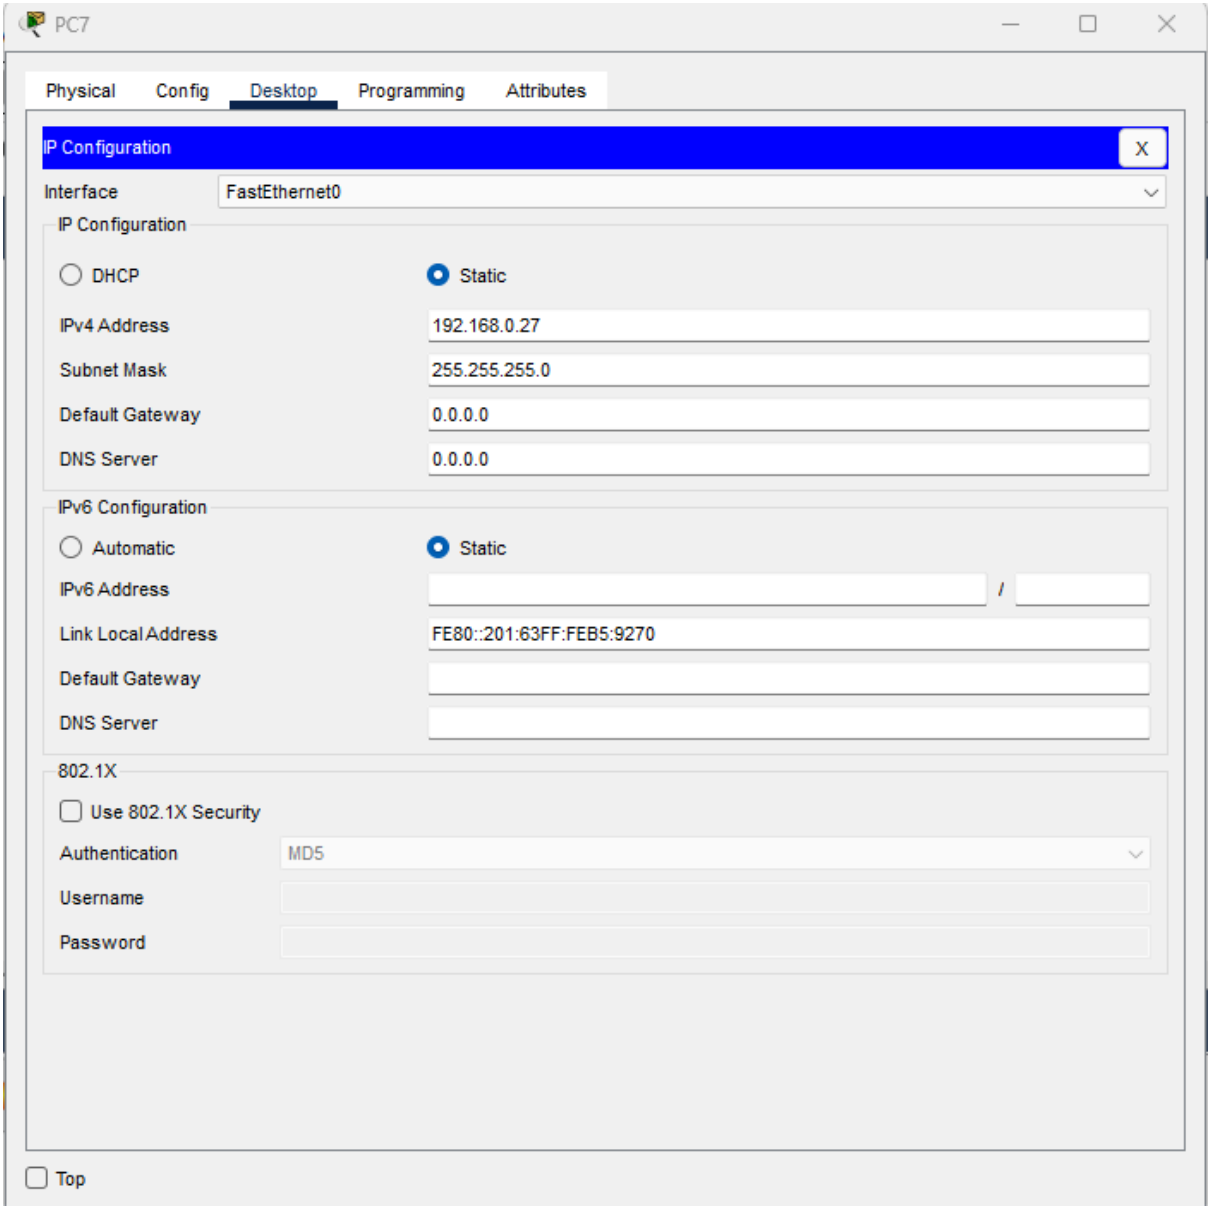

PC4
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.0.24
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::260:3EFF:FE5D:8939
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

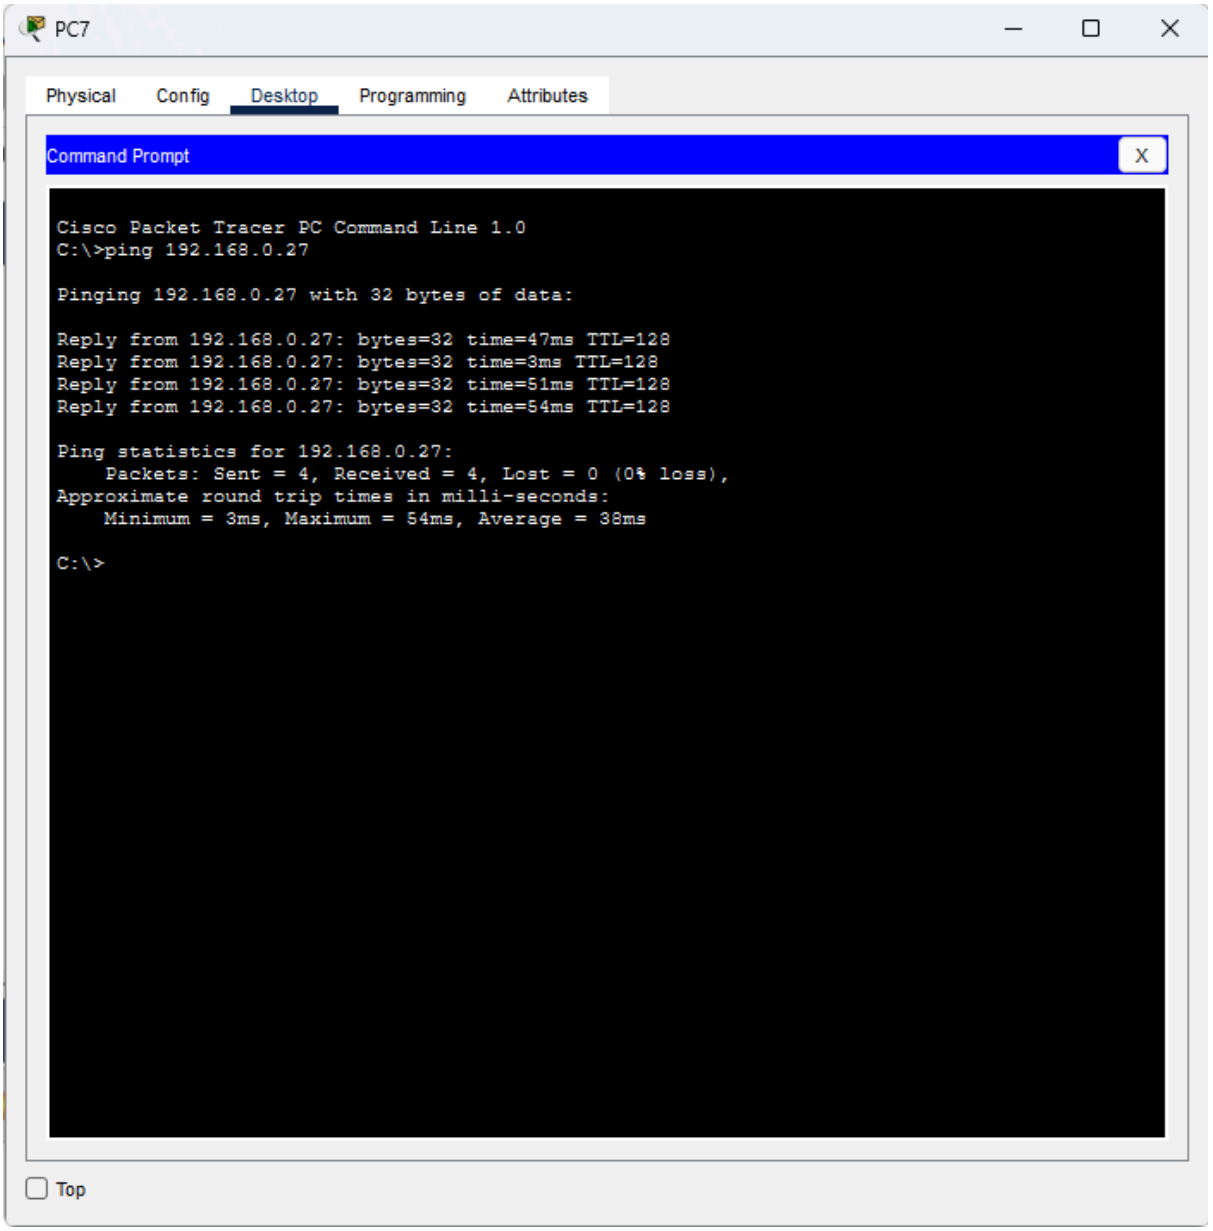

PC4
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.24
Pinging 192.168.0.24 with 32 bytes of data:
Reply from 192.168.0.24: bytes=32 time=44ms TTL=128
Reply from 192.168.0.24: bytes=32 time=5ms TTL=128
Reply from 192.168.0.24: bytes=32 time<1ms TTL=128
Reply from 192.168.0.24: bytes=32 time=3ms TTL=128
Ping statistics for 192.168.0.24:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 44ms, Average = 13ms
C:\>
Top


PC5
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.25
Pinging 192.168.0.25 with 32 bytes of data:
Reply from 192.168.0.25: bytes=32 time=101ms TTL=128
Reply from 192.168.0.25: bytes=32 time=23ms TTL=128
Reply from 192.168.0.25: bytes=32 time=28ms TTL=128
Reply from 192.168.0.25: bytes=32 time=12ms TTL=128
Ping statistics for 192.168.0.25:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 12ms, Maximum = 101ms, Average = 41ms
C:\>
Top

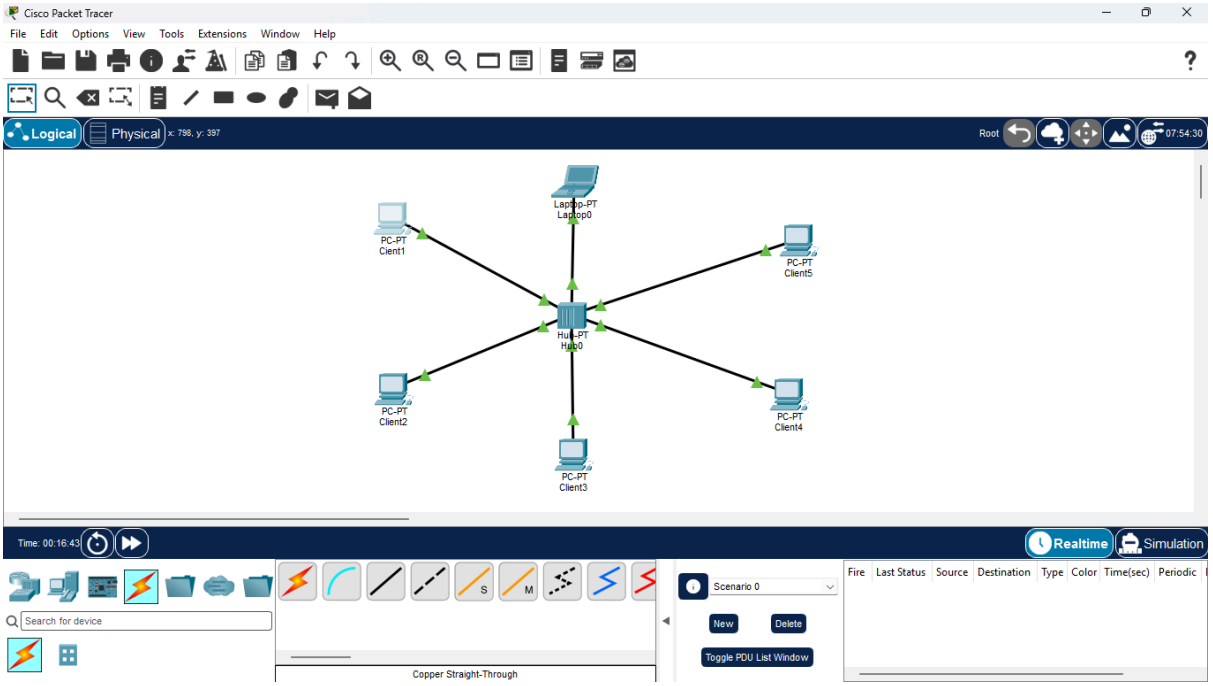

PC6
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.0.26
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::2E0:B0FF:FEBB:1117
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

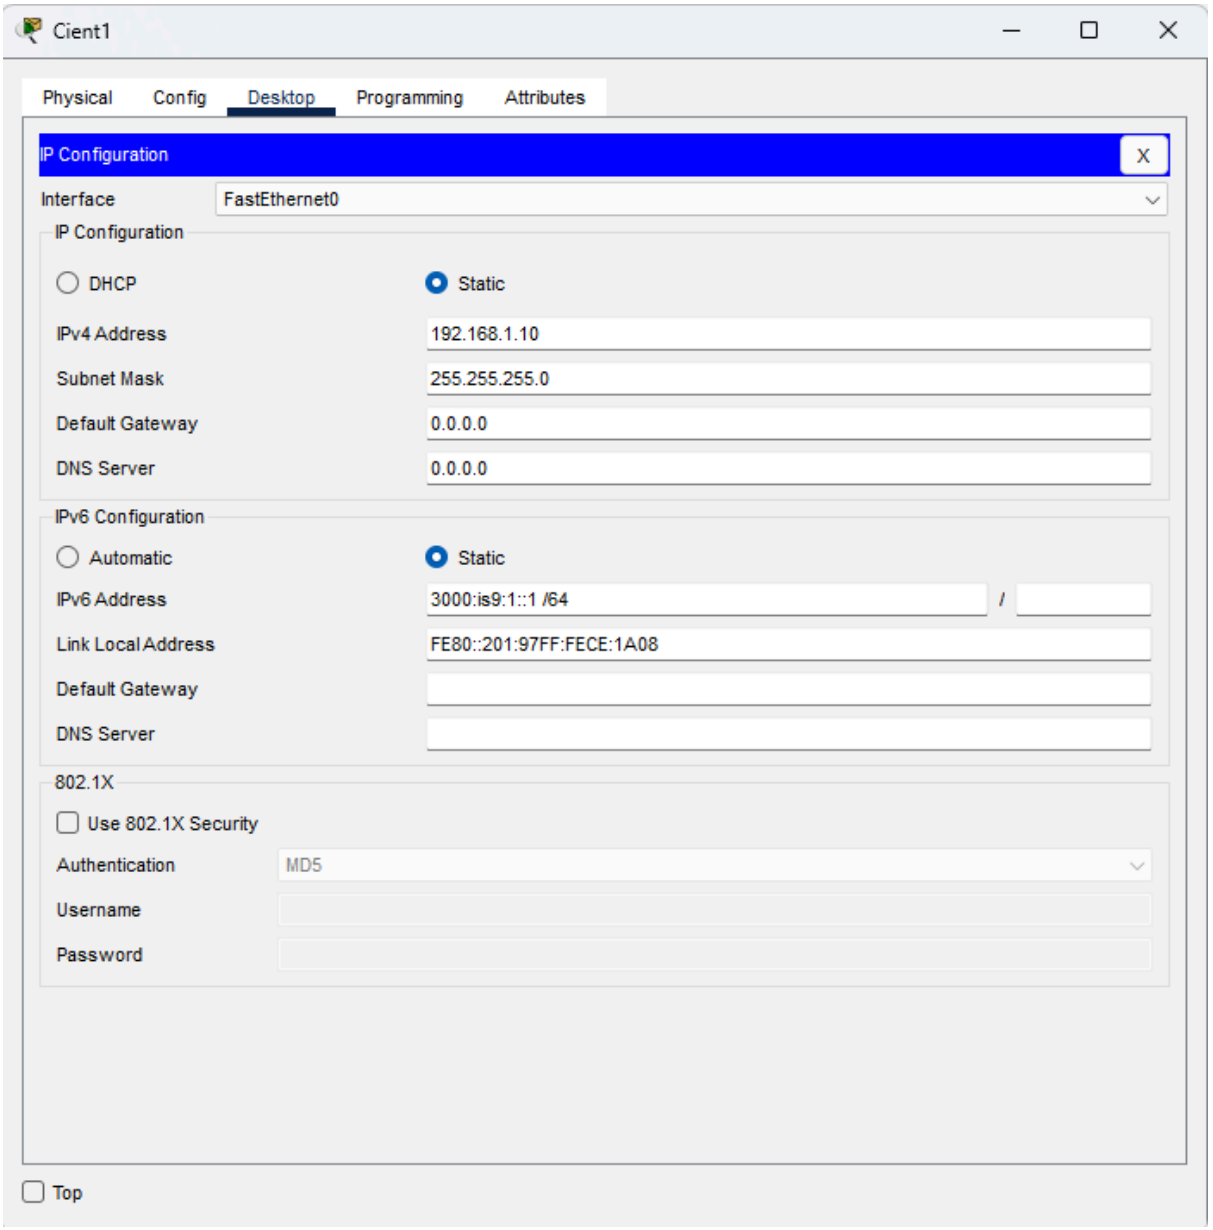

PC6
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.26
Pinging 192.168.0.26 with 32 bytes of data:
Reply from 192.168.0.26: bytes=32 time=28ms TTL=128
Reply from 192.168.0.26: bytes=32 time=59ms TTL=128
Reply from 192.168.0.26: bytes=32 time=3ms TTL=128
Reply from 192.168.0.26: bytes=32 time=7ms TTL=128
Ping statistics for 192.168.0.26:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 3ms, Maximum = 59ms, Average = 24ms
C:\>
Top

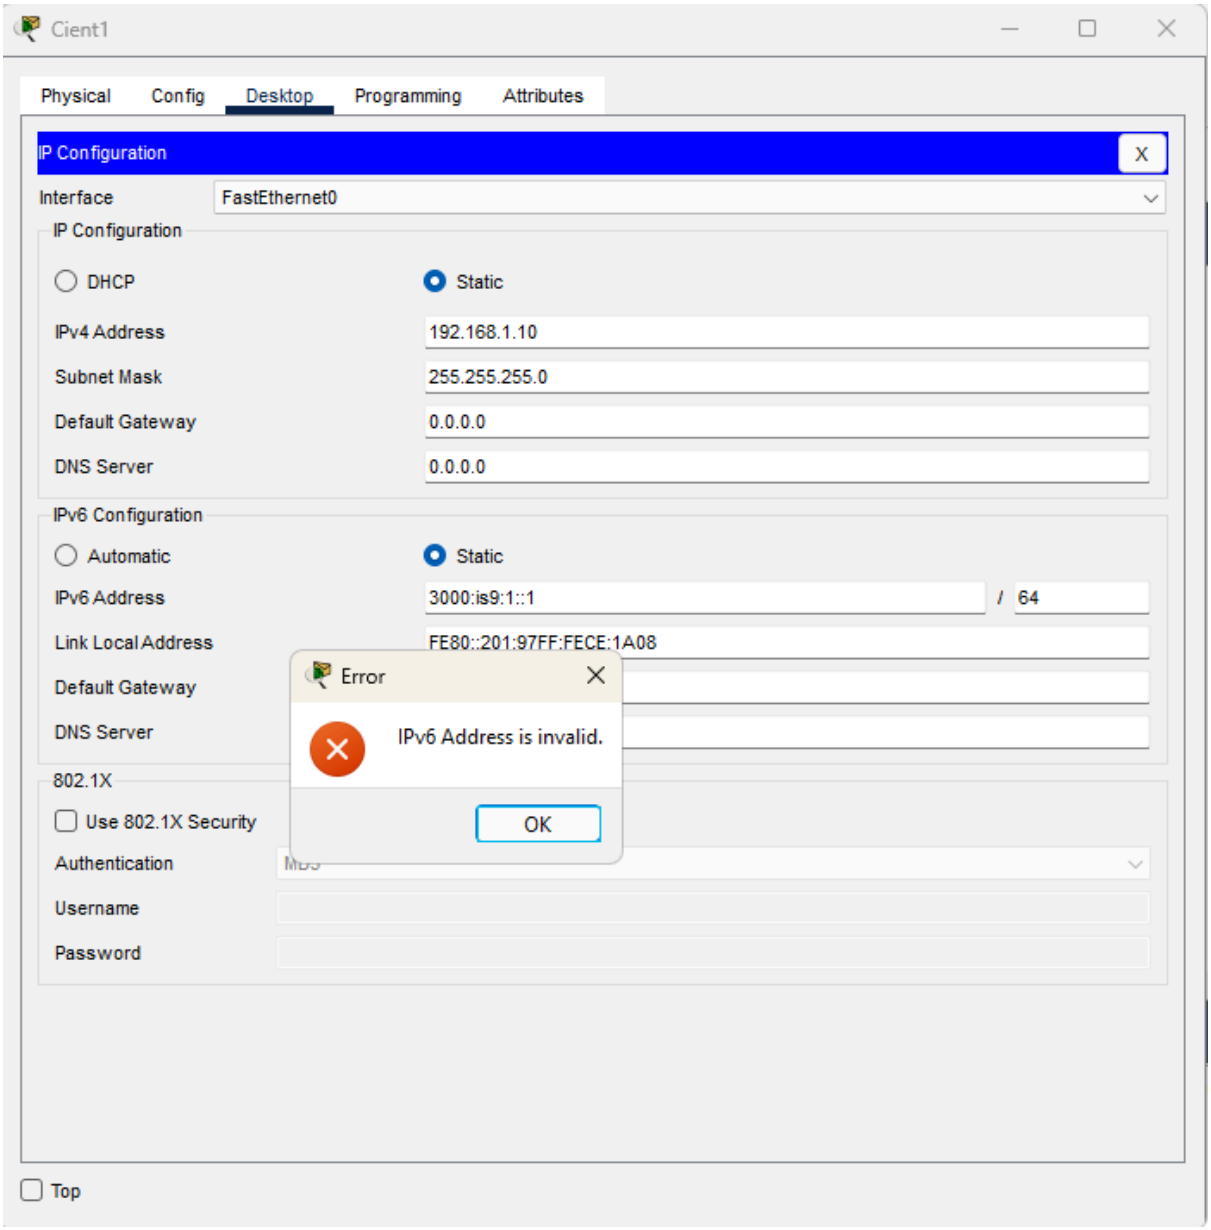

PC7
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.0.27
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::201:63FF:FEB5:9270
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

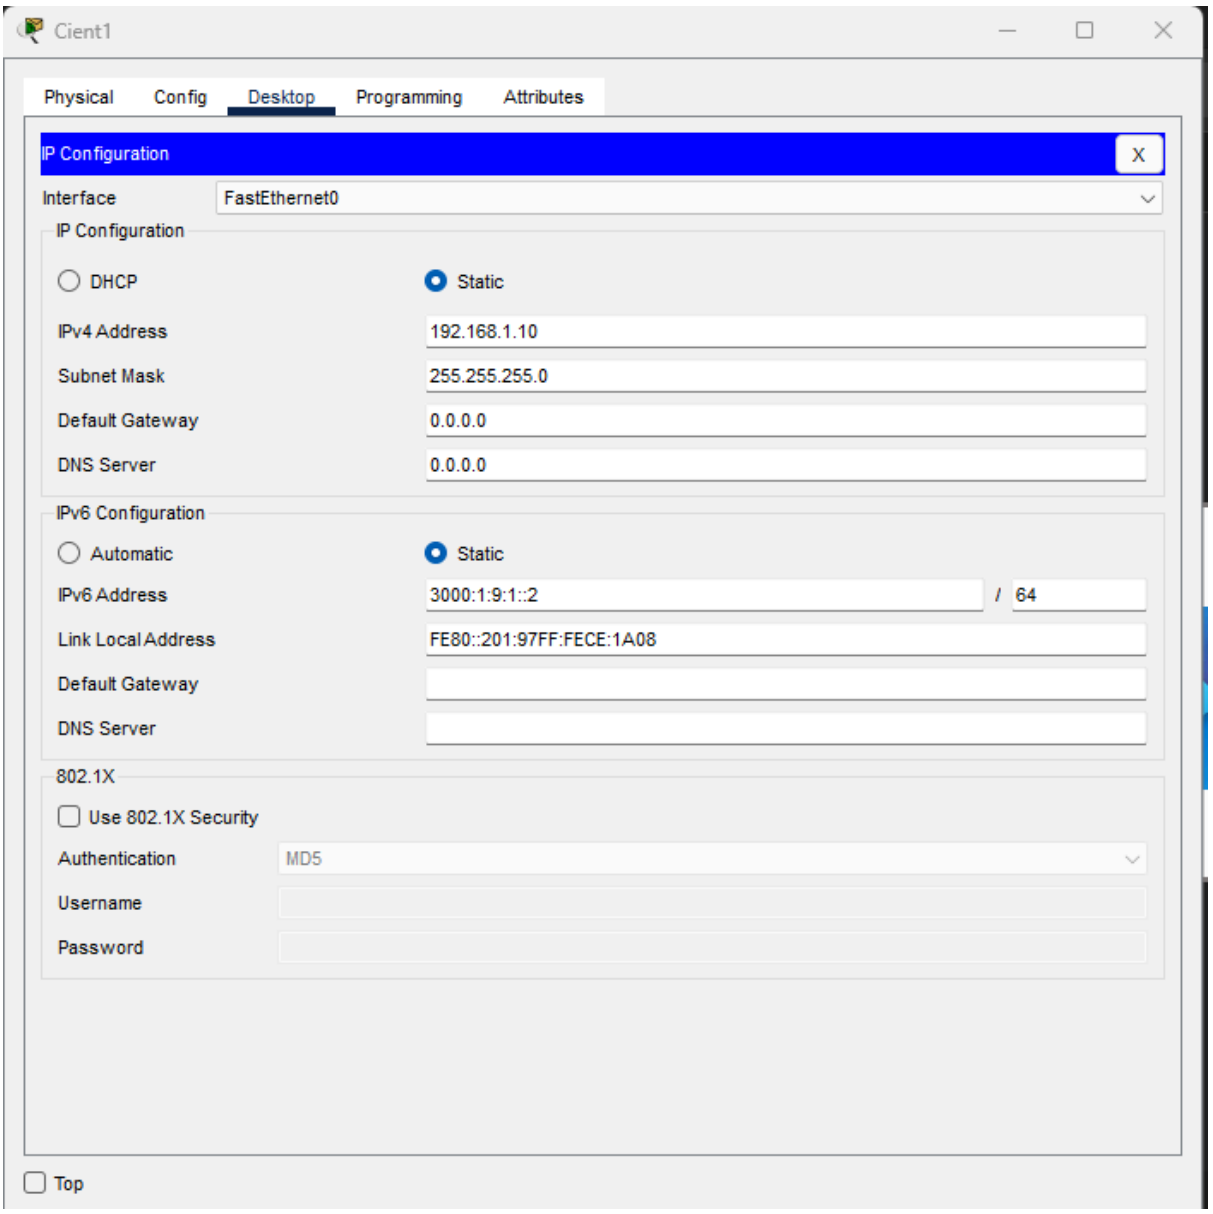

PC7
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.27
Pinging 192.168.0.27 with 32 bytes of data:
Reply from 192.168.0.27: bytes=32 time=47ms TTL=128
Reply from 192.168.0.27: bytes=32 time=3ms TTL=128
Reply from 192.168.0.27: bytes=32 time=51ms TTL=128
Reply from 192.168.0.27: bytes=32 time=54ms TTL=128
Ping statistics for 192.168.0.27:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 3ms, Maximum = 54ms, Average = 38ms
C:\>
Top

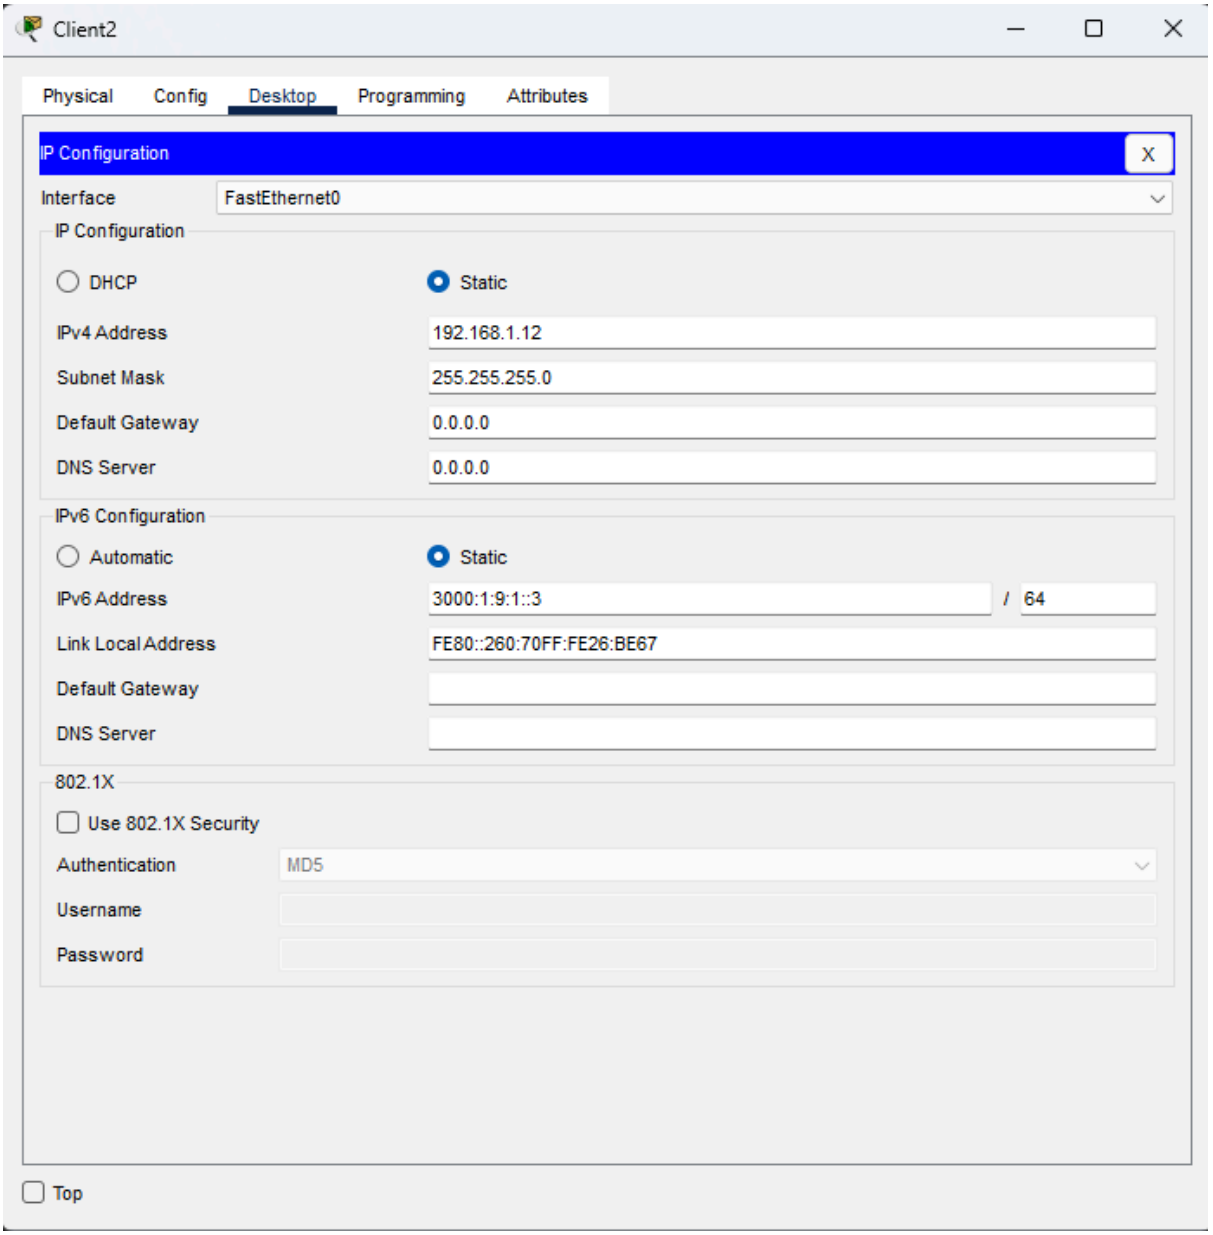
Exercice 4

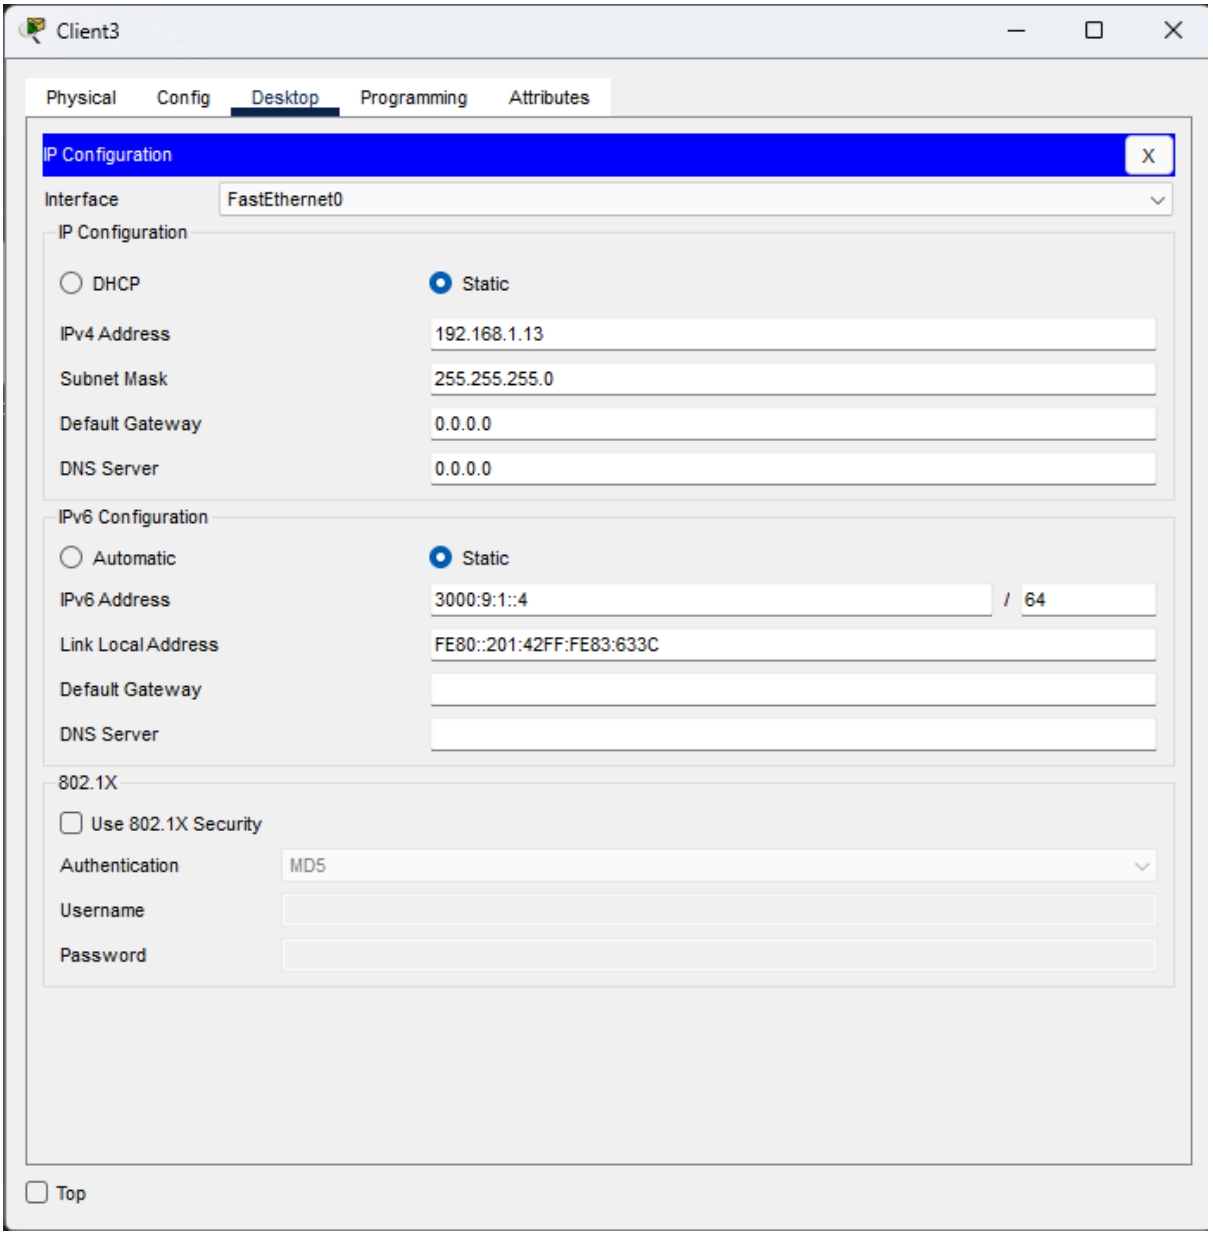

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
Root
Laptop-PT Laptop0
PC-PT Client1
PC-PT Client5
Hub-PT Hub0
PC-PT Client2
PC-PT Client4
PC-PT Client3
Realtime
Simulation
Search for device
Copper Straight-Through
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic

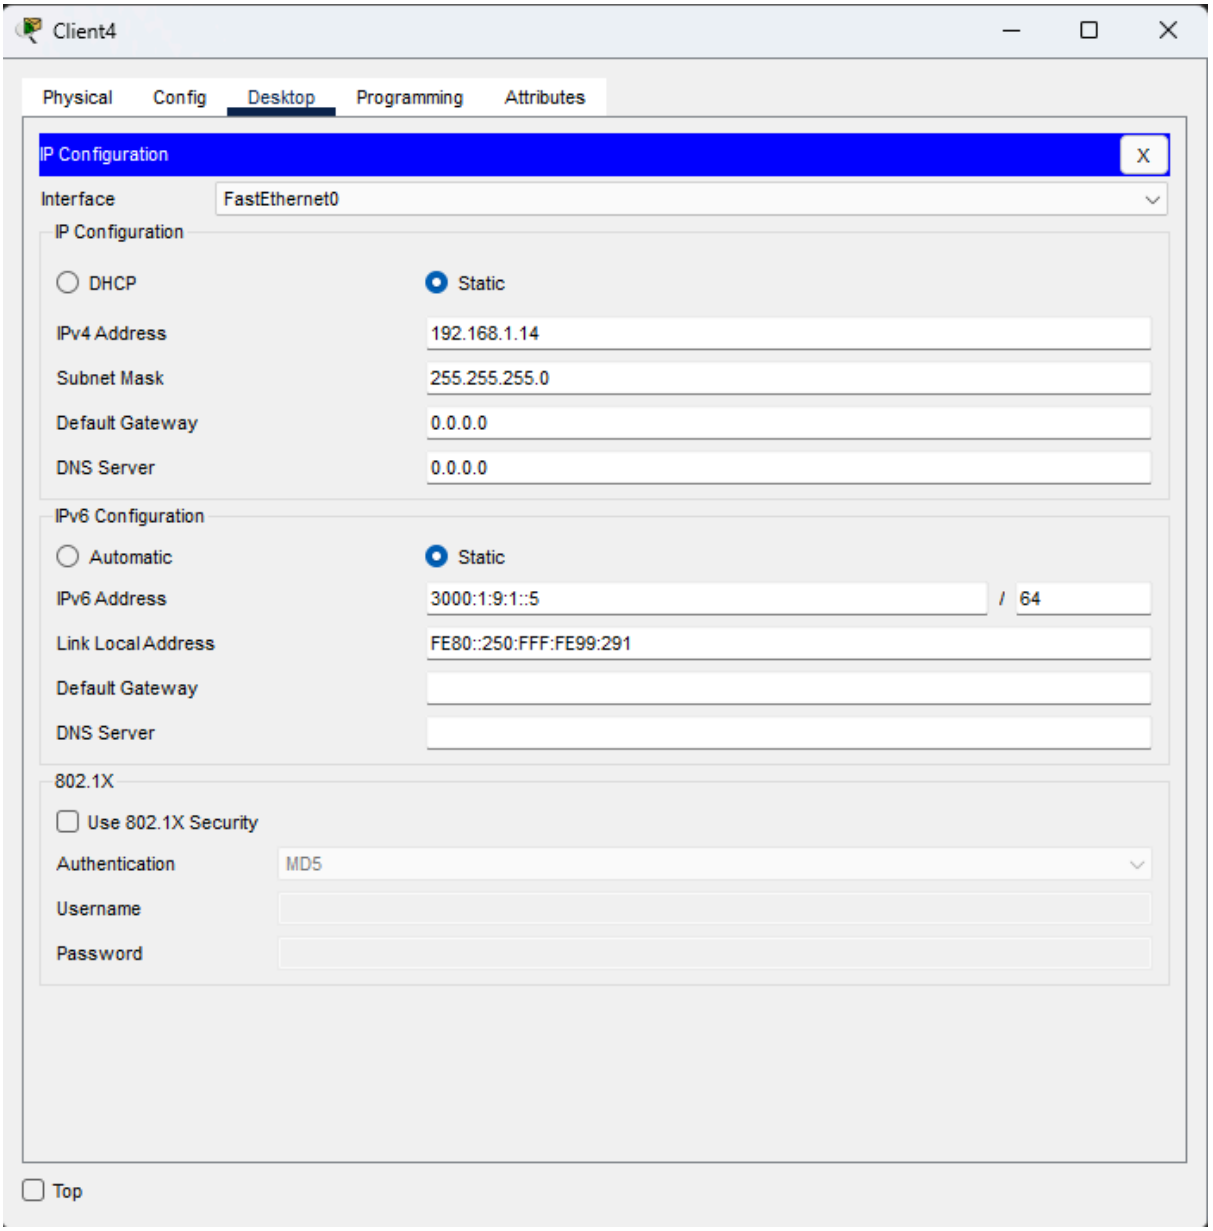

Cient1
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.1.10
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:is9:1::1 /64
Link Local Address
FE80::201:97FF:FECE:1A08
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

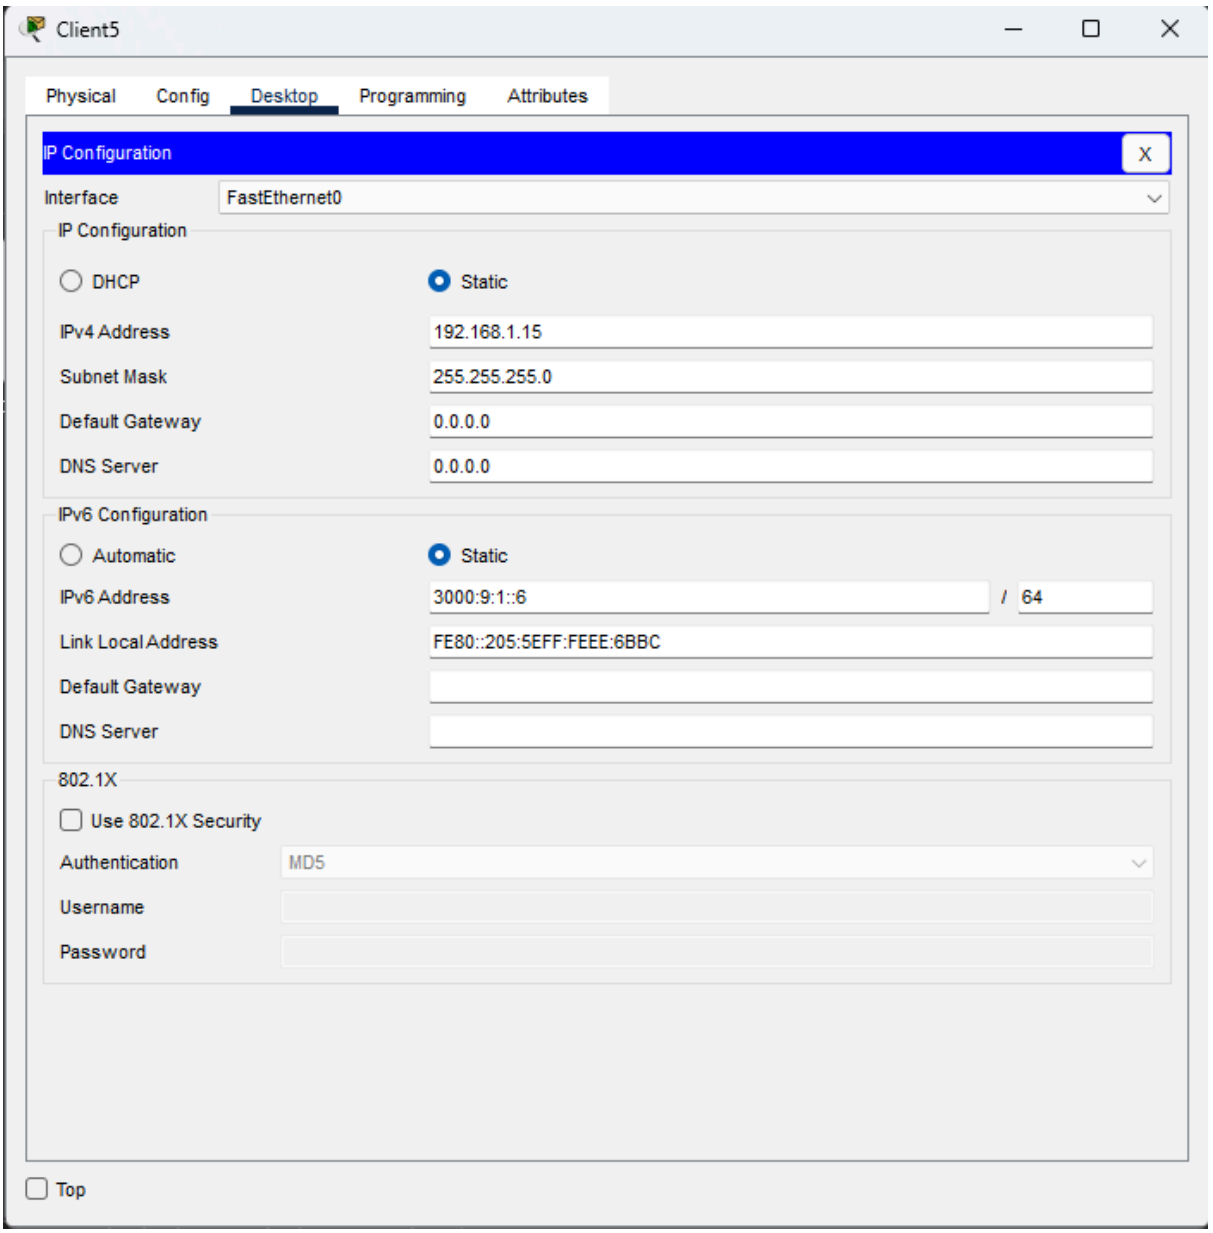

Cient1
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.1.10
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:is9:1::1
/ 64
Link Local Address
FE80::201:97FF:FECE:1A08
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
Username
Password
Error
IPv6 Address is invalid.
OK
Top

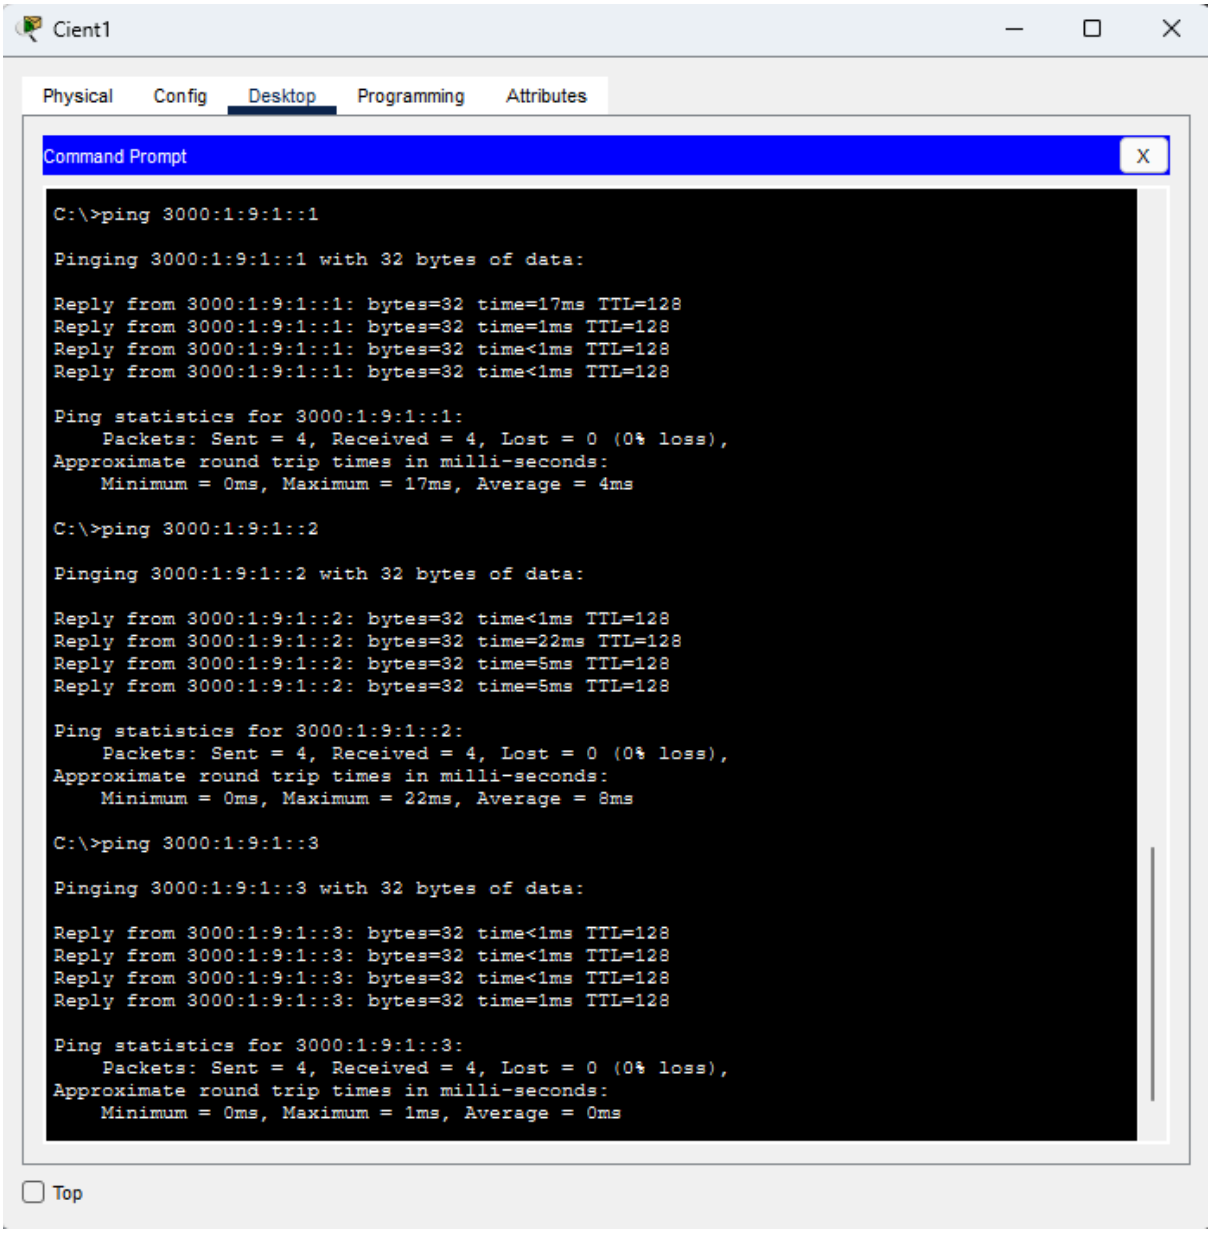

Cient1
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.1.10
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:1:9:1::2
/ 64
Link Local Address
FE80::201:97FF:FECE:1A08
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

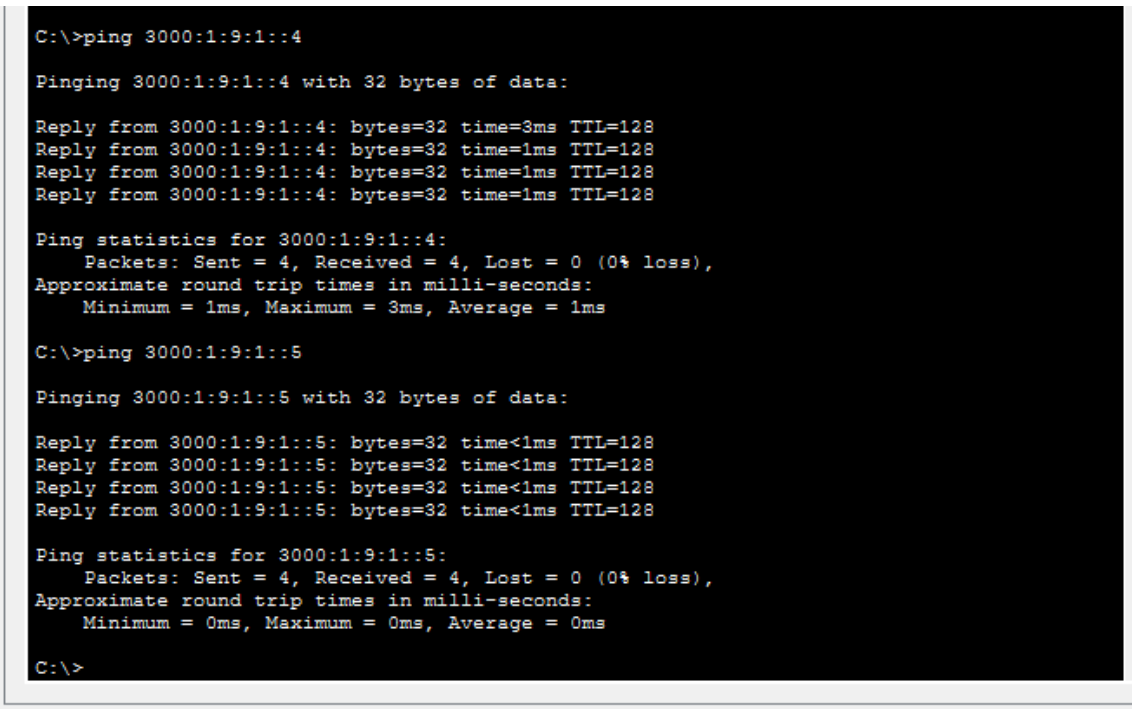

Client2
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.1.12
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:1:9:1::3
/
64
Link Local Address
FE80::260:70FF:FE26:BE67
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top


Client3
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.1.13
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:9:1::4
/
64
Link Local Address
FE80::201:42FF:FE83:633C
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

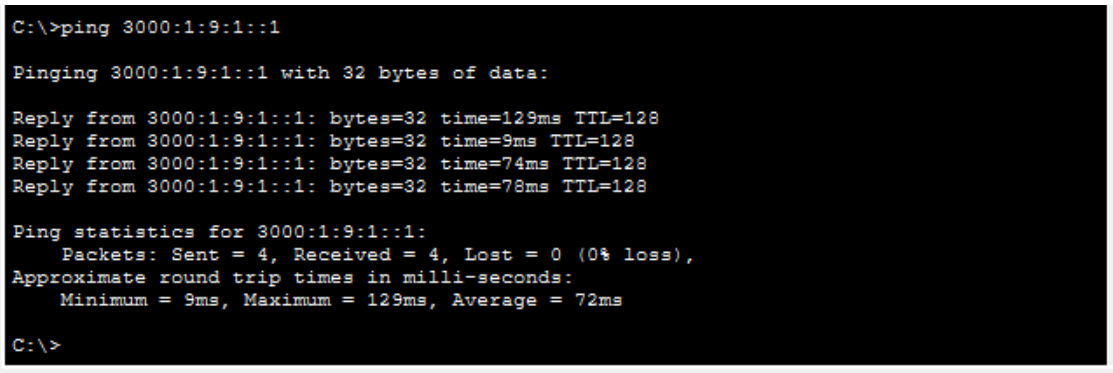

Client4
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.1.14
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:1:9:1::5
/
64
Link Local Address
FE80::250:FFF:FE99:291
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top


Client5
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.1.15
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:9:1::6
/
64
Link Local Address
FE80::205:5EFF:FEEE:6BBC
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top


Cient1
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
C:\>ping 3000:1:9:1::1
Pinging 3000:1:9:1::1 with 32 bytes of data:
Reply from 3000:1:9:1::1: bytes=32 time=17ms TTL=128
Reply from 3000:1:9:1::1: bytes=32 time=1ms TTL=128
Reply from 3000:1:9:1::1: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:1::1: bytes=32 time<1ms TTL=128
Ping statistics for 3000:1:9:1::1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 17ms, Average = 4ms
C:\>ping 3000:1:9:1::2
Pinging 3000:1:9:1::2 with 32 bytes of data:
Reply from 3000:1:9:1::2: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:1::2: bytes=32 time=22ms TTL=128
Reply from 3000:1:9:1::2: bytes=32 time=5ms TTL=128
Reply from 3000:1:9:1::2: bytes=32 time=5ms TTL=128
Ping statistics for 3000:1:9:1::2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 22ms, Average = 8ms
C:\>ping 3000:1:9:1::3
Pinging 3000:1:9:1::3 with 32 bytes of data:
Reply from 3000:1:9:1::3: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:1::3: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:1::3: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:1::3: bytes=32 time=1ms TTL=128
Ping statistics for 3000:1:9:1::3:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
Top

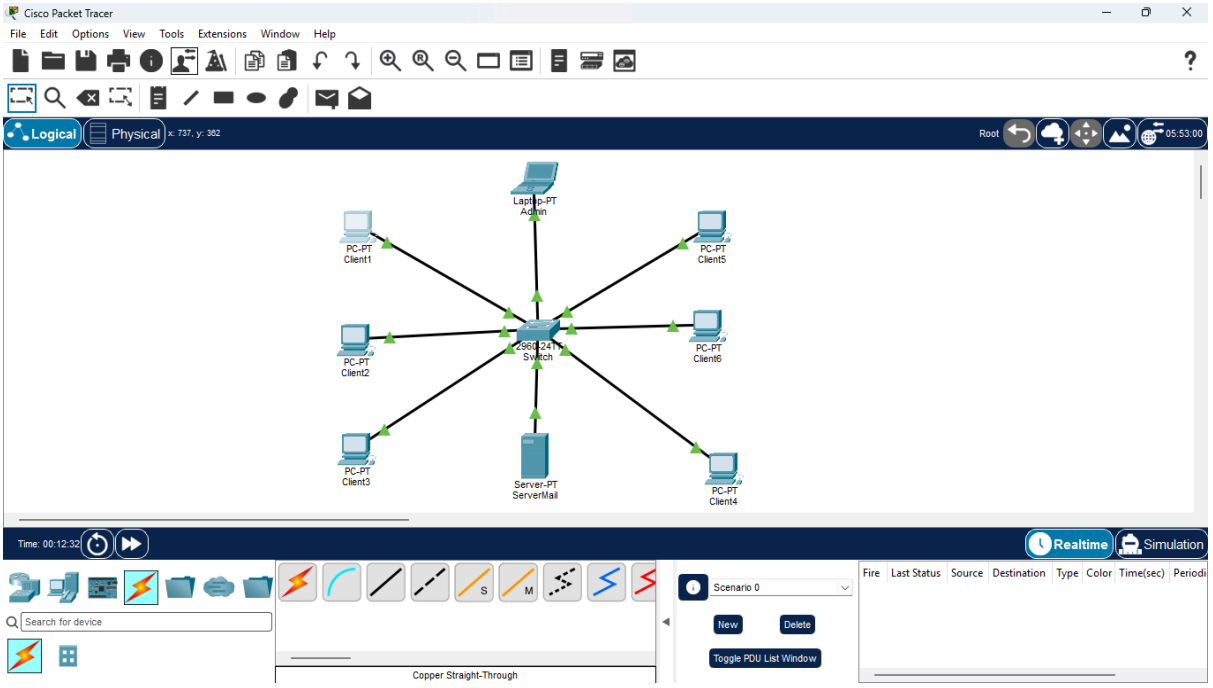

C:\>ping 3000:1:9:1::4
Pinging 3000:1:9:1::4 with 32 bytes of data:
Reply from 3000:1:9:1::4: bytes=32 time=3ms TTL=128
Reply from 3000:1:9:1::4: bytes=32 time=1ms TTL=128
Reply from 3000:1:9:1::4: bytes=32 time=1ms TTL=128
Reply from 3000:1:9:1::4: bytes=32 time=1ms TTL=128
Ping statistics for 3000:1:9:1::4:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 3ms, Average = 1ms
C:\>ping 3000:1:9:1::5
Pinging 3000:1:9:1::5 with 32 bytes of data:
Reply from 3000:1:9:1::5: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:1::5: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:1::5: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:1::5: bytes=32 time<1ms TTL=128
Ping statistics for 3000:1:9:1::5:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>

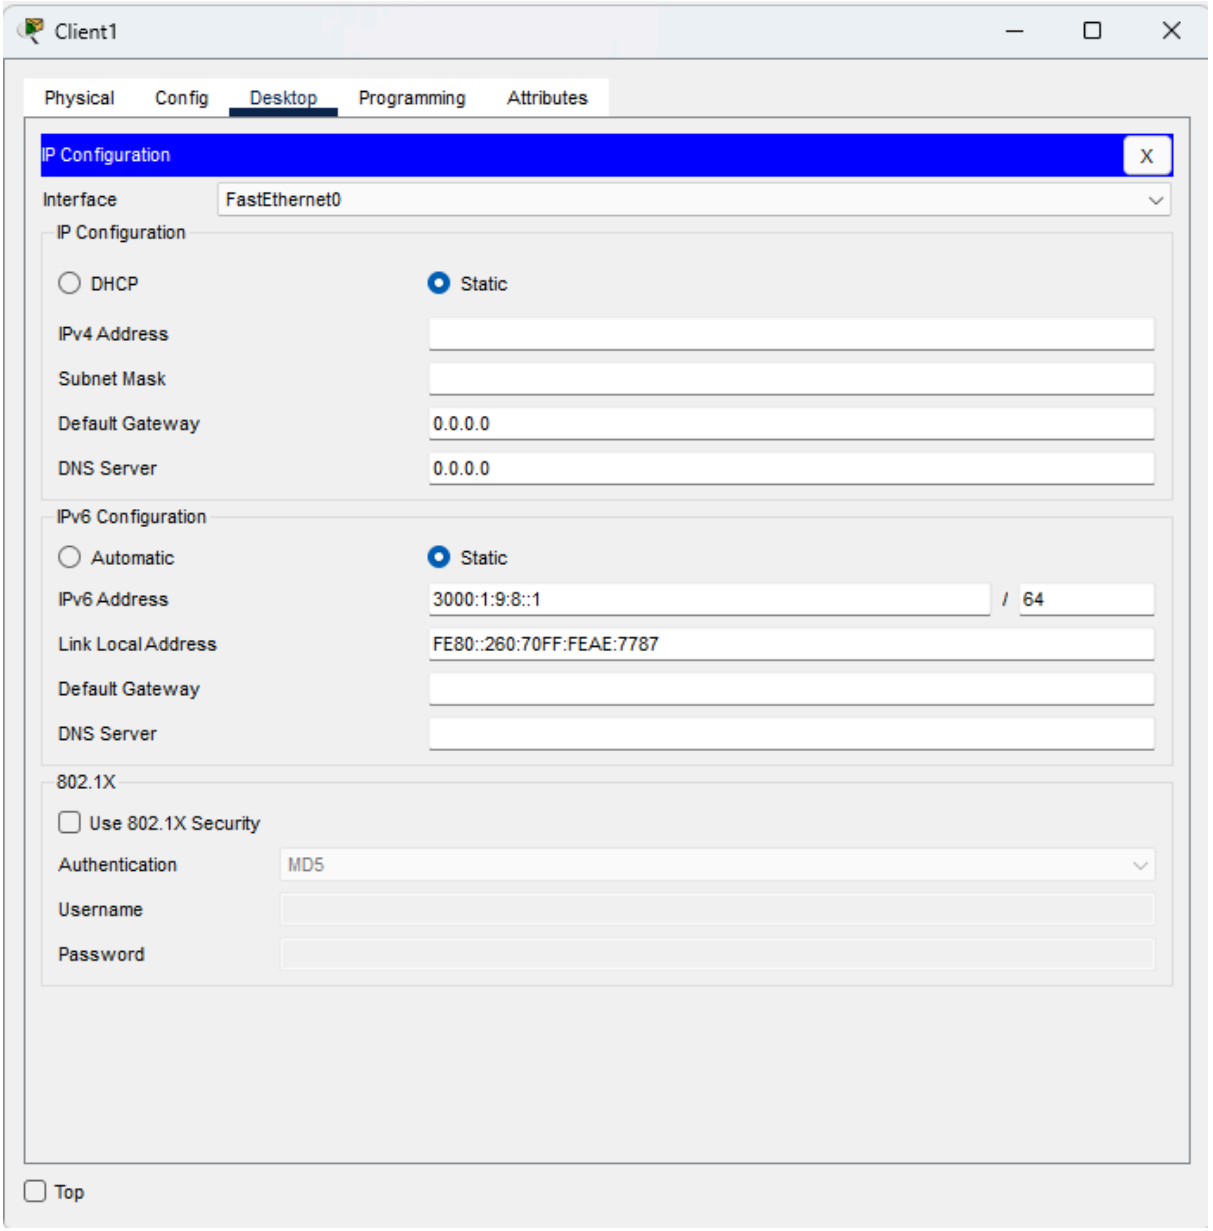
Top

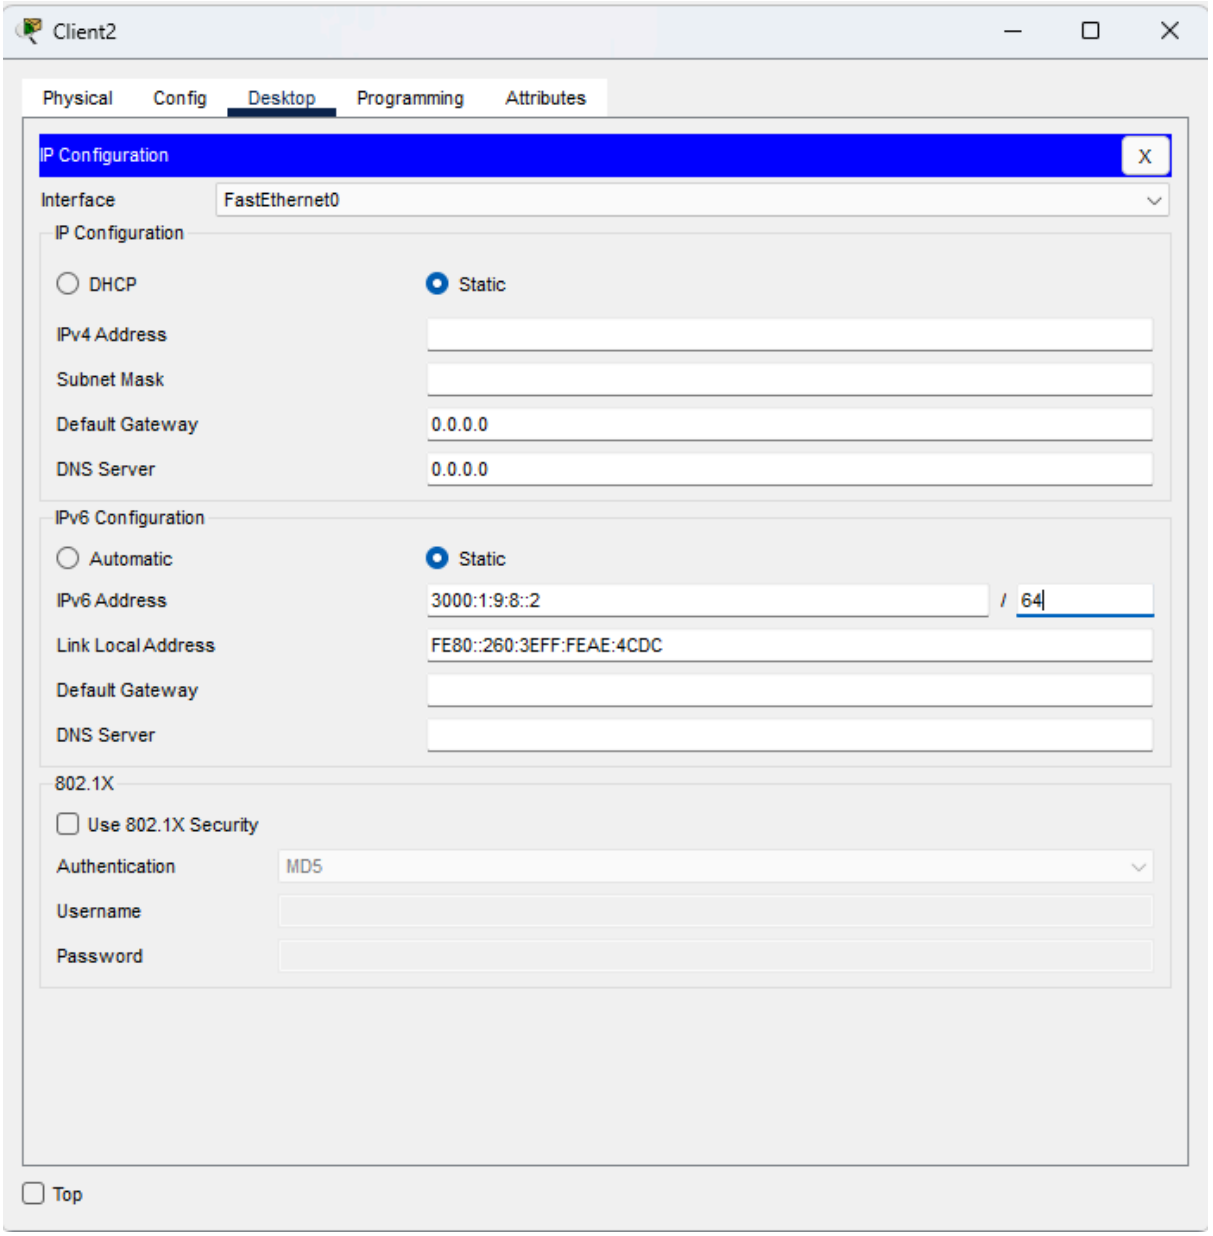

C:\>ping 3000:1:9:1::1
Pinging 3000:1:9:1::1 with 32 bytes of data:
Reply from 3000:1:9:1::1: bytes=32 time=129ms TTL=128
Reply from 3000:1:9:1::1: bytes=32 time=9ms TTL=128
Reply from 3000:1:9:1::1: bytes=32 time=74ms TTL=128
Reply from 3000:1:9:1::1: bytes=32 time=78ms TTL=128
Ping statistics for 3000:1:9:1::1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 9ms, Maximum = 129ms, Average = 72ms
C:\>

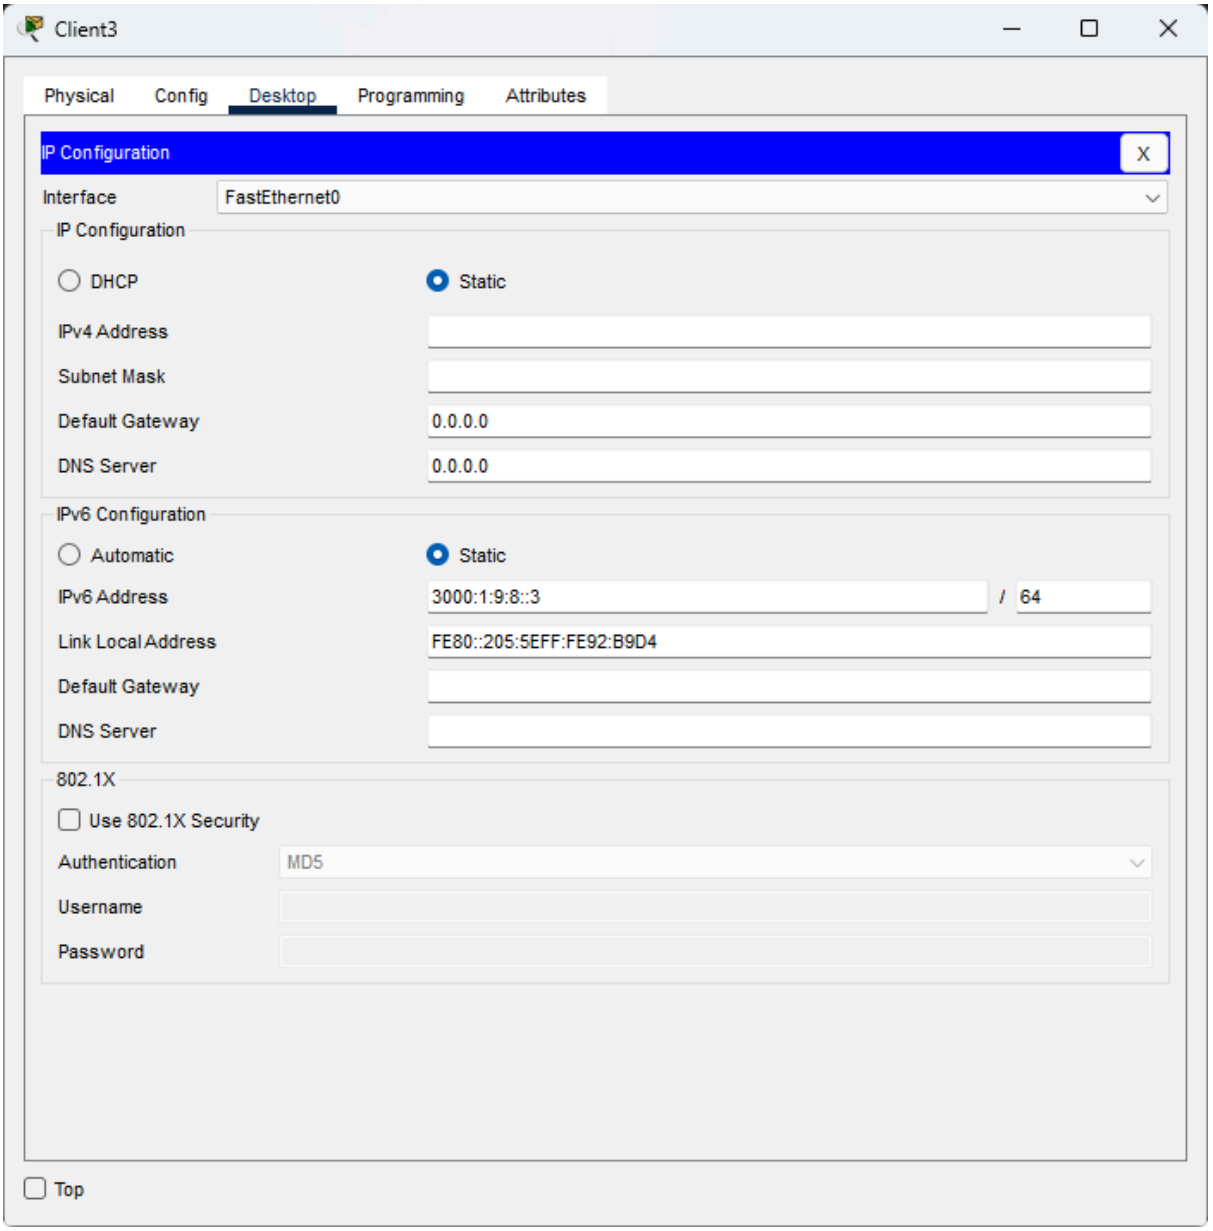
Top

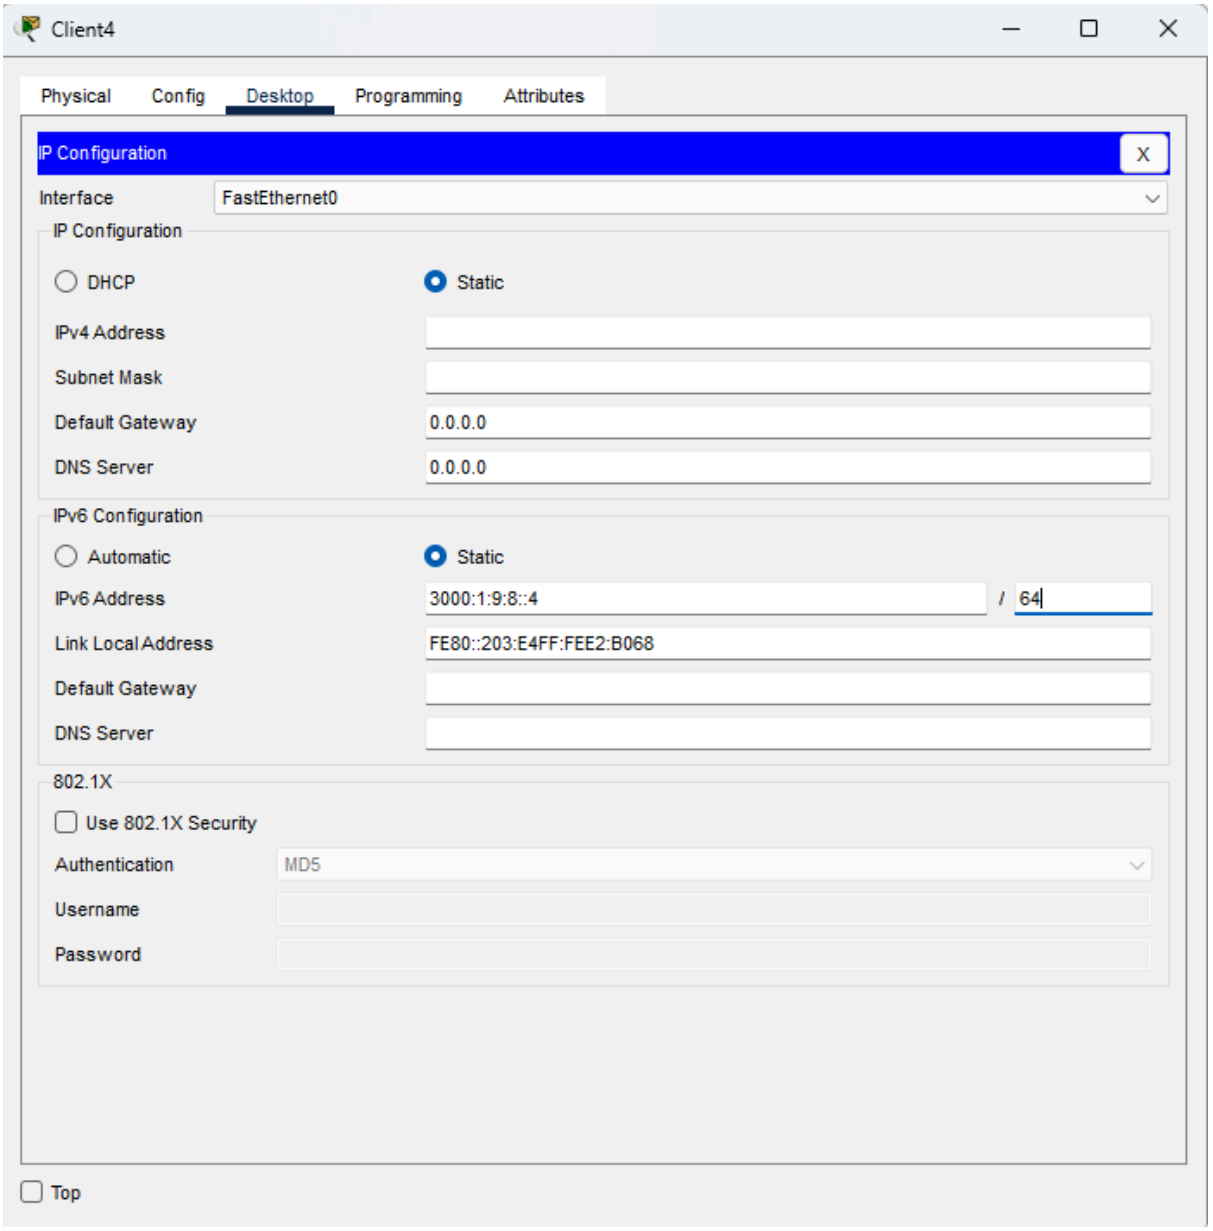
Exercice 5

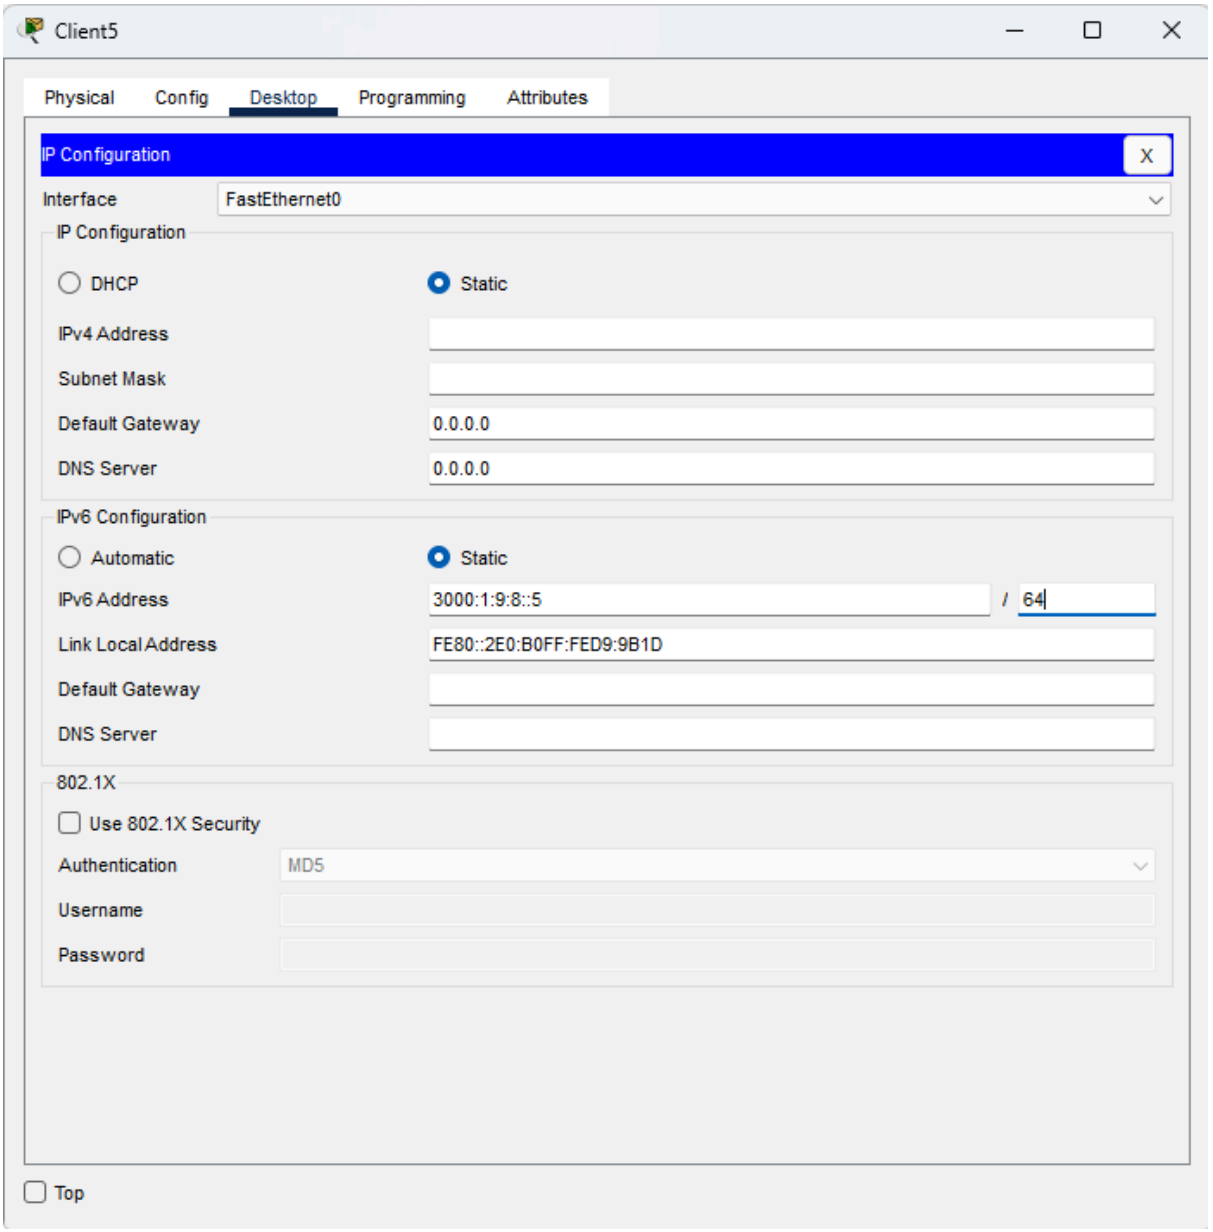

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
Root
05:53:00
Laptop-PT Admin
PC-PT Client1
PC-PT Client5
PC-PT Client2
2960-24TT Switch
PC-PT Client6
PC-PT Client3
Server-PT ServerMail
PC-PT Client4
Time: 00:12:32
Realtime
Simulation
Search for device
Copper Straight-Through
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodi

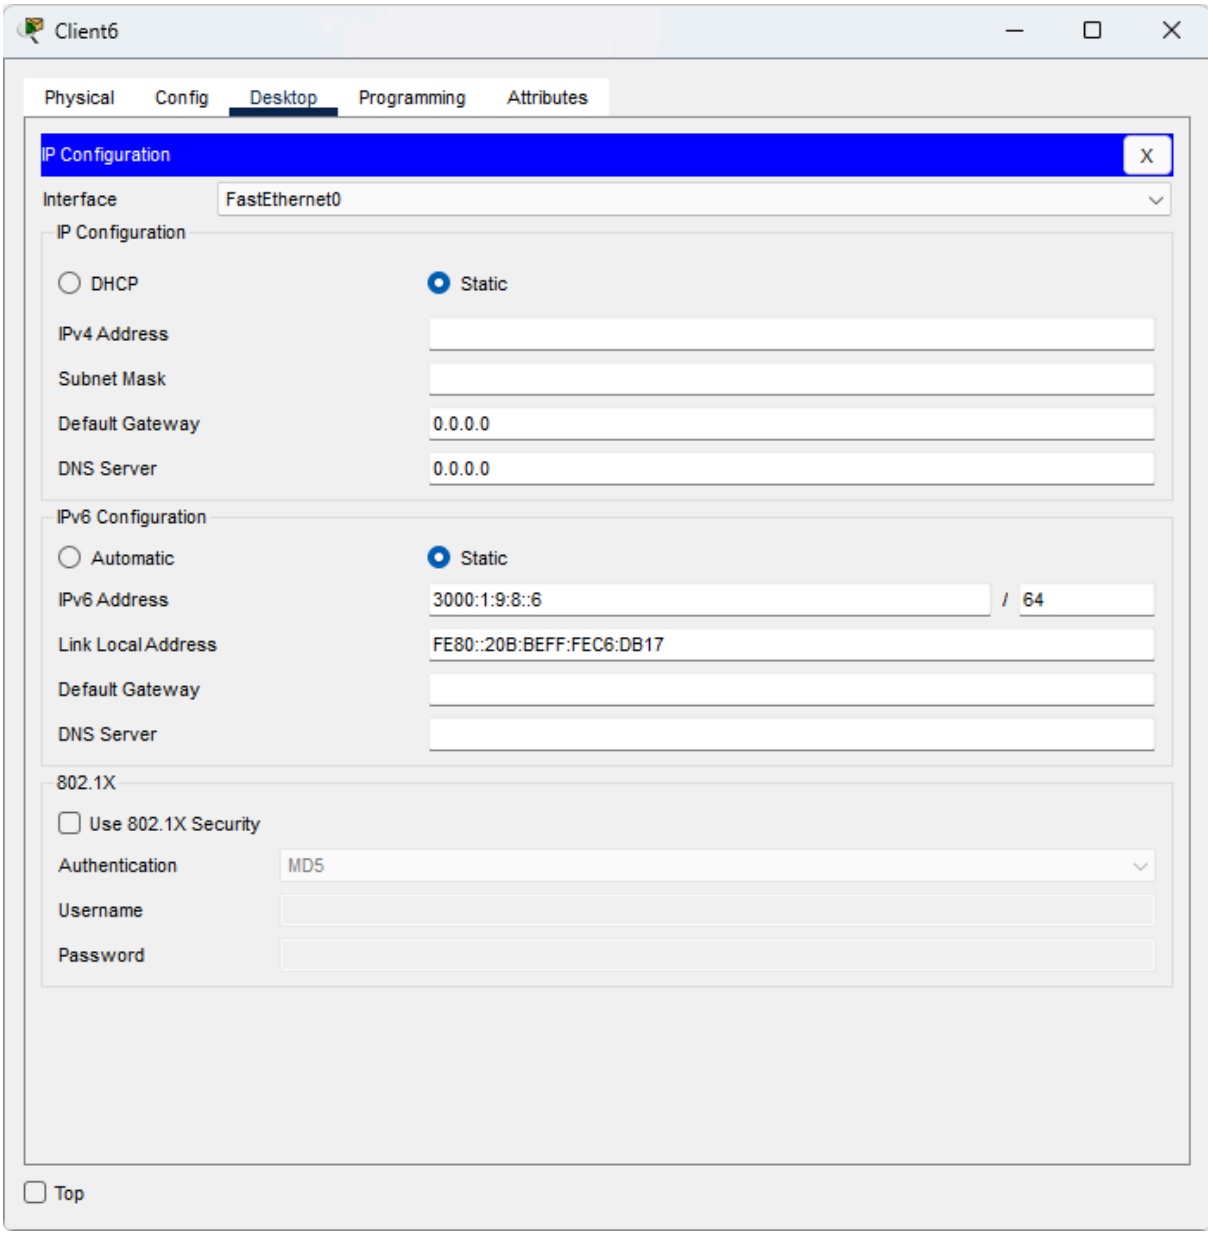

Client1
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:1:9:8::1
/
64
Link Local Address
FE80::260:70FF:FEAE:7787
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

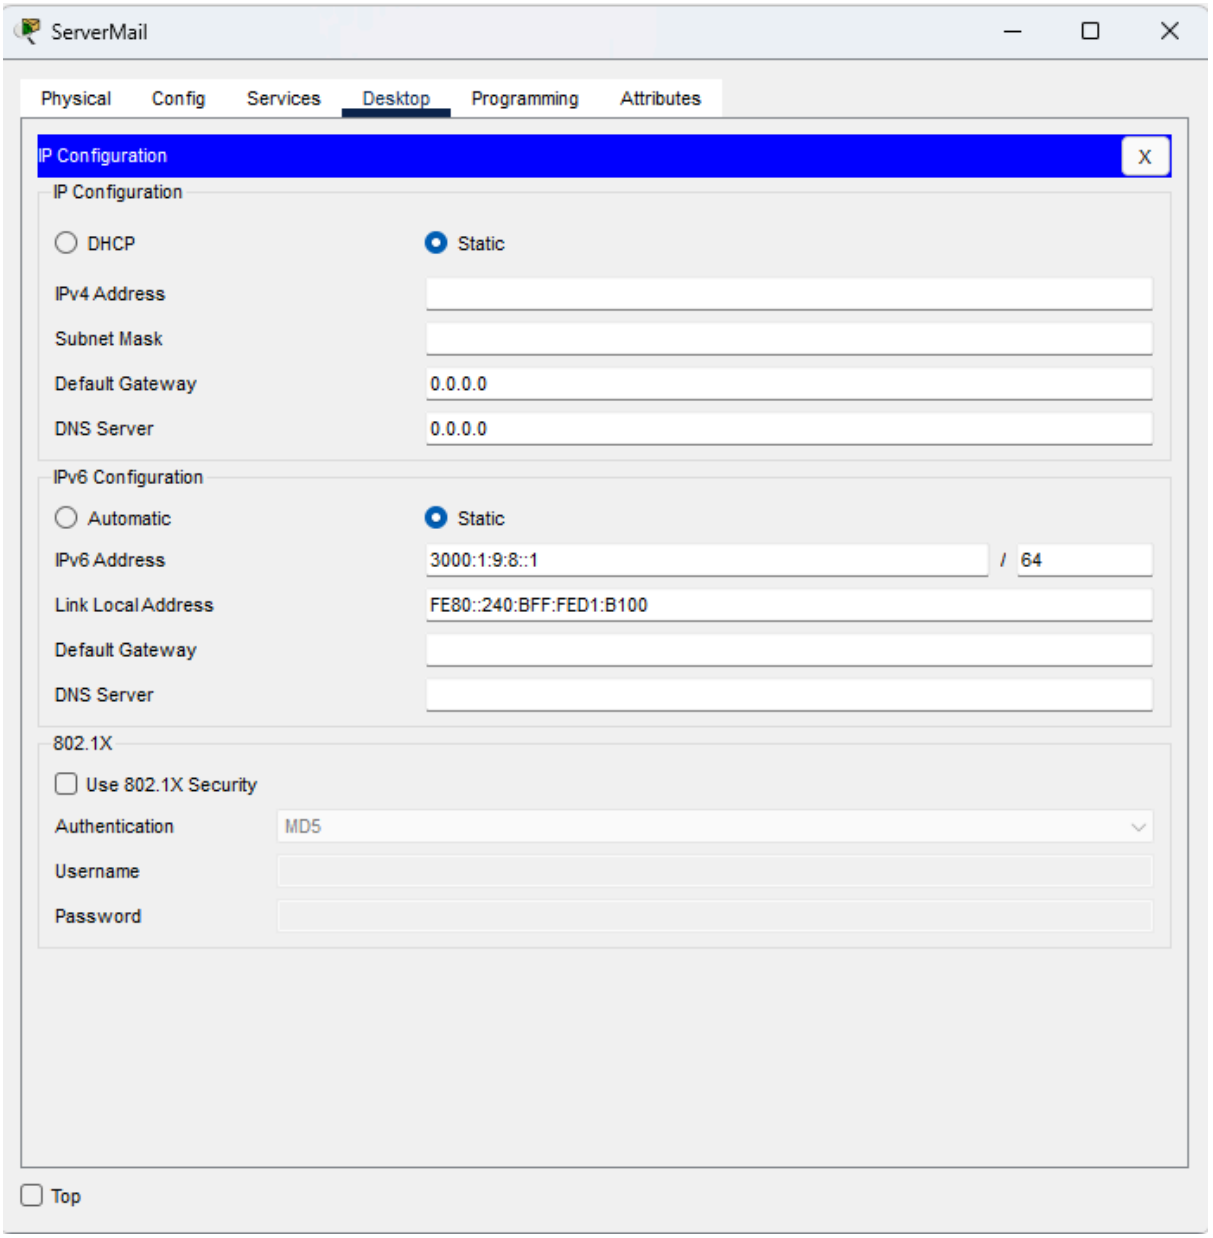

Client2
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:1:9:8::2
/
64
Link Local Address
FE80::260:3EFF:FEAE:4CDC
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

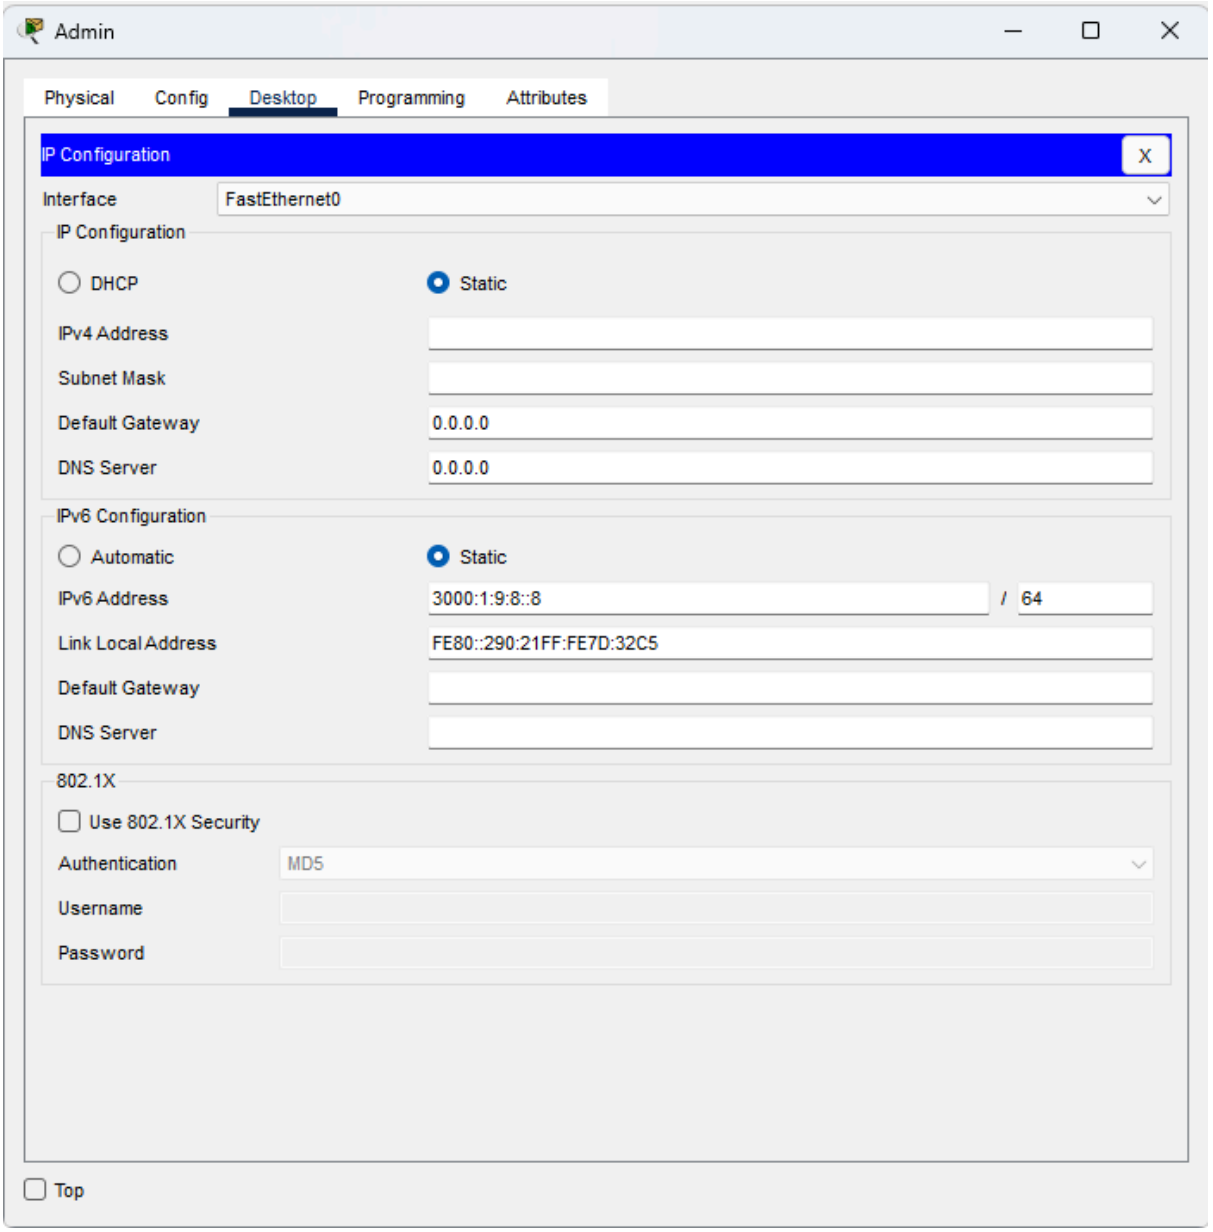

Client3
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:1:9:8::3
/
64
Link Local Address
FE80::205:5EFF:FE92:B9D4
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

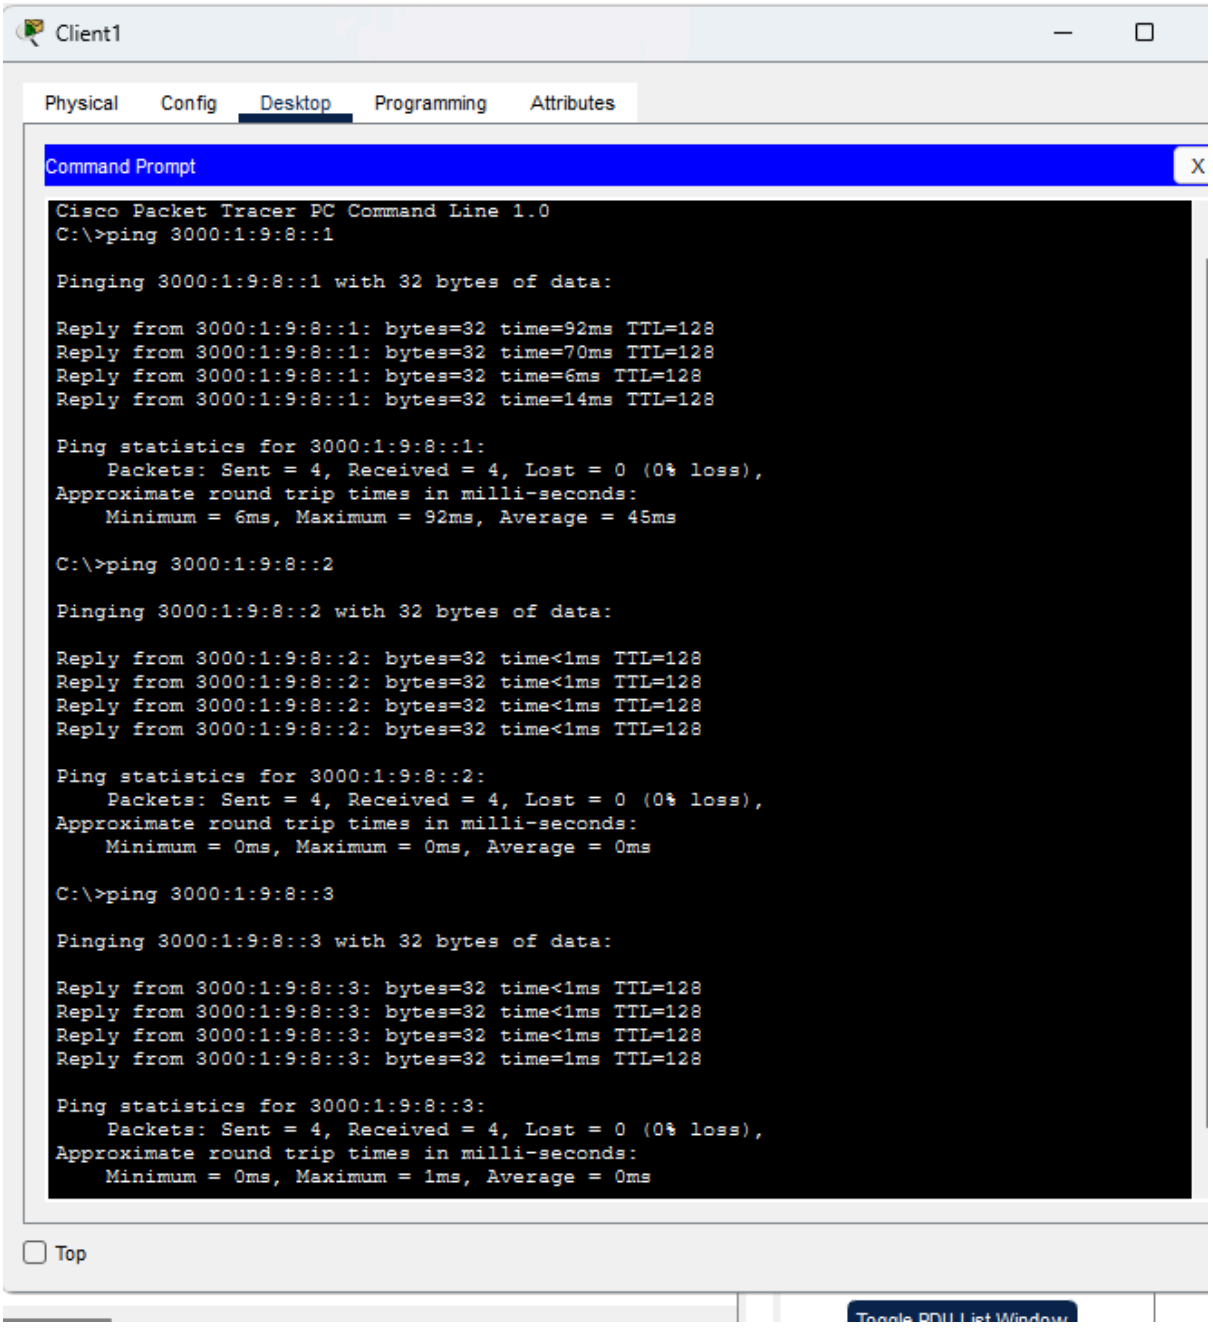

Client4
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:1:9:8::4
/
64
Link Local Address
FE80::203:E4FF:FEE2:B068
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

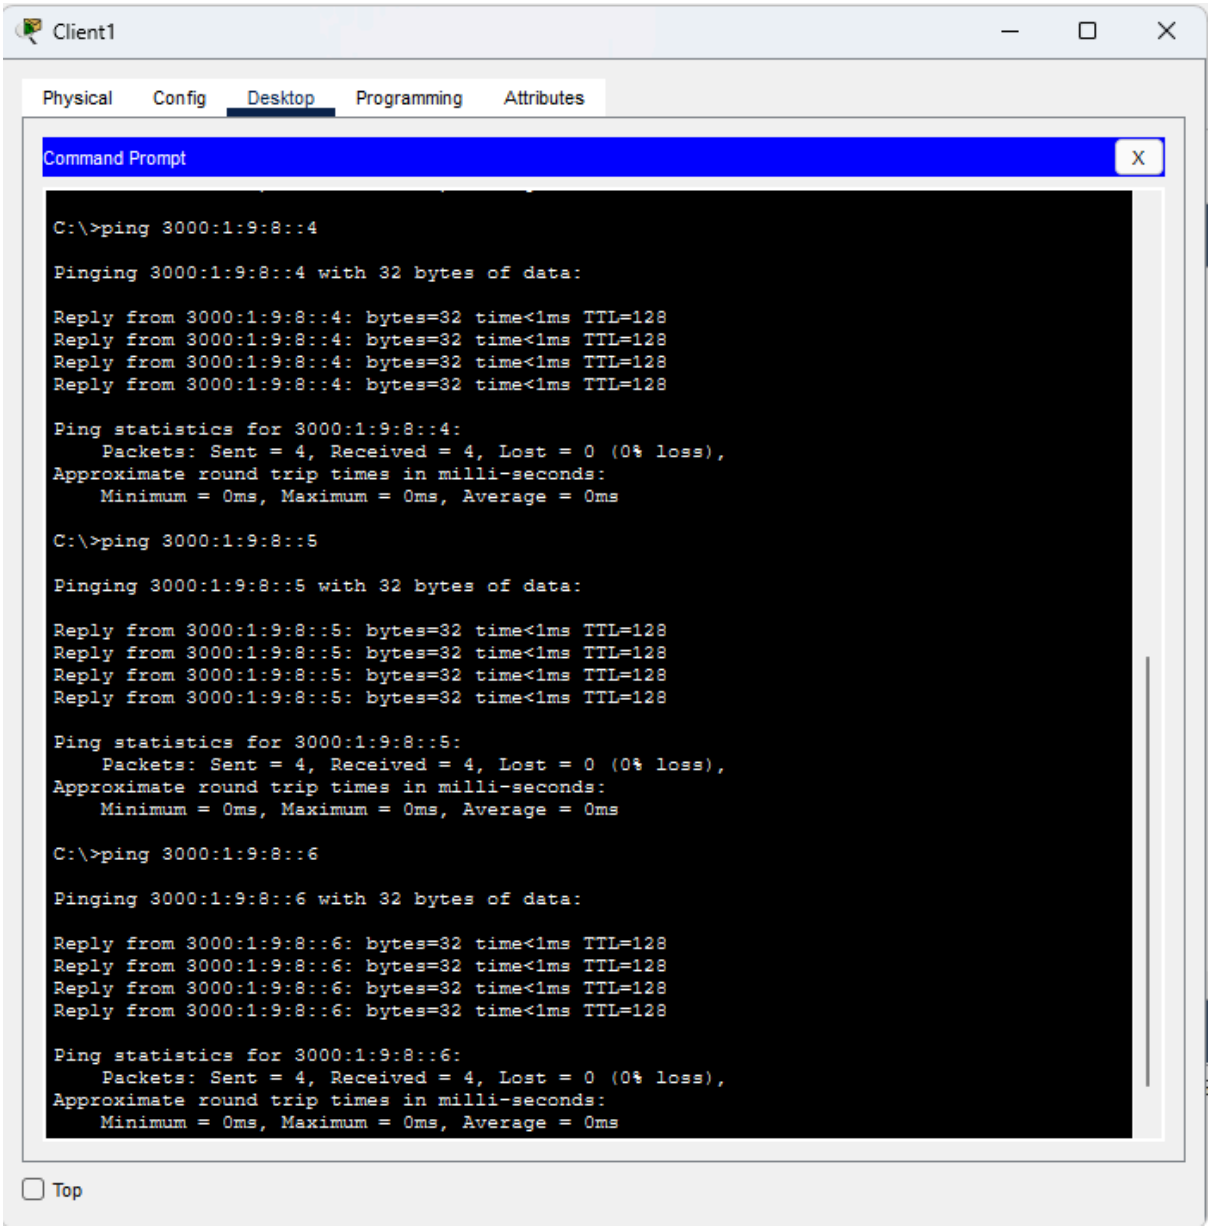

Client5
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:1:9:8::5
/
64
Link Local Address
FE80::2E0:B0FF:FED9:9B1D
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top


Client6
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:1:9:8::6
/
64
Link Local Address
FE80::20B:BEFF:FEC6:DB17
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top


ServerMail
Physical
Config
Services
Desktop
Programming
Attributes
IP Configuration
X
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:1:9:8::1
/ 64
Link Local Address
FE80::240:BFF:FED1:B100
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top


Admin
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:1:9:8::8
/ 64
Link Local Address
FE80::290:21FF:FE7D:32C5
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top


Client1
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:1:9:8::1
Pinging 3000:1:9:8::1 with 32 bytes of data:
Reply from 3000:1:9:8::1: bytes=32 time=92ms TTL=128
Reply from 3000:1:9:8::1: bytes=32 time=70ms TTL=128
Reply from 3000:1:9:8::1: bytes=32 time=6ms TTL=128
Reply from 3000:1:9:8::1: bytes=32 time=14ms TTL=128
Ping statistics for 3000:1:9:8::1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 6ms, Maximum = 92ms, Average = 45ms
C:\>ping 3000:1:9:8::2
Pinging 3000:1:9:8::2 with 32 bytes of data:
Reply from 3000:1:9:8::2: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:8::2: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:8::2: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:8::2: bytes=32 time<1ms TTL=128
Ping statistics for 3000:1:9:8::2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>ping 3000:1:9:8::3
Pinging 3000:1:9:8::3 with 32 bytes of data:
Reply from 3000:1:9:8::3: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:8::3: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:8::3: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:8::3: bytes=32 time=1ms TTL=128
Ping statistics for 3000:1:9:8::3:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
Top


Client1
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
C:\>ping 3000:1:9:8::4
Pinging 3000:1:9:8::4 with 32 bytes of data:
Reply from 3000:1:9:8::4: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:8::4: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:8::4: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:8::4: bytes=32 time<1ms TTL=128
Ping statistics for 3000:1:9:8::4:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>ping 3000:1:9:8::5
Pinging 3000:1:9:8::5 with 32 bytes of data:
Reply from 3000:1:9:8::5: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:8::5: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:8::5: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:8::5: bytes=32 time<1ms TTL=128
Ping statistics for 3000:1:9:8::5:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>ping 3000:1:9:8::6
Pinging 3000:1:9:8::6 with 32 bytes of data:
Reply from 3000:1:9:8::6: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:8::6: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:8::6: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:8::6: bytes=32 time<1ms TTL=128
Ping statistics for 3000:1:9:8::6:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
Top

```
C:\>ping 3000:1:9:8::7

Pinging 3000:1:9:8::7 with 32 bytes of data:

Reply from 3000:1:9:8::7: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:8::7: bytes=32 time=1ms TTL=128
Reply from 3000:1:9:8::7: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:8::7: bytes=32 time<1ms TTL=128

Ping statistics for 3000:1:9:8::7:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 3000:1:9:8::8

Pinging 3000:1:9:8::8 with 32 bytes of data:

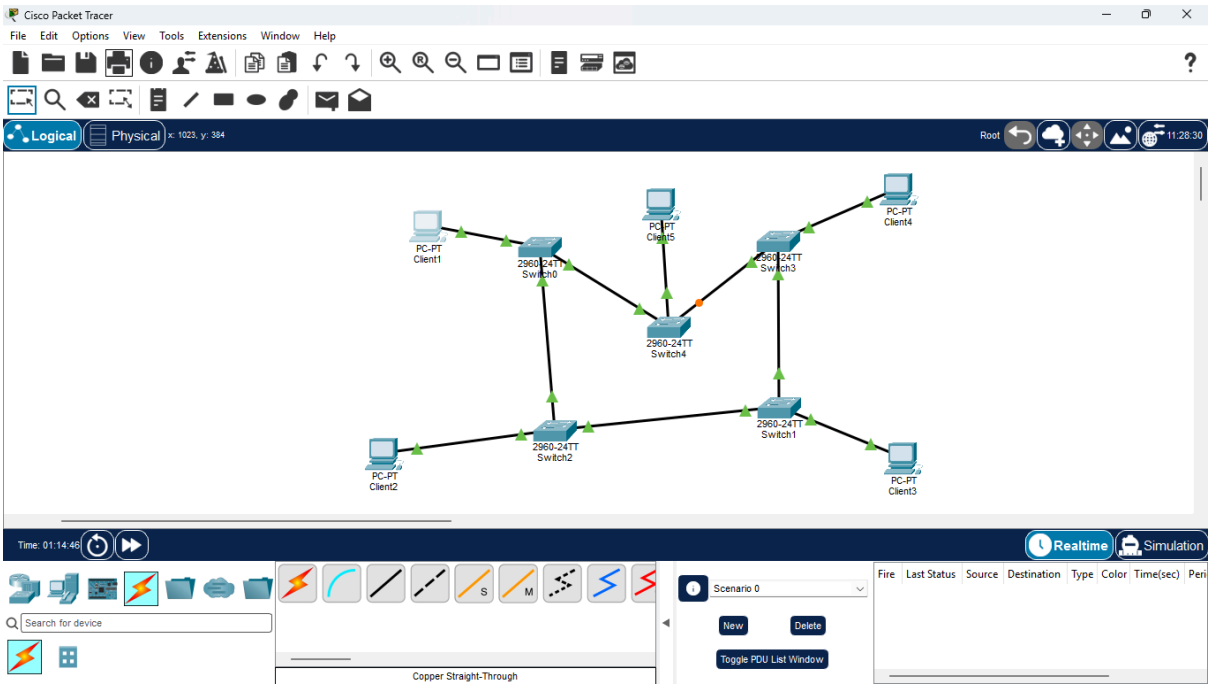
Reply from 3000:1:9:8::8: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:8::8: bytes=32 time=1ms TTL=128
Reply from 3000:1:9:8::8: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:8::8: bytes=32 time<1ms TTL=128

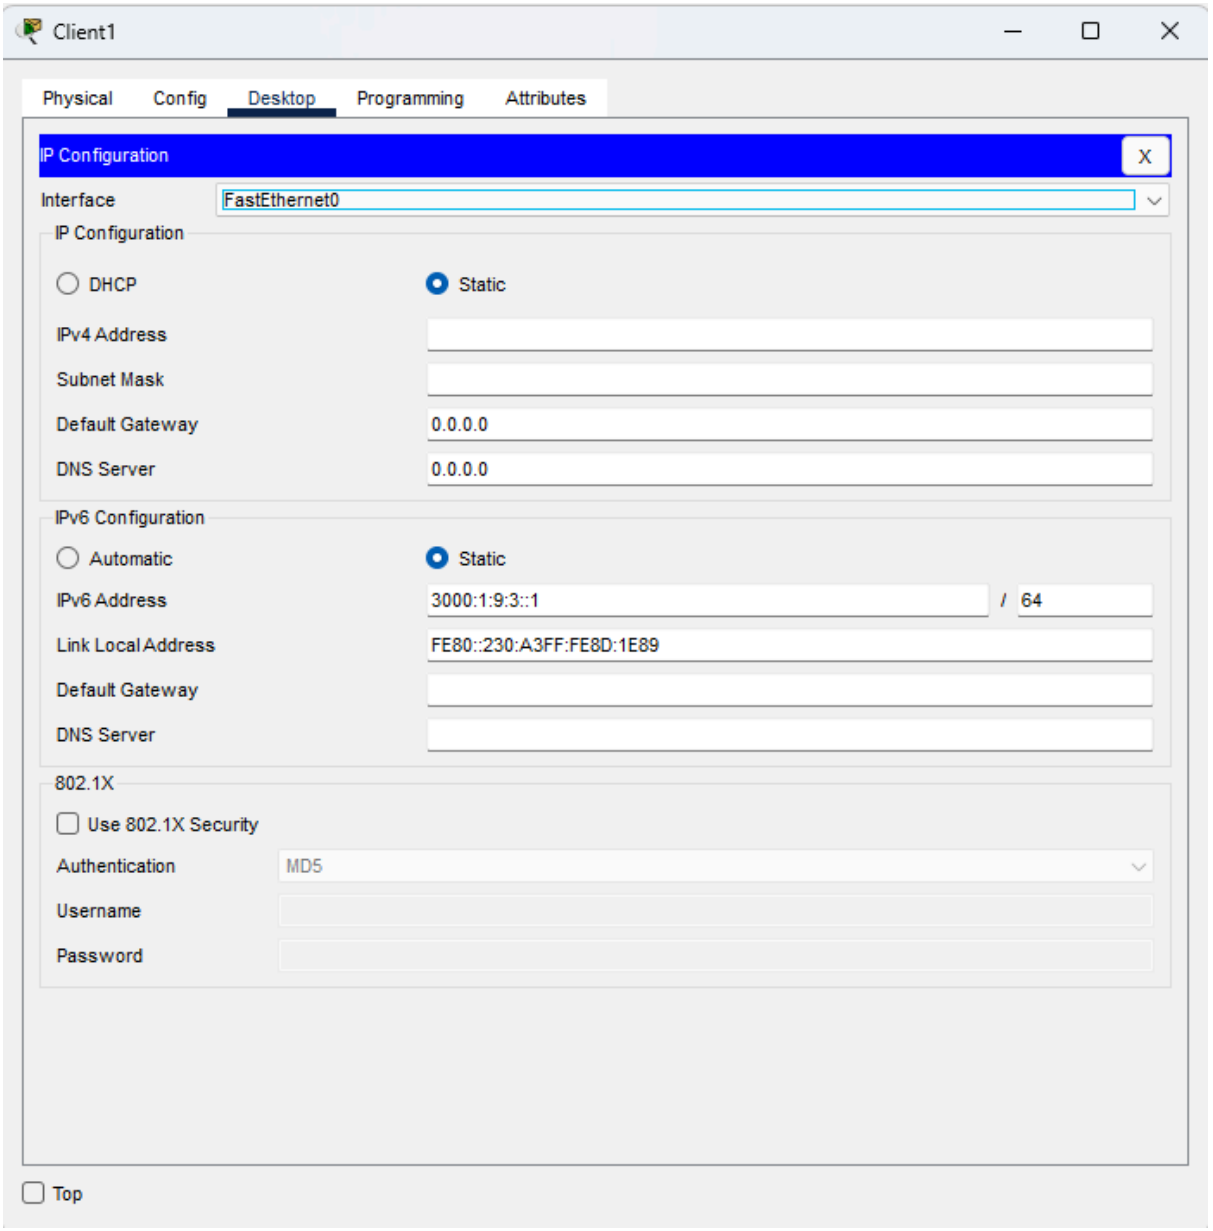
Ping statistics for 3000:1:9:8::8:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

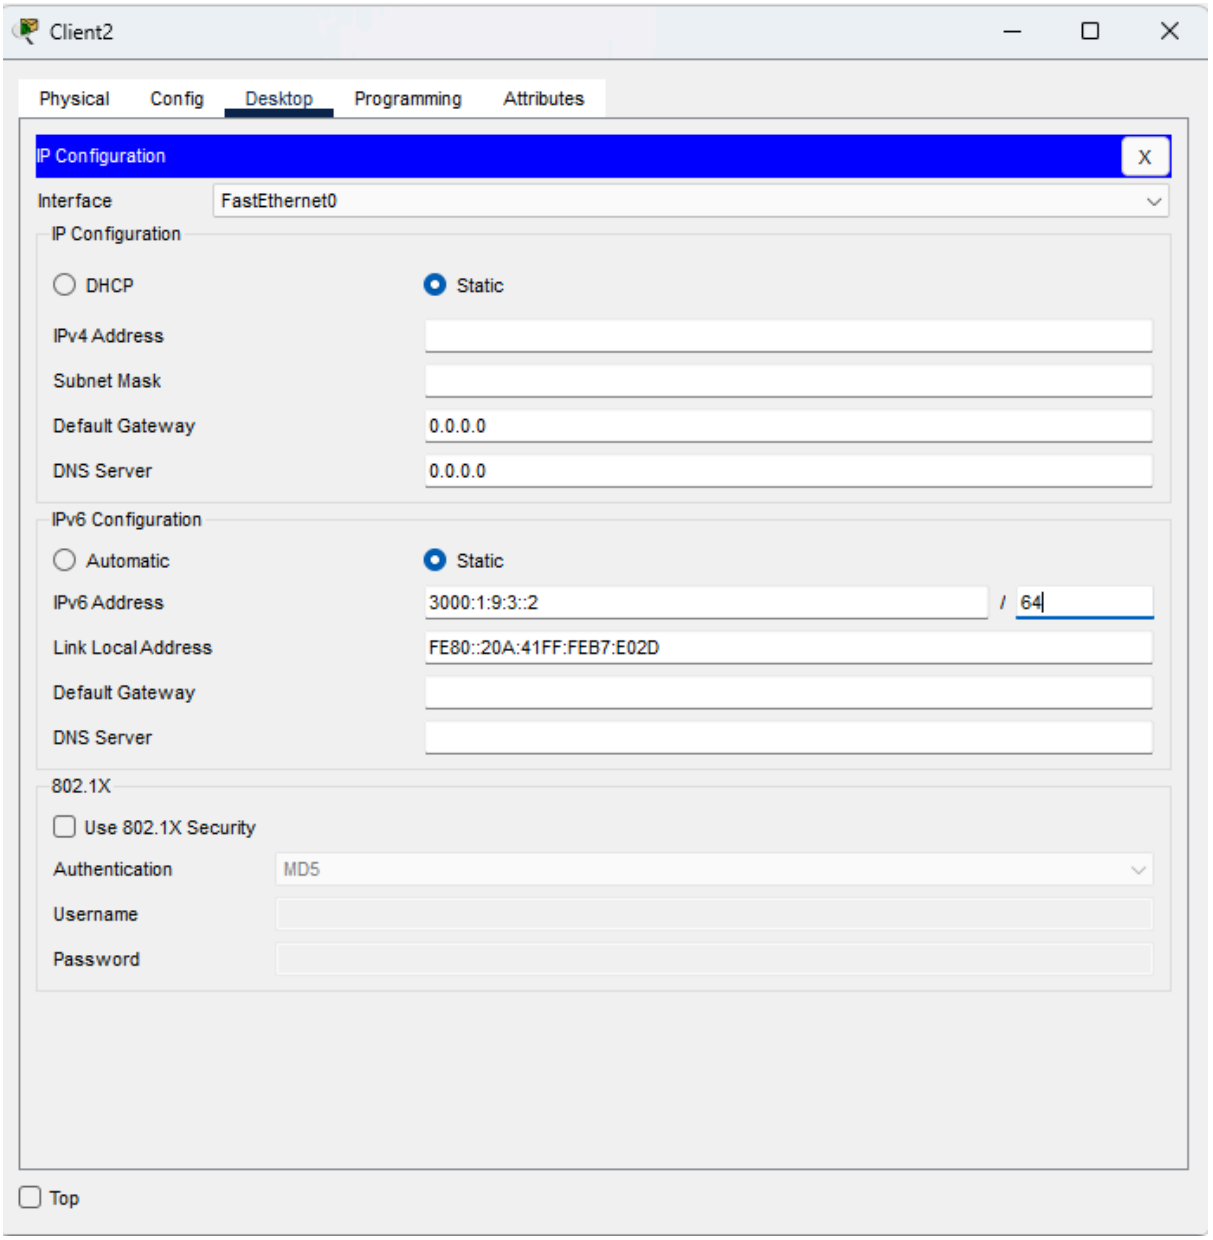
C:\>
```

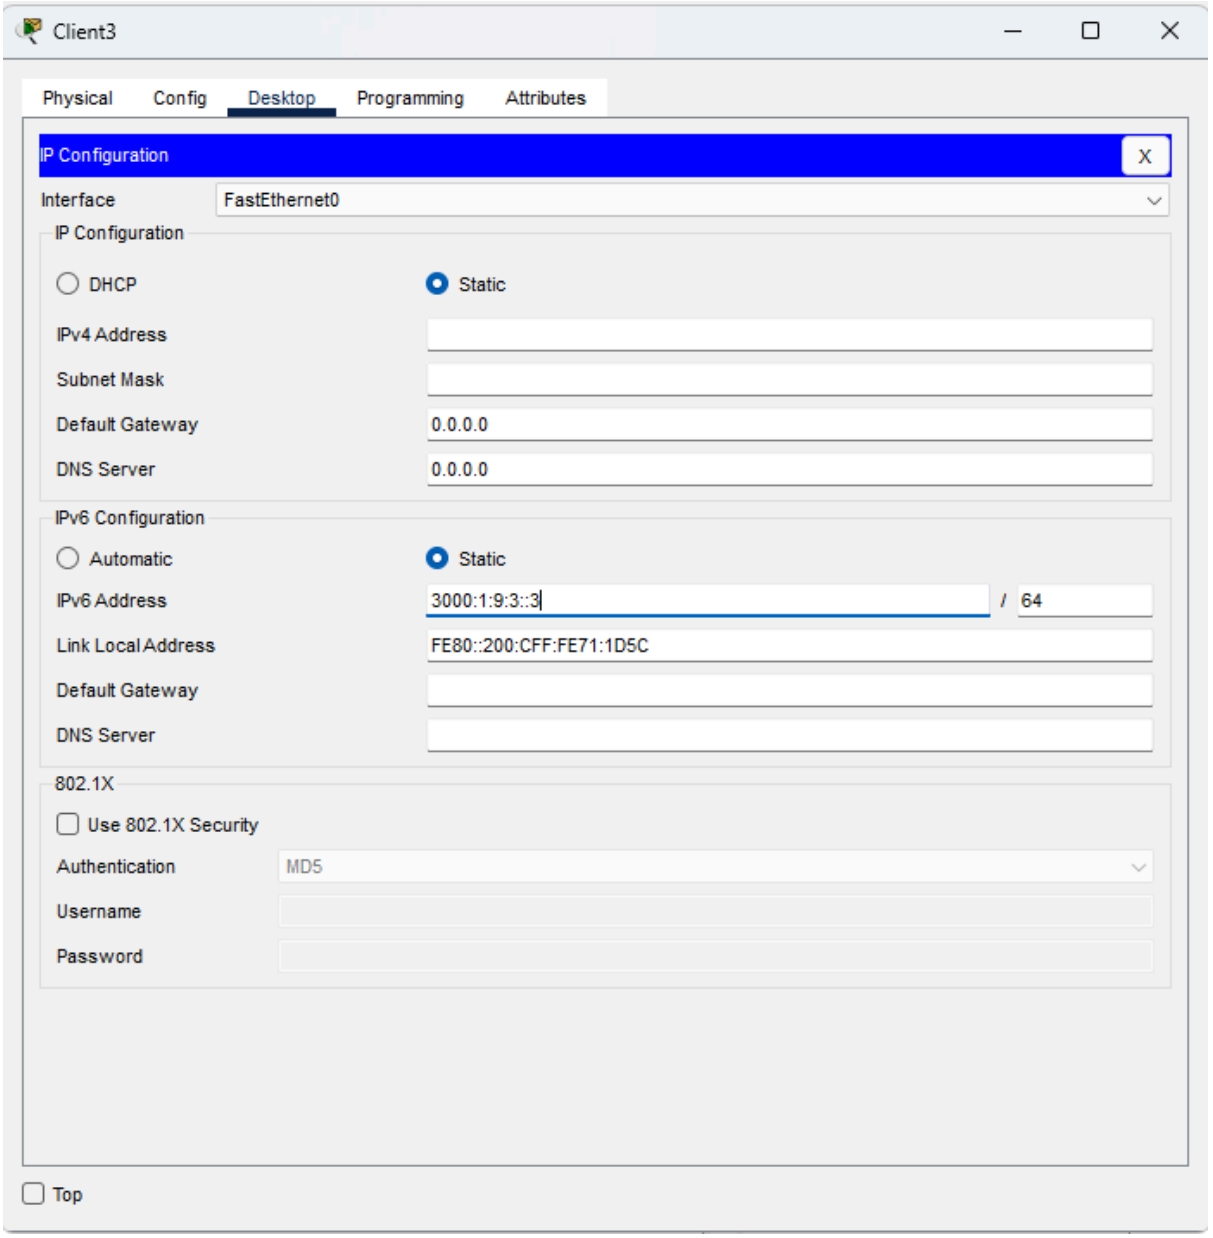
Top

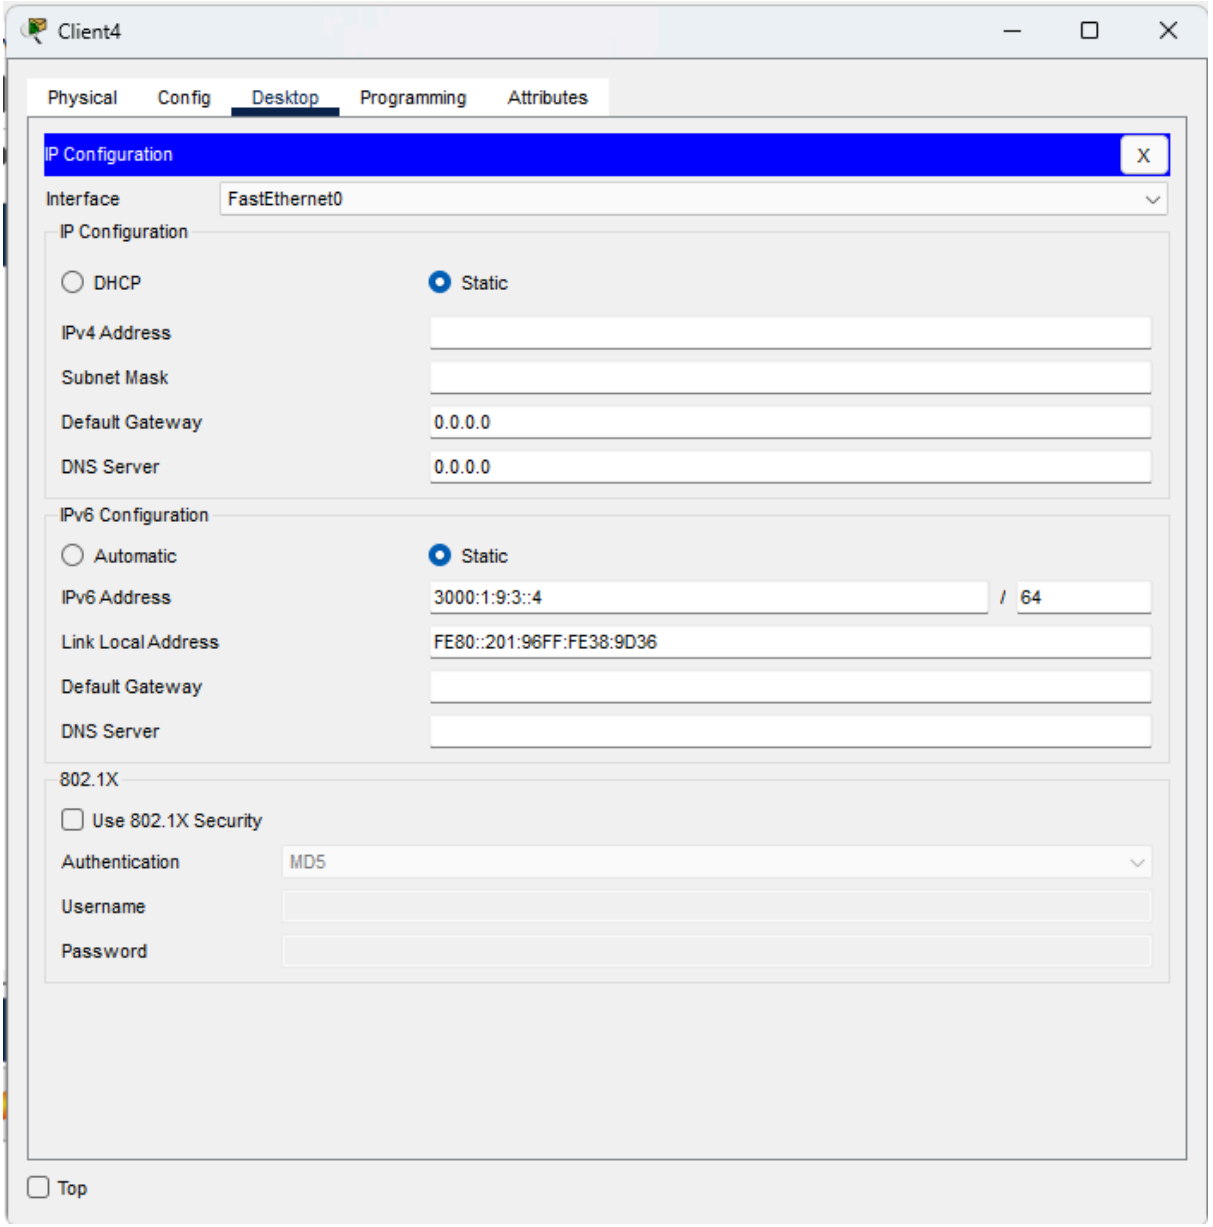
Exercice 6

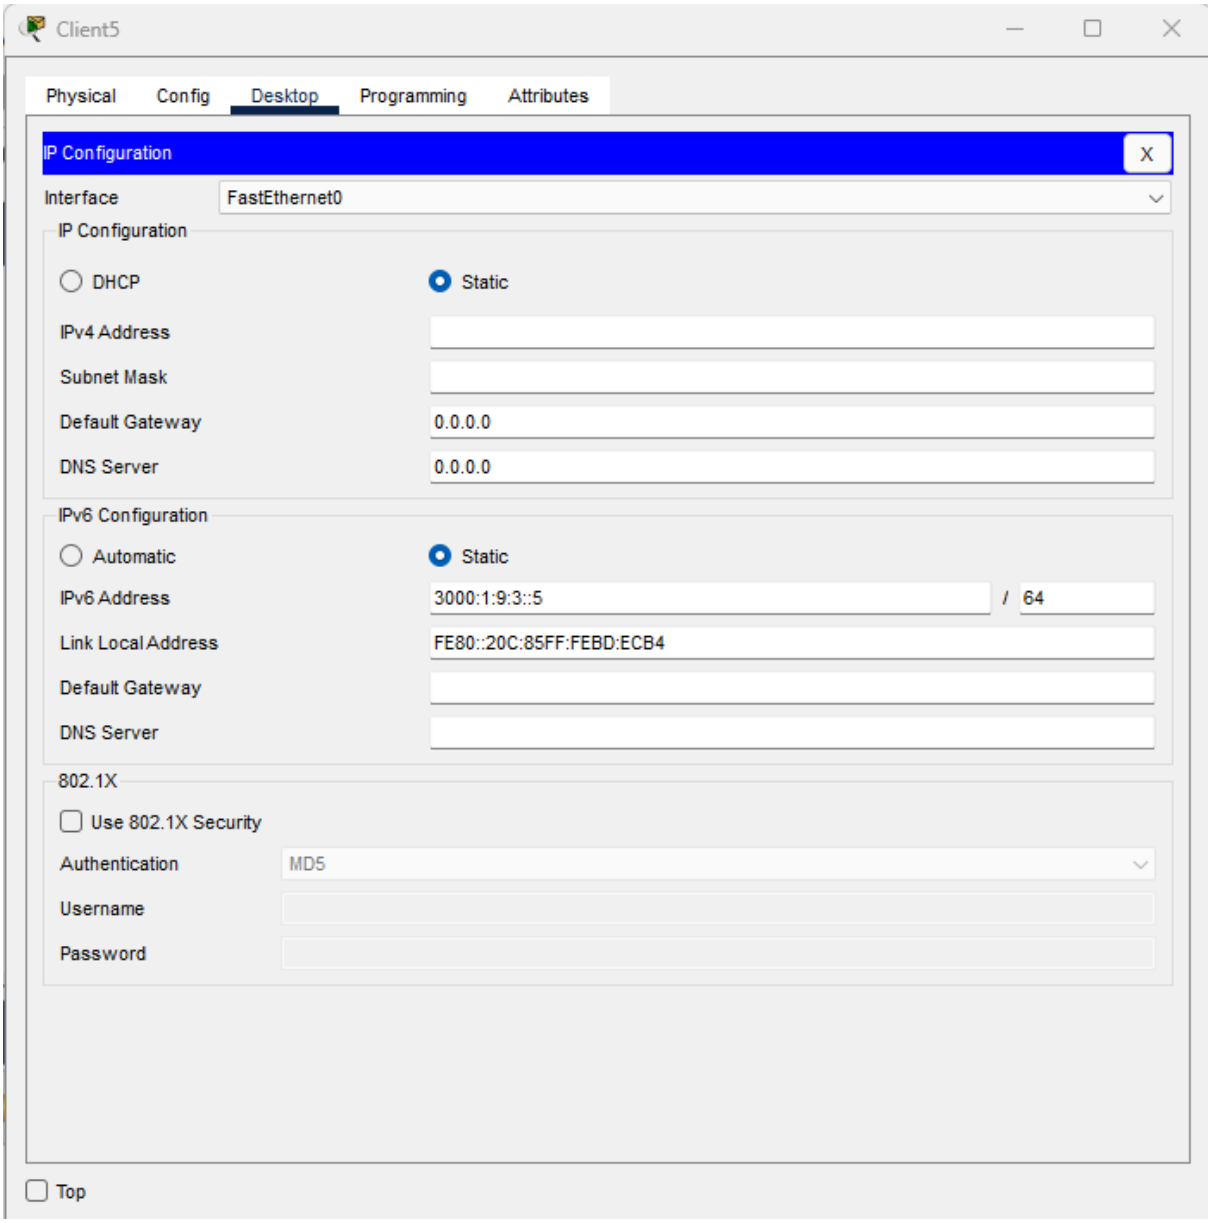


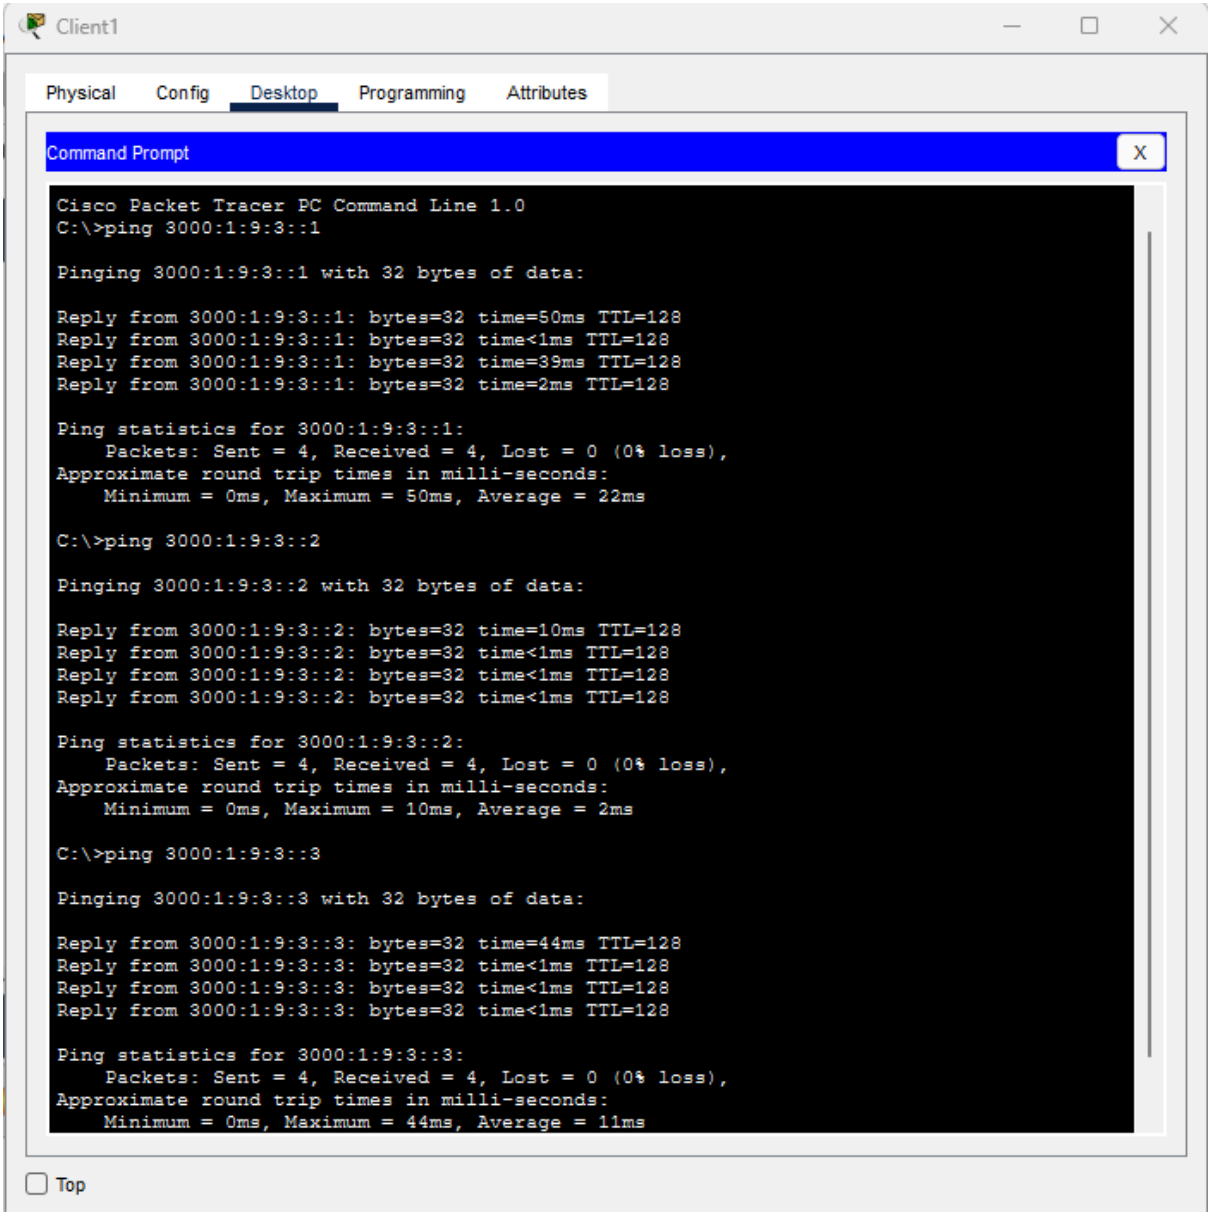

Client1
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:1:9:3::1
/ 64
Link Local Address
FE80::230:A3FF:FE8D:1E89
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

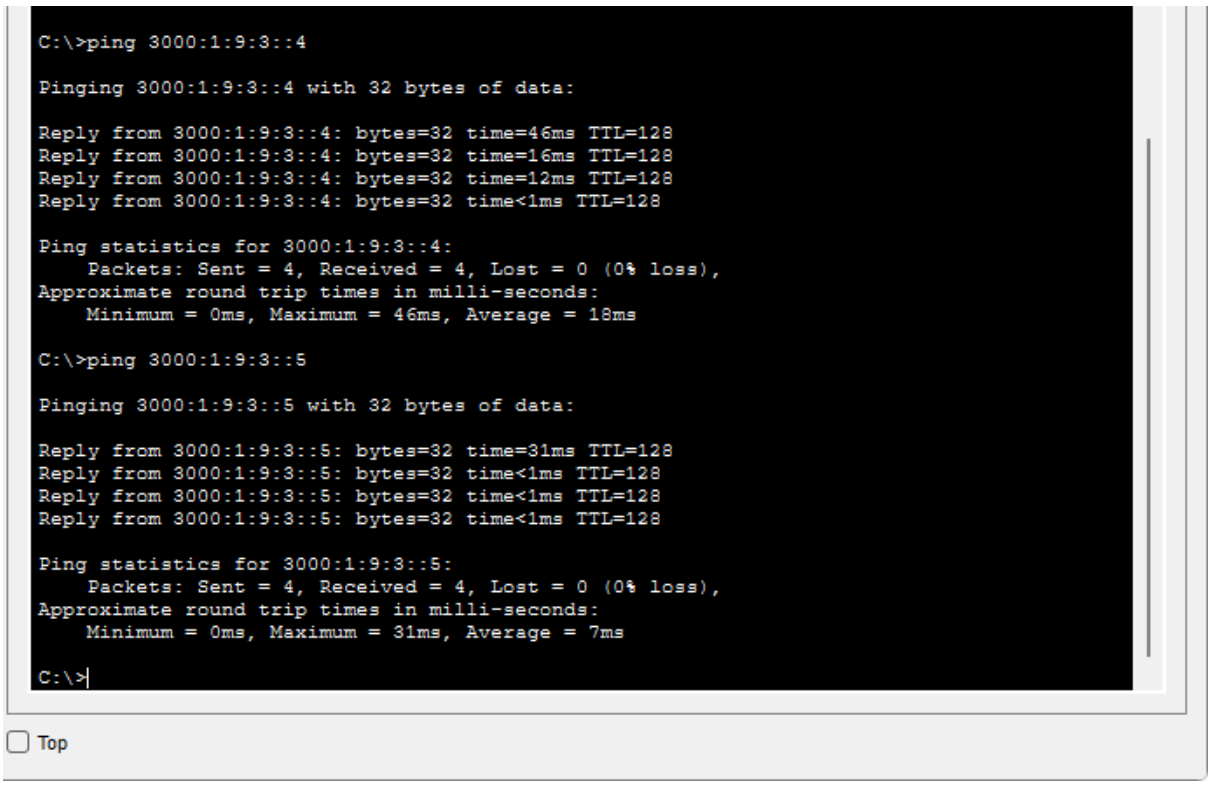

Client2
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:1:9:3::2
/ 64
Link Local Address
FE80::20A:41FF:FEB7:E02D
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top


Client3
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:1:9:3::3
/ 64
Link Local Address
FE80::200:CFF:FE71:1D5C
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top


Client4
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:1:9:3::4
/
64
Link Local Address
FE80::201:96FF:FE38:9D36
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top


Client5
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
3000:1:9:3::5
/
64
Link Local Address
FE80::20C:85FF:FEBD:ECB4
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top


Client1
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:1:9:3::1
Pinging 3000:1:9:3::1 with 32 bytes of data:
Reply from 3000:1:9:3::1: bytes=32 time=50ms TTL=128
Reply from 3000:1:9:3::1: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:3::1: bytes=32 time=39ms TTL=128
Reply from 3000:1:9:3::1: bytes=32 time=2ms TTL=128
Ping statistics for 3000:1:9:3::1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 50ms, Average = 22ms
C:\>ping 3000:1:9:3::2
Pinging 3000:1:9:3::2 with 32 bytes of data:
Reply from 3000:1:9:3::2: bytes=32 time=10ms TTL=128
Reply from 3000:1:9:3::2: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:3::2: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:3::2: bytes=32 time<1ms TTL=128
Ping statistics for 3000:1:9:3::2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 10ms, Average = 2ms
C:\>ping 3000:1:9:3::3
Pinging 3000:1:9:3::3 with 32 bytes of data:
Reply from 3000:1:9:3::3: bytes=32 time=44ms TTL=128
Reply from 3000:1:9:3::3: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:3::3: bytes=32 time<1ms TTL=128
Reply from 3000:1:9:3::3: bytes=32 time<1ms TTL=128
Ping statistics for 3000:1:9:3::3:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 44ms, Average = 11ms
Top



Conclusion

Ce TD nous a permis d'appliquer les concepts d'adresse IP (Internet Protocole) qui est un identifiant numérique unique attribué à chaque appareil connecté à un réseau informatique utilisant le protocole Internet. Nous avons pu faire la différence entre un IPV4 et un IPV6 et les configurer dans notre simulation de topologie à usage local et aussi savoir tester la connectivité de ces adresses avec la commande ping.

Note complètement hors sujet mais importante pour moi: je vous ai adressé un requête le mardi 3 Novembre 2026 à 19h09 via whatsapp concernant l'exposé du cours systèmes, je vous prie de bien vouloir y prêter attention lorsque vous aurez le temps, et par la suite vous me ferais savoir si j'ai votre autorisation ou pas pour deposer le sujet de mon choix ainsi que la liste des membres du groupe. Merci à vous!