

Quality Assessment of OpenStreetMap Footpath Data for 3D City Recreation

ALEXANDER HJELM

Master in Computer Science

Date: May 17, 2020

Supervisor: Christopher Peters

Examiner: Jonas Beskow

School of Electrical Engineering and Computer Science

Swedish title: Kvalitativ undersökning av OpenStreetMaps
gångvägsdata för stadsmodellering i 3D

Abstract

Modeling cities in 3D has long been a topic of interest in field of computer graphics. It is often desirable to recreate real-world cities in 3D applications such as urban design software and video games, and the topic of 3D city reproduction comes with its own set of unique challenges. So far there have been a lot of research in modelling of 3D road networks, but these projects have often focused on the road networks designated for cars and public transit, and seldom on pedestrian footpaths. This project assesses the feasibility of reconstructing a city from OpenStreetMap (OSM) road and building data, and will focus on the feasibility of including pedestrian footpaths, by focusing on OSM road and building data in the Stockholm metropolitan area.

An estimate of the positional accuracy of OSM data has been obtained by comparing OSM data to a dataset with a known accuracy. It was found that the average positional error in the OSM dataset was about 2 meters. This estimate of the positional error was then used to assess the integrity of the OSM Stockholm road network, by locating critical points where assigning standard widths to the roads would cause collision with other features, and evaluating how many of those points could be eliminated by making adjustments within the found margin of error. It was found that footpaths were less problematic than other road types (primary, secondary, residential), in terms of feature collisions, and thus should pose no more problems in 3D city reproduction than other road types. The report concludes with a scientific study of the field of 3D city reproduction. It serves to give an overview of the challenges in the field and place the study and findings of this project in a broader scientific context.

Sammanfattning

Träutensilierna i ett tryckeri äro ingalunda en oviktig faktor, för trevnadens, ordningens och ekonomiens upprätthållande, och dock är det icke sällan som sorgliga erfarenheter göras på grund af det oförstånd med hvilket kaster, formbräden och regaler tillverkas och försäljas Kaster som äro dåligt hopkomna och af otillräckligt.

Contents

1	Introduction	1
1.1	Research question	3
1.2	Implementation overview	5
1.2.1	Assesment of geodata precision	5
1.2.2	Collision study	5
1.3	Problem constraints	6
2	Background	7
2.1	Background of 3D city reproduction	7
2.2	Related work	8
3	The geodata used in this project	10
3.1	OSM data	10
3.2	SLU data	11
3.3	A word on coordinate systems	11
3.4	Specific geodata preprocessing	11

4	Implementation	13
4.1	Geodata precision study	13
4.1.1	Quality criteria	13
4.1.2	Other accuracy criteria	15
4.1.3	Assesment of dataset completeness	16
4.1.4	Correspondence by building area	17
4.1.5	Shape accuracy definition	18
4.1.6	Closest point and point proximity	20
4.2	Collision study	22
4.2.1	Road widths and properties	22
4.2.2	Feature overlap algorithm	22
4.2.3	Projected edge distance	23
5	Results and metrics	24
5.1	Road collision study	24
5.2	Positional accuracy study	25
5.3	Secondary metrics	26
5.3.1	Completeness by building area	26
5.3.2	Building matching statistics	27
5.3.3	Shape accuracy statistics	27
6	Conclusions and future work	29
6.1	Quality of the OSM dataset	29

6.2	Collision study	30
6.3	Suggested algorithms for collision correction	32
6.4	Scientific study: Where does this fit in the general Scietific scope of things	35

Chapter 1

Introduction

Cities consist of complex collections of buildings, blocks, parcels and neighbourhoods which are all interconnected via a street network, where individual streets can serve different types of traffic. Virtual city reproduction has a growing number of applications, including visualization, urban planning and entertainment in the form of video games and 3D animation. Traditionally, modelling virtual cities is a labour-intensive and time-consuming task. In recent years there has been major research work into the field of procedural content generation, meaning automatic or semi automatic generation of 3D models. Such methods can indeed be used in the field of virtual city reproduction to reduce the labour required to reproduce accurate 3D representations of cities. But the field of virtual city reproduction comes with its own host of challenges. Urban environments are typically dense and large, spanning a few to hundreds of square kilometers, and are influenced by variables that are hard to quantify, including land policies, government plans, population changes and transportation infrastructure. (**Vanegas et al, 2010**).

Applications: Navigating agents or pedestrian flows. Using a road network to create an underlying navmesh. This process is analytical and relies on the availability and accurate representation of city maps. (**Parish and Müller, 2001**)

Description of different levels of subdivision. What levels of subdivision are we looking at? Picture, ref to Todor's paper. Viewpoints can range from modelling individual roads (**find reference) and building facades (**Stojanovski, 20****) to looking at entire city parcels and how they connect with each other

(*****find reference**).

Description of procedural modelling of cities Importing geodata from online databases and converting it to a 3D city representation. It would be labour intensive to recreate these . Procedural models for city reproduction instead rely on programmatic solutions for converting map data to 3D road and building models, and composing them to a 3D world that the designer may continue to fine-tweak through interfaces fo interactive editing. (**Müller et al, 2006**)

At the base of this process is the procedural layout of road networks in 3D. (**Müller et al, 2006**)

So far there have been a lot of research in modelling of 3D road networks, but these projects have often focused on the road networks designated for cars and public transit, as a part of the sustainable mobility paradigm and the topic of sustainable cities. Also the rise of investigation into self-propelled cars and carpools. The study of energy efficient mobility such as walking and cycling is only in its emerging phase. (**Stojanovski, 2019**)

Description of the unique character of footpaths vs other types of roads (pictures).

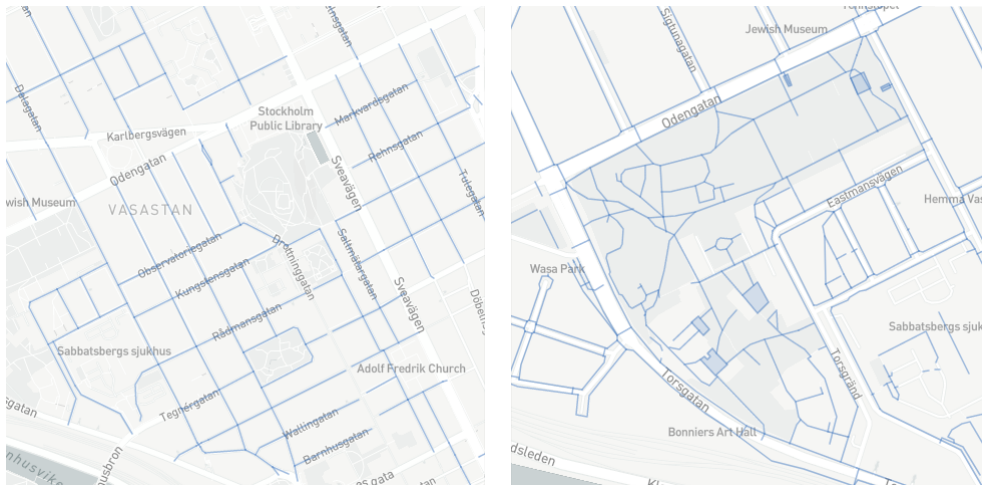


Figure 1.1: Example segments of the Stockholm metropolitan area with highlighted residential streets (left) and footpaths (right). Here can be seen the unique character of footpaths. Walkways in parks appear to grow much more organically, and pavements form rough grid systems with organic branches that bridge over city blocks.

Currently, when modeling 3D GIS datasets without errors are rare. While previously (Biljecki et al, 2016) note that there are coming more and more sophisticated methods for automatically correcting the most common errors. Among the most common errors: Missing or invalid geometry, invalid semantics. GIS validation has only been a topic of research lately, and many such datasets were usually obtained years ago, and creating error-free datasets was neither possible due to the lack of validation techniques, nor a high priority.

The idea of gathering geodata from OpenStreetMap (OSM), where the temporal aspect of data accuracy is perhaps mitigated by the crowd contribution nature. There have already been a few services (***) Name a few services + links) but such services are usually limited in the type of data that they can provide. Usually they focus on obtaining either road networks or buildings separately, and in the case of road networks they usually focus on car road networks (why? Driving games?***), and roads designated for energy efficient mobility are left out.

This project assesses the feasibility of reconstructing a city from OSM road and building data, and will focus on the feasibility of including pedestrian footpaths, by focusing on OSM road and building data in the Stockholm metropolitan area.

1.1 Research question

This project has dealt with the feasibility of including footpath data when generating 3D representations of OpenStreetMap (OSM) data, and preserving the integrity of the 3D road network, avoiding overlap and collision between road meshes. The project falls within the broader topic of geodata extraction and modelling, primarily of roads and building parcels. Geodata modeling is at the foundation of procedural modelling of real-world cities, since any application which models cities based on geodata will need a robust method of acquiring and laying out road and building data without compromising the data's integrity. (***)find reference)

The primary contribution is an **investigation into the rate of collision between map features in OSM**. A program has taken an OSM dataset of the Stockholm area and assigned each road with standard widths according to Swedish regulation. It has then identified critical areas in the OSM dataset,

where the paths are so wide that they collide with existing map features. It has also identified how many of those areas can in theory be corrected by simple translation of the road vertices, without propagation of collision to other features. Here, features are defined as the geometrical components that comprise the OSM map. For the purpose of this report, features will refer mainly to roads and building footprints.

The primary study of the rate of collision between roads and other features, will serve to obtain the following three metrics:

1. The number of road features that collide with any other feature (road or building).
2. The number of road edges that intersect with any other building polygon or road polyline.
3. The total length in meters of these edges will also be calculated as a measure of the total length of road.

The road features will be categorized according to type, so that the rate of collisions between footpaths and other features can be compared to that of other road types. OSM mainly makes the distinction between primary, secondary, residential and footpath roads, so this classification will also be used in this report. The above features will be calculated for each road type separately by summing over each road feature of a certain type. Following this, an algorithm will find the exact same metrics with regards to how many road features that can in theory be corrected by simple geometrical translation of their vertices. This will also be presented in terms of the number of road features, the number of edges and the total length in meters of remaining colliding road.

For the collision study, see sections 1.3.1 for an implementation overview, 4.2 for a detailed walkthrough of the program implementation, and 5.1 for the results.

The secondary contribution will be an **assessment of the geometrical precision of OSM data** around the Stockholm area. The positional accuracy will be estimated by comparing feature points between the OSM dataset and a reference dataset. The positional accuracy will be needed to assess where road collisions occur and whether they can easily be corrected.

The secondary study about geodata precision will primarily serve to obtain an estimate of the positional accuracy of the OSM dataset, in meters. A number of auxillary metrics will be needed to estimate the domain of error on the positional accuracy, namely the feature completeness and shape accuracy of the OSM dataset. The completeness of the OSM dataset will be taken as the number of features are represented in both datasets, as a percentage of the total number of features in the reference dataset. Shape accuracy is a measure of polygon similarity that was obtained by comparing polygon turning function between matching features, feature by feature. See section 5.3 for more details about the shape accuracy measure.

For the positional accuracy study, see sections 1.3.2 for an implementation overview, 4.1 for a walkthrough of the program implementation, and 5.2 for the results.

1.2 Implementation overview

1.2.1 Assesment of geodata precision

The geometrical precision study has been carried out in a number of steps that are all detailed below. First a feature map was found, which mapped individual features between the OSM dataset and a reference dataset. A program then took matching building pairs and extracted matching geometrical points after first simplifying the polygons using the Douglas-Peucker algorithm (**Douglas and Peucker, 1973**). Once a set of matching points has been found across the whole dataset, the average distance between them was taken as a measure of the positional accuracy.

Additionally, a number of auxillary calculations were necessary for this study. The estimated completeness of the OSM dataset (a measure of how many features are represented in both the OSM dataset and the reference dataset) was calculated as the relative difference in area of all building footprints, between the two datasets. The completeness is needed to estimate the error boundary of the positional accuracy. Additionally, the shape accuracy of the OSM dataset has also been calculated and graphed as an extra verification of the similarity between the datasets.

1.2.2 Collision study

For the purpose of the collision study, each road has been assigned a standard width that is in line with Swedish regulations, since in the OSM dataset, roads are represented as simple polylines, lacking width. In a 3D representation however, it is crucial that each road object has a spacial width in order to be rendered and seen. After the width assignment, a program has iterated over all features and calculated how many of them that overlap with any other feature, as well as the total length of the road polylines that is intersecting some other feature. The program has then calculated how many of these colliding features that can be corrected by making adjustments that are within the positional accuracy of the OSM data (As obtained by the previous study in this report: Assessment of Geodata Precision).

1.3 Problem constraints

In this study, when working with OSM geodata, the following assumptions have been made about the dataset to reduce the size of the problem domain:

1. The program will not handle terrain features and altitude. It will be assumed that the road mesh can be projected on a flat 2D surface without feature intersection.
2. It will be assumed that the city map consists of only arterial (primary) roads, secondary roads and footpaths.
3. It will be assumed that the OSM dataset represents all roads as simple polylines, and building footprints as simple connected polygons. Any other features (such as squares, which are roads represented as polygons) will be omitted from the dataset.
4. The road network is assumed to be a 2D simple graph. This means that any overlapping roads, such as tunnels and bridges that cross over street-level roads, will be eliminated from the dataset. Any self-connected nodes will also be eliminated from the dataset.

Chapter 2

Background

2.1 Background of 3D city reproduction

Procedural modeling of road networks is of interest to the fields of urban planning and urban architecture. In recent years there has been an advent of interactive tools that aid urban planners in placing or generating features of an urban plan, particularly roads and road networks. Procedural and AI solutions that aid the architect in a form of human-machine symbiosis.

Procedural city-generation models combine architectural elements, such as streets, lots, buildings, building facades. Urban design practises with conventional two-dimensional deliverables range from delivering neighbourhood designs, urban zoning and building plans, to writing design codes and building ordinances. The last decade has seen multiple startups in the area of software that aid urban architecture. The software uses procedural models to render a city grid based on real-world locations, or generate new user-specified parameters, and allow for varying degrees of manual editing on grid, road, neighbourhood, city block or individual feature level. Some of the most prominent examples are ArcGIS Pro (made by Esri), CityEngine (made by the startup Procedural, bought by ESRI) and Urban Canvas (made by the startup Synthicity, bought by Autodesk, now defunct).

But such tools are as of today not commonly applied in urbanist practises, due to failures in reflecting the unique workspace of architects and their design

needs. Urban architecture is a social factors, stakeholders. Each architect is an actor in a continuously developing environment, and affecting that environment in a complex manner through their action (**Stojanovski et al, 2020**).

In recent years, there have been an advent of tools that extract geodata from OSM and generate 3D representations of real world locations by placing terrain, buildings, roads and other features. However, freely available such tools seldom include smaller roads and pedestrian footpaths such as walkways, side-walks or trails.

Additionally, the topic is of interest for 3D content creators in for example the fields of video game design or 3D animation. A trend in these fields is using methods of procedural modeling to create large amounts of 3D content quickly and efficiently, while requiring as little hand modeling as possible. Studios who create large worlds are often interested in solutions that generate large road networks without any hand modeling. (**Parish and Müller, 2001**)

2.2 Related work

When assessing the completeness of geodata, a very common scale is Van Oorts criteria for evaluating the quality of geographical information, which at the time of publication received attention from surveyors and cartographers. (**Van Oort, 2006**) Since then a number of publications have examined slices of geodata from van Oort's criteria. In 2008, (**Haklay, 2010**) conducted such a study to estimate of the quality of OSM positional geodata in London and England. Since the OSM project started in London it was thought that OSM data in the London metropolitan area would be representative of the highest quality data available, and therefore a good indicator for the whole global OSM dataset. The study was conducted by comparing OSM data to Ordnance Survey datasets. The study showed that the OSM dataset had a rough positional accuracy of 6 meters from the reference dataset. However, at the time of the study, the OSM project had captured roughly 29% of the area of England, meaning that the data completeness was fairly low.

The next notable study to assess the quality of OSM data was published by (**Kunze, 2012**). The study applied different methods to assess the completeness of OSM data in two federal states in Germany, mainly by analysing the area difference between the OSM dataset and an administrative dataset. Fi-

nally, a notable study in 2013-2014, conducted by researchers from various universities in Norway and Germany (**Fan et al, 2014**), examined the quality and accuracy in building footprint data of the Munich area, at a time and place where the completeness of the OSM dataset was significantly higher (the results of their study showed that the OSM had captured close to 100% of all building footprints). At the time Munich was one of the most developed cities in OSM. Their study included an insight in the geometrical calculations necessary to match features and points between two datasets, and how to reliably calculate the metrics needed for the most important and assessable of van Oorts criteria. Their study revealed that although the feature completeness of OSM was high, some architectural details were missing. The results reveal that the positional accuracy of OSM data at the time was about 4 meters.

Chapter 3

The geodata used in this project

For the purpose of this project, the OSM road dataset has been sampled around Stockholm metropolitan area. To assess and correct path widths and path node locations, the OSM building footprint dataset around the same area has also been used. As a reference dataset, the property map from the Swedish National Land Survey was used in comparison with the OSM map. The reference map is provided by the Swedish University of Agricultural Sciences (SLU), and will be referred to in this report as the SLU map or the SLU dataset. The SLU map contains only building and property footprints. The exact map segments that were extracted were in both cases rectangular boundaries with the following coordinates in WGS84: (N: 59.42, E: 18.15, S: 59.23, W: 17.79). Both datasets were collected on March 18th, 2020.

3.1 OSM data

The OSM project is a wiki-like geodatabase based on Volunteered Geographical Information (VGI), meaning anyone can contribute by adding or editing features. OSM road data and building footprints are commonly obtained by manually tracing features in commercially available satellite images. Such images have a limit on their resolution which puts a theoretical limit on the accuracy of map features compared to their real-world equivalents (Haklay 2010). Particularly the high resolution imagery from Bing in 2010 led to an increase in building information in OSM, and the positional error is largely

due to the limited resolution in such satellite imagery. (Fan et al, 2014).

3.2 SLU data

The SLU map is maintained by The Swedish National Land Survey (Swedish: Lantmäteriet). The data is collected by geodetic professionals, by land surveying methods such as GPS or DGNSS positioning, or by reproduction of features from ortophoto or stereo mapping from 3D aerial images. Building features in the SLU dataset have a position accuracy requirement of 2 meters. The SLU map contains building features and property limits, but no road data. The map is updated continuously by Lantmäteriet, in conjuncture with the forming or reforming of property. Whereas OSM is a free service, the SLU map is available to paying customers or for free to students and researchers.¹

3.3 A word on coordinate systems

The SLU dataset is delivered in the SWEREF 99 TM coordinate system. SWEREF 99 TM is a projected coordinate system and there is no linear transformation to the WGS 48 system, which OSM uses.² The coordinate conversions for this paper were obtained using proj: a Linux commandline application for geospatial coordinate conversion.

3.4 Specific geodata preprocessing

Upon delivery of the OSM dataset, all features that intersect with the user-specified domain are included, with their full geometry. The SLU map however, is delivered with building footprints cropped to exactly match the query coordinates, meaning that buildings at the edge of the user-specified domain

¹Lantmäteriet. Produktbeskrivning: GSD-Fastighetskartan vektor - Lantmäteriet. Accessed 16-04-2020. <https://www.lantmateriet.se/globalassets/kartor-och-geografisk-information/kartor/fastshmi.pdf>

²Converting to WGS84 - OpenStreetMap Wiki. Accessed 13-03-2020. https://wiki.openstreetmap.org/wiki/Converting_to_WGS84

can have cropped geometries. Any building area outside of the query domain will be excluded. Since the principles behind what features are delivered and how differ between the datasets, it is necessary to crop both datasets to ensure that all buildings are complete and have matching candidates in the other set. Any features that intersect the edge of the rectangular boundary, in both datasets, were therefore excluded from the study.

Chapter 4

Implementation

4.1 Geodata precision study

4.1.1 Quality criteria

(Haklay, 2010) presents a comprehensive list of 8 accuracy classes when it comes to evaluating the quality of geographic information (van Oorts criteria)

- Lineage. This is the historical aspect of the dataset, which concerns the collection process and evolution.
- Positional accuracy. This relates the coordinate value of an object in the database to the actual location of the ground in the real world.
- Attribute accuracy. In a geographical database, objects are commonly tagged with meta-information. This class assesses how correct those values are.
- Logical consistency - This assesses the internal consistency of the dataset. For every dataset there may be internal rules and relationships that objects and features must follow, and this class assesses the degree to which these are adhered to.
- Completeness - This assesses the lack of data in a dataset, and the coverage of real-world objects. Objects or features may be missing from a

dataset, which reduces its quality.

- Semantic accuracy - This links the way in which an object or feature is recorded and represented to how it should be interpreted.
- Usage, purpose and constraints - This concerns the validity of the dataset in relation to its purpose and how it is used.
- Temporal quality - This assesses the validity of the dataset in relation to real-world changes over time.

Other than for the purpose of mentioning various sources or error, this project will focus exclusively on the Positional accuracy, Completeness and Semantic accuracy classes. The comparison of the OSM and SLU maps will focus on these accuracy classes to determine the error tolerance when manipulating features in the 3D map presentation and the road network generating phase. Figure 4.1 shows two segments of the Stockholm map where the OSM and SLU datasets show lower semantic and positional accuracy respectively.



Figure 4.1: Example segments of the Stockholm metropolitan area with unsystematic errors in precision. The SLU building dataset (blue) is superimposed on the OSM dataset (dark gray). The top picture is centered on a city block which shows a semantic mismatching between the two datasets. The whole block consists of only two buildings in the OSM dataset, but is divided into 15 smaller building lots in the SLU dataset. The bottom picture shows 4 smaller buildings whose positional accuracy is low, due to the buildings being incorrectly scaled, skewed and rotated.

4.1.2 Other accuracy criteria

Let us briefly go over all of van Oorts accuracy criteria that will not be assessed through this study. Let us see how they could be obtained and assessed for both the OSM and SLU maps, starting with the data lineage. The lineage aspect of the OSM data is available through the OSM History Viewer, an online debugging tool that lets anyone freely view the change history of individual features in a commit history-like fashion. There is an option for editors to include a

personal note with their changesets to include additional details or motivate why a change was made, but there is no guarantee that the data includes any information on the acquisition method used¹ The history aspect of the SLU dataset is not freely available online, but the acquisition method is included in the file metadata on a per-object basis. Lantmäteriet uses internal codes to specify the acquisition method, and these codes can be referred to in the product description that accompanies the map files. As the scope of this project is limited to making a broad comparison of the positional accuracy of the two datasets, only the required positional accuracy as described by the SLU product description will be used.

The attribute accuracy measure is interesting, as both maps use encoded metadata on a per feature basis, the attribute accuracy of the two datasets could be assessed by doing a simple feature comparison and creating a translation table between the two attribute maps. To the knowledge of the author, this has never been done with specifically these two datasets, at the time of writing.

The temporal accuracy will not be assessed as this project focuses on comparing a single snapshot of the two datasets at the same point in time, and finally the logical accuracy will not be assessed because the underlying logical relations between features in both maps serve no purpose to this project.

4.1.3 Assessment of dataset completeness

(Fan et al, 2014) used the fraction of the total building area in their reference dataset and the OSM dataset to assess the completeness of OSM data. The motivation for this is to eliminate semantic differences between both datasets. A very common example of a semantic error when comparing geographic data is that a large building in one dataset may be segmented into several smaller ones in the other, that is to say a building in one set is represented as an aggregation of multiple buildings in the other set. This makes a complete one-to-one object mapping impossible. Rather, buildings have to be identified as 1:1 (one to one), 1:n (one to many) or 1:0 (one to none) cases, depending on if a building is fully represented in the other dataset, represented as an aggregation of smaller plots, or not found at all. Figure 4.2 shows examples of two buildings that were found in the OSM and SLU datasets as 1:1 and 1:n matches respectively.

¹OSM History Viewer - OpenStreetMap Wiki. Accessed 20-03-2020. https://wiki.openstreetmap.org/wiki/OSM_History_Viewer

Since it is impossible to find a one-to-one feature map for building footprints, using building area as an estimator for completeness is much better than i.e. using the number of buildings or other objects in each dataset. This project will use the building area in the OSM dataset versus that of the SLU dataset to determine the completeness of OSM building data in the Stockholm area, which will then be used as an argument for how accurate the building correspondence and point proximity measures can be.

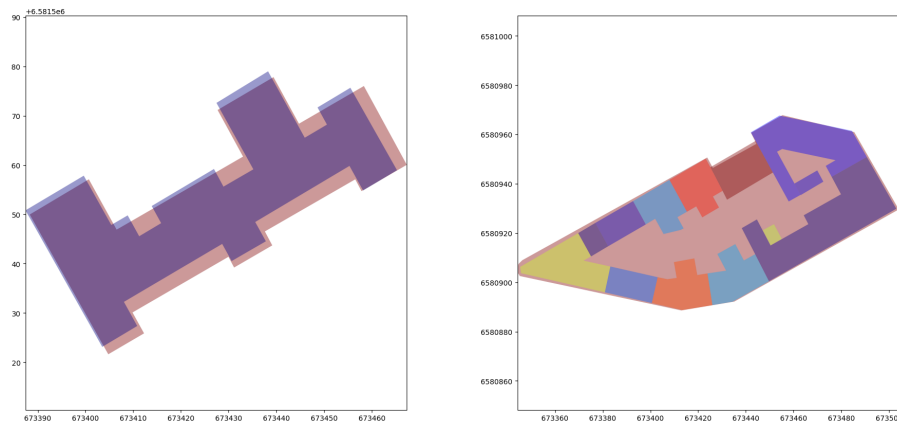


Figure 4.2: Examples of a 1:1 building match (left), where the sought-after building was found both in the OSM (red) and SLU (blue) datasets, and of a 1:n building match (right), where the sought-after building was represented as one polygon in the OSM (red) dataset, but divided into many smaller lots in the SLU (multicolored) dataset.

4.1.4 Correspondence by building area

(Fan et al, 2014) further discussed how the relative overlap in building area can be used as an estimate of the building correspondence between datasets. In this project, relative area overlap was used in order to pair buildings from the two datasets together and create a feature map. This can only be done in cases where there is not much displacement between OSM building footprints data and the reference data set. Figure 4.1 under Section 5 shows a typical comparison between the OSM and SLU datasets. By eyesight it was determined that the displacement of features is small.

The relative building overlap between the OSM and SLU datasets will be defined as follows, given the footprints of any building in the OSM set ($foot_{OSM}$) and the SLU set ($foot_{SLU}$):

$$S_{RO}(foot_{OSM}, foot_{SLU}) = \frac{A_{Overlap}}{\min(A_{foot_{OSM}}, A_{foot_{SLU}})}$$

The relative overlap may be used to determine building matching relations even when the semantic accuracy is low. If a large building is represented by a single footprint in one dataset but by several smaller footprints in the other, **(Rutzing, Rottensteiner and Pfeifer, 2009)** found that if $S_{RO}(foot_A, foot_B) < 30\%$ for two buildings A and B from different sets, then A and B are highly likely to be separate, neighbouring buildings and not in fact identical. Therefore it will here be assumed that two buildings are matching candidates if their relative area overlap is greater than 30%. If a one-to-many object matching is found, the compound perimeter of the footprints in the many-set will be used when calculating the shape accuracy and finding closest vertices between the polygons.

When calculating the area overlap, it was utilized the fact that multipolygons in geojson are represented with the main, bounding polygon first. Any subsequent polygons always represent cutouts or crop-outs in the footprint. When calculating the area of a multipolygon building, the area of the first polygon was therefore taken and subtracted with those of the subsequent polygons.

4.1.5 Shape accuracy definition

The building footprint correspondence will be evaluated using a similarity function that depends on the difference between the turning functions of matching building footprints in both datasets. The turning function was first defined by **(Arkin et al, 1991)**, as a method for measuring the similarity of two polygons. The Turning function $T_c(l)$ measures the cumulative angle of the polygon's counter-clockwise tangent, as a function of the cumulative normalized length l . This project uses the turning function as it is defined by **(Fan et al, 2014)**. See figure 4.3 for a side-by-side comparison of a polygon and its turning function. For a polygon with vertices $v_1 \dots v_n$ and line segments $e_1 \dots e_n$ It is defined as follows. Fix a starting vertex v_1 . The tangent angle at v_1 is $\theta_{n,1}$. This is the angle between the neighbouring line segments e_n and e_1 . For any i such that $i > 1$ and $n < i$, the tangent angle at v_i is recursively defined as:

$$\theta_{i,i-1} = \theta_{n,1} + \sum_{k=1}^i \theta_{k,k-1}$$

The turning function has some nice geometric properties, in that it is invariant to both rotation and scaling of the polygon. The function contains no information of the orientation of the polygon, only of the relative angle between successive line segments, thus it does not change under rotation. It also measures only the normalized cumulative length, which does not change under scaling. The similarity of two polygons A and B in terms of their turning function is defined as their distance of their cumulative turning functions:

$$S_T(A, B) = 1 - (\int_0^1 T_{C,A}(l) - T_{C,B}(l) dl)^{1/2}.$$

The value range will be $(0 < S_T < 1)$, where $S_T(A, B) = 1$ if the polygons are identical. See figure 4.4 for a side-by-side comparison of two similar polygons and their turning functions.

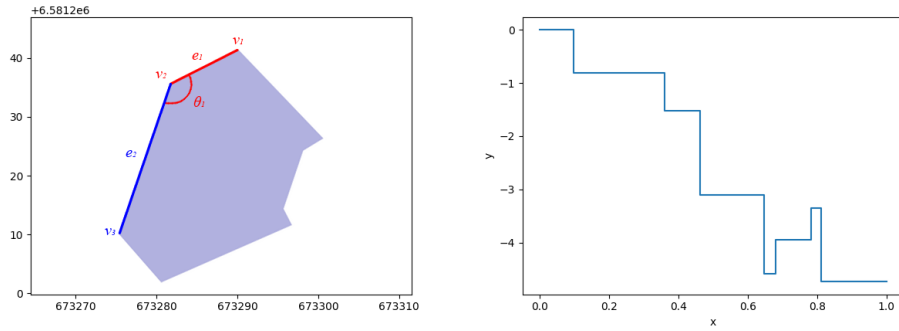


Figure 4.3: An example of the turning function of a polygon. The edges, vertices and angle of the initial step of the turning function are marked.

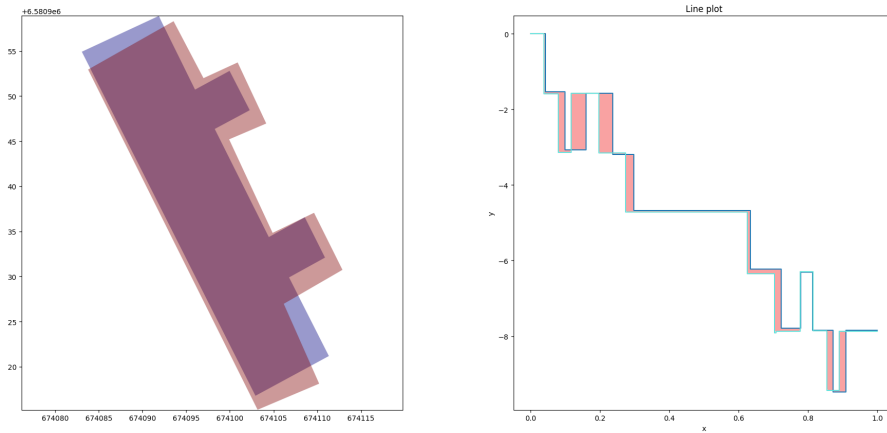


Figure 4.4: An example of the turning functions of two corresponding buildings from the OSM and SLU datasets, with the area between them highlighted.

4.1.6 Closest point and point proximity

The final problem is that even when building polygons have been matched between the two datasets, they may not have one-to-one vertex relationship. Footprints from different datasets may be formed at a different level of detail. Problems that arise are e.g. that the vertex counts are dissimilar, or that vertex clusters may be found at different parts of the polygon in the two datasets. To avoid this effect, key points are extracted using the Douglas-Peucker algorithm (**Douglas and Peucker, 1973**), to create a simplified footprint with less points that still retain information about the rough features of the detailed footprint. The idea behind Douglas-Peucker is to recursively divide a polyline. It initially marks only the start and end points (v_0, v_n) to be kept, and finds the point v_i in between whose distance is the greatest to the line segment between v_0 and v_n . It then recursively refines the line segments (v_0, v_i) and (v_i, v_n) , and proceeds to do so until a line segment (v_j, v_k) is found, where every point in between v_j and v_k have a distance to the line segment (v_j, v_k) that is smaller than some resolution ϵ . Then v_j are added to the simplified polyline, and all nodes in between them are discarded. See Algorithm 1 for a detailed view. In either case The Oriented Minimum Bounding Rectangle (OMBR) is calculated for the two polygons. Finally the OMBR for the OSM building footprint is shifted so that its centroid aligns with the centroid of the OMBR of the SLU

building footprint. Any edges in the simplified footprints that coincide with the OMBR from the same dataset are extracted, and the corresponding points in the original footprints will be matched with each other.

Algorithm 1: Douglas-Peucker

Result: Write here the result

```

// Find the point with the maximum distance;
 $d_{max} = 0$ ;
 $index = 0$ ;
 $end = \text{length}(\text{PointList})$ ;
for  $i=2$  to  $(end-1)$  do
     $d = \text{perpendicularDistance}(\text{PointList}[i], \text{Line}(\text{PointList}[1],$ 
         $\text{PointList}[end]))$ ;
    if  $d > d_{max}$  then
         $index = i$ ;
         $d_{max} = d$ ;
    end
end
ResultList = [];
// If max distance is greater than epsilon, recursively simplify;
if  $d_{max} > \epsilon$  then
    // Recursive call;
    recResults1[] = Douglas-Peucker(PointList[1... $index$ ],  $\epsilon$ );
    recResults2[] = Douglas-Peucker(PointList[ $index$ ... $end$ ],  $\epsilon$ );
    // Build the result list;
    ResultList[] = recResults1[1...length(recResults1) - 1],
        recResults2[1...length(recResults2)];
else
    ResultList[] = PointList[1], PointList[ $end$ ];
end
return ResultList[];
```

Finally, when two building footprints and their vertices have been mapped, we will use the offset of matching vertices as a measure of positional error. The average and variance in vertex spread will be calculated and used to make an assessment of the geometric precision of the OSM dataset, and this precision will further be used to form an upper boundary on geometrical corrections that can be made to the map once it has been imported into the application.

4.2 Collision study

4.2.1 Road widths and properties

The maximum distance between two features was set to 1 times the positional accuracy, since then there will always be ample room to make changes to any features that would collide with the newly moved nodes, and thus we do not need to worry about feature collisions propagating. In this implementation, roads of different types were allowed to merge into one another to form common intersections. To facilitate this, it was necessary to work with a path-by-path representation of the point data. When two paths share a node with common coordinates, they form an intersection which can be of multiple different types.

See the footnote for the publication that the default minimum widths were obtained from.² The standard recommended minimum width for a two-lane road in Sweden is 6.5 meters.

Subsequent visual measurements of a few key locations in the Stockholm area revealed the following minimum way widths: Table 4.1 shows the minimum and maximum road widths that were found during these measurements, and that will be used in the collision study.

	Footpath	Residential	Secondary	Primary
Minimum width	2.0 m	6.0 m	6.5 m	8.0 m
Maximum width	5.0 m	9.0 m	10.0 m	16.0 m

Table 4.1: Standard road widths used for the collision study

4.2.2 Feature overlap algorithm

Outline of the feature overlap algorithm (Go over all features) Since only road collisions are of interests, all roads were added to a queue and gone over one by one.

²Vägars och gators utformning - Trafikverket. Publikation 2020:029.
https://trafikverket.ineko.se/Files/sv-SE/71830/Ineko.Product.RelatedFiles/2020_029_vagar_och_gators_utformning_krav.pdf

The boundary polygon of the buildings are extracted, as well as the polylines of the roads.

To speed up the collision checking process, a geometric hashing solution was developed. This way feature collision lookup could be made without comparing a feature to all other available features, but instead from a selection of the closest candidates. The hash bucket size was 230 meters and a feature could be in multiple hash buckets.

Special cases: Where two roads intersect though they share a node. Then this is a natural connection in the road network and should not be counted as a problematic case of feature overlap. Also ignored collisions between tunnels and bridges and other roads since these are of different heights. These were identified by looking at feature attributes in OSM. Any roads that were represented as polygons or multipolygons instead of polylines were also excluded from the study.

4.2.3 Projected edge distance

Outline of the minimum edge distance algorithm.

Chapter 5

Results and metrics

5.1 Road collision study

For the primary collision study. Table 5.1 shows the statistics of the collision study, and the number of roads, number of edges and total edge length that showed intersections with other features before road extrusion, by road category. For footpaths in particular, it was shown that 12.05% of all roads collide with some other feature after extrusion to the minimum width. The same was shown to be true for 0.11% of the road polyline edges and 0.09% of the total road length. Table 5.2 shows the remaining roads, edges and total edges length whose intersections with other features could not be resolved by geometrical translation of a distance smaller than the positional accuracy. For footpaths this was shown to hold of 0.51% of all roads, The number of road edges and percentage of the total road length that could not be corrected by geometric translation was significantly small.

	Footpath	Residential	Secondary	Primary
Features, total	26473	10523	3044	2756
Edges, total	6382579	6612383	968420	420810
Edge length, total	129984.79 km	186089.55 km	29304.57 km	16162.95 km
Features, colliding	3189	1032	412	456
Edges, colliding	7330	2362	643	824
Edge length, colliding	110.67 km	66.18 km	9389.30 m	20.41 km
Features, percent	12.05 %	9.81 %	13.53 %	16.55 %
Edges, percent	0.11 %	0.04 %	0.07 %	0.20 %
Edge length, percent	0.09 %	0.04 %	0.03 %	0.13 %

Table 5.1: The first result table of the collision study. This table shows the amount of features and edges, as well as the cumulative edge length, in total and which are intersecting with any other feature.

	Footpath	Residential	Secondary	Primary
Features, colliding	134	336	246	277
Edges, colliding	157	530	306	407
Edge length, colliding	3248.73	6475.99 m	3840.00 m	8039.54 m
Features, percent	0.51 %	3.19 %	8.08 %	10.51 %
Edges, percent	0.00 %	0.00 %	0.03 %	0.09 %
Edge length, percent	0.00 %	0.00 %	0.01 %	0.05 %

Table 5.2: The second result table of the collision study. This table shows the amount of features and edges, as well as the cumulative edge length, which can be corrected by simple geometric translation.

5.2 Positional accuracy study

For the secondary study, the average positional accuracy per building was calculated to roughly 2.06 meters, and this will be taken as an estimate of the positional accuracy of the OSM dataset. Table 5.3 shows the estimate in positional accuracy that was obtained from the study. Figure 5.1 shows the positional accuracies measured per building as a frequency diagram.

$e_{average}$	e_{max}	e_{min}	$e_{standarddeviation}$
2.0579...	9.9878...	0.0	1.2464...

Table 5.3: The estimated positional accuracy of the OSM dataset: average, max, min and standard deviation

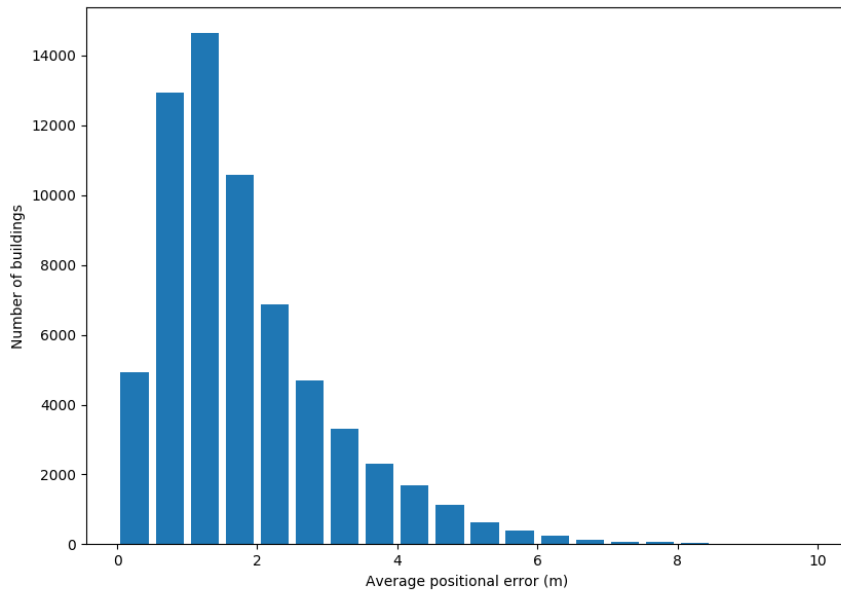


Figure 5.1: The average positional accuracies per building as a frequency diagram.

5.3 Secondary metrics

5.3.1 Completeness by building area

Table 5.4 shows the building coverage of the OSM and SLU datasets in terms of the number of buildings and their total area. Table 5.5 shows the building coverage of both datasets as percentages. The area cover of the OSM dataset in relation to the SLU dataset was estimated to 98.18%. This will be taken as an estimate of the completeness of the OSM dataset.

	Total number of buildings	Area cover
OSM	102755	33105023.32... m^2
SLU	170783	33718628.97... m^2

Table 5.4: Total number of buildings and their cumulative area

	Number of buildings (%)	Area cover (%)
OSM	60.17%	98.18%
SLU	100.00%	100.00%

Table 5.5: Total number of buildings and cumulative area as percentages

5.3.2 Building matching statistics

Table 5.6 shows how many of the OSM to SLU building matches were found in each category of 1:1, 1:n and 1:0 matches.

	1:0	1:1	1:n	Total
Match count	9812	81722	11221	102755
Percent	9.55%	79.53%	10.92%	100%

Table 5.6: The number and percentages of matching buildings between both datasets, ordered by type of correlation (1:0, 1:1 or 1:n)

5.3.3 Shape accuracy statistics

Figure 5.2 shows the shape similarity measured per building as a frequency diagram.

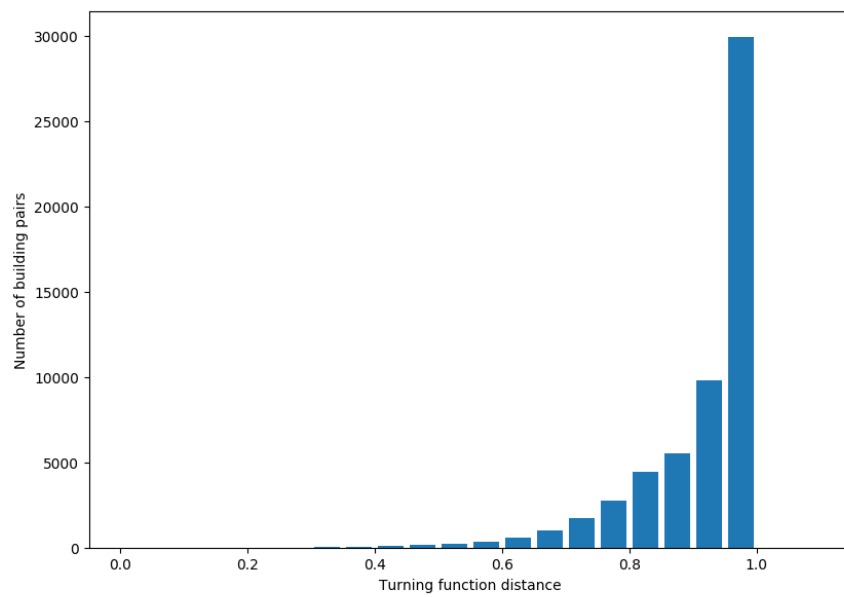


Figure 5.2: The shape similarities between 1:1 building pairs as a frequency diagram.

Chapter 6

Conclusions and future work

6.1 Quality of the OSM dataset

One could reasonably assume that Stockholm, being one of the more developed cities in one of the most technologically connected country in the world, would be fairly well mapped in OSM. Let us take the positional accuracy of the Stockholm area, as obtained by this study, as representative of that of major cities in developed countries in the OSM dataset. Then the positional accuracy has improved by roughly 3.5 meters since the study by **(Haklay, 2010)**, and by roughly 1.5 meters since the study by **(Fan et al, 2014)**. This of course assumes that the SLU reference dataset is taken as absolute.

The completeness analysis by building area shows that the OSM Stockholm dataset has high completeness in terms of both building area and counted features, in the same level as the study of Munich by **(Fan et al, 2014)**. The difference in area cover can partially be explained by small utility buildings that are often not represented in the OSM dataset. Particularly the residential areas in downtown, Stockholm, are characteristic in that each city block consists of a street front and an open, communal compound in the middle, inside of which there are usually a number of small utility buildings such as bicycle garages, toolsheds, refuse rooms and such. See figure 6.1 for an example of an area in stockholm with such characteristics. These buildings are likely hard to make out and trace on publicly available satellite image data. They are, according to **(Fan et al, 2014)** occluded by their surroundings due to shadows or

forestry. This appears to be a large consensus in the field.

The low semantic accuracy has made analysis hard. The available SLU dataset from Lantmäteriet uses a plot-based subdivision of buildings, whereas OSM uses a subdivision that more closely resembles the actual building footprint as seen from above. In many cases whole city blocks are represented as single buildings, which means that many less meaningful feature matches can be found. As seen in table 5.6, about 80% of all OSM features were found to have a 1:1 mapping to the SLU dataset, but upon further visual comparison it can be seen that many of the 1:n matches are found in a very specified area, namely the residential areas in downtown, Stockholm. This is problematic since this typical area with the same level of accessibility was likely measured with the same measuring technique, and the unsystematic positional error will likely be similar in these areas. The question is whether it conforms well to the positional error in the rest of the dataset or not. This analysis will not be carried out in this project, but could be a good subject for a future master's thesis project.

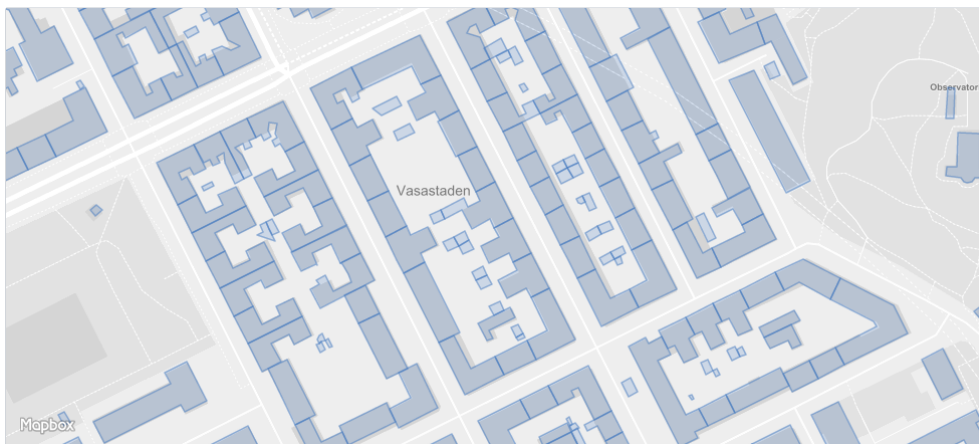


Figure 6.1: A map segment which shows an area with many small utility buildings that are represented in the SLU dataset but not in the OSM dataset.

6.2 Collision study

The immediate conclusion of this study is that, in terms of feature collision, footpaths were not significantly worse than other road categories. As a result, it can promptly be assumed that city modelling services which already utilize

OSM car road data could also use OSM footpath data without a drastic increase in feature collision. The biggest reason for this is thought to be that footpaths in their nature are narrow. So narrow in fact that they can be displaced by more than half of their full width (minimum 1 meter) before the limit of half the positional accuracy (1.025 meters) is reached.

Looking closer at the individual collision cases, the next conclusion is that most often it is actually a small part of a road that is colliding, and will need correction. We make an exemplifying calculation to support this claim. Looking in tables 5.1 and 5.2, we note that before road extrusion, 3189 features and 7330 of their edges are intersecting some other feature. This means that for each colliding road, on average 2.3 of its edges will be intersecting some other feature, thus bearing responsibility for the collision. In total there are 26473 features and 6382579 edges, meaning that each road feature is on average constructed out of 241 edges. Thus the percentage of edges colliding per road is on average roughly 0.95%. A similar calculation for the number of features that could not be corrected by translation yields that the number of colliding edges per feature is on average 1.2, and that the percentage of colliding edges per feature is 0.49%. Visual inspection of the cases where roads collide with other features has supported this.

After visual inspection of the cases where features collide, it was determined that all collision occurrences can be almost exclusively classified into one of five categories. These categories are explained in the list below, and each case is exemplified in figure 6.2. All these cases will create issues when generating the 3D mesh representation of the city.

1. Case 1: A building lies in parallel with a road, and the distance between the two is smaller than the minimum width of the road.
2. Case 2: A road shares a node with a building.
3. Case 3: A road is intersecting with certain building features.
4. Case 4: Two roads have a minimum distance that is smaller than the sum of the minimum widths of both roads.
5. Case 5: Two roads share a node, and a subsequent node in one road lies within the minimum width of the other road.

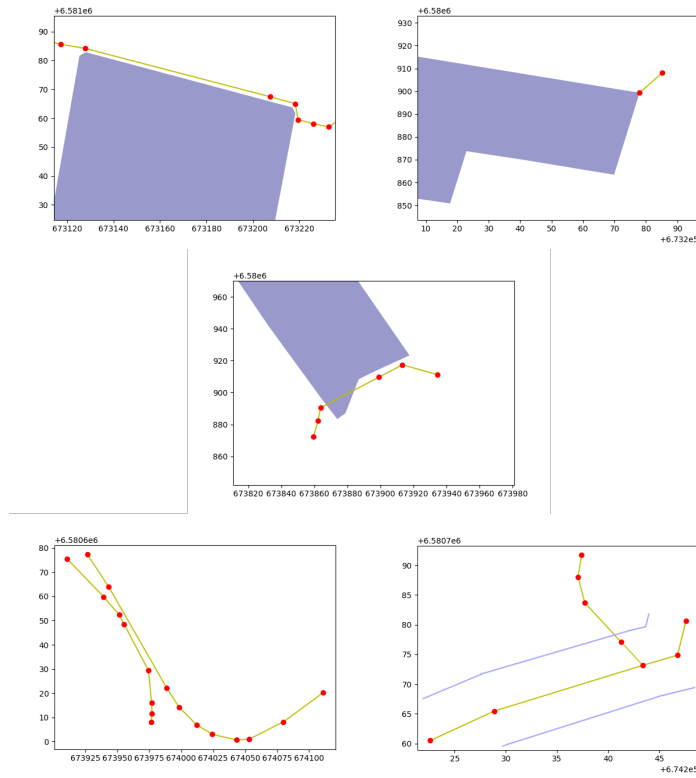


Figure 6.2: The 5 identified cases over feature overlap. Top left: Case 1. Top right: Case 2. Middle: Case 3. Bottom left: Case 4. Bottom right: Case 5.

6.3 Suggested algorithms for collision correction

All collision cases can be solved with relatively simply geometric algorithms. This section will present suggestions on algorithms that will resolve collisions by identifying individual colliding nodes and translating them, after which some degree of smoothing (such as linear interpolation) can be applied to preserve visual features. Cases 1 and 3-5 will be handled, while 2 will be left since case 2 collisions do not inherently cause feature overlap when extruding a 3D road mesh from the way edges. Thus it will me up to the individual developer to decide what to do with Case 2 collisions.

1. Case 1 collisions can be solved by translating colliding way points away

from the building, along the normal of the nearest surface. Smoothing can then be applied as seen fit.

2. Case 3 collisions can be solved by eliminating the building features that intersect with the way, and then applying the same algorithm as in case 1.
3. Case 4 collisions can be solved by calculating the average normal over all colliding edges for both roads, and translating colliding points along the normal, away from the other road. Smoothing can then be applied as seen fit.
4. Case 5 collisions can be solved simply by translating the colliding point along the tangent of the closest edge, and then applying smoothing as seen fit.

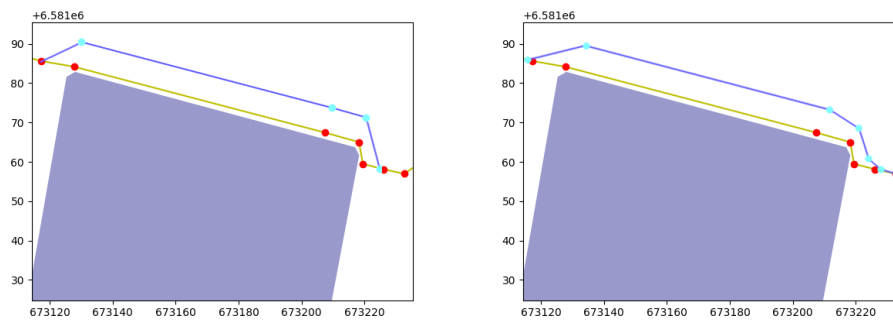


Figure 6.3: Example of the solution algorithm for case 1 collision. The yellow line shows the original road placement. The blue line shows the updated road placement. The second picture illustrates how smoothing can be applied to the translated road if desired.

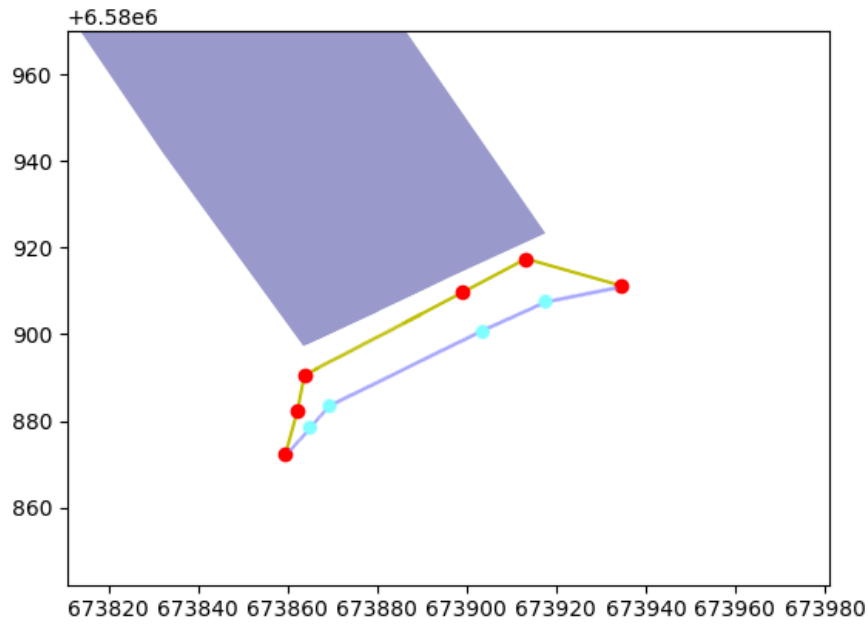


Figure 6.4: Example of the solution algorithm for case 3 collision. The protruding building feature as seen in 6.2 has been eliminated. The yellow line shows the original road placement. The blue line shows the updated road placement.

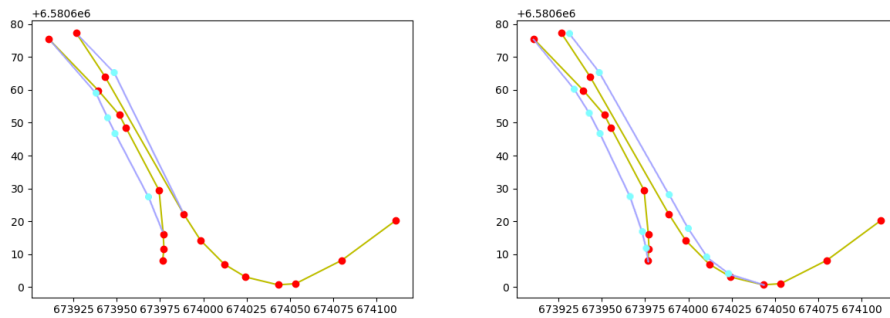


Figure 6.5: Example of the solution algorithm for case 4 collision. The yellow lines show the original road placements. The blue lines show the updated road placements. The second picture illustrates how smoothing can be applied to the translated road if desired.

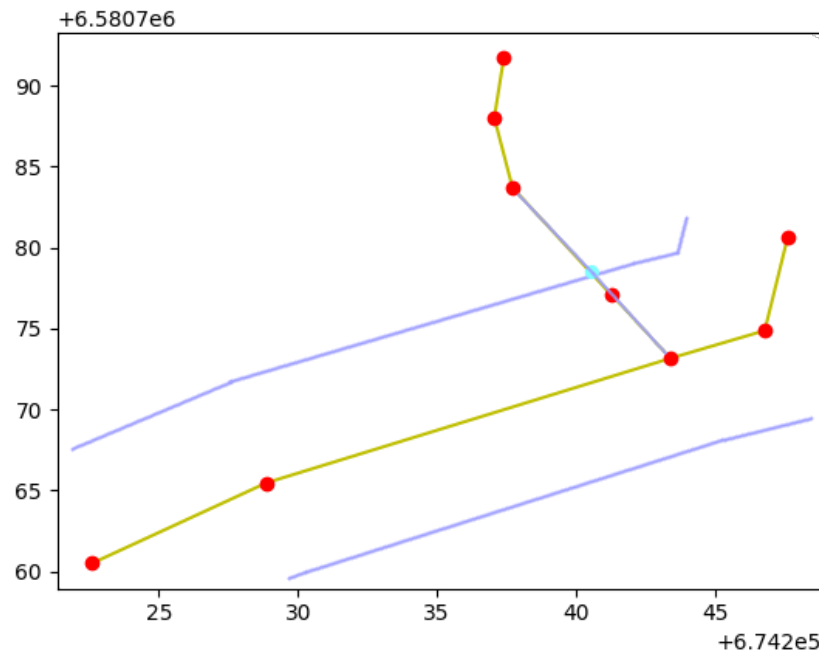


Figure 6.6: Example of the solution algorithm for case 5 collision. The yellow lines show the original road placements. The blue line segment with the cyan vertex shows the updated placement of the interesting vertex. The remaining blue lines show the boundaries of the original road.

6.4 Scientific study: Where does this fit in the general Scientific scope of things

The same methods can be applied to import building footprint data from OSM or some, and the same metrics can be applied to assess the data accuracy. (**Fan et al, 2014**) When we have the fundamental procedure for accurately importing building footprints without compromising the data integrity, we can proceed with building modeling. (**Müller et al, 2006**) Other challenges include inferring or guessing building height. () have presented a method for inferring building height from the building footprint alone, with surprising accuracy.

Depending on the level of data we have access to, we can then choose what level of representation we would like for our application (Todor).

Another crucial concept in city modelling is the Level Of Detail (LOD). LOD is a definition of a series of different 3D representation of the same data, at different detail levels. The LOD chosen for a particular application suggests how the data has been acquired and modelled. The CityGML standard divides the LOD representation of 3D models into three classes: A B and C. LOD-A models are renderings of the building footprint itself, or building blocks that have been extruded from the footprint to give the building height. LOD-B models are building blocks with simplified roof shapes, and LOD-C models include features such as doors, windows, alcoves, building decor, indoor features or vegetation. **(Biljecki, Ledoux and Stoter, 2016)** We may also chose what LOD class(es) to use depending on data availablity and application. With the current means of data aquisition being limited to building footprints, using OSM data we can only produce CityGML If we wish to acquire building as-sets at a LOD-C level, we would have to complete the data with other sources, or rely on procedural methods to populate. Such procedural techniques have long been available. **(Müller et al, 2006)** present how to accomplish this using shape grammar: a method for iteratively constructing 3D models based in a hierarchical set of rules. By starting with a crude volumetric model of a building and iteratively remodeling it from a set of shape grammars, a procedural model can structure the façade, add texture and add details for windows, doors and ornaments, and so on. Shape grammars often work from a databank of 3D models and a set of rules for how these can be pieced together. This creates a possible generative space of many different models that can be created from the same data and rule set, with the induction of random fluctuations. For simple presentation in e.g. animation and videogames or even urban planning software, this could very well be enough. The problem is that these features will rarely match real life. As long as one can be satisfied with looking at rough representations of buildings and does not require additional knowledge about minor features.

The fact is that much of the morpological information is not present in the OSM dataset. Urban architects often work morpological structures where a single road can be comprised of many different sections with different purposes. A single inner-city street for example, often contains sidewalks All of a certain placement and dimension that determines what type of traffic it can serve. This type of representation is known as a multimodal structures, due to the possibility of incorporating mulitple modes of transportation. But may even describe the building facades and distances between curblin and building lot. **Stojanovski, 2019** This type of information could in theory be

generated procedurally using shape grammars and some sort of wayfinding to create logical routes for different types of traffic. But for urban planners requiring an exact morphological representation of some specification, this complementary data will have to be obtained from another dataset.

The main conclusion is that generating virtual cities purely from OpenStreetMap data is a perfectly feasible procedure in the media industry, with the inclusion of procedural methods such as shape grammars to generate detail. It will be a cheap method that requires minimum effort in terms of source data collection. And the shape grammar method allows for a great deal of scalability. The level of detail of individual models and the composition as a whole can be fitted to the scope of the project and the team size. In the area of urban design however, urban planners often require complementary data to build morphological representations of the data that they are working with. The feasibility of creating virtual cities that are of use to urban planners will depend mainly on the availability of that complementary data.

Bibliography

- [1] Arkin, E., Chew, L., Huttenlocher, D., Kedem, K. and Mitchell, J. (1991). An Efficiently Computable Metric for Comparing Polygonal Shapes. *IEEE Transaction Pattern Analysis and Machine Intelligence* 13. 209-216.
- [2] Biljecki, F., Ledoux, H., Stoter, J., Zhao J. (2014): Formalisation of the level of detail in 3D city modelling. *Computers, Environment and Urban Systems*, vol. 48, pp. 1-15.
- [3] Biljecki, F., Ledoux, H., Du, X., Stoter, J., Soon, K., and Khoo, V. (2016). The most common geometric and semantic errors in CityGML datasets. 10.5194/isprs-annals-IV-2-W1-13-2016.
- [4] Douglas, D.H. and Peucker T.K. (1973). Algorithms for the Reduction of the Number of Points Required to Represent a Digitalized Line or Its Caricature. *Cartographica: The International Journal for Geographic Information and Geovisualization*, 10(2), 112-122.
- [5] Fan, H., Zipf, A., Fu, Q. and Neis, P. (2014). Quality assessment for building footprints data on OpenStreetMap. *International Journal of Geographical Information Science*. 28. 700-719.
- [6] Haklay, M. (2010). How Good is Volunteered Geographical Information? A Comparative Study of OpenStreetMap and Ordnance Survey Datasets. *Environment and Planning B: Planning and Design*, 37(4), 682–703.
- [7] Kunze, C. (2012). Vergleichsanalyse des Gebäudedatenbestandes aus OpenStreetMap mit amtlichen Datenquellen. Student research project, Technical University of Dresden. <http://nbn-resolving.de/urn:nbn:de:bsz:14-qucosa-88141>

- [8] Müller, P., Wonka, P., Haegler, S., Ulmer, A. and Van Gool, L. (2006). Procedural modeling of buildings. In ACM SIGGRAPH 2006 Papers, 614-623.
- [9] Parish, Y. I., and Müller, P. (2001) Procedural modeling of cities. In Proceedings of the 28th annual conference on Computer graphics and interactive techniques, SIGGRAPH, 12-17 August 2001, Los Angeles, Calif., 301-308.
- [10] Rutzinger, M., Rottensteiner, F. and Pfeifer, N. (2009). A Comparison of Evaluation Techniques for Building Extraction From Airborne Laser Scanning. IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing 2(1): 11-20.
- [11] Stojanovski, T. (2019). Typo-morphology of transportation -Looking at historical development and multimodal futures of Swedish streets and roads. Conference paper. ISUF 2019 -XXVI International Seminar on Urban Form 2019, At Nicosia, Cyprus
- [12] Stojanovski, T. Partanen J., Samuels I., Sanders, P. and Peters C. (2020, forthcoming). City Information Modelling (CIM) and Digitizing Urban Design Practices. Built Environment.
- [13] Vanegas, C., Aliaga, D., Mueller, P., Waddell, P., Watson, B. and Wonka, P. (2010). Modeling the Appearance and Behavior of Urban Spaces. Computer Graphics Forum. 29. 25-42. 10.1111/j.1467-8659.2009.01535.x.
- [14] Van Oort P.A.J. (2006). Spatial Data Quality: From Description to Application. PhD Thesis, Wageningen University.