C5 CYD · Public Beta 1

A separate sketch: HUNTR-SEEKR_C5_CYD_Public_Beta_1.ino + SkiFonts.h + SkiFontsAlien.h, in a folder of the same name. It is the v3.9 build (normal look, ALIEN green, ALIENS blue) with three changes. Your v3.7, v3.8 and v3.9 files are untouched. Look and ALIEN/ALIENS switches are unchanged: SETUP > ALIEN and SETUP > ALIENS, either/or.

Status: checked in a simulator (42 checks pass; the regression suite gives the same results as v3.9) and built with the real ESP32-C5 compiler (Arduino-ESP32 3.3.9, 58% of flash, 31% of RAM), but not run on the board by its author. The compile used a stand-in for the display library, not the real patched TFT_eSPI. Bug reports are welcome. Tell me if the Arduino IDE shows any error.

1. Snipped corners

In ALIEN and ALIENS every button, card, tile, list row, tab pill and switch has its four corners cut off at 45 degrees, like snipped paper, instead of being square. Bigger buttons get a bigger cut (4 to 9 px). Text sits clear of the cuts. The normal look keeps its rounded corners.



Normal: rounded



ALIEN: snipped



ALIENS: snipped




ALIENS list rows.

2. One ON colour in every look


A switch that is ON, an active scene chip and a setting value such as 'On' or 'Auto' now use the normal look's teal (the same colour) in ALIEN and ALIENS too. In the two alien looks the ON switch is a solid teal block with dark letters. ARM tiles still show each group in its own colour, as in the normal look.



ALIEN: ALIEN is ON, in teal.

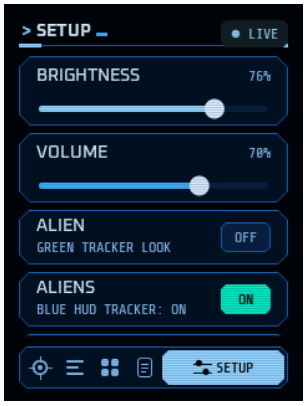

ALIENS: ALIENS is ON, in teal.

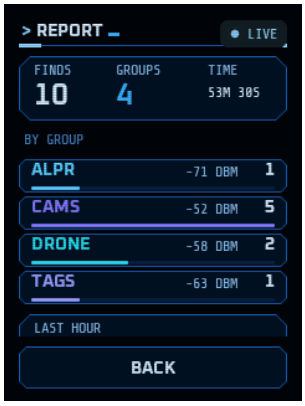


ALIENS report.

3. ALIENS beeps: you can hear that you are getting closer



Far: one blip, slow.

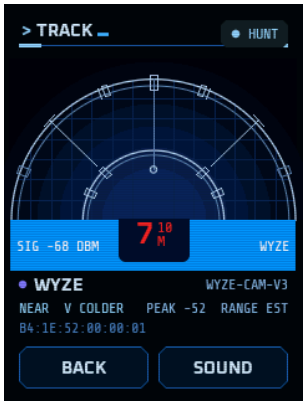

Near.



Close: three blips, fast.

Signal	Time between pings	Blips per ping	First blip pitch
-95 dBm (far)	about 1.1 s	1	about 1.5 kHz
-80 dBm	about 0.89 s	1	about 1.9 kHz
-65 dBm	about 0.67 s	2	about 2.4 kHz
-52 dBm	about 0.49 s	3	about 2.8 kHz
-45 dBm (very close)	about 0.38 s	3	about 3.0 kHz

Direction cue: when your signal has been getting stronger for the last couple of seconds (you are walking toward it) the blips inside each ping climb, a rising chirp. When it has been getting weaker they fall. Standing still or level, they stay at one pitch. Every ping ends with a short low thump. While the target has not been heard yet (SEARCHING) you only get the slow thump. The ring on the screen pulses at the same rate as the beeps. SOUND on the Track screen and the global sound switch still apply; muted, the ring still pulses. The signal is a rough guide: walls, bodies and the target's own power change it a lot, and the board cannot tell which way a signal comes from, only how strong it is.

How to use it

1. Put the three files in a folder named HUNTR-SEEKR_C5_CYD_Public_Beta_1. Same board settings and libraries as before (see the README and C5_TFT_eSPI_setup). 2. Flash, Serial Monitor at 115200. 3. SETUP > ALIEN or ALIENS: tap the row. The boot screen and the Self-test show Public Beta 1.

Please check on the real board

• Do the snipped corners look right on the real panel, and is any text too close to a cut? • Are the ALIENS beeps easy to hear coming closer? Tell me what to change: how fast, how high, how many blips. • Walk toward a target and away from it: do you hear the rising and falling chirp? • SELF-TEST: Radios (Wi-Fi n BLE n) should climb with groups armed. • Anything overlapping or cut off, with the page and orientation.

Credits

Share Tech Mono (Carrois Apostrophe) and Oxanium (Severin Meyer) are open fonts under the SIL Open Font License 1.1. The looks are original designs; they use no film logos, names or artwork.