Ku/K/Ka multi band antenna feed subsystem

【Product introduction】:

Including RF splitters, combiners, OMTs, circular polarizers, filters and connecting waveguides.

Features: wide band, low insertion loss, good rejection, compact size.

【Technical indicators】:

1. Working frequency: Ku band: 11.45～12.75GHz(RX);13.75～14.5GHz(TX)

   K/Ka band: 19.0～21.2GHz(RX);29.0～31.0GHz(TX)

2. VSWR: 1.30:1 MAX

3. Insertion loss: 0.8dB MAX

4. Isolation: (K/Ka)/Ku: 60dB MIN

   Ku: TX/RX 90dB MIN

   Ku: RX/TX 35dB MIN

   K/Ka: TX/RX 90dB MIN

   K/Ka: RX/TX 90dB MIN


5. circular polarizability(K/Ka): 1.0dB MAX

6. Interface: Common port: circular waveguideΦ19.05

   Ku band: RX: WR75; TX: WR75


   K/Ka band: RX: WR42; TX: WR28

7. Principal schematic:

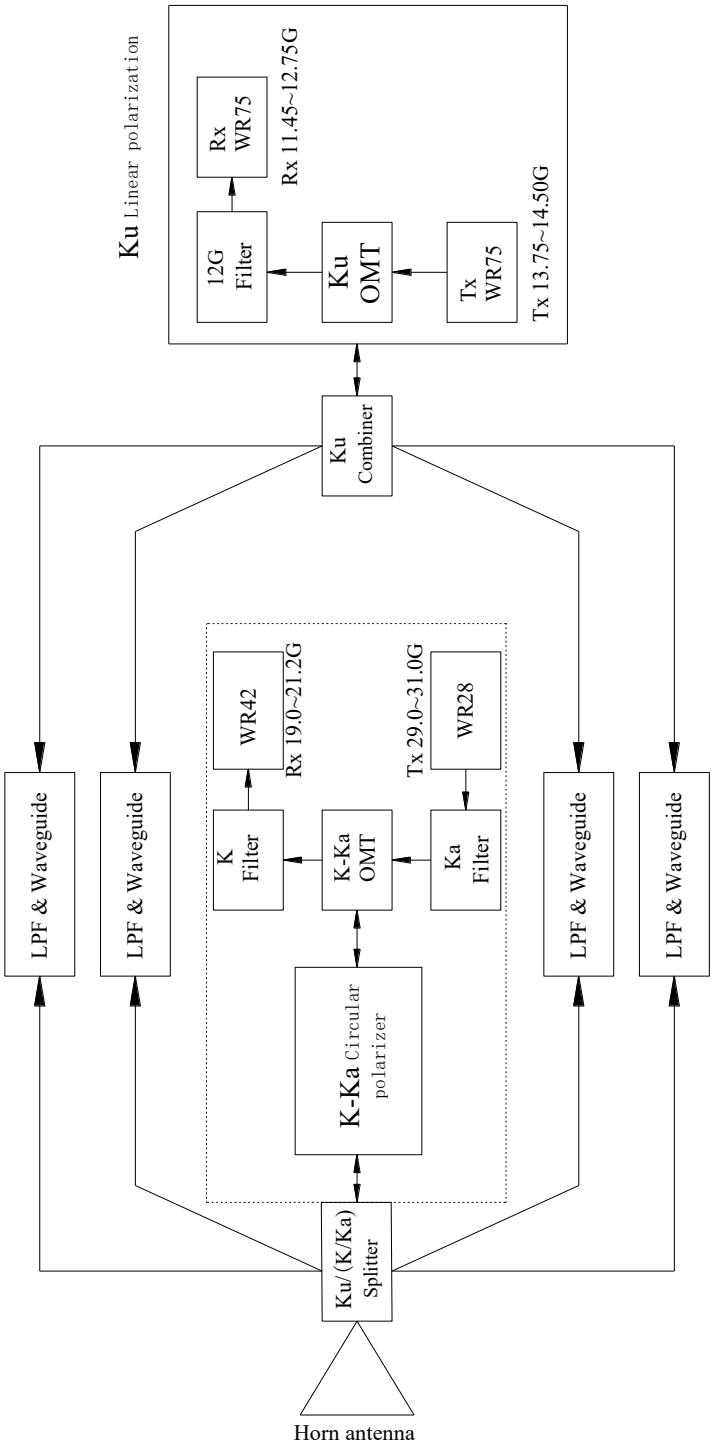

Ku/K/Ka Multi Band Orthogonal Mode Subsystem (Type A)

5. Structure:

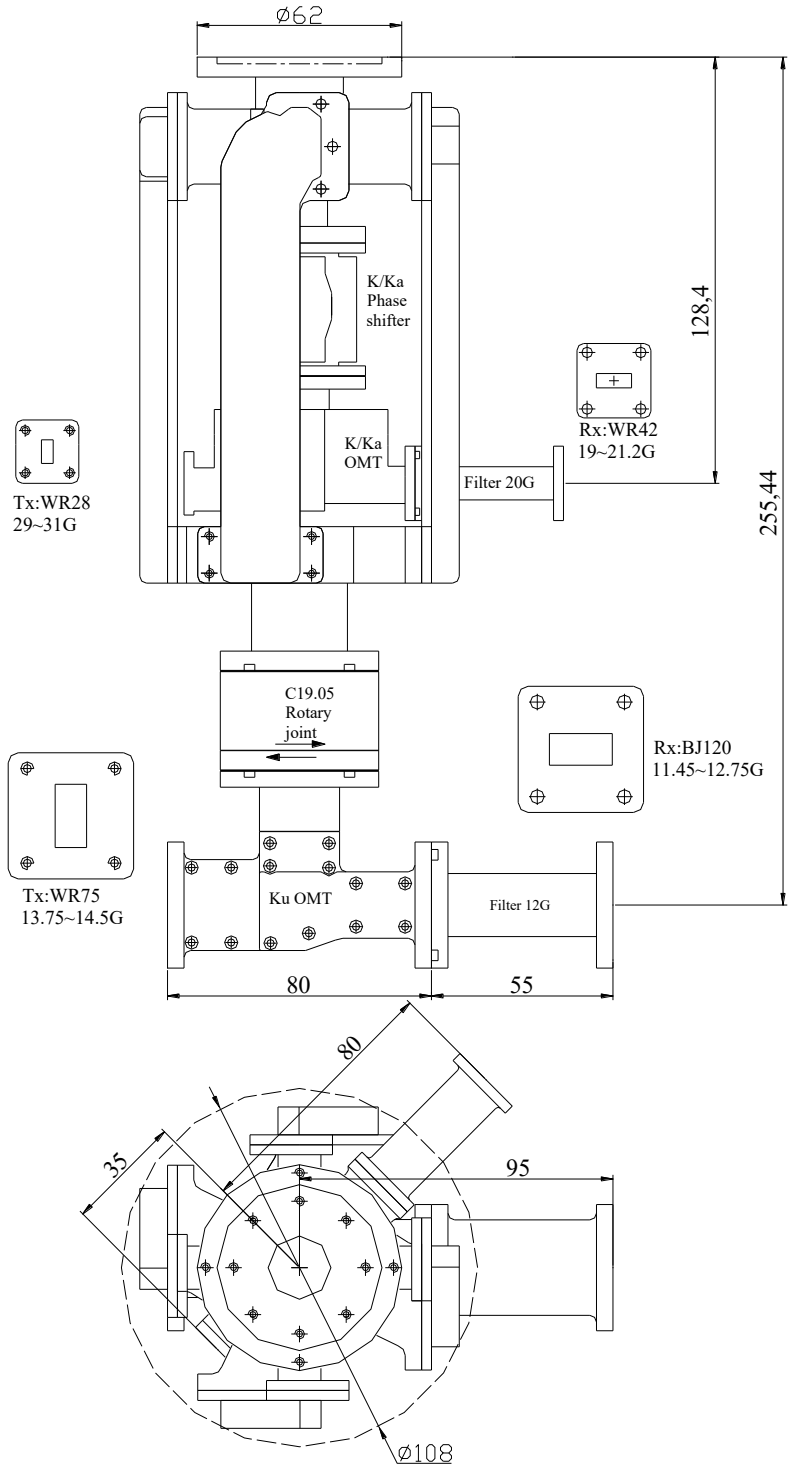

Ku/K/Ka Multi Band Orthogonal Mode Subsystem (Type A)



Ku/K/Ka Multi Band Orthogonal Mode Subsystem (Type A)

Address: 9th Floor, Building 1, Liandong U Valley, 118 Hangtian Road. Chengdu. China. 610052
Web: www.slmicrowave.com www.sanlianweixun.com
Email: wangrui@slmicrowave.com wangrui@sanlianweixun.com