




7.5kVA 1Ø In & Out

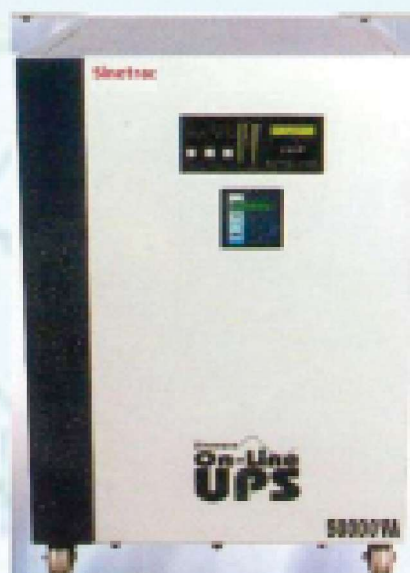

50kVA 3Ø In & Out

Sinetrac®

ONLINE UPS

Capacity : 3kVA to 100kVA



Technical Specifications

	1 ϕ INPUT 3 ϕ OUTPUT	3 ϕ INPUT 1 ϕ OUTPUT	3 ϕ INPUT 3 ϕ OUTPUT
--	--------------------------------	--------------------------------	--------------------------------

INPUT

Voltage	230V $\pm$ 20% + 15%	415V $\pm$ 20% + 15%	415V $\pm$ 20% + 15%
Frequency	50Hz $\pm$ 10%	50Hz $\pm$ 10%	50Hz $\pm$ 10%
DC Voltage	120/180V DC	360V DC	360V DC

OUTPUT

Voltage	220 – 230V $\pm$ 1%	220 – 230V $\pm$ 1%	415V $\pm$ 1%
Frequency	50Hz $\pm$ 0.01%	50Hz $\pm$ 0.01%	50Hz $\pm$ 0.01%
Power Factor	0.7 Lag to Unity	0.7 Lag to Unity	0.7 Lag to Unity
Crest Factor	5:1	5:1	5:1
Transient Response	Output Remains Within 5%	Output Remains Within 5%	Output Remains Within 5%
On 10% To 100%	Recovery Within 1 cycle	Recovery Within 1 cycle	Recovery Within 1 cycle
Output Isolation	In Built	In Built	In Built
Over Load	a. 150% For 1 Sec b. 110% For 1 Minute	150% For 1 Sec 110% For 1 Minute	150% For 1 Sec 110% For 1 Minute
Input Over Voltage	Rectifier Trip	Rectifier Trip	Rectifier Trip
Dc Under/Over Voltage	Inverter Trip	Inverter Trip	Inverter Trip
O/P Under/Over Voltage	Inverter Trip	Inverter Trip	Inverter Trip
RII/EMI Protection	Yes	Yes	Yes
Computer Interface	Through Db 9 Port (Optional)	Through Db 9 Port (Optional)	Through Db 9 Port (Optional)
Generator Compatible	Yes	Yes	Yes
Acoustic Noise	< 42 Db at one Meter	< 50 Db at one Meter	< 60 Db at one Meter
Static By Pass	Optional	Optional	Optional

PROTECTIONS

Rectifier	Input Over Voltage/Under Voltage	Input Over & Under Voltage	Input Over & Under Voltage
	DC Over Voltage	DC Over Voltage	DC Over Voltage
	Battery Charging	Battery Charging	Battery Charging
	Over Current	Over Current	Over Current
		Single Phasing	Single Phasing
		Reverse Phase Sequence	Reverse Phase Sequence

PROTECTIONS

Inverter	Output Over Voltage/Under Voltage	Output Over Voltage/Under Voltage	Output Over Voltage/Under Voltage
	Output Overload	Output Overload	Output Overload
	Output Short Circuit	Output Short Circuit	Output Short Circuit
	DC Under Voltage	DC Under Voltage	DC Under Voltage
	Over Temperature	Over Temperature	Over Temperature

AUDIO ALARM

Rectifier Trip	Mains Fail	Mains Fail	Mains Fail
Battery Low Pre-alarm	System Trip	System Trip	System Trip
Overload	System Trip	System Trip	System Trip

ENVIRONMENT

Operating Temperature	0 to 45°C / 50°C optional	0 to 45°C / 50°C optional	0 to 45°C / 50°C optional
Storage	-10 to 70°C	-10 to 70°C	-10 to 70°C
Humidity	Up to 95% RH (Non-condensing)	Up to 95% RH (Non-condensing)	Up to 95% RH (Non-condensing)
Cooling	Forced air cooling	Forced air cooling	Forced air cooling

Sinetrac Other Products:

Servo & Automatic Voltage Stabilizers, Isolation Transformers, Online UPS, Solar Advanced Hybrid UPS, Auto Phase Correctors/Protectors, Water Level Indicators, Street & Lighting Timers, Battery Chargers, Rectifiers, Utility Gadgets etc.

Chime Electronics: E-17, Sector-3, DSIDC Industrial Area, Bawana, Delhi-110039.

Phones : 011-27761122, 27762600 ; e-mail : sinetrac@gmail.com ; Website : www.sinetrac.in