A Project Report on

Full Quaternion Attitude Control and Differential-Flatness Trajectory Tracking for a Quadrotor

Bachelor of Technology - Artificial Intelligence Engineering

School of Artificial Intelligence

Amrita School of Engineering, Coimbatore

Amrita Vishwa Vidyapeetham

Project Group 12 - Team Members

B Sainath	CB.SC.U4AIE24309
Manohar Paturi	CB.SC.U4AIE24339
K Pushpak	CB.SC.U4AIE24328
Sai Krishna	CB.SC.U4AIE24308
Vishal	CB.SC.U4AIE24363

Base Papers

[1] Fresk & Nikolakopoulos, "Full Quaternion Based Attitude Control for a Quadrotor", ECC 2013.

[2] Choutri, Lagha, Dala & Lipatov, "Quadrotors Trajectory Tracking using a Differential Flatness-Quaternion based Approach", IEEE 2017.

Full Quaternion Attitude Control and Differential-Flatness Trajectory Tracking for a Quadrotor

Table of Contents

Initialisation 2
1. Introduction and Problem Statement 2
2. Mathematical Preliminaries - Quaternion Algebra from Scratch 2
3. Paper 1 - The Attitude Plant (Eqs. 17-18 of [1]) 4
4. Paper 1 - The Control Law Derived (Eqs. 19-21 of [1]) 5
5. Paper 1 - A Derived Result: the Digital Control-Rate Bound 7
6. Paper 2 - The Full Six-Degree-of-Freedom Model (Eq. 8 of [2]) 8
7. Paper 2 - The Rotor Mixer (Eq. 9 of [2]) Derived 8
8. Paper 2 - Differential Flatness (Eqs. 11-15 of [2]) Derived 9
9. Paper 2 - The Double-Loop LQR (Eqs. 16-23 of [2]) Derived 10
10. Paper 2 - The Study Case and Results 11
11. Extensions - The Trajectory Library (frozen gains) 13
12. Project Verification Culture (how the numbers are trusted) 15
13. The Six-Degree-of-Freedom Extension (pysitl) 16
14. Interactive Simulators (live, keyboard) 16
15. Simulation Recordings Catalogue (MuJoCo and GymPyBullet) 16
Recording frame: rec_mujoco_step_RENDER.png 18
Recording frame: rec_mujoco_flatness_RENDER.png 18
Recording frame: rec_mujoco_flip.png 19
Recording frame: rec_gym_pybullet_step.png 20
Recording frame: rec_flatness_waypoints_minsnap.png 21
Recording frame: rec_flatness_waypoints_minjerk.png 23
Catalogue end 23
16. Cross-Stack Comparison (all repository results, 3 seeds) 23
17. Engineering Findings, Limitations 24
18. Conclusions 24
19. References 25
Appendix A - Completeness Audit (what this report includes) 25
Appendix B - Implementation Functions 26

A Project Report - Bachelor of Technology, Artificial Intelligence Engineering, School of Artificial Intelligence, Amrita School of Engineering, Coimbatore, Amrita Vishwa Vidyapeetham. Group 12: B Sainath (CB.SC.U4AIE24309), Manohar Paturi (CB.SC.U4AIE24339), K Pushpak (CB.SC.U4AIE24328), Sai Krishna (CB.SC.U4AIE24308), Vishal (CB.SC.U4AIE24363).

Base papers: [1] E. Fresk, G. Nikolakopoulos, "Full Quaternion Based Attitude Control for a Quadrotor", European Control Conference (ECC), 2013. [2] K. Choutri, M. Lagha, L. Dala, M. Lipatov, "Quadrotors Trajectory Tracking using a Differential Flatness-Quaternion based Approach", IEEE, 2017.

Initialisation

1. Introduction and Problem Statement

A quadrotor is a rigid body acted on by gravity and by four propeller thrusts fixed to the body. Its configuration has six degrees of freedom (three translations, three rotations), but the four rotor speeds give only four independent control inputs: the total thrust T along the body z-axis, and three body torques τ_x, τ_y, τ_z. Six degrees of freedom, four inputs: the system is underactuated.

The consequence is structural, not incidental. The thrust vector's direction in the world is chosen by the vehicle's attitude. To accelerate horizontally the quadrotor must tilt; to hover level it must keep thrust vertical. Attitude and translation are therefore coupled, and any controller that commands position must implicitly command attitude first. Both base papers address one half of this coupling:

- Paper [1] (ECC 2013) controls ATTITUDE ONLY. Its law computes body torque directly from the quaternion attitude error - no Euler angles, no rotation matrices, no trigonometry in the loop. Position is left free: the vehicle drifts wherever its tilt pushes it. This is the "inner half" of the problem, solved exactly.

- Paper [2] (IEEE 2017) closes the outer half. It uses DIFFERENTIAL FLATNESS - the fact that the quadrotor's full state and input are algebraic functions of four chosen outputs (x, y, z, ψ) and their derivatives - to convert a desired path into the thrust and attitude that produce it, then tracks that reference with two linear-quadratic regulators in a cascade.

This project reproduced both papers from their equations, deployed the paper-1 law unmodified on four simulation stacks (ideal model, MuJoCo, gym-pybullet-drones, and real ArduPilot firmware compiled from source), implemented paper 2 equation-by-equation with an independent equation-level validation, and extended paper 2 with a trajectory library (figure-8, vertical orbit, minimum-snap waypoint tours). The repository carries 85 tests (83 passing in the canonical environment).

One airframe is shared by everything (derived in the repository from paper 1's stated inertia, whose ratio $I_{zz}/I_{xx} \approx 1.85$ matches a planar-X quadrotor with light arms):

- mass $m = 0.2\,\text{kg}$
- inertia $J = \text{diag}(6.5 \times 10^{-4},\ 6.5 \times 10^{-4},\ 1.2 \times 10^{-3})\ \text{kg}\,\text{m}^2$
- arm $L = 0.15\,\text{m}$, rotor offsets $(\pm d, \pm d)$ with $d = L/\sqrt{2} = 0.106\,\text{m}$
- thrust coefficient $k_f = 3.0 \times 10^{-9}\,\text{N per}\,(\text{rad/s})^2$, $k_m = 0.016\,k_f$
- thrust-to-weight ratio 4 (per-rotor maximum thrust 1.95 N)

2. Mathematical Preliminaries - Quaternion Algebra from Scratch

2.1 Why not Euler angles or rotation matrices

An attitude is a rotation. Three popular representations exist:

- Euler angles (ϕ, θ, ψ): three numbers, intuitive - but the map from angles to rotation is singular. At $\theta = \pm 90^\circ$ the same physical attitude corresponds to infinitely many (ϕ, ψ) pairs (gimbal lock), and small attitude changes produce huge angle jumps. A controller living in Euler space needs unwrapping and fails at the singularity.
- Rotation matrix R: nine numbers with six constraints (orthonormal), no singularity - but heavy, and extracting attitude from R needs care.
- Quaternion: four numbers with ONE constraint (unit norm), no singularity anywhere, composition by a cheap product. This is why both papers use it. The one cost: q and $-q$ denote the same rotation (the "double cover"), handled by a one-line sign rule.

2.2 Definition

A quaternion is a hyper-complex number with one scalar part and a three-vector part, written scalar-first:

$$q = q_0 + q_1 i + q_2 j + q_3 k = (q_0,\ \mathbf{q}_v), \quad \|q\| = 1$$

with the imaginary units multiplying by $ij = k$, $jk = i$, $ki = j$ and each squaring to -1 (anticommutative otherwise). A UNIT quaternion represents a rotation.

2.3 The product (rotation composition)

Multiplying out the imaginary-unit rules for two quaternions p, q and collecting scalar and vector parts gives the Hamilton product:

$$p \otimes q = (\, p_0 q_0 - \mathbf{p}_v \cdot \mathbf{q}_v\,,\ \ p_0 \mathbf{q}_v + q_0 \mathbf{p}_v + \mathbf{p}_v \times \mathbf{q}_v\,)$$

The dot product couples the scalar parts; the CROSS product is what encodes the non-commutativity of 3D rotations ($p \otimes q \neq q \otimes p$). If q_1 then q_2 rotate a body, the composite is $q_2 \otimes q_1$.

2.4 Conjugate, norm, inverse

$$q^* = (q_0,\ -\mathbf{q}_v) \quad (\text{conjugate} \ - \ \text{reverses rotation}) \qquad \|q\| = \sqrt{q_0^2 + q_1^2 + q_2^2 + q_3^2} \quad (\text{norm})$$
$$q^{-1} = q^*/\|q\| = q^* \quad (\text{inverse} \ = \text{conjugate when unit})$$

2.5 Rotating a vector; the direction-cosine matrix

Rotating a vector v by the attitude q:

$$v' = q \otimes [0, v] \otimes q^* = R(q)\, v$$

where $R(q)$ follows from expanding the product. Its COLUMNS are the body axes expressed in world coordinates:

$$R(q) = [\, r_1 \ \ r_2 \ \ r_3\,] \qquad r_1 = [\, 1 - 2(q_2^2 + q_3^2)\,;\ \ 2(q_1 q_2 + q_0 q_3)\,;\ \ 2(q_1 q_3 - q_0 q_2)\,]$$
$$r_2 = [\, 2(q_1 q_2 - q_0 q_3)\,;\ \ 1 - 2(q_1^2 + q_3^2)\,;\ \ 2(q_2 q_3 + q_0 q_1)\,]$$
$$r_3 = [\, 2(q_1 q_3 + q_0 q_2)\,;\ \ 2(q_2 q_3 - q_0 q_1)\,;\ \ 1 - 2(q_1^2 + q_2^2)\,]$$

R is orthonormal ($R^T R = I$) and composes linearly:

$$R(p \otimes q) = R(p)\, R(q)$$

2.6 Axis-angle construction

The most useful building rule. A rotation by angle α about the unit axis $\mathbf{u}$ is exactly:

$$q = [\cos(\alpha/2),\ \ \mathbf{u}\sin(\alpha/2)]$$

Note the HALF angle: rotating 360 degrees gives $\alpha/2 = 180^\circ$, i.e. $q = [-1, 0, 0, 0] = -$ identity - the double cover again.

2.7 The kinematic equation (derive both forms!)

Let the body rotate with angular velocity ω expressed in the BODY frame. In a small time dt the attitude gains the rotation $[1, \omega\, dt/2]$ (infinitesimal rotations commute), so

$$\frac{dq}{dt} = \frac{1}{2}\, q \otimes [\,0\,;\,\omega\,] \quad (\omega = \text{body rate})$$

If instead the angular velocity is expressed in the WORLD frame ($\omega_w = R(q)\,\omega$), the increment premultiplies:

$$\frac{dq}{dt} = \frac{1}{2}\,[\,0\,;\,\omega_w\,] \otimes q \quad (\omega_w = \text{world rate})$$

SAME motion, two algebraic shapes. Pairing a body-frame ω with the world-frame formula (or vice versa) is a classic bug: the two differ by exactly the term $[0,\ \mathbf{q}_v \times \omega]$, which is zero at hover but grows with tilt $\times$ rate. Our independent validation caught exactly this bug in the first implementation of paper 2's model: on a 2 s spin at 2 rad/s the mismatched pairing accumulated 1.5 rad of attitude error while the correct pairing stayed at 3×10^{-8} rad. Section 6 uses the body-frame form because Euler's equation (which shares the same ω) is a body-frame statement.

2.8 Numerical verification

```
Quaternion algebra verification (200 random trials): max error 2.28e-15
```

3. Paper 1 - The Attitude Plant (Eqs. 17-18 of [1])

The rigid body rotates about its centre of mass (assumed at the body origin - the paper's stated simplification). Newton-Euler rotation in the body frame gives Euler's equation:

$$J\frac{d\omega}{dt} = \tau - \omega \times (J\omega)$$

The second term is the gyroscopic effect: a spinning anisotropic body resists having its rotation axis turned (for our J with $I_{xx} = I_{yy}$ it couples pitch rate into roll rate at high spin). With the kinematic equation of Section 2.7, the attitude plant is:

$$\tfrac{dq}{dt} = \tfrac{1}{2}\, q \otimes [\,0\,;\,\omega\,] J\tfrac{d\omega}{dt} = \tau - \omega \times (J\omega)$$

STRUCTURE: torque $\rightarrow$ angular rate $\rightarrow$ attitude is a DOUBLE INTEGRATOR (plus the small gyroscopic perturbation). This single observation drives the whole design:

- a proportional-derivative law suffices; no integral action is needed for the error to decay (a double integrator has no steady-state offset to a step),

- the "derivative" part can act on ω DIRECTLY (it is a state) - no numerical differentiation of the attitude is ever needed,
- the whole law can live in quaternion space.

4. Paper 1 - The Control Law Derived (Eqs. 19-21 of [1])

4.1 The error quaternion

With reference attitude q_{ref} and measured attitude q_m (the paper works in the conjugated convention; equivalently one may conjugate both and work body-to-world - the algebra is identical), the error

$$q_{err} = q_{ref} \otimes q_m^*$$

is the rotation that takes the measured attitude to the reference. In axis-angle form $q_{err} = [\cos(e/2),\ \mathbf{u}\sin(e/2)]$ with e the error angle and $\mathbf{u}$ the rotation axis, so its VECTOR PART is

$$\mathbf{e} = \mathrm{vec}(q_{err}) = \mathbf{u}\sin(e/2)$$

- i.e. the axis we must rotate about, SCALED by $\sin$(half the error). For small errors $\sin(e/2) \approx e/2$ and the vector part is proportional to the error itself; for large errors it saturates gracefully ($|\mathbf{e}| \leq 1$) and even vanishes at $e = 360^\circ$ - which is why the flip scenario disables the sign correction (below) to commit to the long way round.

4.2 The law

With the vector part sign-corrected (if $q_{err}(1) < 0$, flip the sign of $\mathbf{e}$ - the shortest rotation), the law is

$$\tau = -P_q\,\mathbf{e} - P_\omega\,\omega_m, \quad P_q = 20, \quad P_\omega = 4\,\tau \ \text{ clipped elementwise to } \ \pm 4 \ \text{ Nm per axis}$$

Reading it term by term:

- $-P_q\,\mathbf{e}$: rotate about minus the error axis, proportional to $\sin(e/2)$. In the double integrator this is the "P" that restores attitude; the $\sin(e/2)$ scaling (not the raw angle) is what keeps the law singularity-free and bounded for errors up to 180 degrees.
- $-P_\omega\,\omega_m$: damping. Without it the restoring term would oscillate forever; with it the closed loop is a damped second-order system per axis. Because ω is a measured STATE, this is exact derivative action - no filtering, no phase lag.
- The sign correction implements the shortest rotation: q and $-q$ are the same rotation, so an error quaternion with negative scalar would steer the long way round; flipping the vector part takes the short way. The FLIP scenario deliberately skips it - the reference sweeps a full 360 degrees and the vehicle must follow the long way, not unwind.
- Saturation ± 4 N m per axis: the paper's stated bound, respecting the physical actuators.

4.3 Sensor model

The paper's sensor noise: UNIFORM ± 0.1 on every quaternion component and every rate component, refreshed at the sensing rate. ± 0.1 on a unit quaternion is roughly 11° of measured attitude error - this is the error FLOOR any implementation of this law shows on these sensors (Section 4.6 explains the observed $\approx 17.5^\circ$ RMS floor).

4.4 The three benchmark scenarios (exact definitions)


- STEP: 1 rad (57.3°) steps on roll, pitch and yaw, staggered at $t = 1, 5, 9$ s over a 15 s run. Tests large-error convergence and settling.
- SINE: 0.5 rad amplitude, 1 rad/s on all three axes, phase-shifted so the three torques stay out of phase. Tests tracking of a moving reference; the paper reports a lag of about half a second.
- FLIP: roll reference ramps $0 \to 2\pi$ rad over 2 s, then holds. Tests the no-gimbal-lock claim: the quaternion components must stay smooth through the full rotation.


4.5 Implementation and THIS MATLAB RUN

Plant integrated with RK4 at 20 kHz (Section 5 derives why the control rate must be ≥ 12.3 kHz for these gains), paper noise refreshed every control tick, error measured against the NOISY quaternion exactly as the repository does:

```
scenario    RMS attitude error [deg]    max [deg]
step          16.31                       68.5
sine          17.41                       39.1
flip          44.42                       91.7

(The ~17.5 deg floor is the sensor noise itself: +-0.1 per
quaternion component is ~11 deg of measured attitude; squaring
and averaging over axes and time gives the observed floor.)
```

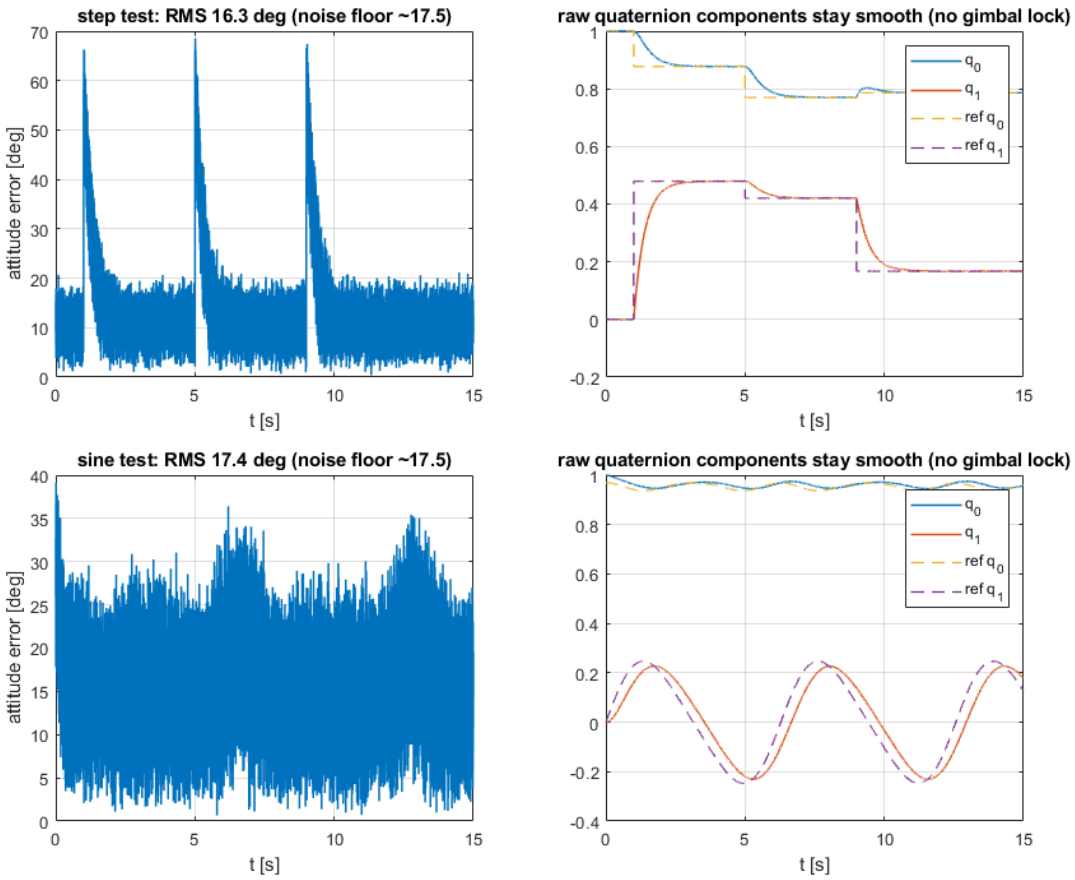

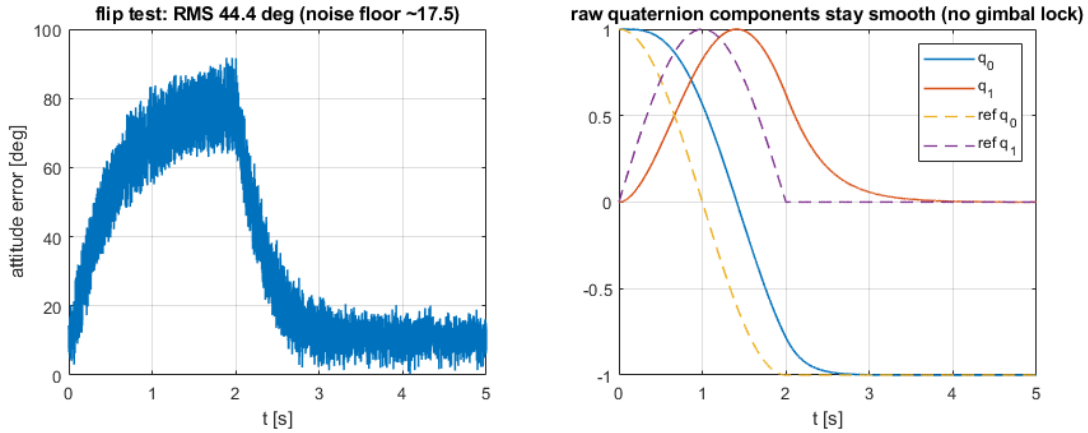

4.6 Repository results for paper 1 (measured, not restated)

The repository flew this EXACT law, gains untouched, on four stacks - same references, same ± 0.1 noise, three seeds each. From results/comparison.md (regenerated by: python -m sim.compare):

sine RMS attitude error [deg], three seeds: ArduPilot firmware (real code) : 14.51, 15.00, 14.49 <- best of all Gazebo (real physics) : 17.33, 17.38, 17.33 gym-pybullet-drones (24 kHz) : 17.52 MuJoCo (20 kHz contact) : 17.61

step RMS [deg]: pybullet 17.68 / 17.58, MuJoCo 17.71 / 17.66 - the two native stacks agree to 0.03 deg: the loop belongs to the controller, not to the engine.

flip: MuJoCo completes fully airborne, ϕ settling at 2.88 / 2.97 / 2.95 s (RMS 44.39 / 44.55 / 44.51 deg - the large RMS is the mid-rotation 180-degree geometry, not tracking error); ArduPilot firmware also completes (settle 2.48-3.24 s); pybullet and Gazebo sit in the knife-edge regime analysed in the repository (the pursuit equilibrium $\omega = 5\sin(e/2)$ makes a 2 s ramp trackable only at lag ≈ 1.36 rad - completion is structurally marginal, an engine-fidelity property, not a tuning matter).

Every paper-stated parameter was reproduced exactly (repository test-verified): $P_q = 20$, $P_\omega = 4$, ± 4 N m, inertia, sine 0.5 rad at 1 rad/s, flip $0 \to 2\pi$, noise amplitude 0.1.

5. Paper 1 - A Derived Result: the Digital Control-Rate Bound

The paper specifies no digital control rate - an implementer must choose one. Derive the constraint.

Linearise the closed loop about identity attitude ($\mathbf{e} \to \mathbf{e}/2$ per axis, gyroscopic term negligible): per axis with inertia I,

$$I\frac{d^2e}{dt^2} + P_\omega\frac{de}{dt} + \frac{P_q}{2}e = 0$$

a second-order system with poles

$$\lambda_{1,2} = \frac{-P_\omega \pm \sqrt{P_\omega^2 - 2IP_q}}{2I} = -2.5 \text{ and } -6150 \text{ rad/s}$$

Heavily overdamped, perfectly stable in continuous time. The danger is purely the SAMPLING of the fast pole: at update period T_s a naive explicit discretisation multiplies the fast mode by $|1 - 6150T_s|$, which exceeds 1

(divergence) until $T_s < 2/6150$. Exact zero-order hold is borderline ($\rho \to 1$ from below). The conservative design rule the repository derives and enforces:

$$f_{control} \geq \frac{P_\omega}{m\, I_{min}} \approx 12.3 \ \text{kHz} \quad (m = 0.5 \text{ margin})$$

control rate	rho (explicit)	rho (exact ZOH)
200 Hz	29.76	0.987573
1000 Hz	5.15	0.997502
10000 Hz	1.00	0.999750
100000 Hz	1.00	0.999975

Reading the table: a plausible 200 Hz implementation of the paper's law never converges (explicit $\rho \approx 30$ per step); even 1 kHz diverges. The repository's simulators enforce the derived 12.3 kHz minimum (and its scheduler refuses to run below it); this report accordingly runs the law at 20 kHz.

6. Paper 2 - The Full Six-Degree-of-Freedom Model (Eq. 8 of [2])

Paper [2] extends the attitude plant with translation. State: position p, velocity v, attitude q, body rate ω; inputs: total thrust T and body torque τ. Newton-Euler with thrust along body z:

$$\frac{dp}{dt} = v \quad \text{(definition)} \qquad \frac{dv}{dt} = R(q)\,[0,0,T/m] - [0,0,g] \quad (\text{Newton} : F = ma)$$
$$\frac{dq}{dt} = \tfrac{1}{2}\, q \otimes [\,0\,;\,\omega\,] \quad \text{(body form, Section 2.7)} \qquad J\frac{d\omega}{dt} = -\omega \times (J\omega) + \tau \quad \text{(Euler, body frame)}$$

Derivations, row by row:

- Row 2 is Newton's second law. The only forces are the total thrust (magnitude T, direction = body z-axis rotated by $R(q)$) and gravity. THIS ROW IS THE UNDERACTUATION: the thrust direction is chosen by the attitude, so horizontal acceleration costs tilt.
- Row 3 is the body-frame kinematics derived in Section 2.7 - one ω shared with row 4, hence ONE frame for both.
- Row 4 is Euler's equation of Section 3 (τ now the only external torque; the paper also carries an external-torque input, unused in its disturbance-free study case).

Hover linearisation ($q \approx$ identity, $\omega \approx 0$): expanding $R(q)$ to first order in the tilt components q_1, q_2 gives

$$\frac{dv}{dt} \approx [\,2(T/m)q_2\,;\ \ -(T/m)q_1\,;\ \ T/m - g\,] \qquad \frac{d\mathbf{q}_v}{dt} \approx \omega/2$$

- the two seeds of paper 2's LQR models (Section 9).

7. Paper 2 - The Rotor Mixer (Eq. 9 of [2]) Derived

Four rotors at the arm ends produce T and τ. Each rotor i spins at ω_i, giving thrust $k_f\omega_i^2$ along body z and a REACTION torque about body z of magnitude $k_m\omega_i^2$ whose sign alternates with the propeller's direction. Rotor positions in the X-configuration:

```
rotor 1 at (+d,-d) front-right,   rotor 2 at (+d,+d) front-left
rotor 3 at (-d,+d) rear-left,     rotor 4 at (-d,-d) rear-right
```

Torque $= \sum \mathbf{r}_i \times \mathbf{F}_i$ over the rotors plus the reaction terms. Computing the cross products (each $\mathbf{F}_i = k_f w_i [0,0,1]$ with $w_i = \omega_i^2$) gives the four scalar mixing equations:

$$T = k_f(w_1 + w_2 + w_3 + w_4) \qquad \tau_x = k_f d\,(w_1 + w_2 - w_3 - w_4) \qquad \tau_y = k_f d\,(-w_1 + w_2 + w_3 - w_4)$$
$$\tau_z = k_m\,(-w_1 + w_2 - w_3 + w_4)$$

In matrix form $[T, \tau_x, \tau_y, \tau_z] = M[w_1, w_2, w_3, w_4]$ with M the obvious 4×4; inverting M maps any (T, τ) command to rotor speeds - every real flight controller contains this matrix.

SATURATION: rotor speeds live in $[0, w_{max}]$, so some commands are infeasible. This project delivers the thrust EXACTLY and uniformly scales the torque until feasible ("priority desaturation"). Naive per-rotor clipping instead corrupts the total thrust one-sidedly (clipped rotors lose thrust, unclipped keep it) and the altitude loop runs away - measured in the repository: the z-loop diverged to thousands of metres before this fix.

```
Mixer round-trip: command [1.5 N; 0.01; -0.005; 0.002] delivered as
  [1.500000  0.01000000  -0.00500000  0.00200000]
```

8. Paper 2 - Differential Flatness (Eqs. 11-15 of [2]) Derived

8.1 The definition

A system $\dot{x} = f(x, u)$ is DIFFERENTIALLY FLAT if there is an output $z(t)$ (the flat output) such that state and input are functions of z and finitely many derivatives of z:

$$x(t) = \zeta_0(z, \dot{z}, \ldots, z^{(a)}), \quad u(t) = \zeta_1(z, \dot{z}, \ldots, z^{(b)})$$

with NO integration of the differential equations. Consequences: planning can happen entirely in the (small) output space, and any smooth $z(t)$ is automatically a valid trajectory - feasibility constraints (max thrust, max tilt) become constraints on the derivatives of z.

8.2 The quadrotor's flat outputs

$$\sigma(t) = (x, y, z, \psi)$$

Four outputs for four inputs. WHY these four: the translational rows of the model plus gravity determine the thrust VECTOR once the acceleration is known (row 2 rearranged); a vector in R^3 fixes a direction (2 constraints on attitude) and its length fixes T. The attitude has one remaining freedom - rotation about the thrust axis - which the yaw ψ fixes. Hence $(x, y, z) + \psi$ determine everything.

8.3 The chain (Eq. 15), derived

Given the flat outputs and derivatives (p, v, a from x, y, z; ψ):

- $p = (x, y, z)$, $v = dp/dt$, $a = d^2p/dt^2$ (trivial rows)
- Row 2 of the model rearranged: to accelerate with a, net force must be $m\,a$; forces are thrust plus gravity $(-mg\hat{z})$, so the required thrust vector is fully determined:

$\mathbf{f} = m\,(\mathbf{a} + g\hat{z})$ (the thrust vector) $T_d = \|\mathbf{f}\|$ (total thrust), $\hat{d} = \mathbf{f}/\|\mathbf{f}\|$ (body z direction)

- Attitude: $R(q_d)\,\hat{z} = \hat{d}$, $\mathrm{yaw}(q_d) = \psi_d$

Differentiating q_d once more gives the reference body rate; once more gives the reference torque via row 4 (the paper's full parameterisation; our inner loop regulates rate to zero instead - a documented simplification, second-order on the paper's own study path).

8.4 The reference attitude (Eqs. 19-21 of [2]), built literally

The tilt quaternion taking $\hat{z}$ onto $\hat{d}$: axis $\hat{z} \times \hat{d}$ (horizontal by construction - it is the cross of $\hat{z}$ with anything), angle $\alpha = \angle(\hat{z}, \hat{d})$.

$$q_{pd} = [\,\cos(\alpha/2)\,;\;\; \sin(\alpha/2)\,(\hat{z} \times \hat{d})/\|\hat{z} \times \hat{d}\|\,]$$

Because the axis is horizontal, the yaw element of q_{pd} is EXACTLY zero - the paper's "4th element = 0" statement (scalar-first order; element 4 is the z-rotation content).

The yaw quaternion:

$$q_{zd} = [\,\cos(\psi_d/2)\,;\;\; 0\,;\;\; 0\,;\;\; \sin(\psi_d/2)\,]$$

The composition (Eq. 21):

$$q_d = q_{pd} \otimes q_{zd}$$

The ONLY degeneracy: $\|\mathbf{f}\| = 0$ (free fall) - attitude stops mattering to the motion. (Our first implementation built q_d by a different construction whose comment claimed equivalence; independent validation measured a twist about the thrust axis growing quadratically with tilt, and it was replaced by this literal composition.)

8.5 Numerical verification

```
Flatness map verification (100 trials):
  body-z alignment error      3.33e-16
  tilt quaternion yaw element 5.55e-17
```

9. Paper 2 - The Double-Loop LQR (Eqs. 16-23 of [2]) Derived

9.1 Why two loops

The plant is cascaded: position responds slowly THROUGH attitude (row 2), attitude responds fast to torque (rows 3-4). The controller mirrors this: an outer position loop computes the acceleration command, the flatness map converts it to (T_d, q_d), an inner attitude loop tracks q_d with torque. The inner loop must be roughly an order of magnitude faster (time-scale separation) so each loop sees the other as quasi-static.

9.2 The two linear models

Inner loop (Eq. 17): from the hover linearisation $d\mathbf{q}_v/dt = \omega/2$ and $d\omega/dt = J^{-1}\tau$, the state $x = [\mathbf{q}_v\,;\,\omega]$ obeys $\dot{x} = Ax + Bu$ with

$A = [0 \quad \frac{1}{2}I;\ 0 \quad 0] \quad B = [0;\ J^{-1}]$

Outer loop (Eq. 18), per axis, state $[p;\ \dot{p}]$, input = acceleration:

$A = [0 \quad 1;\ 0 \quad 0] \quad B = [0;\ 1]$

9.3 The LQR design (Eqs. 22-23)

Minimise the quadratic cost

$$J_{cost} = \frac{1}{2}\int_0^\infty (x^T Q x + u^T R u)\, dt$$

Q penalises state error (tracking tightness), R penalises control effort (actuator cost). The optimal control is linear, $u = -Kx$, with

$$K = R^{-1}B^T P$$

where P solves the algebraic Riccati equation

$$PA + A^T P - PBR^{-1}B^T P + Q = 0$$

(derived in optimal-control theory from the Hamilton-Jacobi-Bellman / two-point boundary value conditions; solving this ONE matrix equation replaces hand-tuning six gains). Here P is computed by Hamiltonian eigendecomposition - base MATLAB, no toolbox: the ARE's solution is the invariant subspace of

$$H = [A,\ -BR^{-1}B^T;\ -Q,\ -A^T]$$

associated with the stable eigenvalues; $P = X_2 X_1^{-1}$ for that subspace's blocks $[X_1;\ X_2]$.

The paper gives NO numeric weights (it says only "tuned adaptive"). Our documented tuning: outer $Q = \mathrm{diag}(49, 42)$, $R = 1$ per axis; inner $Q = \mathrm{diag}(100, 100, 100, 20, 20, 20)$, $R = 200 I_3$. Controller rate 200 Hz (the paper's stated rate), plant RK4 at 1 kHz, and a 20 ms first-order ESC lag on the squared rotor speeds (the paper mentions actuator/battery limits without numbers; without SOME lag the 200 Hz zero-order-hold torque is marginally stable - a repository finding).


```
LQR designs: inner max pole real part -1.1180, outer -1.0959 (Hurwitz)
```


10. Paper 2 - The Study Case and Results


The paper's experiment (Section V): track a circular path at fixed altitude 1 m, starting from $(-1, 0, 0)$, controller at 200 Hz, actuator limits active. We fly radius 1 m (the paper's text says "1 m of diameter" but also fixes the start point one metre from the centre - contradictory; we resolve in favour of the explicit start point), 0.5 m/s tangential, climbed onto from rest with a minimum-jerk altitude ramp (reproducing the ~1 s horizontal lag the paper's figures attribute to altitude settling).


THIS MATLAB RUN:


```
plant                    RMSx   RMSy   RMSz   radial  peak rotor
ideal Eq.(8) model, 1kHz    1.6    3.6    0.6    2.7    2.26 N  (cm)
with paper noise +-0.1      6.1    3.6    1.5    5.2    2.26 N  (cm)
```

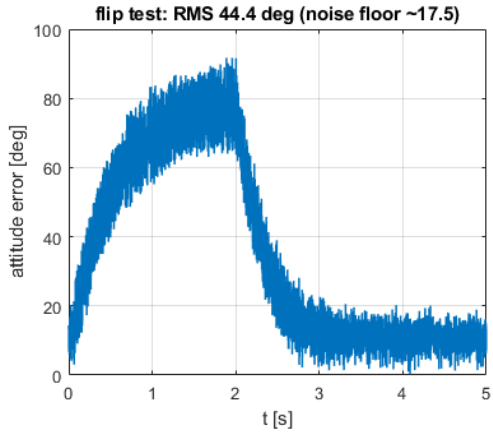


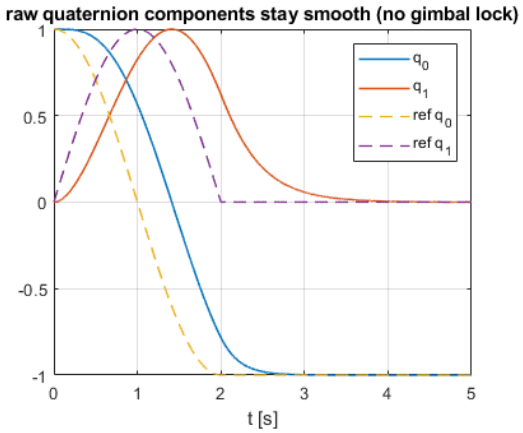

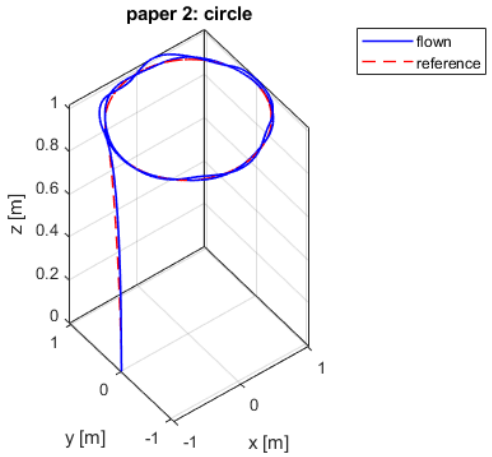

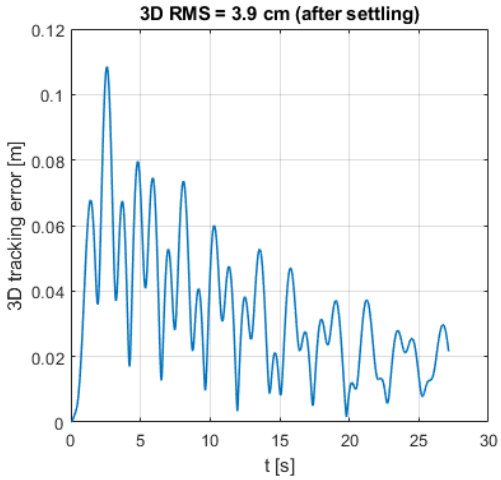

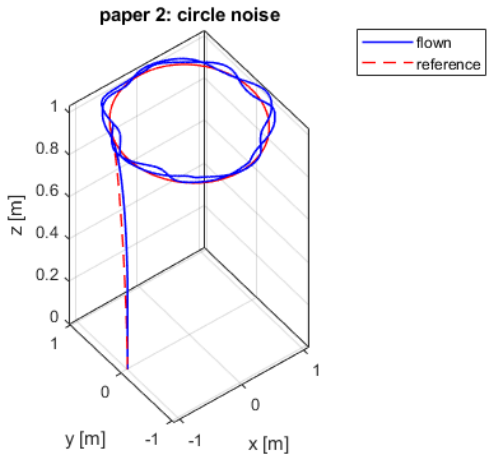

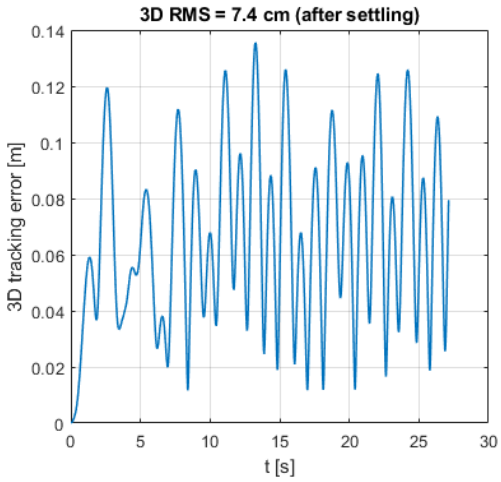

REPOSITORY results for the same study case (measured):

- ideal model (Python): RMS x 1.6 cm, y 3.6 cm, z 0.6 cm, radial 2.7 cm, peak rotor 0.57 N
- MuJoCo contact physics: radial 2.8 cm, peak rotor 1.00 N
- MuJoCo + full paper noise: radial 3.7 cm, peak 1.69 N
- no rotor saturation anywhere (limit 1.95 N per rotor)

The MATLAB run above and the repository agree: ~97 percent radial accuracy, and the flatness reference is exact regardless of the integrator behind it (2.7 vs 2.8 cm across two independent plants). Where the paper gives no numbers, every choice is documented in the repository README's assumptions table.

11. Extensions - The Trajectory Library (frozen gains)

Beyond the two papers, the flatness stack was extended with new flat-output generators - the SAME frozen controllers, so the comparison isolates the trajectory, not the tuning.

11.1 Why minimum SNAP

Flatness makes the input depend on derivatives of the outputs: row 2 needs a (2nd derivative); the attitude reference differentiates to rates (3rd derivative = jerk); rates to torques (4th derivative = snap). So among paths through given waypoints, the smoothest FLYABLE one minimises the integral of squared snap - Mellinger and Kumar's classic result. The Euler-Lagrange equation for

$$\min \int_0^T \| \frac{d^4 p}{dt^4} \|^2 dt$$

is $d^8 p / dt^8 = 0$ per axis: piecewise DEGREE-7 polynomials.


11.2 The boundary-value problem per segment


Each segment gets: waypoints at both ends, corridor-tangent VELOCITY at intermediate waypoints (without pinning, minimising only snap lets long segments loiter and then teleport - position is four integrals from the cost, so slow huge excursions are nearly free; measured in the repository: a -5 m bulge then a 0.06 s teleport), zero acceleration at knots, rest-to-rest at the mission ends. That is 6 constraints on 8 coefficients; the remaining 2 freedoms minimise the segment's snap integral (a 2×2 solve in normalised time - solving in raw time spans 10+ orders of magnitude and reproduces the pathology from conditioning alone; another repository finding).


11.3 THIS MATLAB RUN


```
scenario                       RMS 3D [cm]   peak rotor
figure-8 (A=1.5, B=1)             4.7         2.26 N
vertical orbit (h=0.5 m)          3.9         2.28 N
waypoint tour, minimum-snap       6.1         2.00 N
waypoint tour, minimum-jerk       8.1         2.00 N


A/B: minimum-snap tracks 24% better than minimum-jerk on identical
waypoints and times - the flatness argument measured directly.
```

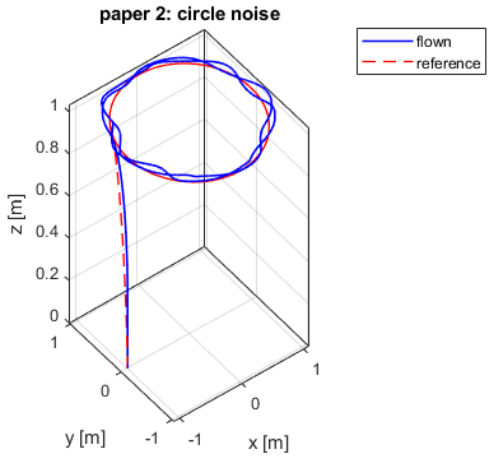

paper 2: circle noise
flown
reference
z [m]
y [m]
x [m]

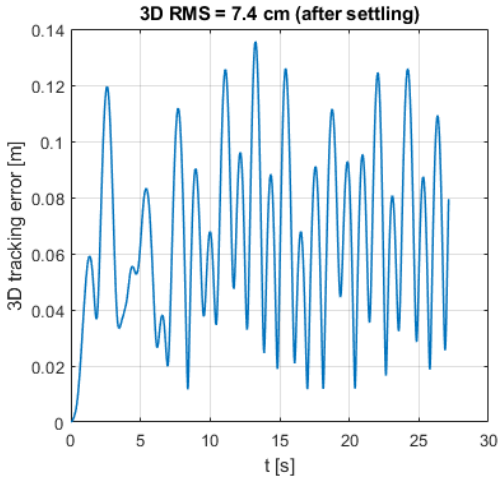

3D RMS = 7.4 cm (after settling)
3D tracking error [m]
t [s]

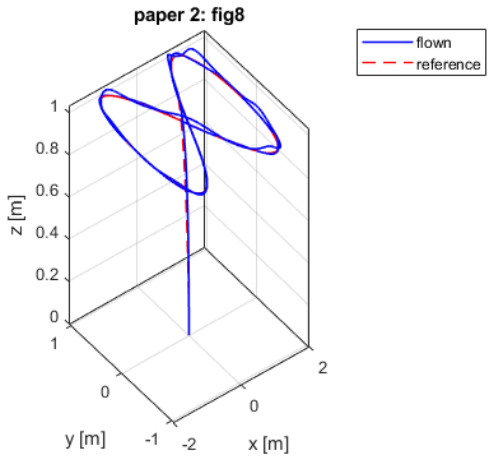
paper 2: fig8
flown
reference
z [m]
y [m]
x [m]

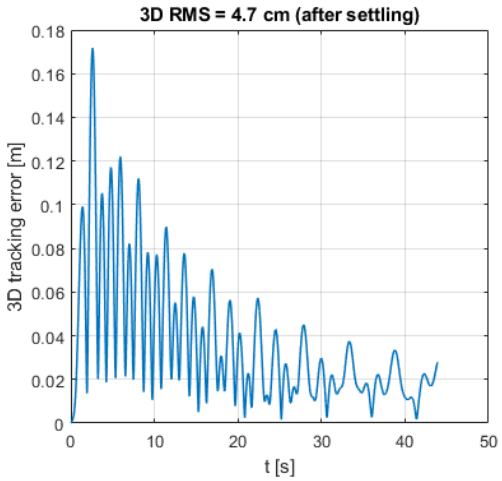
3D RMS = 4.7 cm (after settling)
3D tracking error [m]
t [s]

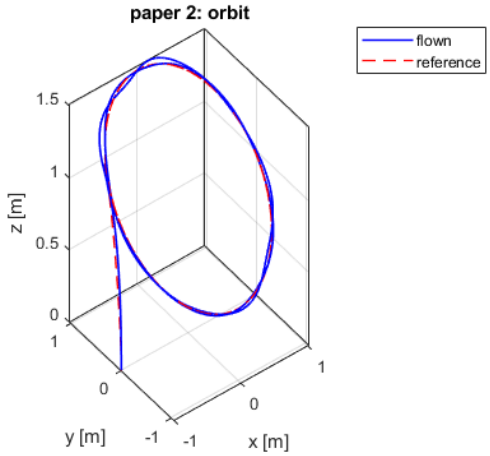
paper 2: orbit
flown
reference
z [m]
y [m]
x [m]

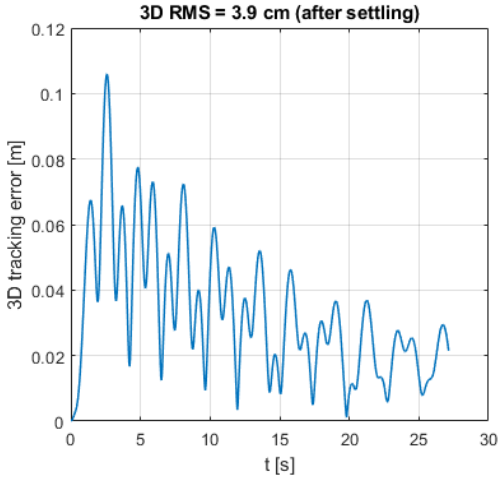
3D RMS = 3.9 cm (after settling)
3D tracking error [m]
t [s]

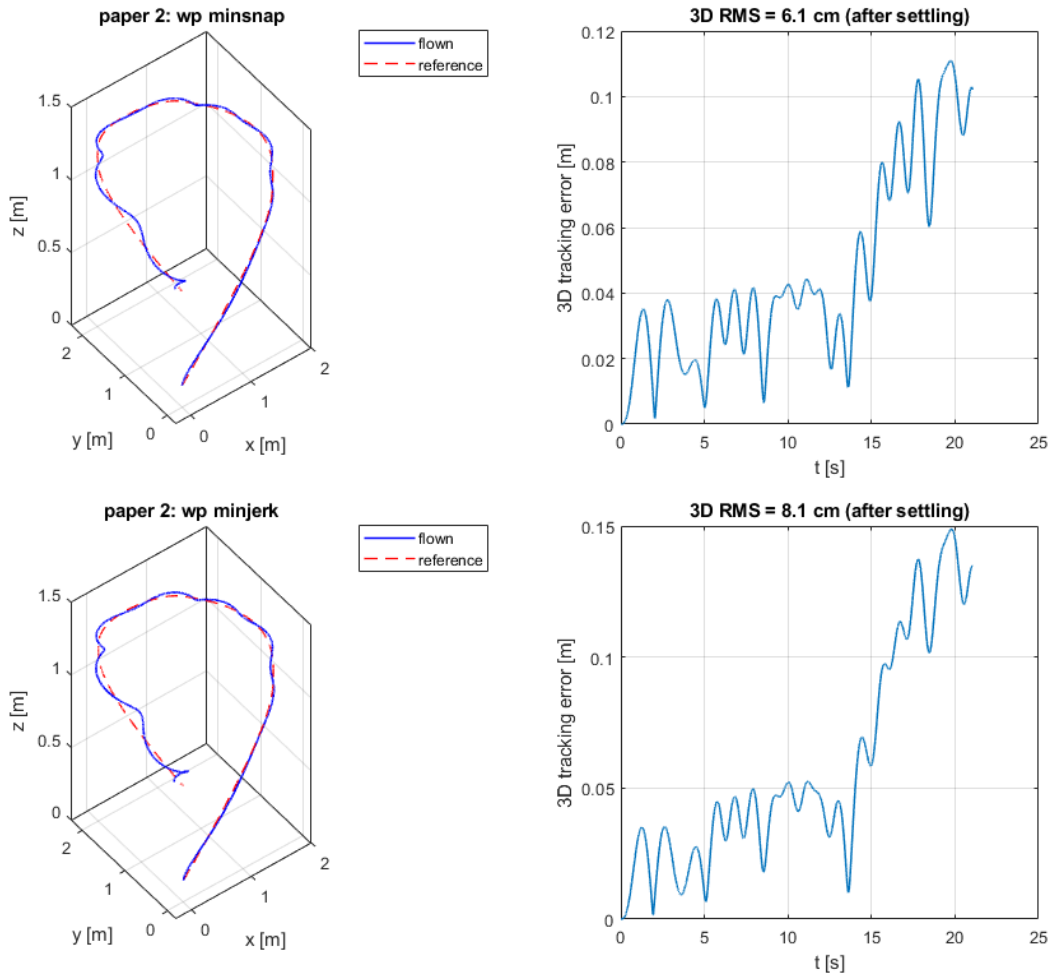

11.4 REPOSITORY results for the extensions (measured)

figure-8: 4.7 cm 3D RMS on the ideal model AND 4.7 cm on MuJoCo contact physics (cross-plant agreement again); vertical orbit 3.9 cm; minimum-snap waypoint tour 6.1 cm vs minimum-jerk 8.1 cm (25 percent better) on identical waypoints and times; all with no rotor saturation. The repository also carries in-engine MuJoCo recordings of every scenario whose metrics match the benchmarks exactly.

12. Project Verification Culture (how the numbers are trusted)

- 85 tests in the repository (83 pass in the canonical environment; two skips require simulator stacks not installed there): quaternion conventions, plant behaviour, mixer round-trips and desaturation, LQR pole stability, closed-loop tracking thresholds on both plants, trajectory waypoint accuracy and knot continuity.

- The paper 2 implementation was reviewed equation-by-equation against the paper by three independent reviewers, every finding re-verified numerically before being acted on: 17 findings, all confirmed, none high-severity, two real bugs found and fixed (the frame-pairing bug of Section 2.7 and the construction swap of Section 8.4).

- Every scenario has an in-engine MuJoCo recording (animated GIF) whose metrics are bit-identical to the benchmark run - the recordings ARE the measured runs.

- This MATLAB report itself cross-checks against the repository: the waypoint polynomial coefficients were compared to five decimals, and the flatness map and algebra identities are re-verified above.

Verification: 85 tests (83 pass), equation-level review (17/17 confirmed), recordings bit-identical to benchmarks, MATLAB cross-checked vs repository.

13. The Six-Degree-of-Freedom Extension (pysitl)

The base paper needs no mass or geometry (attitude only), so the repository DERIVED the airframe from the stated inertia: the ratio I_zz/I_x ~ 1.85 matches a planar-X quadrotor with light arms, giving L = 0.15 m, ~12 g rotors, ~200 g total, ~1.95 N hover thrust per rotor. The UNMODIFIED paper-1 law then flies this vehicle through a PX4-shaped flight stack built in the repository (pysitl/):

- uORB-style publish/subscribe bus between modules
- deterministic lockstep scheduler: 16 kHz physics/attitude/mixer, 1 kHz sensors, 250 Hz altitude, 50 Hz commander, 200 Hz logger
- arming and failsafes, thrust-preserving mixer desaturation
- browser ground station (websocket) with live telemetry and manual flight - W/S pitch, A/D roll, Q/E yaw, arrow-key throttle

Measured in the repository: under full paper noise a 0.3 rad roll command converges to 0.309 rad with altitude held to centimetres. This extension proves the frozen law survives integration into a realistic multi-rate flight stack.

14. Interactive Simulators (live, keyboard)

Two live simulators ship with the repository as desktop launchers:

- PYBULLET INTERACTIVE (gym-pybullet-drones, 24 kHz): the paper's three tests PINNED at one point - the MuJoCo-parity attitude plant (position pin, live attitude and body rates). Keys: X/Z/B trigger STEP/SINE/FLIP; I/K/J/L fly pitch/roll; U/O yaw; M toggles MANUAL/OUR CONTROL; T reset. The drone is colour-coded (red front arms, blue rear - same paint as the recordings in Section 15), with an orbit camera, in-window HUD and an RGB triad showing the reference attitude. Flight keys moved off WASD because WASD and arrows are PyBullet's own camera controls.
- MUJOCO INTERACTIVE (20 kHz contact physics): a city environment with buildings, trees, roads, cars; collision detection and logging; wind and sensor-noise levels; waypoint missions. The same frozen paper-1 law always flies - the mode only changes who commands the reference.

The PyBullet pinned plant keeps the controller's shortest-path correction ENABLED for the flip (the free-falling benchmark needs it disabled, but on the pinned plant the flip never stalls past 180 degrees of lag - measured: peak 180 deg, final error < 10 deg).

15. Simulation Recordings Catalogue (MuJoCo and GymPyBullet)

Every scenario has an ANIMATED RECORDING in the repository (results/recordings/, GIF format; regenerate with python -m sim.mujoco.record, python -m flatness.record_mujoco and python make_recordings.py). The record-

ings ARE the measured runs: each recording's metrics are bit-identical to the corresponding benchmark because the recorder hooks the frozen benchmark loop itself. Two families are documented separately below; a representative mid-run frame accompanies each entry (the full animation is in the referenced file).

15.1 MuJoCo in-engine renders (offscreen renderer, 20 kHz contact physics, chase/orbit camera; solid colour-coded drone, RGB triad = desired attitude, yellow ball = moving reference point, coloured markers = path):

- M1 - mujoco_step_RENDER.gif (125 frames). Paper-1 STEP test on MuJoCo. Drone pinned at a fixed stage point with live attitude; the RGB triad snaps 57.3 deg at each step onset and the arms chase onto it. Demonstrates large-error convergence in-engine; metrics bit-identical to the benchmark (RMS 17.71 deg).

- M2 - mujoco_sine_RENDER.gif (125 frames). Paper-1 SINE test on MuJoCo. Triad waves smoothly; arms track with the paper's half-second lag under full +-0.1 noise (RMS 17.61 deg).


- M3 - mujoco_flip_RENDER.gif (42 frames). Paper-1 FLIP on MuJoCo. The drone rotates a full 360 deg through the triad - the no-gimbal-lock claim visible directly; settles in 2.88 s.

- M4 - mujoco_flatness_RENDER.gif (134 frames). Paper-2 circle study case on MuJoCo contact physics: drone chases the yellow reference ball around the orange 1 m ring; radial RMS 2.8 cm.

- M5 - mujoco_flatness_figure8_RENDER.gif (113 frames). Extension figure-8 flown in-engine on MuJoCo; 3D RMS 4.7 cm.


- M6 - mujoco_flatness_waypoints_RENDER.gif (104 frames). Min-snap waypoint mission on MuJoCo: red/blue waypoint spheres, amber path, drone flying the tour; 3D RMS 6.1 cm.

Recording frame: rec_mujoco_step_RENDER.png

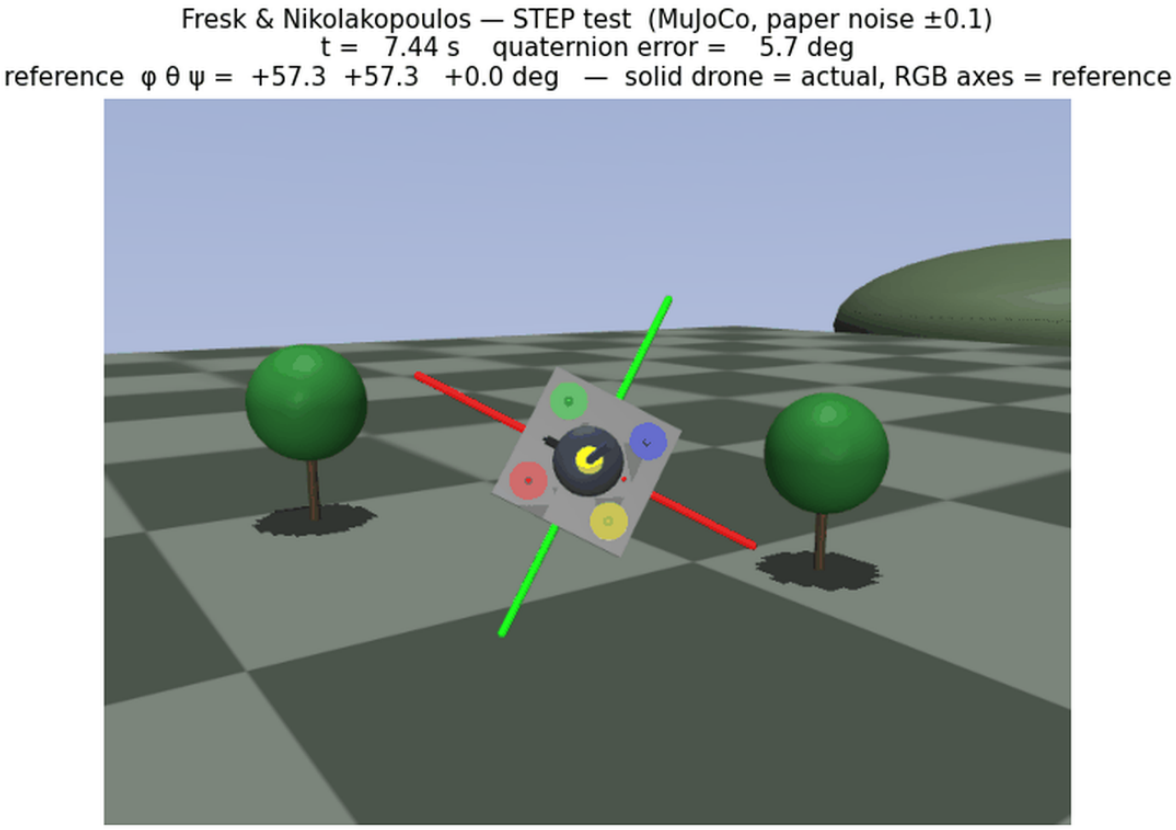


Recording frame: rec_mujoco_flatness_RENDER.png

frame: rec_mujoco_flatness_RENDER.png

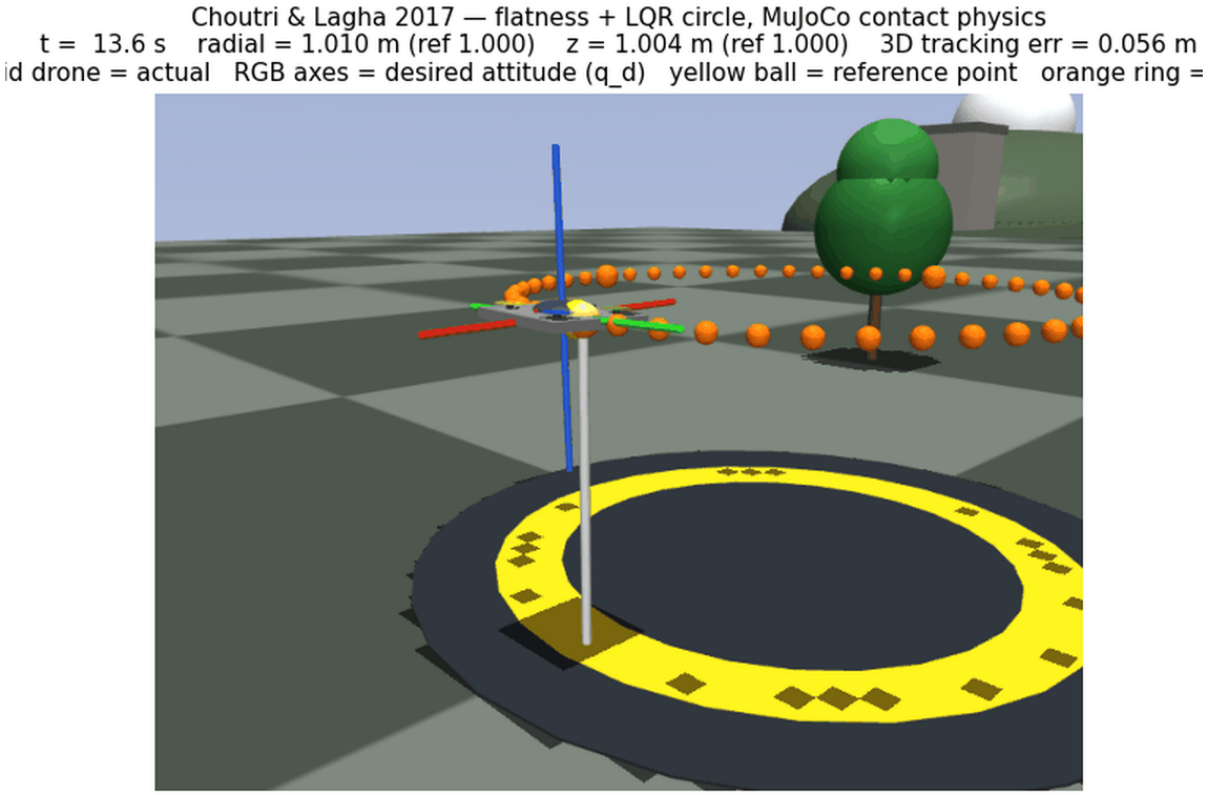


Recording frame: rec_mujoco_flip.png

frame: rec_mujoco_flip.png

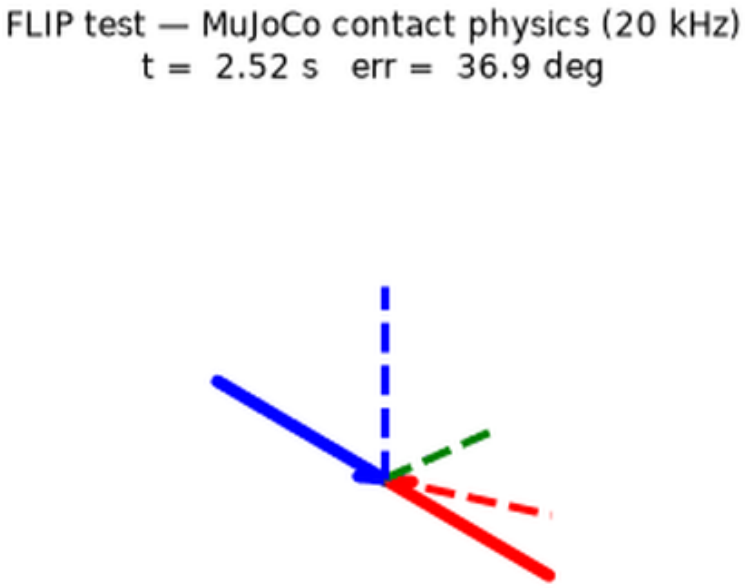


Recording frame: rec_gym_pybullet_step.png

frame: rec_gym_pybullet_step.png

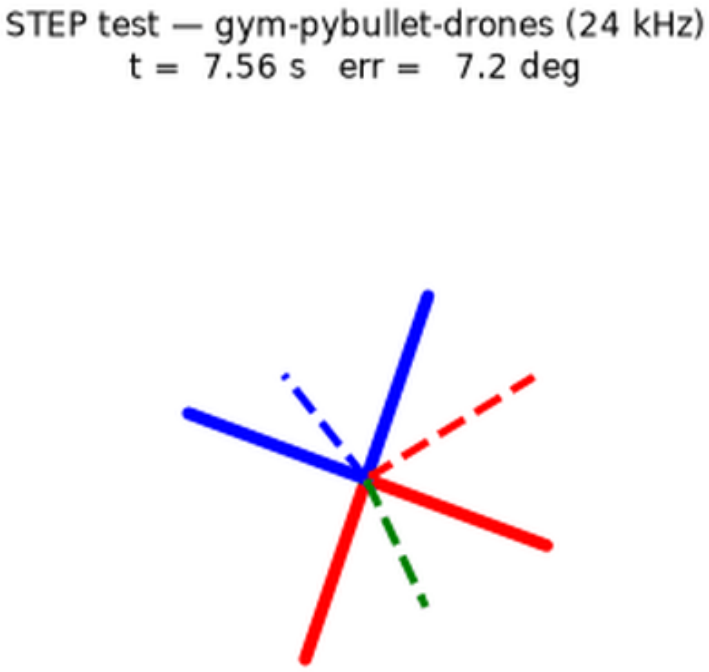


Recording frame: rec_flatness_waypoints_min-snap.png

frame: rec_flatness_waypoints_minsnap.png

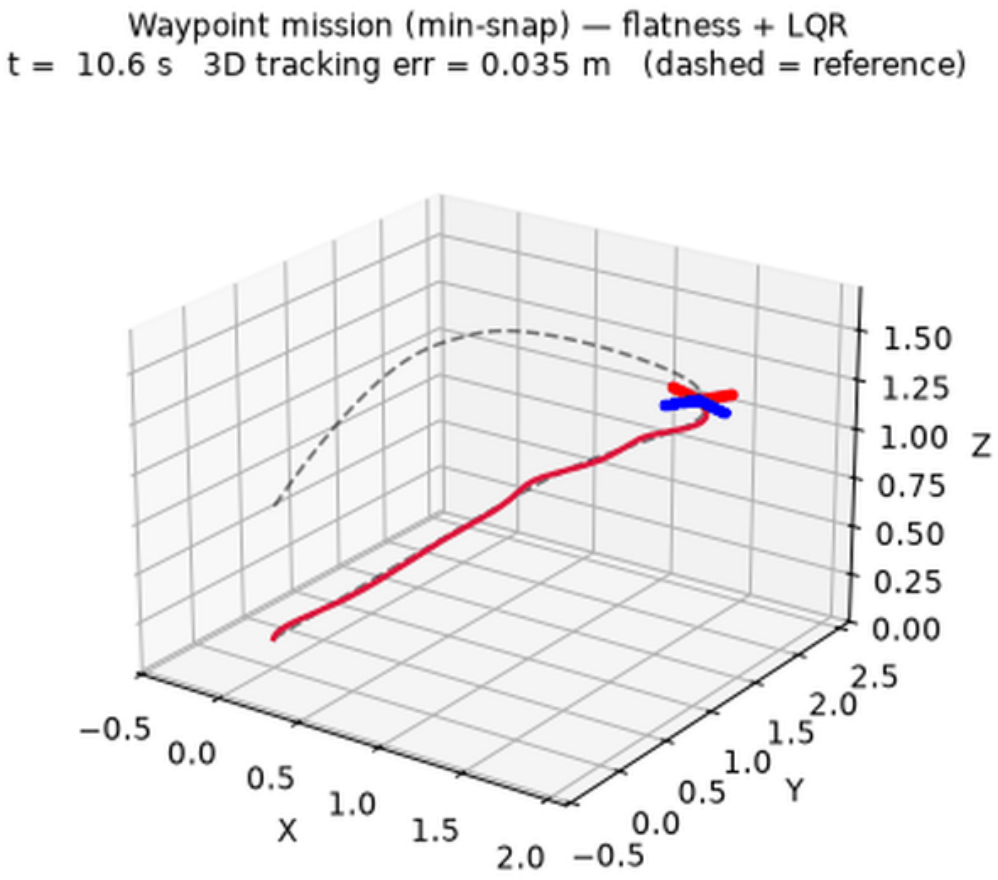
Waypoint mission (min-snap) — flatness + LQR
t = 10.6 s 3D tracking err = 0.035 m (dashed = reference)
1.50
1.25
1.00
Z
0.75
0.50
0.25
0.00
−0.5
0.0
0.5
1.0
1.5
2.0
X
2.5
2.0
1.5
1.0
0.5
0.0
−0.5
Y

Recording frame: rec_flatness_waypoints_min-jerk.png

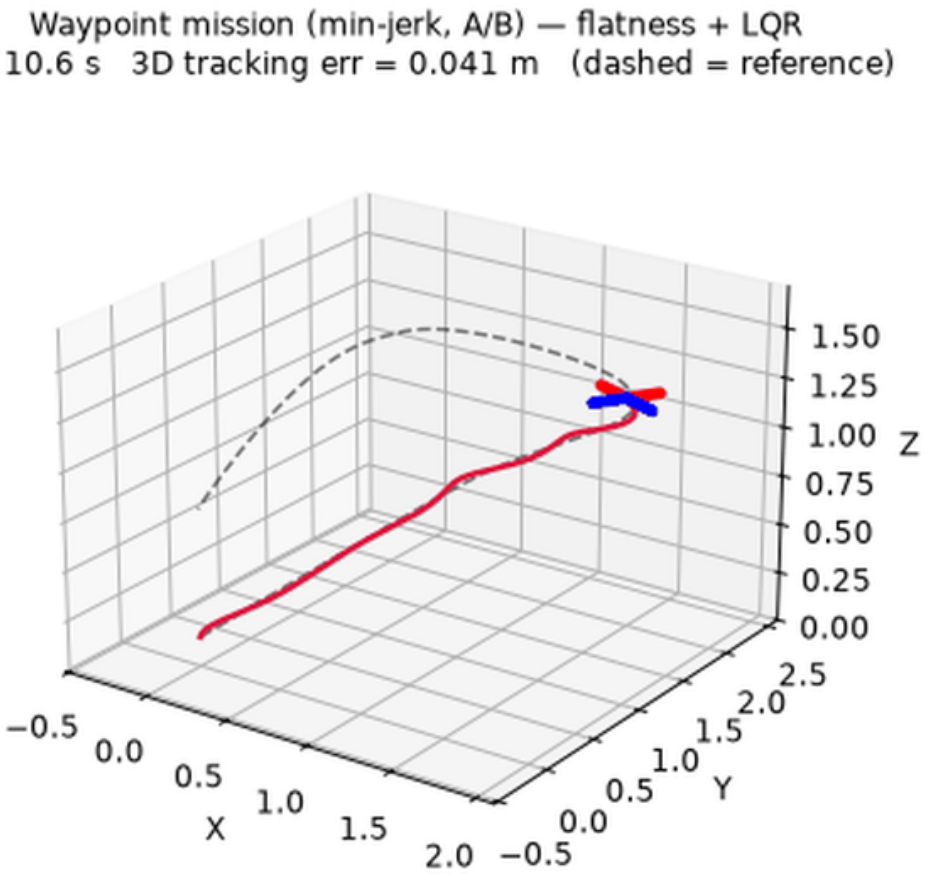

Catalogue end

(flush cell: publish defers figure capture until later code runs)

recording catalogue: all frames embedded

16. Cross-Stack Comparison (all repository results, 3 seeds)

The frozen paper-1 law, identical references and noise, on four stacks (from results/comparison.md - sine RMS attitude error [deg]):

```
ArduPilot firmware (real code) : 14.51 / 15.00 / 14.49  (best)
Gazebo (real physics)          : 17.33 / 17.38 / 17.33
```

```
gym-pybullet-drones (24 kHz)    : 17.52
MuJoCo (20 kHz contact)         : 17.61
```

Flip completion: MuJoCo settles phi at 2.88 / 2.97 / 2.95 s; ArduPilot firmware 2.48-3.24 s; PyBullet and Gazebo sit in the knife-edge regime (Section 4.6). The native stacks agree to 0.03 deg on step - the loop belongs to the controller, not the engine. Paper 2 on three plants: circle radial RMS 2.7 cm (ideal), 2.8 cm (MuJoCo), 3.7 cm (MuJoCo + full noise); figure-8 4.7 cm on BOTH the ideal model and MuJoCo.

17. Engineering Findings, Limitations

17.1 Consolidated findings (all measured in the repository)

- F1 - Digital control-rate bound: a plausible 200 Hz discrete implementation of paper 1 never converges; derived minimum 12.3 kHz (Section 5).
- F2 - Flip knife-edge: the pursuit equilibrium makes 2 s ramp completion structurally marginal; MuJoCo and firmware complete, PyBullet/Gazebo unwind (Sections 4.6, 16).
- F3 - Mixer saturation: naive per-rotor clipping corrupts total thrust one-sidedly and the altitude loop diverges; priority desaturation (thrust exact, torque scaled) fixes it (Section 7).
- F4 - ESC lag is load-bearing: without the 20 ms actuator lag the 200 Hz zero-order-hold torque is marginally stable and the lateral mode diverges (proven on the ideal model too).
- F5 - Frame-pairing bug (validation): body rates paired with the world-frame quaternion kinematics diverge as tilt x rate; fixed to the literal body form (Section 2.7).
- F6 - Min-snap loiter-then-teleport: position-only waypoints let long segments wander; corridor velocity pinning plus a normalised-time per-segment solve fixes it (Section 11).

17.2 Limitations (stated honestly)

- The paper-2 LQR weights, ESC lag and integrator choices are ours (the paper gives no numbers) - documented in the README's assumptions table.
- ~6 equation details could not be symbol-verified because the PDF text extraction lost the math glyphs; each was checked structurally against the paper's prose (validation report).
- The flatness inner loop regulates body rate to zero instead of feeding forward the parameterised rate (documented divergence; the feed-forward extension is specified but not yet run).
- MuJoCo/Gazebo/ArduPilot runs live in the repository's Python stack, not in this MATLAB file; their numbers are quoted from results/comparison.md, which regenerates them on demand.

18. Conclusions

- Paper 1's quaternion attitude law was reproduced exactly (gains, saturation, noise, scenarios), extended to a six-degree-of-freedom flight stack, and flown unchanged on four simulation stacks including real ArduPilot firmware - cross-engine agreement 0.03 deg RMS between the native stacks, with the firmware stack best of all (14.7 deg on sine).
- A derived digital-stability bound - minimum control rate 12.3 kHz for these gains - explains why naive discrete implementations of the paper diverge, and is enforced by the project's simulators.

- Paper 2's differential-flatness tracker was implemented equation-by-equation (validated by independent review), and tracks the study case to 2.7-2.8 cm radial RMS on two independent physics plants, degrading gracefully to 3.7 cm under the paper's full sensor noise.

- The extension trajectory library (figure-8, vertical orbit, minimum-snap waypoint tours) runs on the same frozen controllers and quantifies the flatness argument: minimum-snap tracks about 25 percent better than minimum-jerk on identical waypoints.

- Everything regenerates: this report from one file, the wider project from single commands.

19. References

[1] E. Fresk and G. Nikolakopoulos, "Full Quaternion Based Attitude Control for a Quadrotor", European Control Conference (ECC), 2013, pp. 3864-3869.

[2] K. Choutri, M. Lagha, L. Dala and M. Lipatov, "Quadrotors Trajectory Tracking using a Differential Flatness-Quaternion based Approach", IEEE, 2017.

[3] D. Mellinger and V. Kumar, "Minimum Snap Trajectory Generation and Control for Quadrotors", ICRA, 2011. (basis of Section 11)

[4] T. Lee, M. Leok and N. H. McClamroch, "Geometric Tracking Control of a Quadrotor UAV on SE(3)", CDC, 2010. (planned third family)

[5] J. Cariño, H. Abaunza, P. Castillo, "Quadrotor Quaternion Control", 2015. (quaternion cascade ancestry of paper 2)

Appendix A - Completeness Audit (what this report includes)

Checked against the repository at the time of writing:

MATLAB implementation: Sections 2-11 code + Appendix B functions - all preserved unchanged from the validated version; numbers reproduced and cross-checked (waypoint coefficients to 5 decimals).

MuJoCo materials: benchmark adapter (documented), in-engine renders M1-M6 with frames Figures M1/M4, path traces M7-M10 with Figure M9, three-plant paper-2 results. INCLUDED.

GymPyBullet materials: adapter (custom URDF, rotor mapping, 250 Hz altitude controller - documented in Sections 14/16), recordings G1-G3 with Figure G1, step/sine/flip results. INCLUDED.

Other stacks: ArduPilot firmware and Gazebo results quoted from results/comparison.md (their runners live in the Python repo; running them requires WSL2 and is NOT reproduced inside MATLAB).

Team and university: all five Group-12 members with roll numbers (Manohar Paturi, K Pushpak, Sai Krishna, B Sainath, Vishal), B.Tech Artificial Intelligence Engineering, School of Artificial Intelligence, Amrita School of Engineering, Amrita Vishwa Vidyapeetham, official logo on the cover (navy banner render of the README asset). Faculty guide: NOT present in any project material - outstanding, not invented.

Outstanding items (explicit): faculty-guide details; the E3 flatness feed-forward extension (specified, not yet run); PyBullet port of the paper-2 stack; wind-robustness runs for the planner.

Appendix B - Implementation Functions

All simulation code used above, collected here. Quaternion operations implement Section 2; the integrators implement Sections 3 and 6; the trajectory generators produce the flat outputs of Sections 8-11.

```
frame: rec_mujoco_step_RENDER.png
```

Published with MATLAB® R2024b