


This are instructions which will help you get started. You will learn how to set up the Arduino, the software and how to test if the board is working.

1. Download arduino software called Arduino IDE from the website


<https://support.arduino.cc/hc/en-us/articles/360019833020-Download-and-install-Arduino-IDE>.

2. Once the app is installed, connect your computer to the Arduino module. You can do this by using USB/USB-c (black) wire. Plug the USB part into the Arduino (the USB input) and the other side to your computer. When connected, orange and green lights will turn on. In the app you can now select board (board is called: Arduino UNO).





3. First try if your module is working. To do that you can try to run a basic programme, which makes the orange LED (already integrated in the module) blink.


3.1. To do that open the "file" dropdown menu in the top left corner of the app. Then select Examples -> 01.Basics -> Blink. This will open an already written desired programme in a new window.

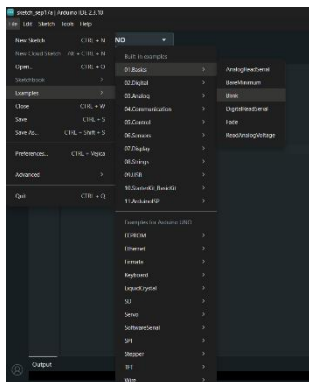

3.2. Double check that you are connected to the desired board (Arduino UNO). In this window click on the round button in the top left corner with a tick. This verifies your programme. This will open a terminal. Wait until the programme is verified. If no errors are produced (they should not be since the programme is already tested), you can proceed to step 3.3.

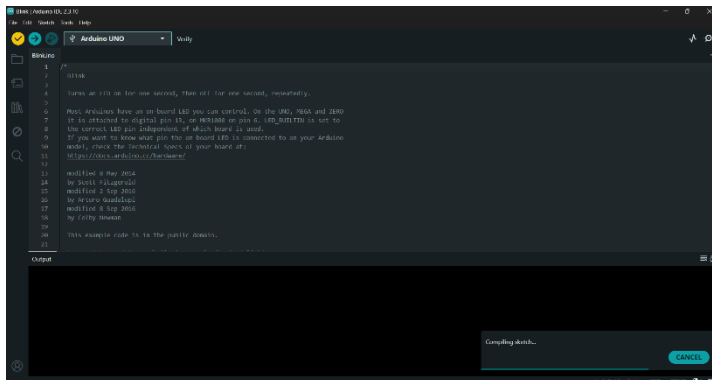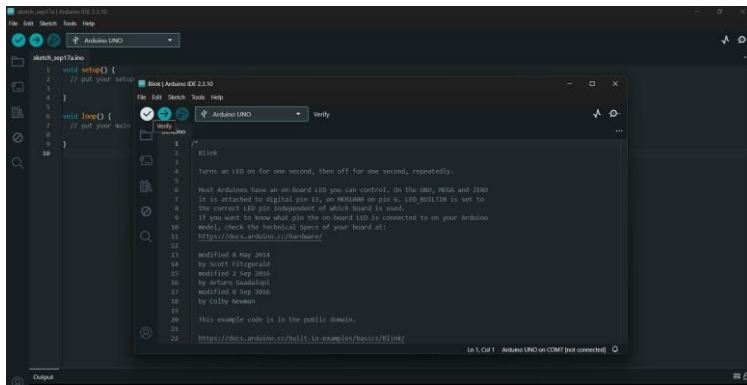

3.3. Now you're ready to upload it to the Arduino. You can do that by pressing the "right arrow" button (Upload) next to the "tick" button. After the programme is uploaded (this should only take a few seconds) the orange light on the Arduino should start blinking.

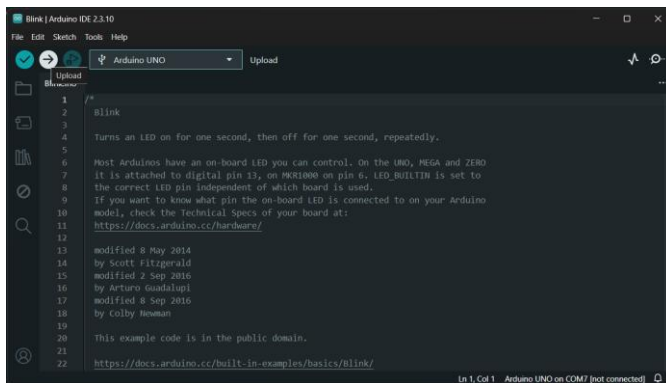

3.4. If the module works, you can start working on your actual project.