

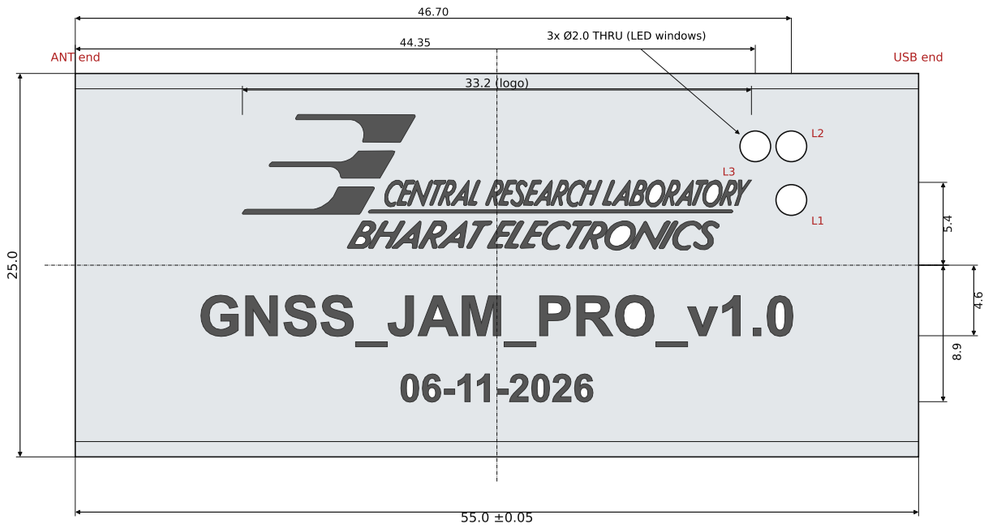


TOP VIEW (Z+, component side) - marking + LED windows

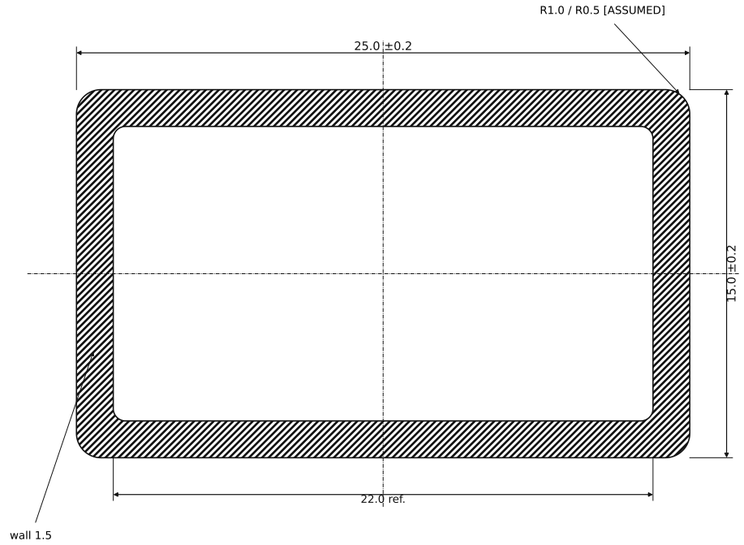

END VIEW (from ANT end) 4 : 1

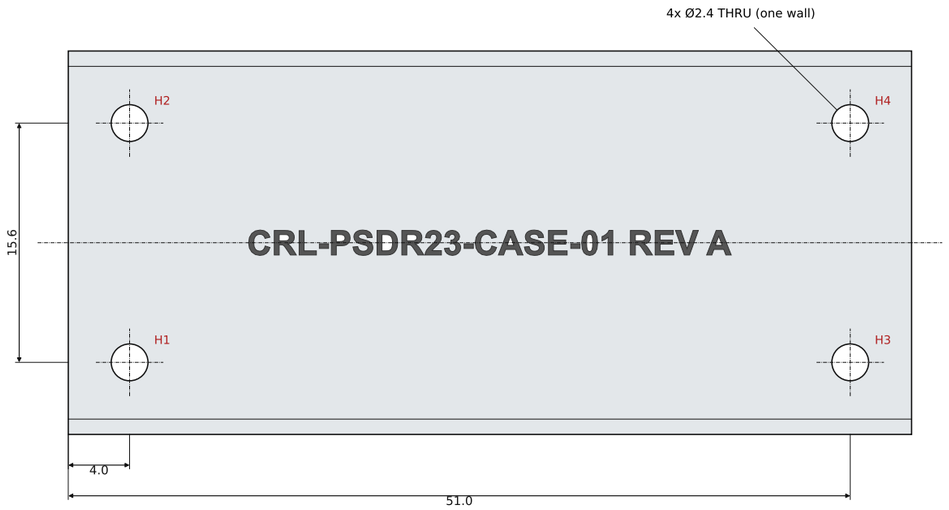

BOTTOM VIEW (Z-) - screw holes + part number

HOLE TABLE (X from the ANT end face, Y from the centre line)

ID	Feature	X	Y	Face
H1	Ø2.4 THRU wall	4.00	+7.80	bottom (Z-)
H2	Ø2.4 THRU wall	4.00	-7.80	bottom (Z-)
H3	Ø2.4 THRU wall	51.00	+7.80	bottom (Z-)
H4	Ø2.4 THRU wall	51.00	-7.80	bottom (Z-)
L1	Ø2.0 THRU, LED1 PWR	46.70	+4.25	top (Z+)
L2	Ø2.0 THRU, LED2 PLL	46.70	+7.75	top (Z+)
L3	Ø2.0 THRU, LED3 DATA	44.35	+7.75	top (Z+)

NOTES

1. Material: Aluminium EN AW-6063-T6 rectangular tube 25 x 15 x 1.5 (EN 755-9).
2. Cut to length 55.0 ±0.05; both ends faced square to the axis 0.05, deburred.
3. Holes H1-H4 in the bottom wall, L1-L3 (LED windows, on the LED centres) in the top wall;
   position ±0.05 to the ANT end face and the centre line. Deburr; no anodize plug in L1-L3.
4. Marking on the top face: laser marking preferred (hairlines 0.07). If engraved: 0.1 deep, Ø0.2 engraver.
   Artwork: 00_input/BEL_CRL_logo.png and the text as drawn; CRL-PSDR23-CASE-01.step governs.
5. Finish: Black anodize MIL-A-8625 Type II Class 2 [ASSUMED], after machining and engraving.
6. Tolerances ISO 2768-mK unless stated. Break sharp edges 0.1 max.
7. Inside 22.0 x 12.0 nominal: check the panel spigot (21.7 x 11.8) slides in by hand.

CENTRAL RESEARCH LABORATORY
BHARAT ELECTRONICS


GNSS_JAM_PRO v1.0 - CASE (POCKETSDR v2.3)

TUBE


Aluminium EN AW-6063-T6 rectangular tube 25 x 15 x 1.5 (EN 755-9)

PART	DWG	REV	SHEET
CRL-PSDR23-CASE-01	CRL-PSDR23-CASE-01-DWG	A	1 / 4
DATE	**UNITS**	**SCALE**	**PROJ.**
06-11-2026	mm	2.5 : 1	1st angle

Design: PocketSDR FE 2CH v2.3 case (T. Takasu), unchanged. Model: CRL-PSDR23-CASE-01.step

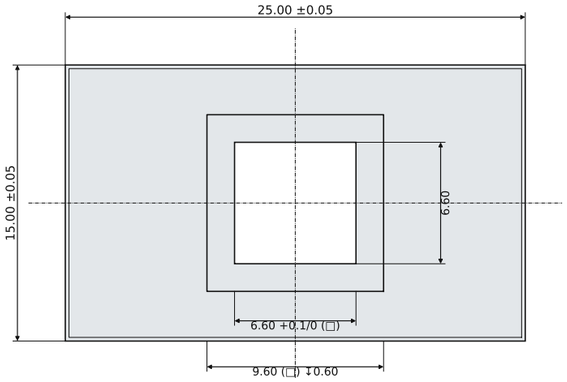

VIEW 1 - OUTSIDE FACE

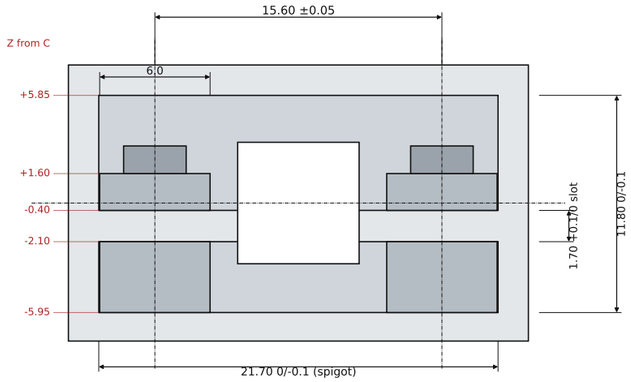


VIEW 2 - INSIDE (from the tube)

FEATURES (Z from the centre line C, Y from B, depth from A)


Feature	Size	Position
Flange	25.0 x 15.0 x 2.0	outside 0.2 x 45°
Spigot	21.70 x 11.80 x 1.0	Z -5.95..+5.85
PCB slot	1.70 +0.1/0	Z -2.10..-0.40
Lugs (2 pairs)	6.0 wide, R3.0	Y ±7.80
Lower lug	Ø2.2 THRU	Z -5.95..-2.10
Upper lug	hex 4.0 A/F THRU	Z -0.40..+1.60
SMA opening	□6.60 THRU, □9.60 ↧0.60	on B / C
Nut stops (2)	3.4 x 1.5 x 1.5	Z 1.6..3.1

NOTES

1. Material: Aluminium EN AW-6061-T6 [ASSUMED; source: nylon, 3D printed].
2. Design = PocketSDR v2.3 printed panel, unchanged; dims from its .3mf.
3. Datum A = flange inside face (seats on the tube end);
   B / C = centre lines of the 25 x 15 outline.
4. Spigot 0/-0.1: slide fit in the tube (inside 22 x 12).
5. Hex nut trap: wire-EDM, or end mill with R0.3 max corners;
   an ISO 4032 M2 nut must press in by hand.
6. Finish: Black anodize MIL-A-8625 Type II Class 2 [ASSUMED].
7. Tolerances ISO 2768-mK unless stated; break edges 0.1.
8. CRL-PSDR23-CASE-02.step governs where not dimensioned.

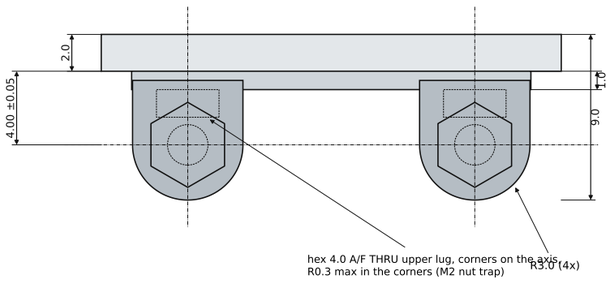

VIEW 3 - TOP (from Z+)

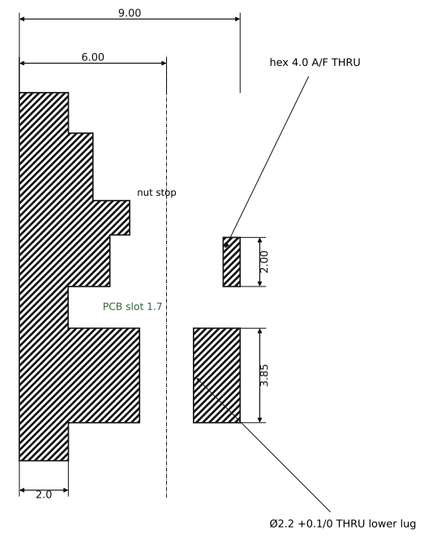

SECTION A-A (on a lug axis) 4 : 1


GNSS_JAM_PRO v1.0 - CASE (POCKETSDR v2.3)

END PANEL - ANT (SMA)


Aluminium EN AW-6061-T6 [ASSUMED; source: nylon, 3D printed]

PART	DWG	REV	SHEET
CRL-PSDR23-CASE-02	CRL-PSDR23-CASE-02-DWG	A	2 / 4
DATE	UNITS	SCALE	PROJ.
06-11-2026	mm	3 : 1	1st angle

Design: PocketSDR FE 2CH v2.3 case (T. Takasu), unchanged. Model: CRL-PSDR23-CASE-02.step

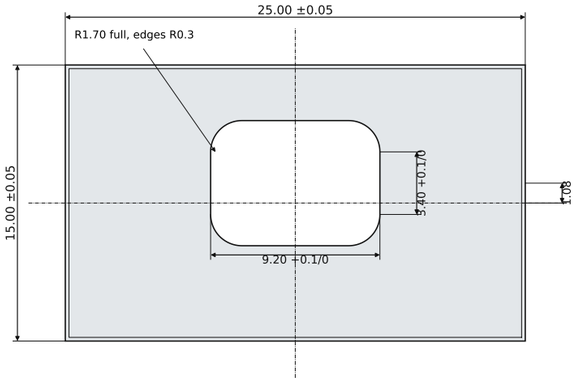

VIEW 1 - OUTSIDE FACE

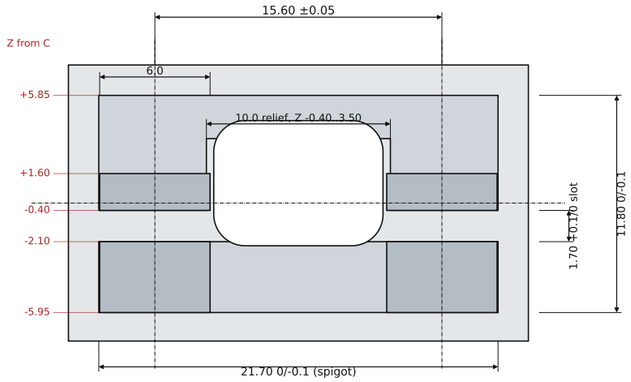


VIEW 2 - INSIDE (from the tube)

FEATURES (Z from the centre line C, Y from B, depth from A)


Feature	Size	Position
Flange	25.0 x 15.0 x 2.0	outside 0.2 x 45°
Spigot	21.70 x 11.80 x 1.0	Z -5.95..+5.85
PCB slot	1.70 +0.1/0	Z -2.10..-0.40
Lugs (2 pairs)	6.0 wide, R3.0	Y ±7.80
Lower lug	Ø2.2 THRU	Z -5.95..-2.10
Upper lug	hex 4.0 A/F THRU	Z -0.40..+1.60
USB-C slot	9.20 x 3.40 stadium THRU	Z +1.08
Spigot relief	10.0 wide	Z -0.40..3.50

NOTES

1. Material: Aluminium EN AW-6061-T6 [ASSUMED; source: nylon, 3D printed].
2. Design = PocketSDR v2.3 printed panel, unchanged; dims from its .3mf.
3. Datum A = flange inside face (seats on the tube end);
   B / C = centre lines of the 25 x 15 outline.
4. Spigot 0/-0.1: slide fit in the tube (inside 22 x 12).
5. Hex nut trap: wire-EDM, or end mill with R0.3 max corners;
   an ISO 4032 M2 nut must press in by hand.
6. Finish: Black anodize MIL-A-8625 Type II Class 2 [ASSUMED].
7. Tolerances ISO 2768-mK unless stated; break edges 0.1.
8. CRL-PSDR23-CASE-03.step governs where not dimensioned.

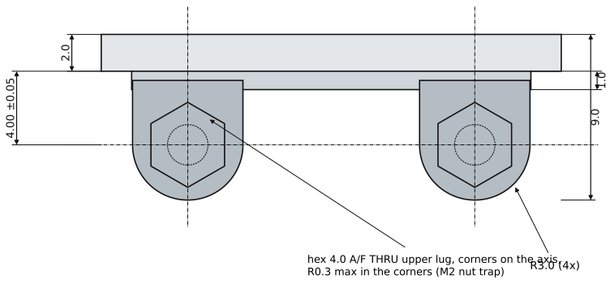

VIEW 3 - TOP (from Z+)

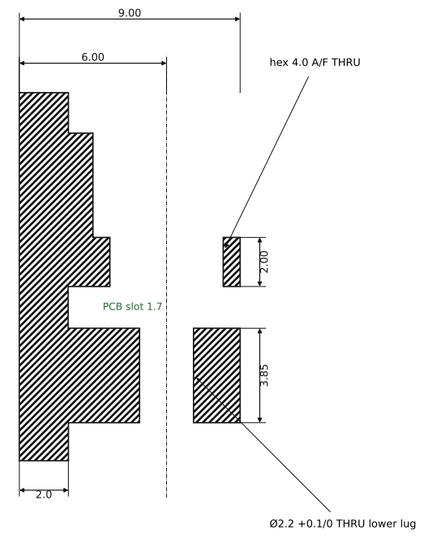

SECTION A-A (on a lug axis) 4 : 1

GNSS_JAM_PRO v1.0 - CASE (POCKETSDR v2.3)


END PANEL - USB

Aluminium EN AW-6061-T6 [ASSUMED; source: nylon, 3D printed]


PART	DWG	REV	SHEET
CRL-PSDR23-CASE-03	CRL-PSDR23-CASE-03-DWG	A	3 / 4
DATE	UNITS	SCALE	PROJ.
06-11-2026	mm	3 : 1	1st angle

Design: PocketSDR FE 2CH v2.3 case (T. Takasu), unchanged. Model: CRL-PSDR23-CASE-03.step


ASSEMBLY

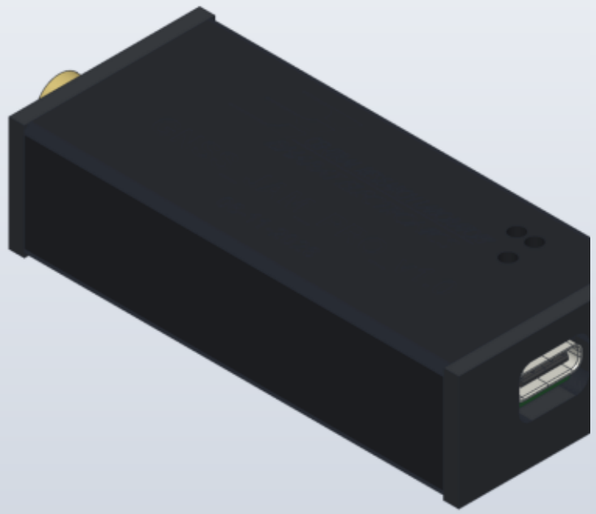

INSIDE (tube see-through)

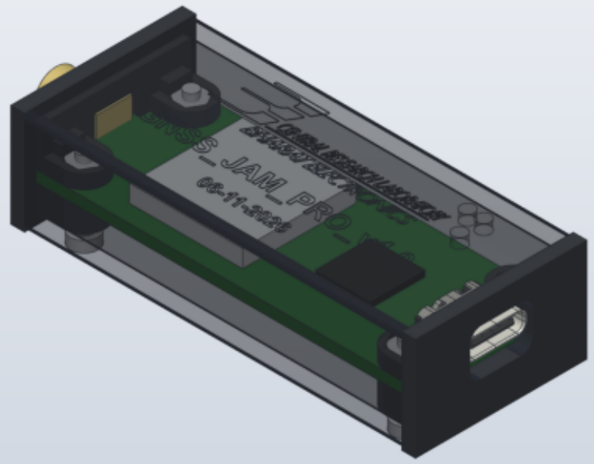

EXPLODED

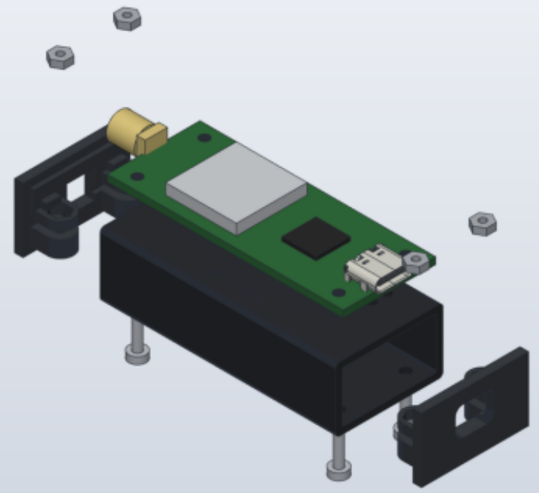

PARTS LIST (per case)

Item	Qty	Part	Description	Supply
1	1	CRL-PSDR23-CASE-01	Tube 25 x 15 x 1.5 x 55, marked (sheet 1)	CNC vendor
2	1	CRL-PSDR23-CASE-02	End panel, ANT / SMA (sheet 2)	CNC vendor
3	1	CRL-PSDR23-CASE-03	End panel, USB-C (sheet 3)	CNC vendor
4	4 + 2	ISO 7045 M2 x 10 - A2 (pan head, cross)	Lugs to the tube, through the PCB	CNC vendor, with spares
5	4 + 2	ISO 4032 M2 - A2	In the hex traps of the upper lugs	CNC vendor, with spares
6	1	PocketSDR FE 2CH v2.3	PCB assembly 55 x 21.6 x 1.6 (not in this order)	BEL CRL

ASSEMBLY

1. Press one M2 nut into each hex trap of the upper lugs (both panels), flat face toward the PCB slot.
2. Slide the PCB into the USB panel slot (components up = the side of the thin lugs), then into the tube.
3. Fit the ANT panel over the SMA end; both flanges seat on the tube ends (PCB 55.0 = tube 55.0).
4. Fit 4 x M2 x 10 from the bottom face (H1-H4): tube wall -> lower lug -> PCB hole -> nut. 0.2 Nm max.
5. Check: USB-C plug mates fully; SMA nut runs free on the jack; PCB does not rattle.

Vendor supplies items 1-5 per the parts list, items 4 and 5 with the spares shown.
Marking on the tube (logo, GNSS_JAM_PRO_v1.0, 06-11-2026) per sheet 1.

CENTRAL RESEARCH LABORATORY
BHARAT ELECTRONICS

GNSS_JAM_PRO v1.0 - CASE (POCKETSDR v2.3)

ASSEMBLY + PARTS LIST

see parts list

PART	DWG	REV	SHEET
CRL-PSDR23-CASE-ASSY	CRL-PSDR23-CASE-ASSY-DWG	A	4 / 4
DATE	UNITS	SCALE	PROJ.
06-11-2026	mm	NTS	1st angle

Design: PocketSDR FE 2CH v2.3 case (T. Takasu), unchanged. Model: CRL-PSDR23-CASE-ASSY.step