

Coordinated system for charging and discharging for different and various electric vehicles for energy management

*Report submitted to the SASTRA Deemed to be University
as the requirement for the course*

EEE300: MINI PROJECT

Submitted by

Mithra Vinda Reddy K

(Reg. No.: 123005085)

Sarvesh Babu R G

(Reg. No.: 123005132)

Shwetha S

(Reg. No.: 123005140)

December 2022



SASTRA
ENGINEERING · MANAGEMENT · LAW · SCIENCES · HUMANITIES · EDUCATION
DEEMED TO BE UNIVERSITY

(U/S 3 of the UGC Act, 1956)

THINK MERIT | THINK TRANSPARENCY | THINK SASTRA



**SCHOOL OF ELECTRICAL AND ELECTRONICS ENGINEERING
THANJAVUR, TAMIL NADU, INDIA-613 401**



**SCHOOL OF ELECTRICAL & ELECTRONICS ENGINEERING
THANJAVUR-613 401**

Bonafide Certificate

This is to certify that the report titled "**Coordinated system for charging and discharging for different and various electric vehicles for energy management**" submitted as a requirement for the course, **EEE300: MINI PROJECT** for B. Tech. Electrical & Electronics Engineering programme, is a bonafide record of the work done by **Ms. Mithra Vinda Reddy K (Reg.No.123005085)**, **Mr. Sarvesh Babu R G (Reg.No.123005132)**, **Ms. Shwetha S (Reg.No.123005140)** during the academic year 2022-23, in the **School of Electrical and Electronics Engineering**, under my supervision.

Signature of Project Supervisor:

Name with Affiliation : Dr. Narayanan K (SAP / EEE / SEEE)

Date : 06 / 12 / 2022

Project *Vivavoce* held on

Examiner-I

Examiner-II



SASTRA

ENGINEERING · MANAGEMENT · LAW · SCIENCES · HUMANITIES · EDUCATION

DEEMED TO BE UNIVERSITY

(U/S 3 of the UGC Act, 1956)



THINK MERIT | THINK TRANSPARENCY | THINK SASTRA

SCHOOL OF ELECTRICAL & ELECTRONICS ENGINEERING THANJAVUR-613 401

Declaration

We declare that the report titled "**Coordinated system for charging and discharging for different and various electric vehicles for energy management**" submitted by me/us is an original work done by us under the guidance of **Dr. Narayanan K, SAP, School of Electrical and Electronics Engineering, SASTRA Deemed to be University** during the academic year 2022-23, in the **School of Electrical and Electronics Engineering**. The work is original and wherever We have used materials from other sources, I/We have given due credit and cited them in the text of the report. This report has not formed the basis for the award of any degree, diploma, associate-ship, fellowship or other similar title to any candidate of any University.

Signature of the candidate(s) :

Name of the candidate(s) : Mithra Vinda Reddy K

: Sarvesh Babu R G

: Shwetha S

Date : 06 / 12 / 2022

ACKNOWLEDGEMENTS

We express our gratitude to honourable **Dr. S. Vaidhyasubramaniam**, Vice Chancellor SAS-TRA University forcm the opportunity of pursuing our engineering in this esteemed in institution and carry out the project work.

We thank **Dr. R. Chandramouli**, Registrar, SASTRA University for granting permission and extending the facilities in carrying out this project.

We express our sincere thanks and gratitude to **Dr. K. Thenmozhi**, Dean, SEEE and **Dr. K. Vijayarekha**, Associate Dean, EED/SEEE SASTRA Deemed to be University, for her support in the supporting the accomplishment of this work.

We also render our sincere thanks to project coordinators, **Dr. Karthikaikannan D**, SAP/EEE/SEEE and **Dr. Venkatesh T**, AP-III/EEE/SEEE, SASTRA Deemed to be University for their involvement and encouragement during this project.

We would like to thank our guide, **Dr. Narayanan K**, SAP/EEE/SEEE, SASTRA Deemed to be University, for his guidance and support, that cumulated to his successful project. His emphasis on making learning an experience allowed us to learn while making mistakes and rectifying them to learn ,not only the scientific concepts behind power systems but also the process of analysing results.

We would like to thank our friends who supported us. We would also like to thank the lab assistants for helping us with their practical expertise and for providing the necessary software tools.

And finally, we would like to acknowledge the appreciation and support that our parents provided to ensure we faced minimal obstacles throughout the project.

ABSTRACT

This work proposes a method for charging and discharging the batteries in Electric Vehicles (EV). The classification of Electric vehicles is Private Vehicle, Commercial Vehicle, Emergency Vehicle, VIP Vehicle based on the battery capacity and vehicle's usage.

The State of Charge (SoC) of each vehicle is calculated for every twenty minutes and compared with the threshold limits of SoC. The Distance traveled and the time for which it is connected to the grid is fixed for each vehicle type. The ideal pattern has been established by comparing the charging pattern with the scheduled Real Time Pricing (RTP) for every 20-minute block. Here 20-minute blocks are considered because the time required for full charge varies from vehicle to vehicle. The pattern has been formulated in such a way that discharging occurs when the cost is higher (peak hours), charging occurs when the cost is low (off peak hours). Few blocks are left idle when charging or discharging is not feasible because of violation of threshold limits. The total price has been calculated for each vehicle for a span of 24 hours after the charging and discharging patterns are established.

The novelty of this work is the establishment of a travel pattern for the classified types of vehicles and thereby arriving at the best charging/discharging patterns.

Specific Contribution

- Establishing the travel pattern for the classified vehicles by using the vehicle's battery capacity and how much time it takes to complete its trip.

Specific Learning

- Understood about various ranges of battery capacities of the vehicles and time to complete its trip after one time charging.

Signature of the Guide

Student Reg. No:123005085

Name of the Guide: Dr. Narayanan K (SAP/EEE/SEEE)

Name:Mithra Vinda Reddy K

ABSTRACT

This work proposes a method for charging and discharging the batteries in Electric Vehicles (EV). The classification of Electric vehicles is Private Vehicle, Commercial Vehicle, Emergency Vehicle, VIP Vehicle based on the battery capacity and vehicle's usage.

The State of Charge (SoC) of each vehicle is calculated for every twenty minutes and compared with the threshold limits of SoC. The Distance traveled and the time for which it is connected to the grid is fixed for each vehicle type. The ideal pattern has been established by comparing the charging pattern with the scheduled Real Time Pricing (RTP) for every 20-minute block. Here 20-minute blocks are considered because the time required for full charge varies from vehicle to vehicle. The pattern has been formulated in such a way that discharging occurs when the cost is higher (peak hours), charging occurs when the cost is low (off peak hours). Few blocks are left idle when charging or discharging is not feasible because of violation of threshold limits. The total price has been calculated for each vehicle for a span of 24 hours after the charging and discharging patterns are established.

The novelty of this work is the establishment of a travel pattern for the classified types of vehicles and thereby arriving at the best charging/discharging patterns.

Specific Contribution

- Charging/Discharging Pattern formulation for the classified Electric Vehicles by comparing it with the Real time pricing.

Specific Learning

- Understood about various types of Electric Vehicles, time required for them to charge and discharge.
- Understood about Real Time Pricing (RTP) and its benefits when incorporated with charging schemes.

Signature of the Guide

Student Reg. No:123005132

Name of the Guide: Dr. Narayanan K (SAP/EEE/SEEE)

Name:Sarvesh Babu R G

ABSTRACT

This work proposes a method for charging and discharging the batteries in Electric Vehicles (EV). The classification of Electric vehicles is Private Vehicle, Commercial Vehicle, Emergency Vehicle, VIP Vehicle based on the battery capacity and vehicle's usage.

The State of Charge (SoC) of each vehicle is calculated for every twenty minutes and compared with the threshold limits of SoC. The Distance traveled and the time for which it is connected to the grid is fixed for each vehicle type. The ideal pattern has been established by comparing the charging pattern with the scheduled Real Time Pricing (RTP) for every 20-minute block. Here 20-minute blocks are considered because the time required for full charge varies from vehicle to vehicle. The pattern has been formulated in such a way that discharging occurs when the cost is higher (peak hours), charging occurs when the cost is low (off peak hours). Few blocks are left idle when charging or discharging is not feasible because of violation of threshold limits. The total price has been calculated for each vehicle for a span of 24 hours after the charging and discharging patterns are established.

The novelty of this work is the establishment of a travel pattern for the classified types of vehicles and thereby arriving at the best charging/discharging patterns.

Specific Contribution

- The vehicles have been classified into different categories based on the usage and the battery capacity. The classifications are Private Vehicle, Commercial Vehicle, Emergency Vehicle, VIP Vehicle.

Specific Learning

- Understood about Electric Vehicles and its parameters like Charging, Discharging and State of charge.
- Understood that Electric vehicles have different battery capacity and time required for full charge depends on the type of vehicle.

Signature of the Guide

Student Reg. No:123005140

Name of the Guide: Dr. Narayanan K (SAP/EEE/SEEE)

Name:Shwetha S

TABLE OF CONTENTS

BONAFIDE CERTIFICATE	ii
DECLARATION	iii
ACKNOWLEDGEMENTS	iv
ABSTRACT	v
LIST OF FIGURES	x
LIST OF TABLES	xi
NOTATIONS	xii
1 INTRODUCTION	1
2 LITERATURE SURVEY	3
3 METHODOLOGY	5
3.1 Vehicle Classification	5
3.2 Travel Pattern Establishment	5
3.3 Charging/Discharging Pattern Establishment	6
3.4 Flowchart	6
3.5 Real Time Price	7
3.6 Load Profile	8
4 Mathematical Modelling	10
4.1 SoC Calculation	10
4.2 Best Pattern for charging	11
4.3 Maximum Power required by EV	11

5 RESULTS & DISCUSSION	12
5.1 Tabulations	12
5.1.1 Economic Charging	12
5.1.2 Maximum EV Load	12
5.1.3 Power Loss	13
5.2 Charging Patterns	13
5.3 Voltage Magnitude Graphs for Different Scenarios	14
6 CONCLUSIONS AND FURTHER WORK	16
REFERENCES	19
A IEEE 33 BUS SYSTEM	20
B IEEE 69 BUS SYSTEM	23

LIST OF FIGURES

3.1	Vehicle Classification	5
3.2	Flowchart for Charging/Discharging Pattern	7
3.3	Real Time Price	8
3.4	9
5.1	Charging/Discharging pattern for Cars	13
5.2	Charging/Discharging pattern for Trucks	14
5.3	Charging/Discharging pattern for Buses	14
5.4	Voltage magnitude variation for different scenarios	15
A.1	Single line diagram of IEEE-33 Bus System	20
B.1	Single line diagram of IEEE-69 Bus System	23

LIST OF TABLES

5.1	Most Economic Time interval to Charge the Vehicle	12
5.2	Hour at which the EV Load is maximum	13
5.3	Power Loss when EV is connected in a 33 bus system	13
A.1	IEEE 33 Bus System Bus Data	21
A.2	IEEE 33 Bus System Line Data	22
B.1	IEEE 69 Bus System Bus Data	24
B.2	IEEE 69 Bus System Line Data	25

NOTATIONS

$SoC_{(y)}$	State of Charge in present hour
$SoC_{(y-1)}$	State of Charge in previous hour
η_c	Charging Efficiency
η_d	Discharging Efficiency
∂y	Time Interval
$SoC_{Threshold}$	Threshold limit for State of Charge
Ch_t	Energy delivered at time ‘t’
Rtp	Real Time Price
$P_{batt}(y)$	Power of the battery in the present hour
T_n	Cost of ‘ n^{th} ’ iteration

CHAPTER 1

INTRODUCTION

With the increase in Pollution , fuel demand, global warming and many other socio-economic issues, one could say Electric Vehicles(EV) will be the future means of transport. Transportation sector can be tremendously changed by Electric Vehicles as there will be no source of carbon emissions, which significantly cleares the climate progress.

EVs help to conserve non-renewable natural resources. Due this the import of natural gasses and the dependency of a nation on petroleum export countries will be reduced. When compared to the recurring expenditure on natural gasses, the cost of EVs are low. The maintenance of electric motors is less when compared with traditional non- electric motors. Electric vehicles have different methods for conversion of fuel to electricity.

Electric bikes, Cars, rickshaws, trucks, etc are some examples of EVs. Most of the trains including metros are already running through electricity all over the world, but there is a problem in charging EVs in comparison with the motor vehicles EVs can't be charged instantly like Petrol/Diesel Vehicles. So here there is a need for an effective charging scheme.

But in present times there are difficulties based on how to charge EV s when there is higher load demand. The problem arises when there are many vehicles at the same time to charge and prioritize them accordingly, there are lesser number of charging stations and the charging the time of vehicles differs for different vehicles. Replacement of battery packs can be one such solution but that is quite expensive for people to afford. There will be a significant impact on the power grid by charging EVs. In order to manage EVs charging, there is a need for an intelligent charging strategy that supports EVs charging while preventing the power grid from overloading. Charging/discharging pattern scheme using Real Time Price can be one possible solution for the difficulties mentioned above and the same is discussed below.

Today when advancement of technology is growing rapidly EVs are the new means of transport to fulfill the larger demand of people growing day by day.

One more important factor to consider regarding EVs is the cost of electricity. There are various types of tariffs followed by the government depending on various factors like maximum demand, Time of the load, Type of the load, amount of the energy used, etc.

Real time price is one such system where the prices vary hourly and the consumer is charged a different price for each interval, here price solely depends on the demand in the network prevailing during the time.This benefits the consumers as well the government in cutting down their losses.Also, this system could make the load duration curve flatter.

The remainder of the thesis is organized as follows:

- A literature survey related to the work and the formulated objectives are presented in the chapter 2.
- The chapter 3 provides detailed explanation of methodology and the system model comprising of EV.

- The chapter 4 deals with the mathematical modelling of the systems used.
- The chapter 5 consists of the results obtained for the considered test systems and are discussed and summarized.
- The conclusions of the work is presented in the chapter 6 with a brief description of the future scope of this work.

CHAPTER 2

LITERATURE SURVEY

Koundinya Sistla Pavan Venkat Sai et al. (2021) This paper addresses the problem of stability with the grid .The load profile of electric vehicle charging stations (EVCS) is determined and its impact of EVCS on the voltage profile of the distribution system. The principle of coordinated charging strategy is approached in this project to find the load profile of EVCS constrained by grid-to-vehicle (G2V) and vehicle-to-grid (V2G).

Chellappan et al. (2022) This paper focuses on minimization of the losses in the distribution network by the Distributed Generators (DGs) systems.The undesirable nature is one of the major challenges in maintaining the power between the DG and the grid. The battery energy storage system serves the purpose,supporting the grid by storing the energy in it. Sizing and placement of DG in the distribution system to support the grid and battery storage placed after the placement of the DGs is done in this work.Particle Swarm Optimization (PSO) is used for this purpose and for placement of the battery energy storage system a genetic algorithm is used in the IEEE networks such as IEEE-33, IEEE-69, IEEE-118 radial node distribution systems.This project incorporates the operation of the battery in accordance with the state of charge.

Senthilkumar et al. (2021) The paper focuses on Cost minimization and export maximisation by optimising the plug-in hybrid electric vehicle (PHEV) schedule , thereby reducing the import from the grid, subsequently minimising the overall operational cost. The proposed DR proposes to reduce imported electricity cost in peak hours by shifting the non-emergency loads(controllable loads) to off-peak hours.In this project the per hour Real time pricing(RTP) and load profile has been incorporated and analysed.

Lee et al. (2019) A dynamic EV charging dataset from the ACN data has been used as the reference to calculate the charging time, discharging time, kWh required, time required to full charge. With this data the charging-discharging pattern has been established.

Koundinya et al. (2020) This paper aims to establish a generalised procedure for evaluating the impact of Electric Vehicles Charging Stations (EVCS) on a distribution system. A load profile for 24 hours of EVCS is proposed using the travel patterns of EV .Radial Load Flow is performed on the distribution system.This is done when the EVCS is connected to the distribution system to find the voltage profile of the system. Voltage Stability Index (VSI) and Voltage Stability Factor (VSF) are calculated for the system with and without EVCS under many cases.

Rao et al. (2012) In this paper, an approach to reconfigure and install DG units simultaneously in the distribution system has been proposed which includes different loss reduction methods to establish the superiority of the proposed method. An effective meta heuristic HSA is used in the process of the network reconfiguration and installation of DG.33- and 69-bus systems at three different load levels vizLight, nominal, and heavy are used for testing the approached as well as other methods.The result was that the approached method was more effective in reducing power loss and improving the voltage profile as compared to other methods. Then this was studied at different load levels. The results showed that the percentage power loss reduction was improving as the number of DG installation locations were increasing from one to four, but rate of improvement

decreased when locations were increasing from one to four at all load levels. However, when the number of DG installation locations were three the ratio of percentage loss reduction to DG size was the highest. The HSA results were compared with the results of genetic algorithm (GA) and refined genetic algorithm (RGA). Final result was that the HSA performance was better than GA and RGA.

Savier and Das (2007) In this paper, the consumer loss connected to a radial system has been examined by the Quadratic-loss allocation scheme, which is based on branch current flow. Therefore, it is ensured each consumer has been allocated the losses only at branches for which current contributes to. A heuristic rule and fuzzy multiobjective algorithm in a radial distribution system is derived to solve the network reconfiguration problem. The analysis demonstrates that the network reconfiguration reduces system real-power loss and most consumers will pay less, due to reduction in the loss allocation. However, this may also result in an increase in the loss allocation to a small group of consumers. This can be addressed by modification of tariff structure. It is also observed that network reconfiguration would influence the real-power loss allocation to each consumer.

Zhang et al. (2022) The large-scale fast charging of EVs in the distribution network creates an issue of uneven temporal and spatial distribution of charging loads and voltage quality deterioration. This can be addressed by adjustable charging service fees for adjustable charging service fees. The charging guidance strategy will guide the users to charge reasonably, helping to reduce the charging cost and the distribution network's voltage quality is enhanced substantially. The spatial and temporal distribution is forecasted considering the grid constraints of urban traffic road network-distribution and fast charging loads of private cars based on trip chains and Monte Carlo methods is proposed. The load and voltage quality of the distribution network is taken into consideration and a flexible tiered charging service fee model is established.

Simolin et al. (2022) This paper assesses the influence on EV charging load through the charging profile modelling method. Realistic sampling with four commercial EVs are experimented and compared. Also, REDI shopping centre's charging session data is used for a large charging site evaluation sample. It is found that, to avoid modelling errors, linear charging profile is not recommended for controlled charging. Measurement-based nonlinear charging profiles wage would lead to most accurate modelling. However, usage of a simple, but justified, bilinear charging profile model is also recommended for a reasonably accurate result.

CHAPTER 3

METHODOLOGY

This section briefly explains about how the vehicles are classified, how the Travel pattern and Charging/Discharging pattern is formulated and how it is incorporated with ‘Rtp’ to find the best case scenarios. It also explains about the Load profiles took to identify and analyse the 33 bus system and 69 bus system.

3.1 Vehicle Classification

Electric vehicles have been classified primarily into four major categories as shown in Figure 3.1

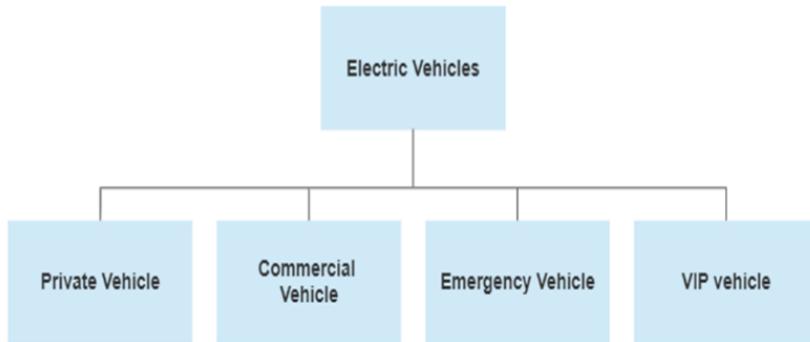


Figure 3.1: Vehicle Classification

The above classification is made by comparing the battery capacity of the vehicles from the data taken with the battery capacity of the similar kind of vehicles in the market.

Private vehicles are further classified into E-bikes and E-cars with average battery capacity of 400 Wh to 500 Wh and 40 kWh to 100 kWh respectively. Commercial vehicles are classified into E-Truck and E-Bus with an average battery capacity of 100 kWh and 60 to 548 kWh respectively. Emergency vehicles have a battery capacity of around 105 kWh and VIP vehicles have around 90 kWh to 200 kWh .

3.2 Travel Pattern Establishment

Travel pattern for three main vehicle subcategories of the above mentioned vehicle categories namely E-car, E-Truck and E-Bus are now taken and travel patterns of the same have been established by using the Battery capacity, Time taken to full charge, Time period of the vehicle when it is connected to the grid , charging rate and discharging rate Lee et al. (2019).

Car: ID – 13646 Lee et al. (2019) is chosen for E-Car as its battery capacity matches with the most common types of E-cars in the market. The battery capacity range of this vehicle is 54 kWh. The time taken for 100% charging of battery happens to be 1 hour 40 minutes. It then continues to Travel for 6 hour 30 minutes after which the Battery's Charge of the vehicle is depleted. This vehicle is connected to the grid for 5 hours 20 minutes until the next trip. The charging/discharging rate is 10.8 kW per twenty minutes.

Truck: ID – 4428 Lee et al. (2019) is chosen for E-Truck as its battery capacity matches with the most common types of E-Trucks in the market. The battery capacity of this vehicle is 99.2 kWh. The time taken for 100% charging of battery happens to be 4 hours. It then continues to Travel for 14 hours after which the Battery's Charge of the vehicle is depleted. This vehicle is connected to the grid for 10 hours until the next trip. The charging/discharging rate is 8.267 kW per twenty minutes.

Bus: Vehicle ID – 16034 Lee et al. (2019) is chosen for E-bus as its battery capacity matches with the most common types of E-Buses in the market. The battery capacity of this vehicle is 199.95 kWh. The time taken for 100% charging of battery happens to be 5 hours 20 minutes. It then continues to Travel for 13 hours after which the Battery's Charge of the vehicle is depleted. This vehicle is connected to the grid for 11 hours until the next trip. The charging/discharging rate is 12.5 kW per twenty minutes.

3.3 Charging/Discharging Pattern Establishment

A 24 hour time scale is taken for charging/discharging pattern formulation. This time scale is further subdivided into 72 time blocks as the classified vehicles have non-uniform charging time, thereby rounding of time into hourly basis would be inefficient and unprecise. So inorder to increase precision, the 24 hour scale is split into 72 Blocks.

Inorder to find the best charging/discharging/idle pattern equation (4.6) is used and this pattern provides less loss to the grid and is useful to the vehicle owner interms of cost.

After running through all successive time logs of vehicles the whole data is analysed with the equation (4.7) and the connection time which is most profitable for both user and grid is identified.

3.4 Flowchart

1. Data necessary for the EV charging is collected from the device and the time period for which it will be connected to the grid from the user.
2. $SoC_{residual,t}$ is calculated from checking the vehicle's battery.
3. This $SoC_{residual,t}$ is then compared with the $SoC_{threshold,t}$ to determine either to charge or discharge.
 - (a) If the SoC is above the Threshold limit there are two viable options either we can discharge or stay idle.
 - (b) Discharging of the vehicle takes place during peak hours.
 - (c) Then The Priority score is checked in order to determine whether to charge or keep the vehicle idle. Emergency vehicles and VIP vehicles will have a priority core of '1'.

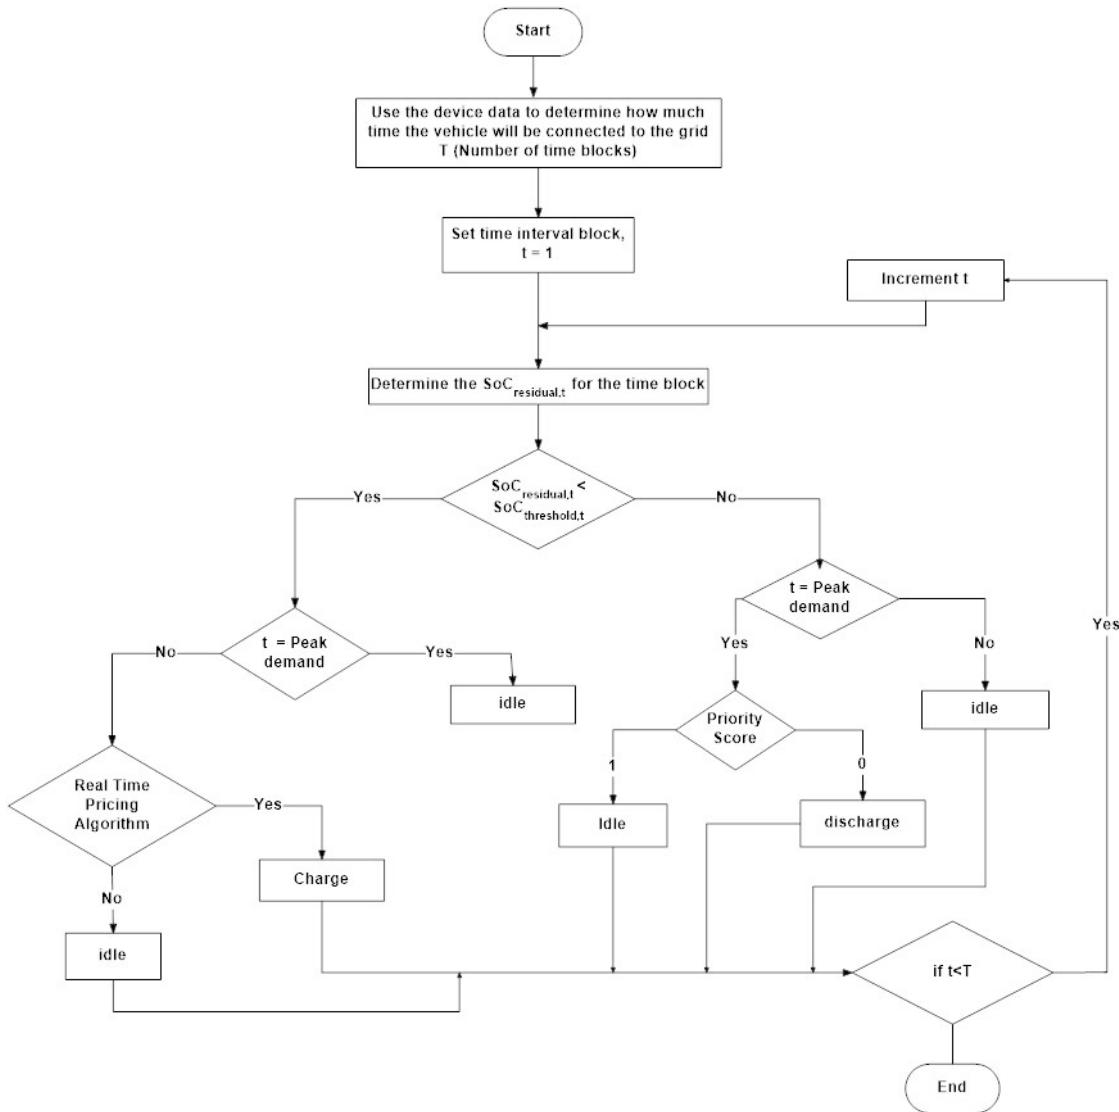


Figure 3.2: Flowchart for Charging/Discharging Pattern

- (d) If the SoC is below the Threshold limit there are two viable options either we can charge or stay idle.
 - (e) Charging of the vehicle takes place during off peak hours.
 - (f) If it is an off peak hour and the vehicle needs to charge, we run the vehicle data through a Real Time Pricing Algorithm where the time periods and energy required will be compared with ‘Rtp’ and an efficient pattern of charging is identified (4.2).
4. Then the time period is incremented and the process repeats till the time period is the total connection time.

3.5 Real Time Price

Real Time Price(‘RTP’) is the cost structure in which the cost for per- kWh varies for every hour. Based on ‘RTP’ on previous and successive hour it can be decided at which hour the vehicle has

to charge, stay idle or to discharge during peak demand. During peak hours it observed that the cost is higher and the vehicle can be charged at that time block.

Hour	Price (\$/kWh)	Hour	Price (\$/kWh)	Hour	Price (\$/kWh)
1	0.033	9	0.215	17	0.086
2	0.027	10	0.572	18	0.059
3	0.020	11	0.572	19	0.050
4	0.017	12	0.572	20	0.061
5	0.017	13	0.215	21	0.181
6	0.029	14	0.572	22	0.077
7	0.033	15	0.286	23	0.043
8	0.054	16	0.279	24	0.037

Figure 3.3: Real Time Price

The product of Charging/Discharging patterns of vehicles (fig 5.1 5.2 5.3) and ‘*RTP*’ are calculated to find the most economical time interval to charge the vehicle. The charge/discharge pattern for each time interval is multiplied correspondingly with the ‘*RTP*’. The cost for each time interval are cumulatively added together to arrive at the total cost using equation 4.6 and then ‘*argmin*’ function is used to find the lowest or minimum cost using equation 4.7.

3.6 Load Profile

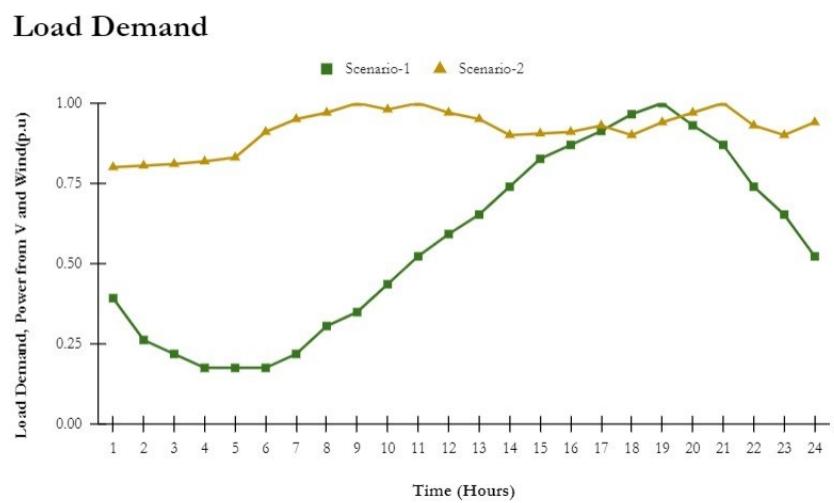


Figure 3.4

CHAPTER 4

Mathematical Modelling

This chapter deals with the Mathematical models involved in the SoC calculation, Charging pattern identification and maximum power demand created by the inclusion of EVs.

4.1 SoC Calculation

The SoC of the vehicle is calculated from the following equations:

$$SoC_{min} \leq SoC \leq SoC_{max} \quad (4.1)$$

where ‘ SoC_{min} ’ and ‘ SoC_{max} ’ are the minimum and maximum values of SoC and the values are 20 % and 80 % respectively.

$$SoC_y = SoC_{y-1} + P_{batt}(y) \times \partial y \times \eta c \quad (4.2)$$

Where ‘ SoC_y ’ is the state of charge in present hour and ‘ SoC_{y-1} ’ is the state of charge in the previous hour. ‘ $P_{battery}(y)$ ’ represents the power of the battery in the present hour. ‘ ∂y ’ is the time interval and ‘ ηc ’ is the charging efficiency which is considered to be 100 %.

$$SoC_y = SoC_{y-1} - P_{batt}(y) \times \partial y \times \eta d \quad (4.3)$$

Where ‘ SoC_y ’ is the state of charge in present hour and ‘ SoC_{y-1} ’ is the state of charge in the previous hour. ‘ $P_{battery}(y)$ ’ represents the power of the battery in the present hour. ‘ ∂y ’ is the time interval and ‘ ηd ’ is the discharging efficiency which is considered to be 100 %.

$$P_{batt}(y) = SoC_y \times E \quad (4.4)$$

$P_{battery}(y)$ ’ represents the output power of the battery in the present hour, ‘ SoC_y ’ is the state of charge in present hour and E is the energy of the battery.

$$InitialPower = Generation - Load \quad (4.5)$$

SoC limits:

SoC_{min} and SoC_{max} are the maximum and minimum SoC of the EV respectively. This constraint allows the SoC to vary between predefined minimum and maximum SoC.

4.2 Best Pattern for charging

The charging pattern is determined by comparing the Energy required to the Real Time Price and by identifying the minimum of it.

$$T_n = \sum_{t=1}^{24} [Ch_t \times [1||0|| - 1]] * Rtp_t \quad (4.6)$$

where ' T_n ' is the cost of ' n^{th} ' iteration, ' i ' ranges from 1 to 24, ' Ch_t ' is the energy delivered at time ' t ' and ' Rtp_t ' is the real time price at the ' t^{th} ' time interval.

where '[1 || 0 || - 1]' represents the priority score for charging the vehicles.

- '1' - representing Charging
- '0' - representing idle
- '-1' - representing discharging

$$\text{Charging Pattern} = \text{argmin}(T_n) \quad (4.7)$$

The function 'argmin' is used to find the minimum cost from all the ' n ' iterations.

4.3 Maximum Power required by EV

Maximum Power demand occurs when all the three vehicles loads are high and the time block of maximum demand is identified.

$$P_{t(total)} = P_{t(car)} + P_{t(truck)} + P_{t(bus)} \quad (4.8)$$

where ' $P_{t(car)}$ ', ' $P_{t(truck)}$ ', ' $P_{t(bus)}$ ' are the total power of car , truck and bus in kW respectively. ' $P_{t(total)}$ ' is the addition of the total power of the individual vehicles (i.e.) car , truck and bus.

$$P_{t(total)} = \text{argmax} \prod_{i=1}^{24} * P_{t(total)} \quad (4.9)$$

' $P_{t(total)}$ ' is the addition of the total power of the individual vehicles (i.e.) car , truck and bus. The function 'argmax' is used to find the value of power from the total power.

CHAPTER 5

RESULTS & DISCUSSION

In the proposed systems the inclusion of ‘EVs’ gives rise to an increase in power loss this and the pros of the charging scheme could be verified via the tables given below.

5.1 Tabulations

The datas given below are about the Most Economic Time interval to Charge the Vehicle, charging Patterns and Voltage magnitude graphs for different scenarios.

5.1.1 Economic Charging

Three cases are taken in this study which are namely: Case 1(00:00): Case 1 depicts that the vehicles has Started on a hourly basis i.e. the 1 hour block. Case 2(00:20) : Case 2 depicts that the vehicle has Started from the 20th min of an hour i.e. 20mins block. Case 3(00:40): Case 3 depicts that the vehicles has Started from the 40th minute of an hour i.e. 40th minute block

Table 5.1: Most Economic Time interval to Charge the Vehicle

VEHICLE TYPE	CASE	BEST PRICE	HOUR
CAR	Case 1 - (00:00)	- \$1.71	12:00
	Case 2 - (00:20)	- \$2.09	01:20
	Case 3 - (00:40)	- \$1.58	01:40
BUS	Case 1 - (00:00)	- \$0.47	12:00
	Case 2 - (00:20)	- \$1.25	20:20
	Case 3 - (00:40)	- \$0.69	11:40
TRUCK	Case 1 - (00:00)	- \$2.57	05:00
	Case 2 - (00:20)	- \$1.00	04:20
	Case 3 - (00:40)	- \$2.11	04:40

Using the above table we can identify the best economic time to charge and how much will it cost at the most economic time.

5.1.2 Maximum EV Load

In the provided table 5.2 the power loss is calculated in such a way that the time blocks having the maximum load is considered and then load flow analysis is performed on 2nd bus(best case)and 18th bus(worst case) of 33 bus system to find the variation of load with and without EV .

Table 5.2: Hour at which the EV Load is maximum

SCENARIO	HOURLY	20MINS	40 MINS
SCENARIO-1	13 th	6 th	13 th
SCENARIO-2	19 th	6 th	19 th

5.1.3 Power Loss

Table 5.3: Power Loss when EV is connected in a 33 bus system

Scenario	Base Case Power Loss	Case 1		Case 2		Case 3	
		Power Loss when EV in Bus 2 (kW)	Power Loss when EV in Bus 18 (kW)	Power Loss when EV in Bus 2 (kW)	Power Loss when EV in Bus 18 (kW)	Power Loss when EV in Bus 2 (kW)	Power Loss when EV in Bus 18 (kW)
Scenario 1	202.691	204.104	253.746	65.773	78.460	204.104	253.746
Scenario 2		189.833	236.912	178.967	222.468	189.833	236.912

5.2 Charging Patterns

These plots depict the charging and discharging pattern for the classified vehicles. 216 vehicles are taken into consideration for each vehicle type and the charging pattern is identified.

A strategic pattern is established to maintain the stability of the grid by comparing the vehicle capacity to the Real time price for each hour. When the price is low, the vehicle is put to charge and when the price is high, the vehicle is put to discharge in comparison with the peak demand. By this way the overall cost is drastically reduced , leading to profit for the user and at the same time the overall load in the grid decreases making the load demand cure flatter.

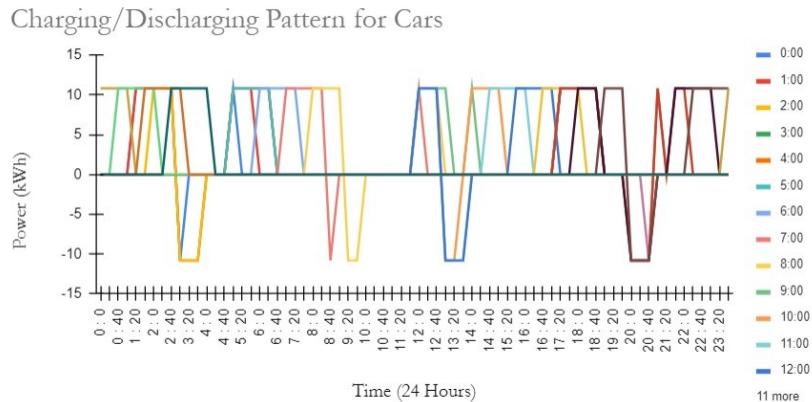


Figure 5.1: Charging/Discharging pattern for Cars

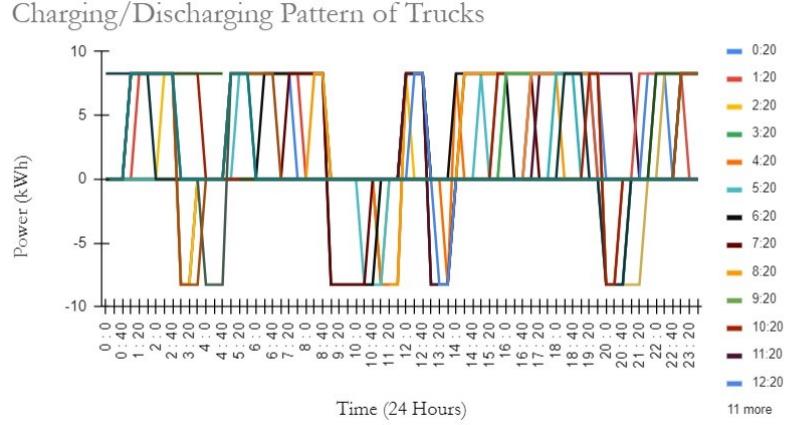


Figure 5.2: Charging/Discharging pattern for Trucks

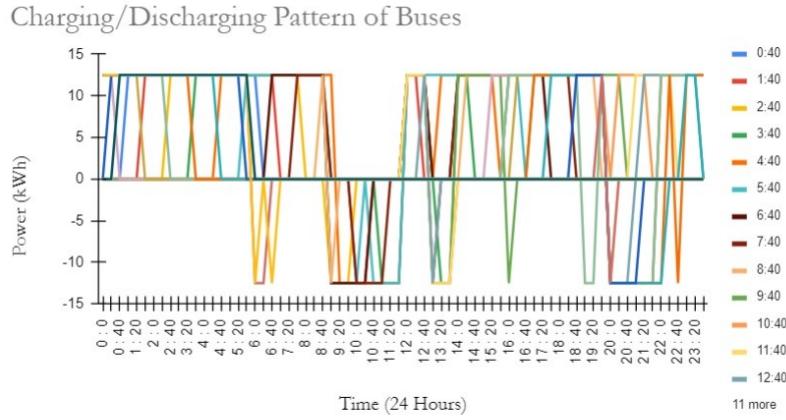


Figure 5.3: Charging/Discharging pattern for Buses

5.3 Voltage Magnitude Graphs for Different Scenarios

The voltage magnitude of the base case and each time block for all the cases are computed. Load flow analysis is done on Bus number 2 and Bus number 18 as these are considered to be the best case and worst case buses to calculate the voltage magnitude as referred from Koundinya et al. (2020). From the results it is evident that the loss difference in the grid without EVs connected to the grid(base case) and with EVs connected to the grid on bus number 2 are comparatively lesser. The same loss difference is higher when the EVs connected in 18th bus is high. Looking into voltage magnitude the value of voltage magnitude in base case and EVs connected to the grid on 2nd bus are equal. Whereas in 18th bus it is clear that voltage magnitude when compared to base case is high.

Here figures (5.4a), (5.4c) and (5.4e) shows the voltage magnitude plot when the EVs are connected to bus 2 and bus 18 during various cases.

and figures (5.4b), (5.4d) and (5.4f) shows the voltage magnitude plot when the EVs are connected to bus 2 and bus 18 during various cases.

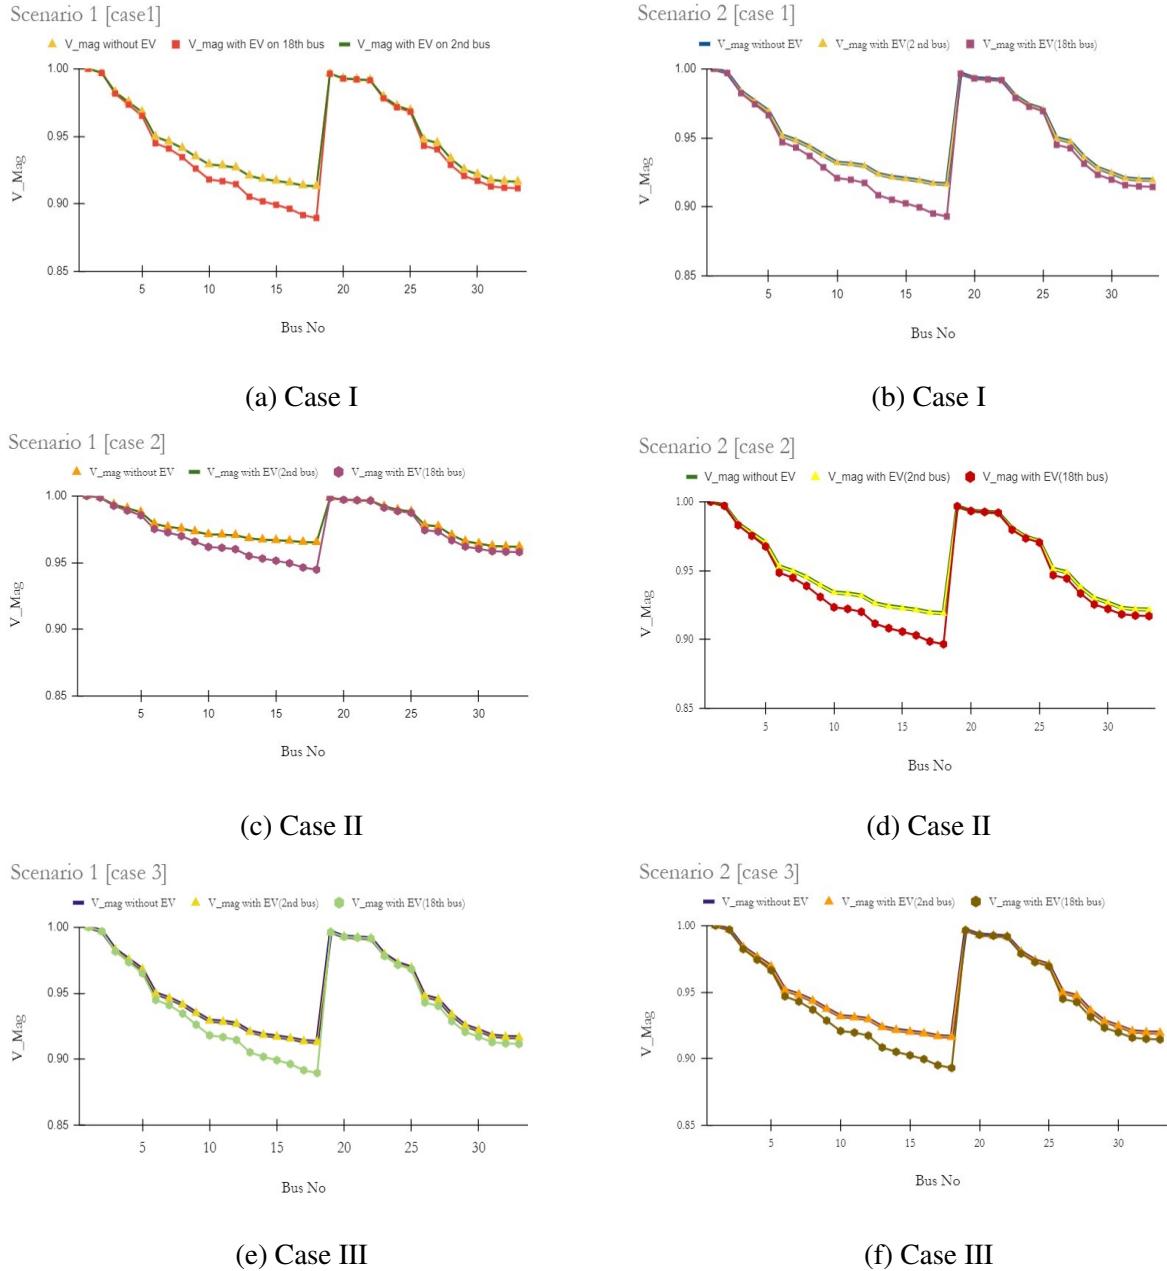


Figure 5.4: Voltage magnitude variation for different scenarios

CHAPTER 6

CONCLUSIONS AND FURTHER WORK

Therefore in this study we have classified the Electric Vehicles, determined their Travel Pattern, estimated their Charging/Discharging Pattern with the help of '*Rtp*', thereby finding the best time period to charge the vehicle with respect to cost for the considered data and have verified that, when the EVs are connected to a strong bus the losses are less and viceversa.

Signature of the Guide

Student Reg. No:123005085

Name of the Guide: Dr. Narayanan K (SAP/EEE/SEEE)

Name:Mithra Vinda Reddy K

CONCLUSIONS

Therefore in this study we have classified the Electric Vehicles, determined their Travel Pattern, estimated their Charging/Discharging Pattern with the help of '*Rtp*', thereby finding the best time period to charge the vehicle with respect to cost for the considered data and have verified that, when the EVs are connected to a strong bus the losses are less and viceversa.

Signature of the Guide

Student Reg. No:123005132

Name of the Guide: Dr. Narayanan K (SAP/EEE/SEEE)

Name:Sarvesh Babu R G

CONCLUSIONS

Therefore in this study we have classified the Electric Vehicles, determined their Travel Pattern, estimated their Charging/Discharging Pattern with the help of '*Rtp*', thereby finding the best time period to charge the vehicle with respect to cost for the considered data and have verified that, when the EVs are connected to a strong bus the losses are less and viceversa.

Signature of the Guide

Student Reg. No:123005140

Name of the Guide: Dr. Narayanan K (SAP/EEE/SEEE)

Name:Shwetha S

REFERENCES

- Chellappan, K., V. S. S. C. S. Murty, N. Krishnan, G. Sharma, and T. Senju (2022). Real power loss minimization considering multiple dgs and battery in distribution system. *Electric Power Components and Systems* 49(6-7), 563–572.
- Koundinya, N. S., S. Vignesh, K. Narayanan, G. Sharma, and T. Senju (2020, nov). Voltage stability analysis of distribution systems in the presence of electric vehicle charging stations with uncoordinated charging scheme. IEEE.
- Koundinya Sistla Pavan Venkat Sai, N., V. Shivkumar, N. Krishnan, G. Sharma, and T. Senju (2021). Voltage stability analysis of distribution systems in presence of electric vehicle charging stations with coordinated charging scheme. *International Transactions on Electrical Energy Systems* 31(12), e13248.
- Lee, Z. J., T. Li, and S. H. Low (2019, June). ACN-Data: Analysis and Applications of an Open EV Charging Dataset. In *Proceedings of the Tenth International Conference on Future Energy Systems*, e-Energy '19.
- Rao, R. S., K. Ravindra, K. Satish, and S. Narasimham (2012). Power loss minimization in distribution system using network reconfiguration in the presence of distributed generation. *IEEE transactions on power systems* 28(1), 317–325.
- Savier, J. and D. Das (2007). Impact of network reconfiguration on loss allocation of radial distribution systems. *IEEE Transactions on Power Delivery* 22(4), 2473–2480.
- Senthilkumar, P., S. Samidurai, V. Nedunchezian, N. Krishnan, G. Sharma, and T. Senju (2021). Profit maximization in hybrid microgrid system incorporating demand response and plug in ev. *International Transactions on Electrical Energy Systems* 31(12), e13260.
- Simolin, T., A. Rautiainen, P. Järventausta, K. Rauma, and C. Rehtanz (2022). Assessing the influence of electric vehicle charging profile modelling methods. *IET Generation, Transmission & Distribution*.
- Zhang, M., Q. Zhang, X. Yang, and Q. Sun (2022). Fast charging load guidance strategy based on adjustable charging service fee. *IET Generation, Transmission & Distribution* 16(16), 3297–3317.

APPENDIX A

IEEE 33 BUS SYSTEM

This test system and its data are referred from Rao et al. (2012). In base case (i.e) topology I, there are five open tie switches and branch numbers are 33, 34, 35, 36, and 37 respectively. In topology II, the five open tie switches and branch numbers are 7, 9, 14, 32, and 37 respectively. The single line diagram of the IEEE 33 bus system is shown in Fig. A.1. The total real and reactive power loads on the system are 3715 kW and 2300 kVAr respectively. The voltage magnitude of the system is $1\angle 0^\circ \text{ p.u.}$

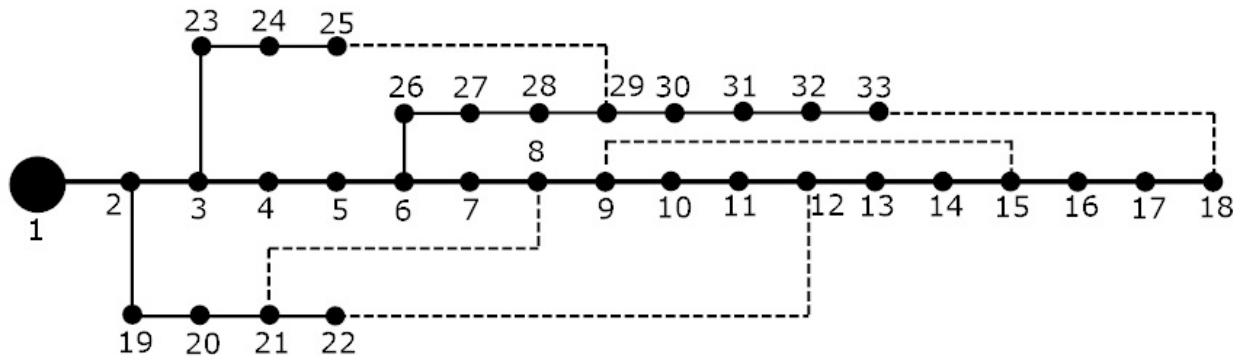


Figure A.1: Single line diagram of IEEE-33 Bus System

Table A.1: IEEE 33 Bus System Bus Data

Bus No.	Bus Code	Load Type	Load		Generator				Injected MVAr
			MW	MVAr	MW	MVAr	Qmin	Qmax	
1	1	-	0	0	0	0	0	0	0
2	0	Curtailable	0.100	0.060	0	0	0	0	0
3	0	Curtailable	0.090	0.040	0	0	0	0	0
4	0	Curtailable	0.120	0.080	0	0	0	0	0
5	0	Curtailable	0.060	0.030	0	0	0	0	0
6	0	Fixed	0.060	0.020	0	0	0	0	0
7	0	Fixed	0.200	0.100	0	0	0	0	0
8	0	Fixed	0.200	0.100	0	0	0	0	0
9	0	Fixed	0.060	0.020	0	0	0	0	0
10	0	Fixed	0.060	0.020	0	0	0	0	0
11	0	Fixed	0.045	0.020	0	0	0	0	0
12	0	Controllable	0.060	0.035	0	0	0	0	0
13	0	Controllable	0.060	0.035	0	0	0	0	0
14	0	Controllable	0.120	0.080	0	0	0	0	0
15	0	Controllable	0.060	0.010	0	0	0	0	0
16	0	Controllable	0.060	0.020	0	0	0	0	0
17	0	Controllable	0.060	0.020	0	0	0	0	0
18	0	Controllable	0.090	0.040	0	0	0	0	0
19	0	Controllable	0.090	0.040	0	0	0	0	0
20	0	Controllable	0.090	0.040	0	0	0	0	0
21	0	Controllable	0.090	0.040	0	0	0	0	0
22	0	Controllable	0.090	0.040	0	0	0	0	0
23	0	Controllable	0.090	0.050	0	0	0	0	0
24	0	Controllable	0.420	0.200	0	0	0	0	0
25	0	Controllable	0.420	0.200	0	0	0	0	0
26	0	Curtailable	0.060	0.025	0	0	0	0	0
27	0	Curtailable	0.060	0.025	0	0	0	0	0
28	0	Curtailable	0.060	0.020	0	0	0	0	0
29	0	Curtailable	0.120	0.070	0	0	0	0	0
30	0	Curtailable	0.200	0.600	0	0	0	0	0
31	0	Curtailable	0.150	0.070	0	0	0	0	0
32	0	Curtailable	0.210	0.100	0	0	0	0	0
33	0	Curtailable	0.060	0.040	0	0	0	0	0

Bus Code

1 - Slack Bus

0 - Load Bus

Table A.2: IEEE 33 Bus System Line Data

Line No.	From Bus	To Bus	R (p.u)	X (p.u)	B (p.u)	line code = 1 for lines > 1 or <1 for tr.tap	Failure Rate (f/yr)	Repair Time (h)
1	1	2	0.0922	0.0470	0	1	0.05	1.0
2	2	3	0.4930	0.2511	0	1	0.30	1.0
3	3	4	0.3660	0.1864	0	1	0.22	1.0
4	4	5	0.3811	0.1941	0	1	0.23	1.0
5	5	6	0.8190	0.7070	0	1	0.51	1.0
6	6	7	0.1872	0.6188	0	1	0.11	1.0
7	7	8	0.7115	0.2351	0	1	0.44	1.0
8	8	9	1.0300	0.7400	0	1	0.64	1.0
9	9	10	1.0440	0.7400	0	1	0.65	1.0
10	10	11	0.1967	0.0651	0	1	0.12	1.0
11	11	12	0.3744	0.1238	0	1	0.23	1.0
12	12	13	1.4680	1.1550	0	1	0.91	1.0
13	13	14	0.5416	0.7129	0	1	0.33	1.0
14	14	15	0.5909	0.5260	0	1	0.36	1.0
15	15	16	0.7463	0.5450	0	1	0.46	1.0
16	16	17	1.2890	1.7210	0	1	0.80	1.0
17	17	18	0.7320	0.5740	0	1	0.45	1.0
18	2	19	0.1640	0.1565	0	1	0.10	0.5
19	19	20	1.5042	1.3554	0	1	0.93	0.5
20	20	21	0.4095	0.4784	0	1	0.25	0.5
21	21	22	0.7089	0.9373	0	1	0.44	0.5
22	3	23	0.4512	0.3083	0	1	0.28	0.5
23	23	24	0.8990	0.7011	0	1	0.56	0.5
24	24	25	0.8960	0.7011	0	1	0.55	0.5
25	6	26	0.2030	0.1034	0	1	0.12	0.5
26	26	27	0.2842	0.1447	0	1	0.17	0.5
27	27	28	1.0590	0.9337	0	1	0.66	0.5
28	28	29	0.8043	0.7006	0	1	0.50	0.5
29	29	30	0.5075	0.2585	0	1	0.31	0.5
30	30	31	0.9744	0.9630	0	1	0.60	0.5
31	31	32	0.3105	0.3619	0	1	0.19	0.5
32	32	33	0.6411	0.5302	0	1	0.21	0.5
33*	8	21	2.0000	2.0000	0	1	1.24	0.5
34*	9	15	2.0000	2.0000	0	1	1.24	0.5
35*	12	22	2.0000	2.0000	0	1	1.24	0.5
36*	18	33	0.5000	0.5000	0	1	0.31	0.5
37*	25	29	0.5000	0.5000	0	1	0.31	0.5

*- Tie Line

APPENDIX B

IEEE 69 BUS SYSTEM

This test system and its data are referred from Savier and Das (2007). In base case (i.e) topology I, there are five open tie switches and branch numbers are 68, 69, 70, 71, and 72 respectively. In topology II, the five open tie switches and branch numbers are 13, 18, 56, 61, and 69 respectively. The single line diagram of the IEEE 69 bus system is shown in Fig. B.1. The total real and reactive power loads on the system are 3802.19 kW and 2694.06 kVAr respectively. The voltage magnitude of the system is $1\angle 0^\circ \text{ p.u.}$

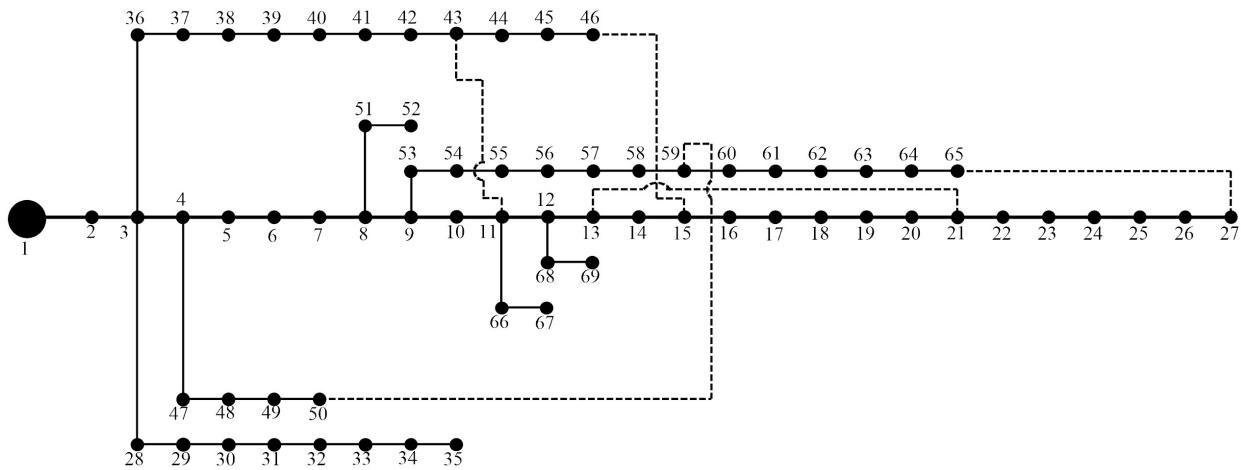


Figure B.1: Single line diagram of IEEE-69 Bus System

Table B.1: IEEE 69 Bus System Bus Data

Bus No.	Bus Code	Load Type	Load		Generator				Injected MVAr
			MW	MVAr	MW	MVAr	Qmin	Qmax	
1	1	-	0	0	0	0	0	0	0
2	0	Curtailable	0	0	0	0	0	0	0
3	0	Curtailable	0	0	0	0	0	0	0
4	0	Curtailable	0	0	0	0	0	0	0
5	0	Curtailable	0	0	0	0	0	0	0
6	0	Fixed	0.0026	0.0022	0	0	0	0	0
7	0	Controllable	0.0404	0.0030	0	0	0	0	0
8	0	Fixed	0.0750	0.0054	0	0	0	0	0
9	0	Fixed	0.0300	0.0022	0	0	0	0	0
10	0	Fixed	0.0280	0.0019	0	0	0	0	0
11	0	Fixed	0.1450	0.1040	0	0	0	0	0
12	0	Fixed	0.1450	0.1040	0	0	0	0	0
13	0	Controllable	0.0080	0.0055	0	0	0	0	0
14	0	Controllable	0.0080	0.0055	0	0	0	0	0
15	0	Controllable	0	0	0	0	0	0	0
16	0	Controllable	0.0455	0.0030	0	0	0	0	0
17	0	Controllable	0.0600	0.0350	0	0	0	0	0
18	0	Controllable	0.0600	0.0350	0	0	0	0	0
19	0	Controllable	0	0	0	0	0	0	0
20	0	Controllable	0.0010	0.0006	0	0	0	0	0
21	0	Controllable	0.1140	0.0810	0	0	0	0	0
22	0	Controllable	0.0530	0.0035	0	0	0	0	0
23	0	Controllable	0	0	0	0	0	0	0
24	0	Controllable	0.0280	0.020	0	0	0	0	0
25	0	Controllable	0	0	0	0	0	0	0
26	0	Controllable	0.0140	0.0100	0	0	0	0	0
27	0	Curtailable	0.0140	0.0100	0	0	0	0	0
28	0	Curtailable	0.0260	0.0186	0	0	0	0	0
29	0	Curtailable	0.0260	0.0186	0	0	0	0	0
30	0	Curtailable	0	0	0	0	0	0	0
31	0	Curtailable	0	0	0	0	0	0	0
32	0	Curtailable	0	0	0	0	0	0	0
33	0	Curtailable	0.0140	0.0100	0	0	0	0	0
34	0	Curtailable	0.0195	0.0140	0	0	0	0	0
35	0	Controllable	0.0060	0.0040	0	0	0	0	0
36	0	Controllable	0.0260	0.01855	0	0	0	0	0
37	0	Controllable	0.026	0.01855	0	0	0	0	0
38	0	Controllable	0	0	0	0	0	0	0
39	0	Controllable	0.0240	0.0170	0	0	0	0	0
40	0	Controllable	0.0240	0.0170	0	0	0	0	0
41	0	Controllable	0.0012	0.0100	0	0	0	0	0
42	0	Controllable	0	0	0	0	0	0	0

43	0	Controllable	0.0060	0.0043	0	0	0	0	0
44	0	Controllable	0	0	0	0	0	0	0
45	0	Controllable	0.03922	0.05263	0	0	0	0	0
46	0	Controllable	0.03922	0.0263	0	0	0	0	0
47	0	Controllable	0	0	0	0	0	0	0
48	0	Controllable	0.0790	0.0564	0	0	0	0	0
49	0	Curtailable	0.3847	0.2745	0	0	0	0	0
50	0	Controllable	0.3847	0.2745	0	0	0	0	0
51	0	Curtailable	0.0405	0.0283	0	0	0	0	0
52	0	Curtailable	0.0036	0.0027	0	0	0	0	0
53	0	Curtailable	0.00435	0.0035	0	0	0	0	0
54	0	Curtailable	0.0264	0.0190	0	0	0	0	0
55	0	Curtailable	0.0240	0.0172	0	0	0	0	0
56	0	Curtailable	0	0	0	0	0	0	0
57	0	Fixed	0	0	0	0	0	0	0
58	0	Fixed	0	0	0	0	0	0	0
59	0	Fixed	0.1000	0.0720	0	0	0	0	0
60	0	Fixed	0	0	0	0	0	0	0
61	0	Controllable	1.2440	0.8880	0	0	0	0	0
62	0	Fixed	0.0320	0.0230	0	0	0	0	0
63	0	Fixed	0	0	0	0	0	0	0
64	0	Fixed	0.2270	0.1620	0	0	0	0	0
65	0	Fixed	0.0590	0.0420	0	0	0	0	0
66	0	Fixed	0.0180	0.0130	0	0	0	0	0
67	0	Fixed	0.0180	0.0130	0	0	0	0	0
68	0	Fixed	0.0280	0.0200	0	0	0	0	0
69	0	Controllable	0.02800	0.0200	0	0	0	0	0

Bus Code

1 - Slack Bus

0 - Load Bus

Table B.2: IEEE 69 Bus System Line Data

Line No.	From Bus	To Bus	R (p.u)	X (p.u)	B (p.u)	line code = 1 for lines > 1 or <1 for tr.tap	Failure Rate (f/yr)	Repair Time (h)
1	1	2	0.0005	0.0012	0	1	0.0003	0.5
2	2	3	0.0005	0.0012	0	1	0.0003	0.5
3	3	4	0.0015	0.0036	0	1	0.0009	0.5
4	4	5	0.0251	0.0294	0	1	0.0156	0.5
5	5	6	0.3660	0.1864	0	1	0.2269	0.5
6	6	7	0.3811	0.1941	0	1	0.2363	0.5

7	7	8	0.0922	0.0470	0	1	0.0572	0.5
8	8	9	0.0493	0.0251	0	1	0.0306	0.5
9	9	10	0.8190	0.2707	0	1	0.5078	0.5
10	10	11	0.1872	0.0619	0	1	0.1161	0.5
11	11	12	0.7114	0.2351	0	1	0.4411	0.5
12	12	13	1.0300	0.3400	0	1	0.6386	0.5
13	13	14	1.0440	0.3450	0	1	0.6473	0.5
14	14	15	1.0580	0.3496	0	1	0.6560	0.5
15	15	16	0.1966	0.0650	0	1	0.1219	0.5
16	16	17	0.3744	0.1238	0	1	0.2321	0.5
17	17	18	0.0047	0.0016	0	1	0.0029	0.5
18	18	19	0.3276	0.1083	0	1	0.2031	0.5
19	19	20	0.2106	0.0690	0	1	0.1306	0.5
20	20	21	0.3416	0.1129	0	1	0.2118	0.5
21	21	22	0.0140	0.0046	0	1	0.0087	0.5
22	22	23	0.1591	0.0526	0	1	0.0986	0.5
23	23	24	0.3463	0.1145	0	1	0.2147	0.5
24	24	25	0.7488	0.2745	0	1	0.4643	0.5
25	25	26	0.3089	0.1021	0	1	0.1915	0.5
26	26	27	0.1732	0.0572	0	1	0.1074	0.5
27	3	28	0.0044	0.0108	0	1	0.0027	1.0
28	28	29	0.0640	0.1565	0	1	0.0397	1.0
29	29	30	0.3978	0.1315	0	1	0.2466	1.0
30	30	31	0.0702	0.0232	0	1	0.0435	1.0
31	31	32	0.3510	0.1160	0	1	0.2176	1.0
32	32	33	0.8390	0.2816	0	1	0.5202	1.0
33	33	34	1.7080	0.5646	0	1	1.0590	1.0
34	34	35	1.4740	0.4873	0	1	0.9139	1.0
35	3	36	0.0044	0.0108	0	1	0.0270	1.0
36	36	37	0.0640	0.1565	0	1	0.0397	1.0
37	37	38	0.1053	0.1230	0	1	0.0653	1.0
38	38	39	0.0304	0.0355	0	1	0.0188	1.0
39	39	40	0.0018	0.0021	0	1	0.0011	1.0
40	40	41	0.7283	0.8509	0	1	0.4515	1.0
41	41	42	0.3100	0.3623	0	1	0.1922	1.0
42	42	43	0.0410	0.0478	0	1	0.0254	1.0
43	43	44	0.0092	0.0116	0	1	0.0057	1.0
44	44	45	0.1089	0.1373	0	1	0.0675	1.0
45	45	46	0.0009	0.0012	0	1	0.0006	1.0
46	4	47	0.0034	0.0084	0	1	0.0021	1.0
47	47	48	0.0851	0.2083	0	1	0.0528	1.0
48	48	49	0.2898	0.7091	0	1	0.1797	1.0
49	49	50	0.0822	0.2011	0	1	0.5100	1.0
50	8	51	0.0928	0.0473	0	1	0.0575	1.0
51	51	52	0.3319	0.1114	0	1	0.2058	1.0
52	9	53	0.1740	0.0886	0	1	0.1079	1.0

53	53	54	0.2030	0.1034	0	1	0.1259	1.0
54	54	55	0.2842	0.1447	0	1	0.1762	1.0
55	55	56	0.2813	0.1433	0	1	0.1744	1.0
56	56	57	1.5900	0.5337	0	1	0.9858	1.0
57	57	58	0.7837	0.263	0	1	0.4859	1.0
58	58	59	0.3042	0.1006	0	1	0.1886	1.0
59	59	60	0.3861	0.1172	0	1	0.2394	1.0
60	60	61	0.5075	0.2585	0	1	0.3146	1.0
61	61	62	0.0974	0.0496	0	1	0.6040	1.0
62	62	63	0.1450	0.0738	0	1	0.0899	1.0
63	63	64	0.7105	0.3619	0	1	0.4405	1.0
64	64	65	1.0410	0.5302	0	1	0.6454	1.0
65	11	66	0.2012	0.0611	0	1	0.1247	1.0
66	66	67	0.0047	0.0014	0	1	0.0029	1.0
67	12	68	0.7394	0.2444	0	1	0.4584	1.0
68	68	69	0.0047	0.0016	0	1	0.0029	1.0
69*	11	43	0.5000	0.5000	0	1	0.3100	1.0
70*	13	21	0.5000	0.5000	0	1	0.3100	1.0
71*	15	46	1.0000	1.0000	0	1	0.6200	1.0
72*	50	59	2.0000	2.0000	0	1	1.2100	1.0
73*	27	65	1.0000	1.0000	0	1	0.6200	1.0

*- Tie Line