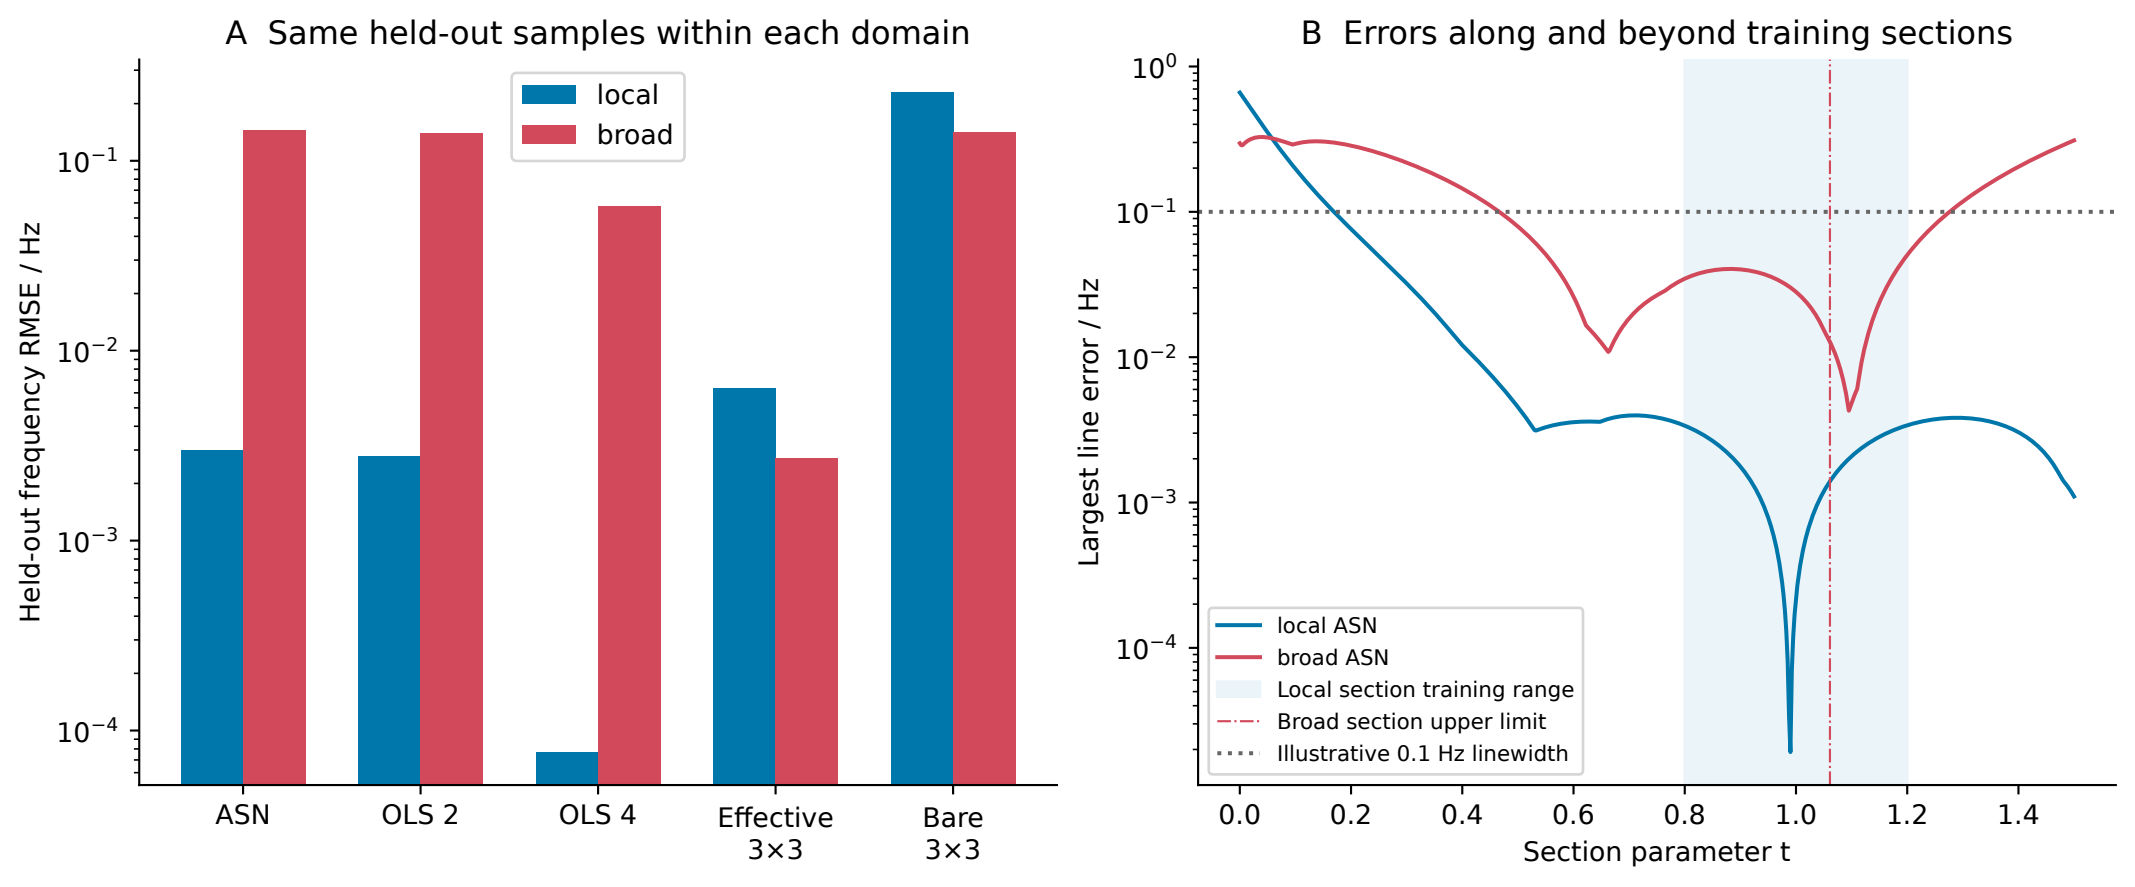
A Same held-out samples within each domain
local
broad
Held-out frequency RMSE / Hz
10^{-1}
10^{-2}
10^{-3}
10^{-4}
ASN
OLS 2
OLS 4
Effective 3×3
Bare 3×3
B Errors along and beyond training sections
Largest line error / Hz
10^{0}
10^{-1}
10^{-2}
10^{-3}
10^{-4}
local ASN
broad ASN
Local section training range
Broad section upper limit
Illustrative 0.1 Hz linewidth
0.0
0.2
0.4
0.6
0.8
1.0
1.2
1.4
Section parameter t