

INDUSTRIAL PRODUCT DATASHEET

reComputer Super J3011 - Advanced Edge AI Computer with NVIDIA® Jetson™ Orin™ Nano 8GB in Super Mode

reComputer Super J3011 edge AI computer powered by NVIDIA Jetson Orin Nano 8GB in Super Mode delivers up to 67 TOPS in MAXN Super Mode, ready for deployment with JetPack 6.2 and 128GB NVMe SSD, and supports multi-camer...

SKU	UPDATED	PRICE
114110312	2026-09-15 11:06:49	\$769.00(Excl. VAT)



Overview



The reComputer Super J3011 is an advanced edge AI computer powered by NVIDIA Jetson Orin Nano 8GB in Super Mode, delivering up to 67 TOPS in MAXN Super Mode with configurable 10W–25W power and operating reliably from -20°C to 65°C. It arrives ready for deployment with JetPack 6.2 and a 128GB NVMe SSD, and features dual GbE RJ45, LTE, 4x USB 3.2, HDMI 2.1, CAN, M.2 Key E/M, Mini-PCIe, and 4x MIPI-CSI to support AI frameworks such as NVIDIA Isaac, Hugging Face, and ROS2/1 for multi-camera vision AI and edge AI development.

Key Features

Price Increase Announcement


Date: February 28, 2026

Due to surging demand for modules and SSDs, prices for reComputer and reServer Jetson devices will increase by approximately \$50 to \$400 in the coming weeks. Please confirm your requirements and place your orders promptly to secure your stock.

- **Super Boost AI Performance:** Delivers up to 67 TOPS in MAXN Super Mode, ideal for demanding applications like vision AI, robotics, and generative AI.
- **Energy-Efficient Operation:** Configurable power modes from 10W to 25W allow for optimized performance and energy consumption.
- **Robust Thermal Design:** Operates reliably in temperatures from -20°C to 65°C.
- **Rich interfaces:** Features 2x RJ45, SIM card, 4x USB 3.2, HDMI 2.1 and CAN. Also including M.2 Key E/M, Mini-PCIe, 4x Mipi-CSI for connectivity and cameras.
- **Ready for Deployment:** Pre-installed with JetPack 6.2 ([Supports JP7.2](#)) and a 128GB NVMe SSD, supporting AI frameworks like NVIDIA Isaac, Hugging Face, and ROS2/1, enabling rapid development of various AI applications.
- Memory Bandwidth Upgrade
- Higher Throughput
- Improved higher frame rate processing
- Enhanced Power Management
- Reduced Inference Latency

Built for developers, the reComputer Super J3011 is an enhanced upgrade over the [reComputer J3011](#). It takes edge AI development further with key enhancements: dual GbE (RJ45) ports, LTE, 4x Mipi-CSI for Camera, and full support for MAXN Mode.



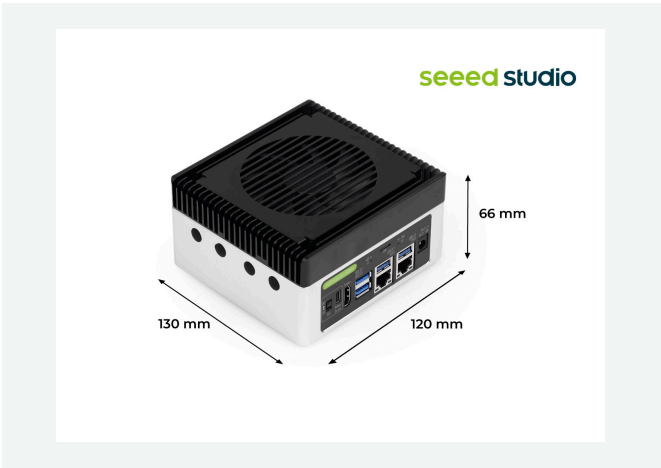

Specification

	reComputer Super J3010	reComputer Super J3011
Applications Processor(AP)	NVIDIA Orin™ Nano 4GB	NVIDIA Orin™ Nano 8GB
AI Performance	Orin Nano 4GB – 34 TOPS(MAXN_SUPER)	Orin Nano 8GB – 67 TOPS(MAXN_SUPER)
GPU	512-core NVIDIA Ampere architecture GPU with 16 Tensor Cores	1024-core NVIDIA Ampere architecture GPU with 32 Tensor Cores
GPU Max Frequency	1020 MHz (MAXN_SUPER)	
CPU	6-core Arm® Cortex®-A78AE	
CPU Max Frequency	1.7 GHz (MAXN_SUPER)	
Memory	4GB 64-bit wide LPDDR5 DRAM(up to 34GB/s; 51 GB/s MAXN_SUPER)	8GB 128-bit wide LPDDR5 DRAM(up to 68GB/s; 102 GB/s MAXN_SUPER)
Power	7W - 10W - 25W	7W - 15W - 25W
Video Encode	1080p30 supported by 1-2 CPU cores	
Video Decode	1x 4K60 (H.265) 2x 4K30 (H.265) 5x 1080p60 (H.265) 11x 1080p30 (H.265)	
CSI camera	Up to 4 cameras (8 via virtual channels***) 8 lanes MIPI CSI-2 D-PHY 2.1 (up to 20Gbps)	

Mechanical	69.6mm x 45mm 260-pin SO-DIMM connector
------------	--


Carrier Board		
Storage	1x M.2 KEY M PCIe (M.2 NVMe 2280 SSD 128G included)	
Networking	M.2 KEY E	1x M.2 Key E for WiFi/Bluetooth module
	Mini PCIe	1x mini-PCIe for LTE 4G module
	Ethernet	2x RJ45 Gigabit Ethernet
I/O	USB	4x USB 3.2 Type-A (5Gbps); 1x USB 2.0 Type-C (Device Mode/Debug);
	Camera	4x mipi CSI(2-lane 15-Pin)
	CAN	1 x CAN(4-Pin Header)
	Display	1x HDMI 2.1
	Fan	1x 4-Pin 1.25mm Fan Connector (5V PWM) 1x 4-Pin 2.54mm Fan Connector (12V PWM)
	Extension Port	1x 40-Pin extension header 1x 12-Pin control and UART header
	RTC	1x RTC 2-pin 1x RTC Socket
	LED	2x LED(PWR and ACT)
	Button	1x PWR 1x RESET
	Switch	1x REC
	Antenna hole	4x Antenna Hole
Power	12-19V 5525 Barrel DC Jack	
Jetpack Version	Jetpack 6.2	
Mechanical	Dimensions (W x D x H)	130mm x 120mm x 66mm
	Weight	1110g
	Installation	Desk, Wall-mounting
Operating Temperature	-20°C~65°C	
Warranty	2 Years	
Certification	RoHS,REACH,CE,FCC,UKCA, KC	

Hardware Overview




- | | | |
|------------------|---------------------|-------------------------|
| ① DIP Switch | ④ 4x Type A USB 3.2 | ⑦ SIM Card Slot |
| ② Type C USB 2.0 | ⑤ 2x Pinhole Button | ⑧ 2x RJ45 Ethernet Port |
| ③ HDMI 2.1 | ⑥ 2x LED Indicator | ⑨ Barrel DC Jack 5525 |

Top View

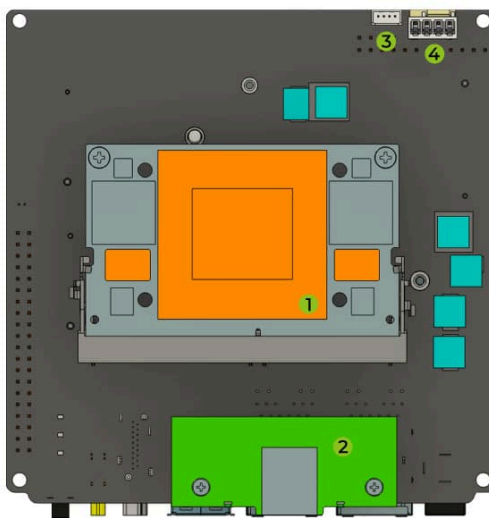

- | |
|---------------------------------|
| ① Nvidia Jetson Orin Module |
| ② Extension Board |
| ③ 4-Pin Fan Connector (5V PWM) |
| ④ 4-Pin Fan Connector (12V PWM) |

Bottom View

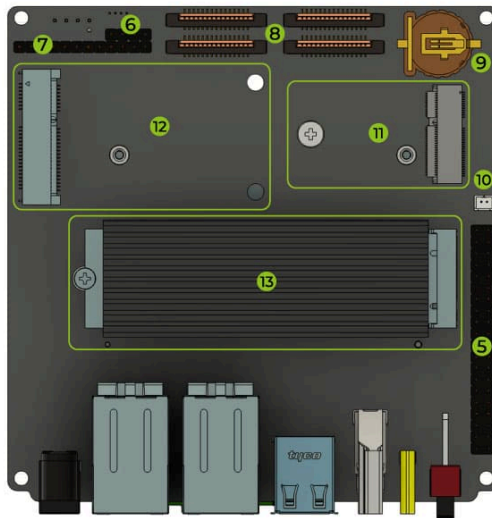

- 5 40-Pin Extension Header
- 6 CAN Header
- 7 12-Pin control and UART header
- 8 4x 15-Pin MIPI CSI
- 9 RTC Battery Socket(CR1220)
- 10 RTC 2-Pin Header(3V)
- 11 M.2 Key E Slot
- 12 Mini PCIe Slot
- 13 M.2 Key M Slot(with SSD)

Applications

- **From Zero to Real Projects:** Master Linux basics on the Jetson environment to build an end-to-end AI NVR/AMR.
- **Hardware Integration:** Tailored for reComputer Jetson devices for a seamless, out-of-the-box experience.
- **Coverage of Cutting-Edge Domains:** Deep dive into CV, GenAI, ROS, agentic AI, and TensorRT optimization.
- **Toolchain Mastery:** Hands-on tutorials with NVIDIA JetPack SDK, CUDA, DeepStream, PyTorch, and TensorFlow.
- **reComputer AI Lab:** To improve the developer experience, Seeed offers reComputer AI Lab — a platform that helps you deploy AI applications with one-click tools and ready-to-use resources. It includes optimized edge AI model demos for CV, LLM, VLM, interactive tutorials, deployment tools, containerized applications, and community projects to speed up development on Jetson.
- **Seeed Jetson Develop Tool:** Seeed Jetson Develop Tool is a desktop client for all developers who are going to use reComputer Jetson device for the very first time. It brings the common bring-up and development workflow into one GUI: firmware flashing, first-boot initialization, device diagnostics, remote development, app deployment, skill-based automation, OTA updates, and community resources. All we provide here is to help you to get started with Seeed reComputer Jetson hardware much more easily and seamlessly.
- **Jetson-example:** Ready to build a solution for the real world? Jetson-example offers one-line deployable projects compatible with generative AI large models, including LeRobot, Ollama, Qwen, etc; with computer vision such as Ultralytics YOLO26. We have configured all environment setups for you to provide a single command deployment of projects, easy to try out/verify if the trending model performance is suitable for your GPU needs and application scenarios.
- **Multi-Camera Vision AI:** Powered by the reComputer Super AI box, the system supports up to 4x USB cameras or MIPI-CSI cameras to create a 360° panoramic vision network. Leveraging the advanced spatial foundation model, it processes multiple real-time video streams simultaneously to deliver accurate depth perception, comprehensive environmental awareness, and real-time blind-spot elimination for safer autonomous operation.

Part List

Jetson Orin™ Nano 8GB module	x 1
Seeed Carrier Board (reComputer Super J401)	x 1
128GB NVMe SSD	x 1
Aluminum Case and Heatsink with Fan	x 1
USB Cable; Type A to Type C	x 1
User Manual	x 1

Compliance & Logistics



HSCODE	8471504090
USHSCODE	8517180050
UPC	
EUHSCODE	8471707000
COO	CHINA

FCC Requirement

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

15.21

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy.

If not installed and used in accordance with the instructions, it may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Resource Links

- <https://www.seeedstudio.com/reComputer-Super-J3011-p-6444.html>
- [User Manual&Datasheet](#)
- [Temperature Test Report](#)
- [Schematic](#)
- [3D File](#)
- [Mechanical Document-reComputer Super](#)
- [Mechanical Document-reComputer Super PCBA](#)
- [Seeed Nvidia Jetson Success Cases](#)
- [Seeed Jetson One Pager](#)
- [Flash BSP for Jetson](#)

Seeed Technology Co.,Ltd.
9F, Building G3, International E City,
Zhongshanyuan Road, Nanshan, Shenzhen, China

Tel: +86 0755-80695676
Web: www.seeed.cc
Shop: www.seeedstudio.com