

INDUSTRIAL PRODUCT DATASHEET

reComputer J202 - Carrier Board for Jetson Xavier NX/Nano/TX2 NX

reComputer J202 carrier board for Jetson modules, ideal for AI video analytics, machine vision, and AMR.

SKU

102991695

UPDATED

2026-07-31 11:10:50

PRICE

\$139.00(Excl. VAT)



Power adapter included

Overview





Power adapter included

The reComputer J202 is a carrier board designed for NVIDIA Jetson Xavier NX, Nano, and TX2 NX modules. It enables deployment in AI video analytics, machine vision, and autonomous mobile robot applications.

Key Features

Product Gallery

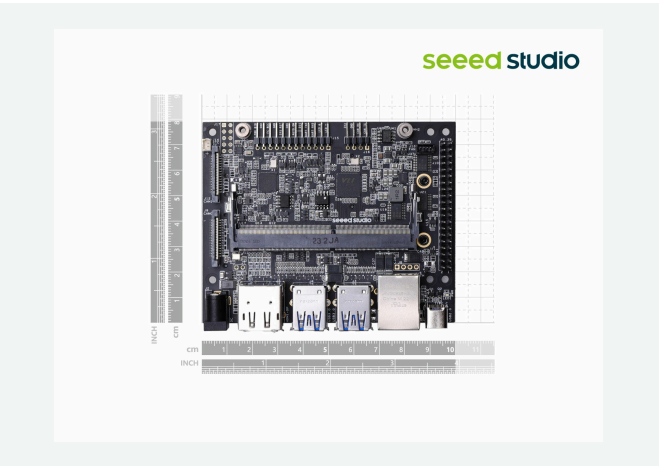
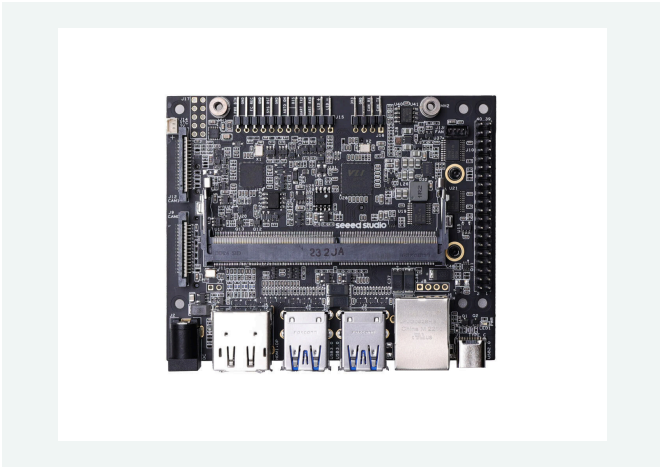


Specification

Carrier Board	
Storage	1x M.2 Key M

Networking	Ethernet	1x RJ-45 Gigabit Ethernet (10/100/1000M)
	M.2 KEY E	1x M.2 Key E for WiFi/Bluetooth module
I/O	USB	4x USB 3.1 Type-A (10Gbps for Xavier NX, 5Gbps for Nano), 1x USB2.0 Type-C (Device Mode)
	Camera	2x CSI
	Display	1x HDMI 2.1, 1x DP
	Fan	1x Fan Connector
	CAN	1x CAN
	Multifunctional Port	1x 40-Pin Expansion header 1x 12-Pin Control and UART header
	RTC	1x RTC 2-pin
Power		DC 12V/5A
Mechanical	Dimensions (W x D)	100mm x 80mm
	Installation	Desk, wall-mounting
Operating Temperature		0°C~60°C

Hardware Overview

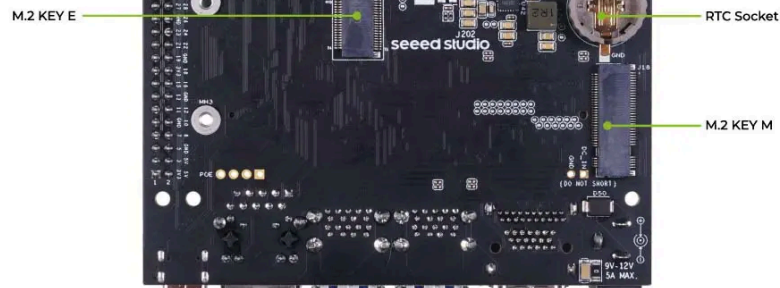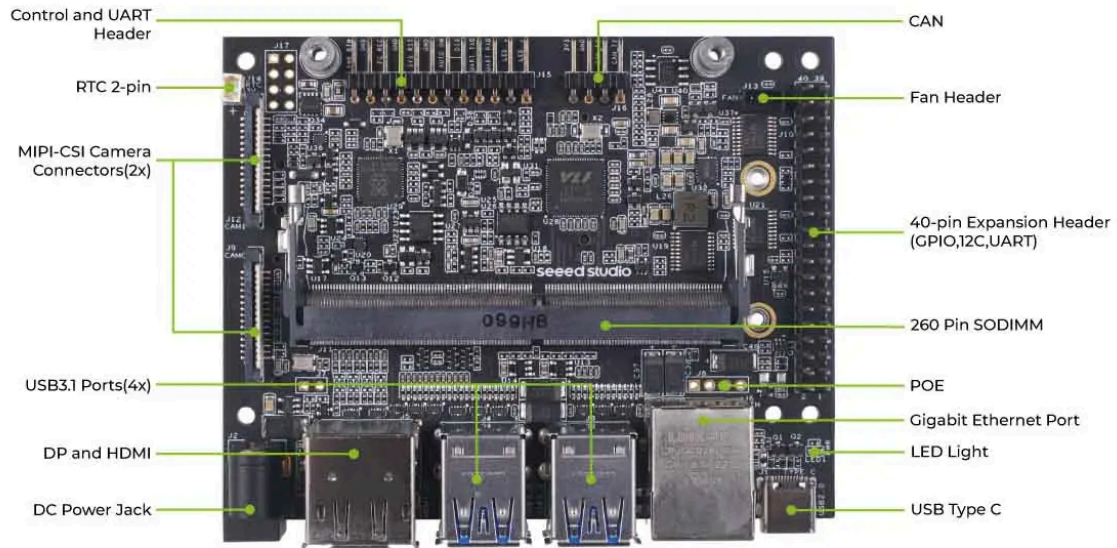

Applications

- **AI Video Analytics**
- **Machine Vision**
- **Autonomous Mobile Robot (AMR)**

Part List

reComputer J202 Carrier Board	x1
12V/5A Power adapter 5.5mm/2.1mm (power cord not provided)	x1

Compliance & Logistics



HSCODE	8543909000
USHSCODE	8517180050
UPC	
EUHSCODE	8543709099
COO	CHINA

FCC Requirement

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

15.21

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy.

If not installed and used in accordance with the instructions, it may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Resource Links

- <https://www.seeedstudio.com/reComputer-J202-Carrier-Board-for-Jetson-Xavier-NX-p-5397.html>
- [reComputer J202 datasheet.pdf](#)
- [reComputer J202 PCBA 2D&3D.zip](#)

Seeed Technology Co.,Ltd.

9F, Building G3, International E City,
Zhongshanyuan Road, Nanshan, Shenzhen, China

Tel: +86 0755-80695676

Web: www.seeed.cc

Shop: www.seeedstudio.com