

# RK3588 SOM

## *Main Functions Introduction*

- 1) PMIC: 1xRK806-1+DiscretePower
- 2) RAM: 2xLPDDR4/4X\_32bit or 2xLPDDR5\_32bit
- 3) ROM: eMMC5.1(Default) or SPI Flash
- 4) Storage: 1xSDMMC3.0 Card
- 5) Support: 1 x TYPEC3.0(With DP TX)+1 x USB3.0 HOST+ 1 x USB20 HOST (TP)
- 6) Support: 3 x SATA3.0 Connector (7pin) or SATA PM
- 7) Support: 4Lane PCIe3.0 Connector (Dual Mode)
- 8) Support: 2 x 4Lanes MIPI DPHY RX Camera
- 9) Support: HDMI2.1 TX
- 10) Support: IEEE 802.11a/b/g/n/ac WLAN with Bluetooth 5

# I2C map with FET3588-C

| Name        | Pin  | Voltage | Address                | Notes                       |
|-------------|------|---------|------------------------|-----------------------------|
| I2C2_SCL_M0 | T28  | 3.3V    | 0100011R/W - 0x23      | 0100010R/W - 0x22           |
| I2C2_SDA_M0 | T31  |         | GPIO expander          | TypeC port 0                |
| I2C5_SCL_M2 | AL27 | 3.3V    | 0100010R/W - 0x22      | PCF8563:0x51                |
| I2C5_SDA_M2 | AM27 |         | TypeC Port 1           | RX8010:0x32                 |
| I2C7_SCL_M0 | F25  | 1.8V    | 0011010R/W - 0x1A      | Sensor IIC Address:0x20     |
| I2C7_SDA_M0 | F27  |         | Audio Codec NAU88C22YG | Driver IIC Address:0x18     |
| I2C3_SCL_M0 | G27  | 1.8V    | 01111100r/w - 0x3C     | MIPI CSI0 Cam3 only on Mini |
| I2C3_SDA_M0 | G29  |         | MIPI CSI1 Cam4         | Sensor IIC Address:0x20     |
| I2C4_SCL_M1 | AB30 | 1.8V    | 01111100r/w - 0x3C     | Driver IIC Address:0x18     |
| I2C4_SDA_M1 | AB31 |         | MIPI CSI1 Cam5         | MIPI DPHY0 Cam1             |
|             |      |         |                        | Sensor IIC Address:0x20     |
|             |      |         |                        | Driver IIC Address:0x18     |
|             |      |         |                        | MIPI DPHY1 Cam2             |

## Note

The power suffix S0 or S3 means

S3: Keep power On during sleeping

S0:Power off during sleeping

## NOTE

Component parameter description

1. DNP stands for component not mounted temporarily


2. If Value or option is DNP, which means the area is reserved without being mounted

## Description


## Note

## Option


|   |                         |             |           |                              |                 |   |
|---|-------------------------|-------------|-----------|------------------------------|-----------------|---|
|   | 1                       | 2           | 3         | 4                            | 5               | 6 |
| A | <i>Revision History</i> |             |           |                              |                 |   |
|   | <i>Version</i>          | <i>Date</i> | <i>By</i> | <i>Change Dscription</i>     | <i>Approved</i> |   |
|   | V1.0                    | 2024-04-10  | Andrew Ng | Revision preliminary version |                 |   |
|   |                         |             |           |                              |                 |   |
| B |                         |             |           |                              |                 |   |
|   |                         |             |           |                              |                 |   |
| C |                         |             |           |                              |                 |   |
| D |                         |             |           |                              |                 |   |
|   | 1                       | 2           | 3         | 4                            | 5               | 6 |

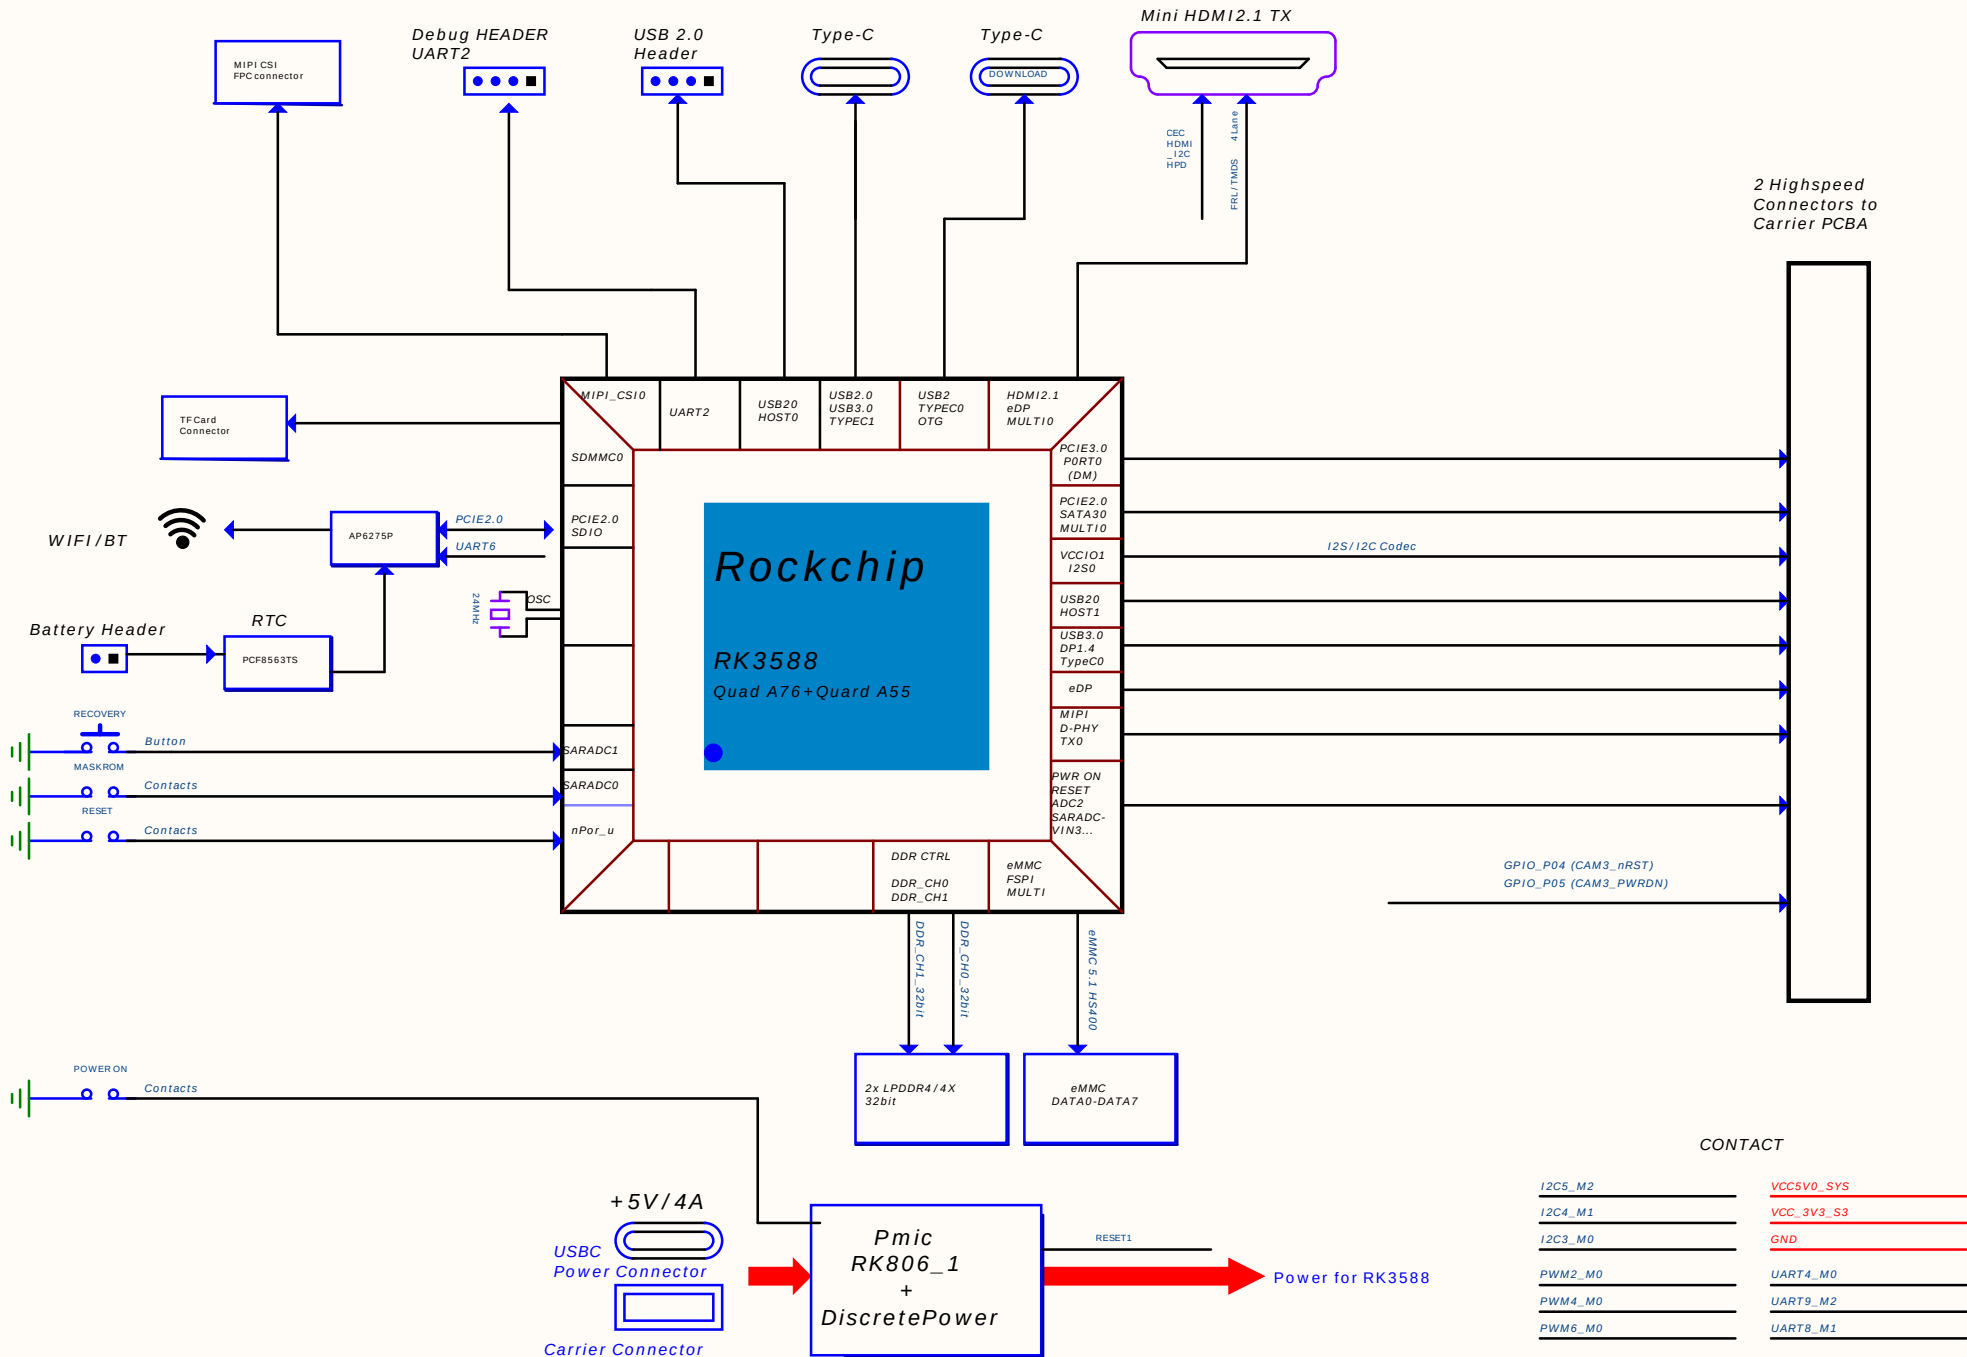

## Power Tree

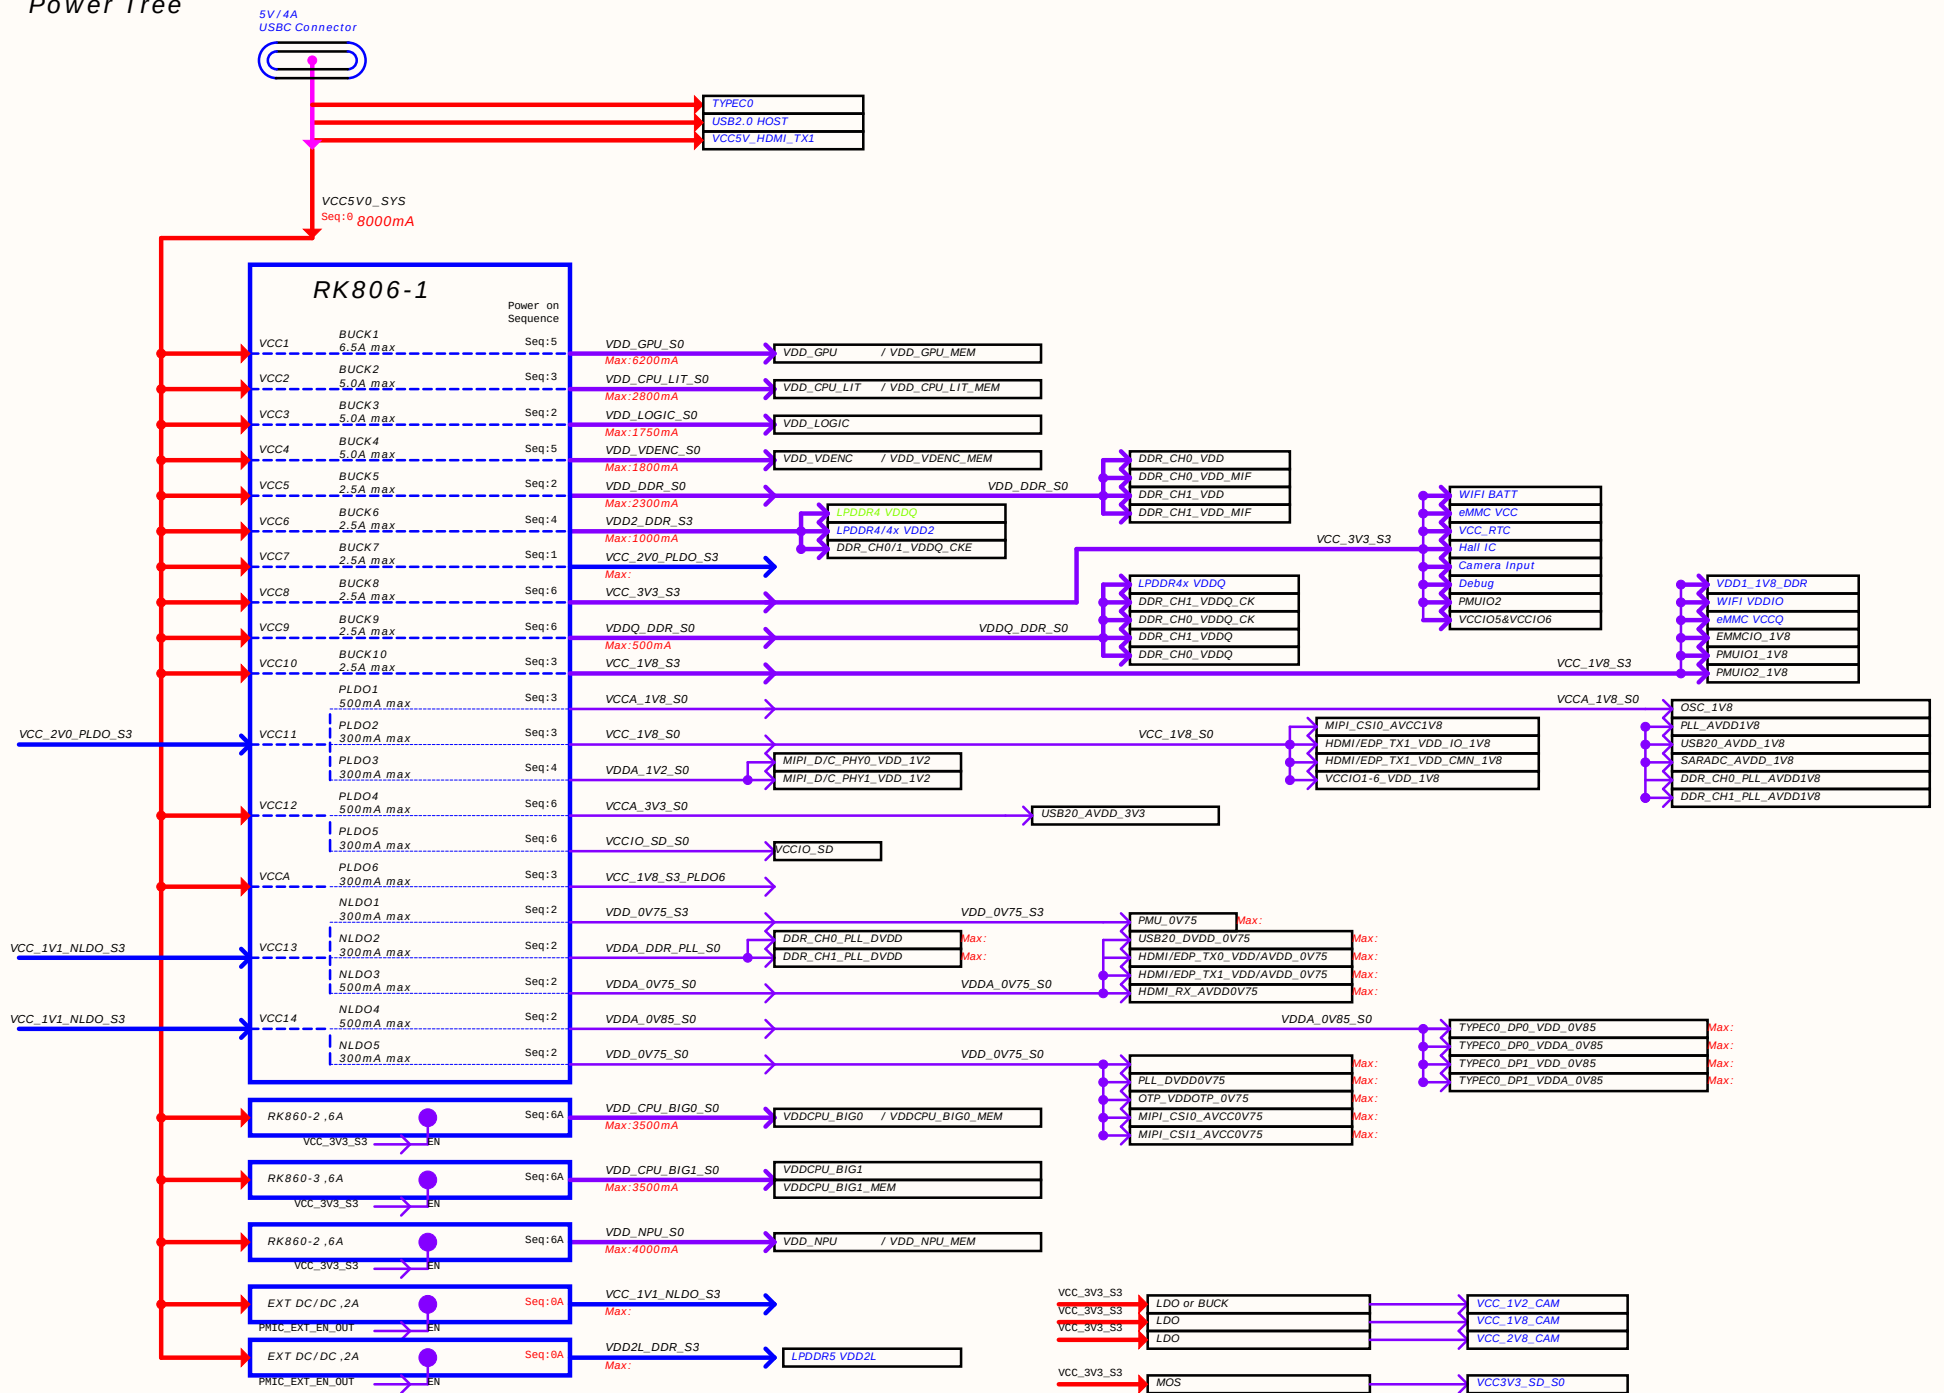


# Power Sequence

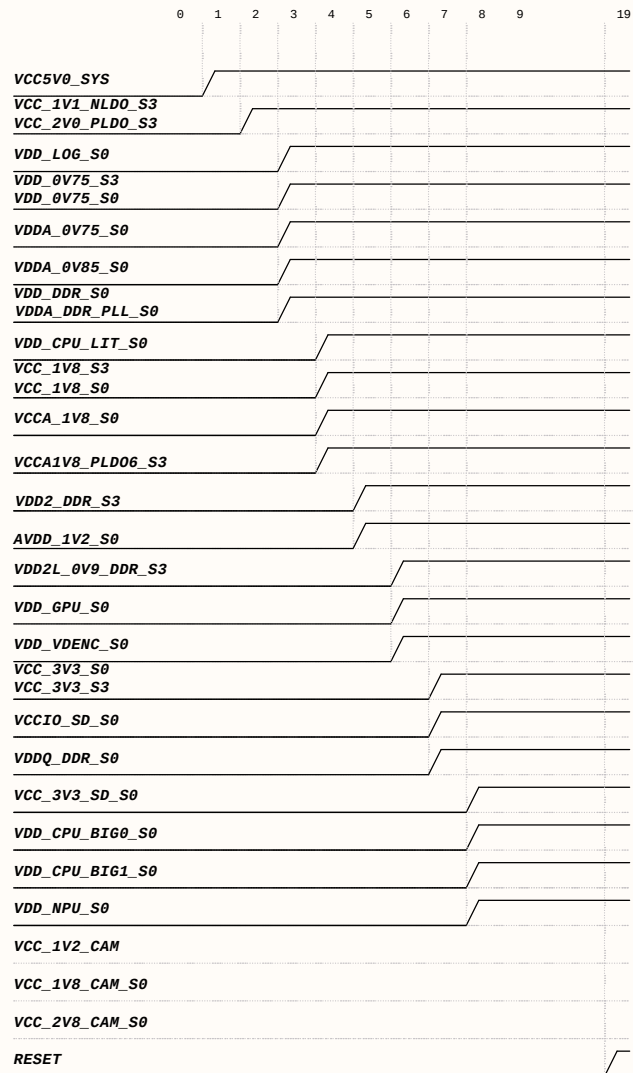


| Power Supply | PMIC Channel   | Supply Limit | Power Name       | Time Slot | Default Voltage | Default ON/OFF | Sleep ON/OFF | Peak Current | Sleep Current |
|--------------|----------------|--------------|------------------|-----------|-----------------|----------------|--------------|--------------|---------------|
| VCC5V0_SYS   | RK806-1_BUCK1  | 6.5A         | VDD_GPU_S0       | Slot:5    | 0.75V           | ON             | OFF          | TBD          | TBD           |
| VCC5V0_SYS   | RK806-1_BUCK2  | 5A           | VDD_CPU_LIT_S0   | Slot:3    | 0.75V           | ON             | OFF          | TBD          | TBD           |
| VCC5V0_SYS   | RK806-1_BUCK3  | 5A           | VDD_LOG_S0       | Slot:2    | 0.75V           | ON             | OFF          | TBD          | TBD           |
| VCC5V0_SYS   | RK806-1_BUCK4  | 3A           | VDD_VDENC_S0     | Slot:5    | 0.75V           | ON             | OFF          | TBD          | TBD           |
| VCC5V0_SYS   | RK806-1_BUCK5  | 2.5A         | VDD_DDR_S0       | Slot:2    | 0.85V           | ON             | OFF          | TBD          | TBD           |
| VCC5V0_SYS   | RK806-1_BUCK6  | 2.5A         | VDD2_DDR_S3      | Slot:4    | ADJ FB=0.5V     | ON             | ON           | TBD          | TBD           |
| VCC5V0_SYS   | RK806-1_BUCK7  | 2.5A         | VCC_2V0_PLDO_S3  | Slot:1    | 2.0V            | ON             | ON           | TBD          | TBD           |
| VCC5V0_SYS   | RK806-1_BUCK8  | 2.5A         | VCC_3V3_S3       | Slot:6    | 3.3V            | ON             | ON           | TBD          | TBD           |
| VCC5V0_SYS   | RK806-1_BUCK9  | 2.5A         | VDDQ_DDR_S0      | Slot:6    | ADJ FB=0.5V     | ON             | OFF          | TBD          | TBD           |
| VCC5V0_SYS   | RK806-1_BUCK10 | 2.5A         | VCC_1V8_S3       | Slot:3    | 1.8V            | ON             | ON           | TBD          | TBD           |
| VCC_2V0_PLDO | RK806-1_PLDO1  | 0.5A         | VCCA_1V8_S0      | Slot:3    | 1.8V            | ON             | OFF          | TBD          | TBD           |
|              | RK806-1_PLDO2  | 0.3A         | VCC_1V8_S0       | Slot:3    | 1.8V            | ON             | OFF          | TBD          | TBD           |
|              | RK806-1_PLDO3  | 0.3A         | VDDA_1V2_S0      | Slot:4    | 1.2V            | ON             | OFF          | TBD          | TBD           |
| VCC4V0_SYS   | RK806-1_PLDO4  | 0.5A         | VCCA_3V3_S0      | Slot:6    | 3.3V            | ON             | OFF          | TBD          | TBD           |
|              | RK806-1_PLDO5  | 0.3A         | VCCIO_SD_S0      | Slot:6    | 3.3V            | ON             | OFF          | TBD          | TBD           |
|              | RK806-1_PLDO6  | 0.3A         | VCCA1V8_PLDO6_S3 | Slot:3    | 1.8V            | ON             | ON           | TBD          | TBD           |
| VCC_1V1_NLDO | RK806-1_NLDO1  | 0.3A         | VDD_0V75_S3      | Slot:2    | 0.75V           | ON             | ON           | TBD          | TBD           |
|              | RK806-1_NLDO2  | 0.3A         | VDDA_DDR_PLL_S0  | Slot:2    | 0.85V           | ON             | OFF          | TBD          | TBD           |
|              | RK806-1_NLDO3  | 0.5A         | VDDA_0V75_S0     | Slot:2    | 0.75V           | ON             | OFF          | TBD          | TBD           |
| VCC_1V1_NLDO | RK806-1_NLDO4  | 0.5A         | VDDA_0V85_S0     | Slot:2    | 0.85V           | ON             | OFF          | TBD          | TBD           |
|              | RK806-1_NLDO5  | 0.3A         | VDD_0V75_S0      | Slot:2    | 0.75V           | ON             | OFF          | TBD          | TBD           |
| VCC5V0_SYS   | BUCK_RK860-2   | 6A           | VDD_CPU_BIG0_S0  | Slot:6A   | 0.75V           | ON             | OFF          | TBD          | TBD           |
| VCC5V0_SYS   | BUCK_RK860-3   | 6A           | VDD_CPU_BIG1_S0  | Slot:6A   | 0.75V           | ON             | OFF          | TBD          | TBD           |
| VCC5V0_SYS   | BUCK_RK860-2   | 6A           | VDD_NPU_S0       | Slot:6A   | 0.75V           | ON             | OFF          | TBD          | TBD           |
| VCC5V0_SYS   | EXT_BUCK       | 2A           | VCC_1V1_NLDO_S3  | Slot:1    | 1.1V            | ON             | ON           | TBD          | TBD           |
| VCC5V0_SYS   | EXT_BUCK       | 2A           | VDD2L_0V9_DDR_S3 | Slot:5    | 0.9V            | ON             | ON           | TBD          | TBD           |
| VCC5V0_SYS   | EXT_BUCK       | 2.5A         | VCC_3V3_SD_S0    | Slot:6A   | 3.3V            | ON             | OFF          | TBD          | TBD           |
| VCC_3V3_S3   | EXT_BUCK       | 2A           | VCC_1V2_CAM_S0   | OFF       | 1.2V            | OFF            | OFF          | TBD          | TBD           |
| VCC_3V3_S3   | LDO_PT5108     | 0.5A         | VCC_1V8_CAM_S0   | OFF       | 1.8V            | OFF            | OFF          | TBD          | TBD           |
| VCC_3V3_S3   | LDO_PT5108     | 0.5A         | VCC_2V8_CAM_S0   | OFF       | 2.8V            | OFF            | OFF          | TBD          | TBD           |


# IO Power Domain Map

| IO Domain | Pin Num  | Support IO Voltage | Supply Power Pin Name | Power Source | IO Operating Voltage |
|-----------|----------|--------------------|-----------------------|--------------|----------------------|
| PMUIO1    | Pin N28  | 1.8VOnly           | PMUIO1_1V8            | VCC_1V8_S3   | 1.8V                 |
| PMUIO2    | Pin R27  | 1.8V or 3.3V       | PMUIO2_1V8            | VCC_1V8_S3   | 3.3V                 |
|           | Pin P28  |                    | PMUIO2                | VCC_3V3_S3   |                      |
| EMMCIO    | Pin V26  | 1.8VOnly           | EMMCIO_1V8            | VCC_1V8_S0   | 1.8V                 |
| VCCIO1    | Pin G20  | 1.8VOnly           | VCCIO1_1V8            | VCC_1V8_S0   | 1.8V                 |
| VCCIO2    | Pin AA7  | 1.8V or 3.3V       | VCCIO2_1V8            | VCC_1V8_S0   | 1.8V/3.3V            |
|           | Pin Y7   |                    | VCCIO2                | VCC_IO_S0    |                      |
| VCCIO3    | Pin Y26  | 1.8VOnly           | VCCIO3_1V8            | VCC_1V8_S0   | 1.8V                 |
| VCCIO4    | Pin H20  | 1.8V or 3.3V       | VCCIO4_1V8            | VCC_1V8_S0   | 1.8V                 |
|           | Pin H21  |                    | VCCIO4                | VCC_1V8_S0   |                      |
| VCCIO5    | Pin W25  | 1.8V or 3.3V       | VCCIO5_1V8            | VCC_1V8_S0   | 3.3V                 |
|           | Pin W26  |                    | VCCIO5                | VCC_3V3_S0   |                      |
| VCCIO6    | Pin AC25 | 1.8V or 3.3V       | VCCIO6_1V8            | VCC_1V8_S0   | 3.3V                 |
|           | Pin AC26 |                    | VCCIO6                | VCC_3V3_S0   |                      |

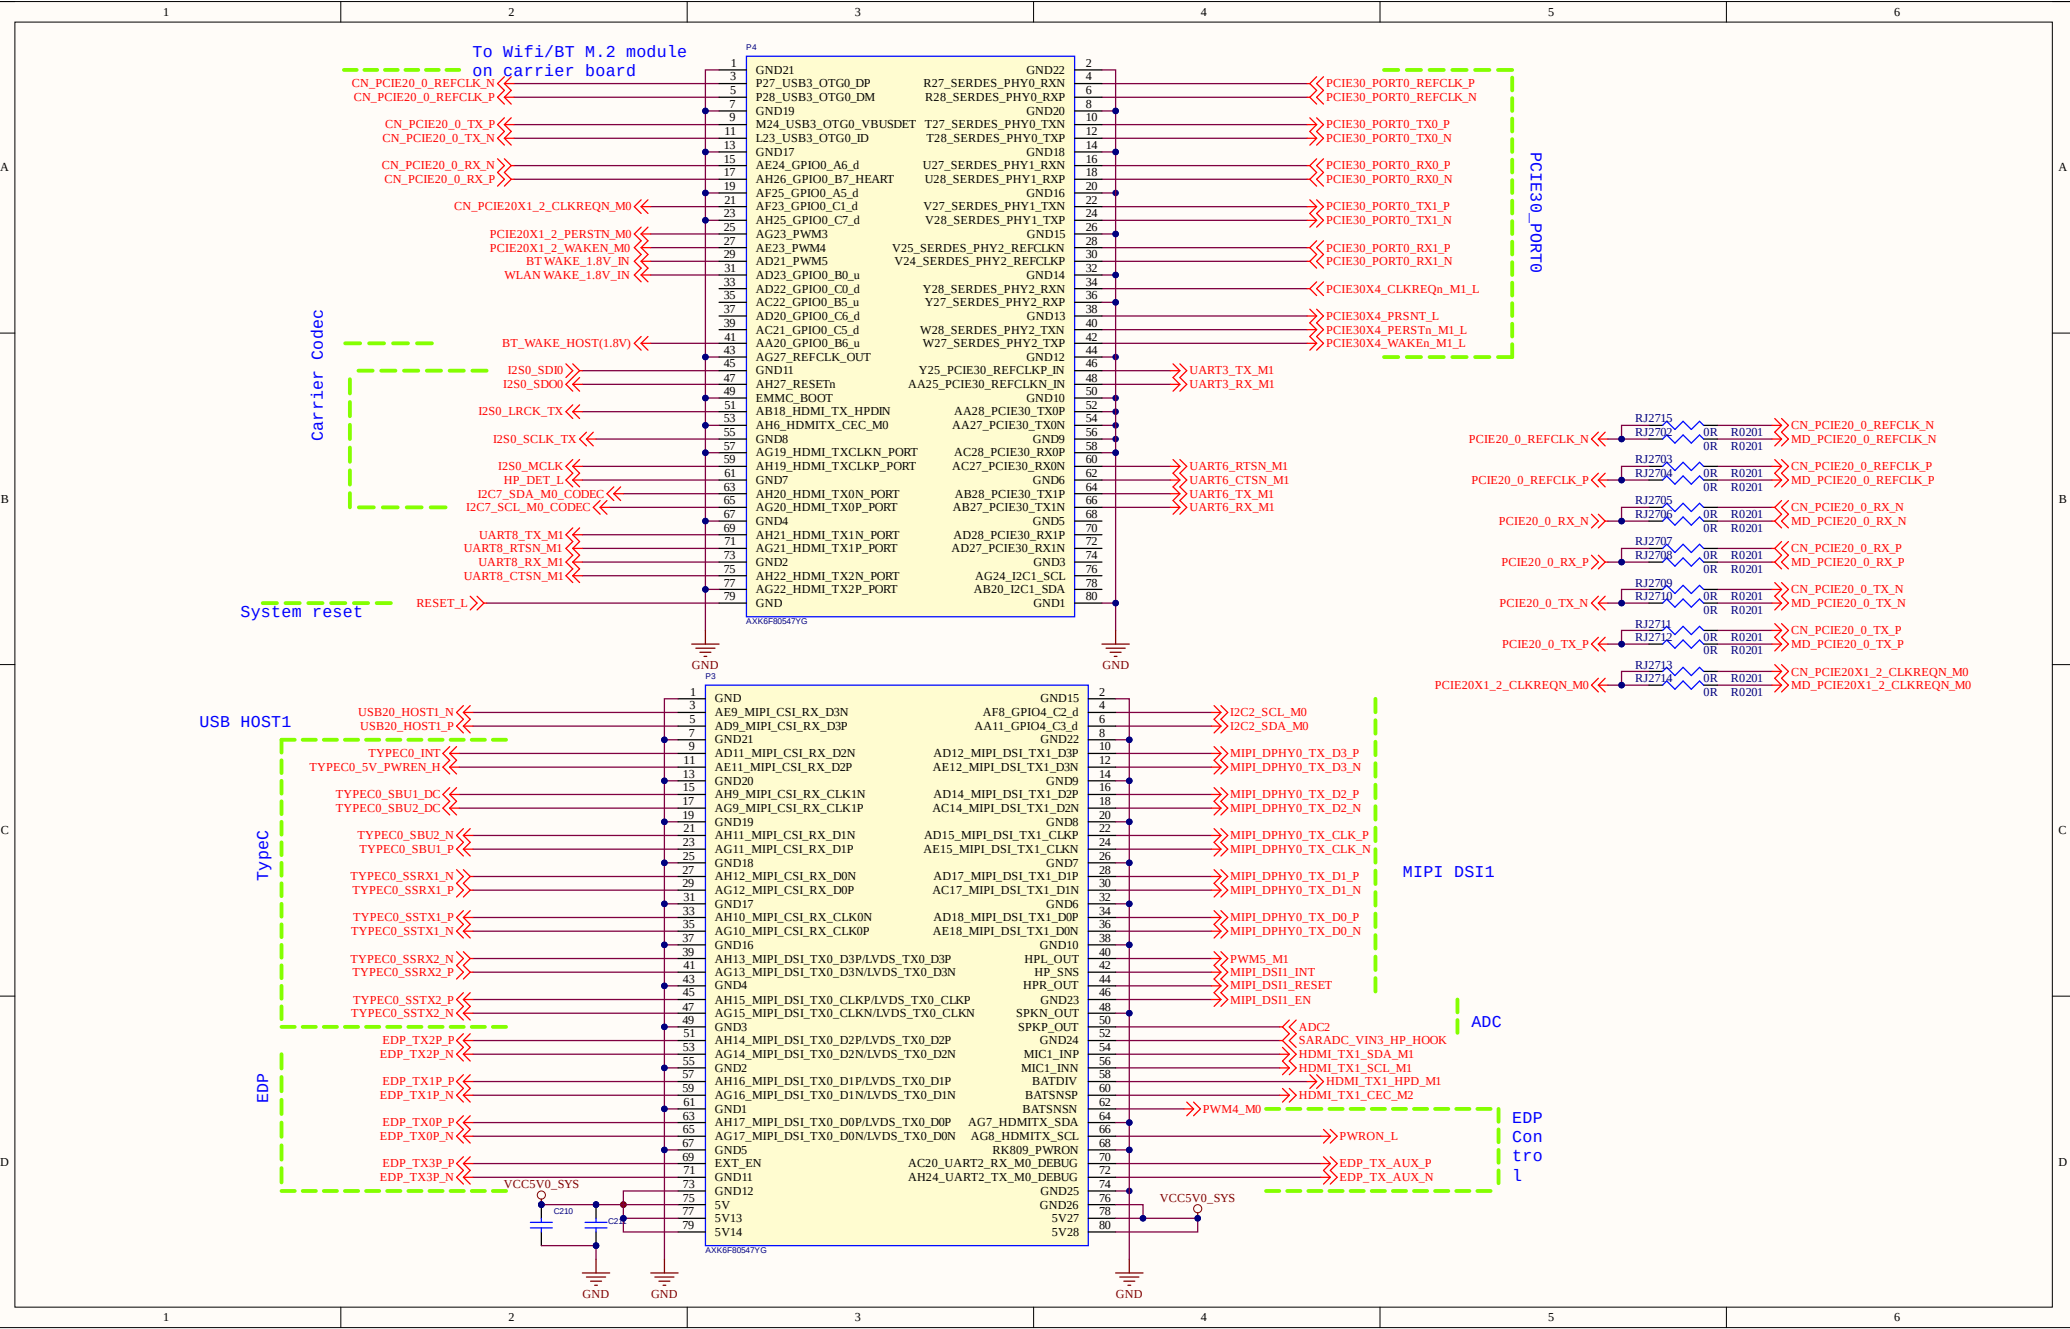

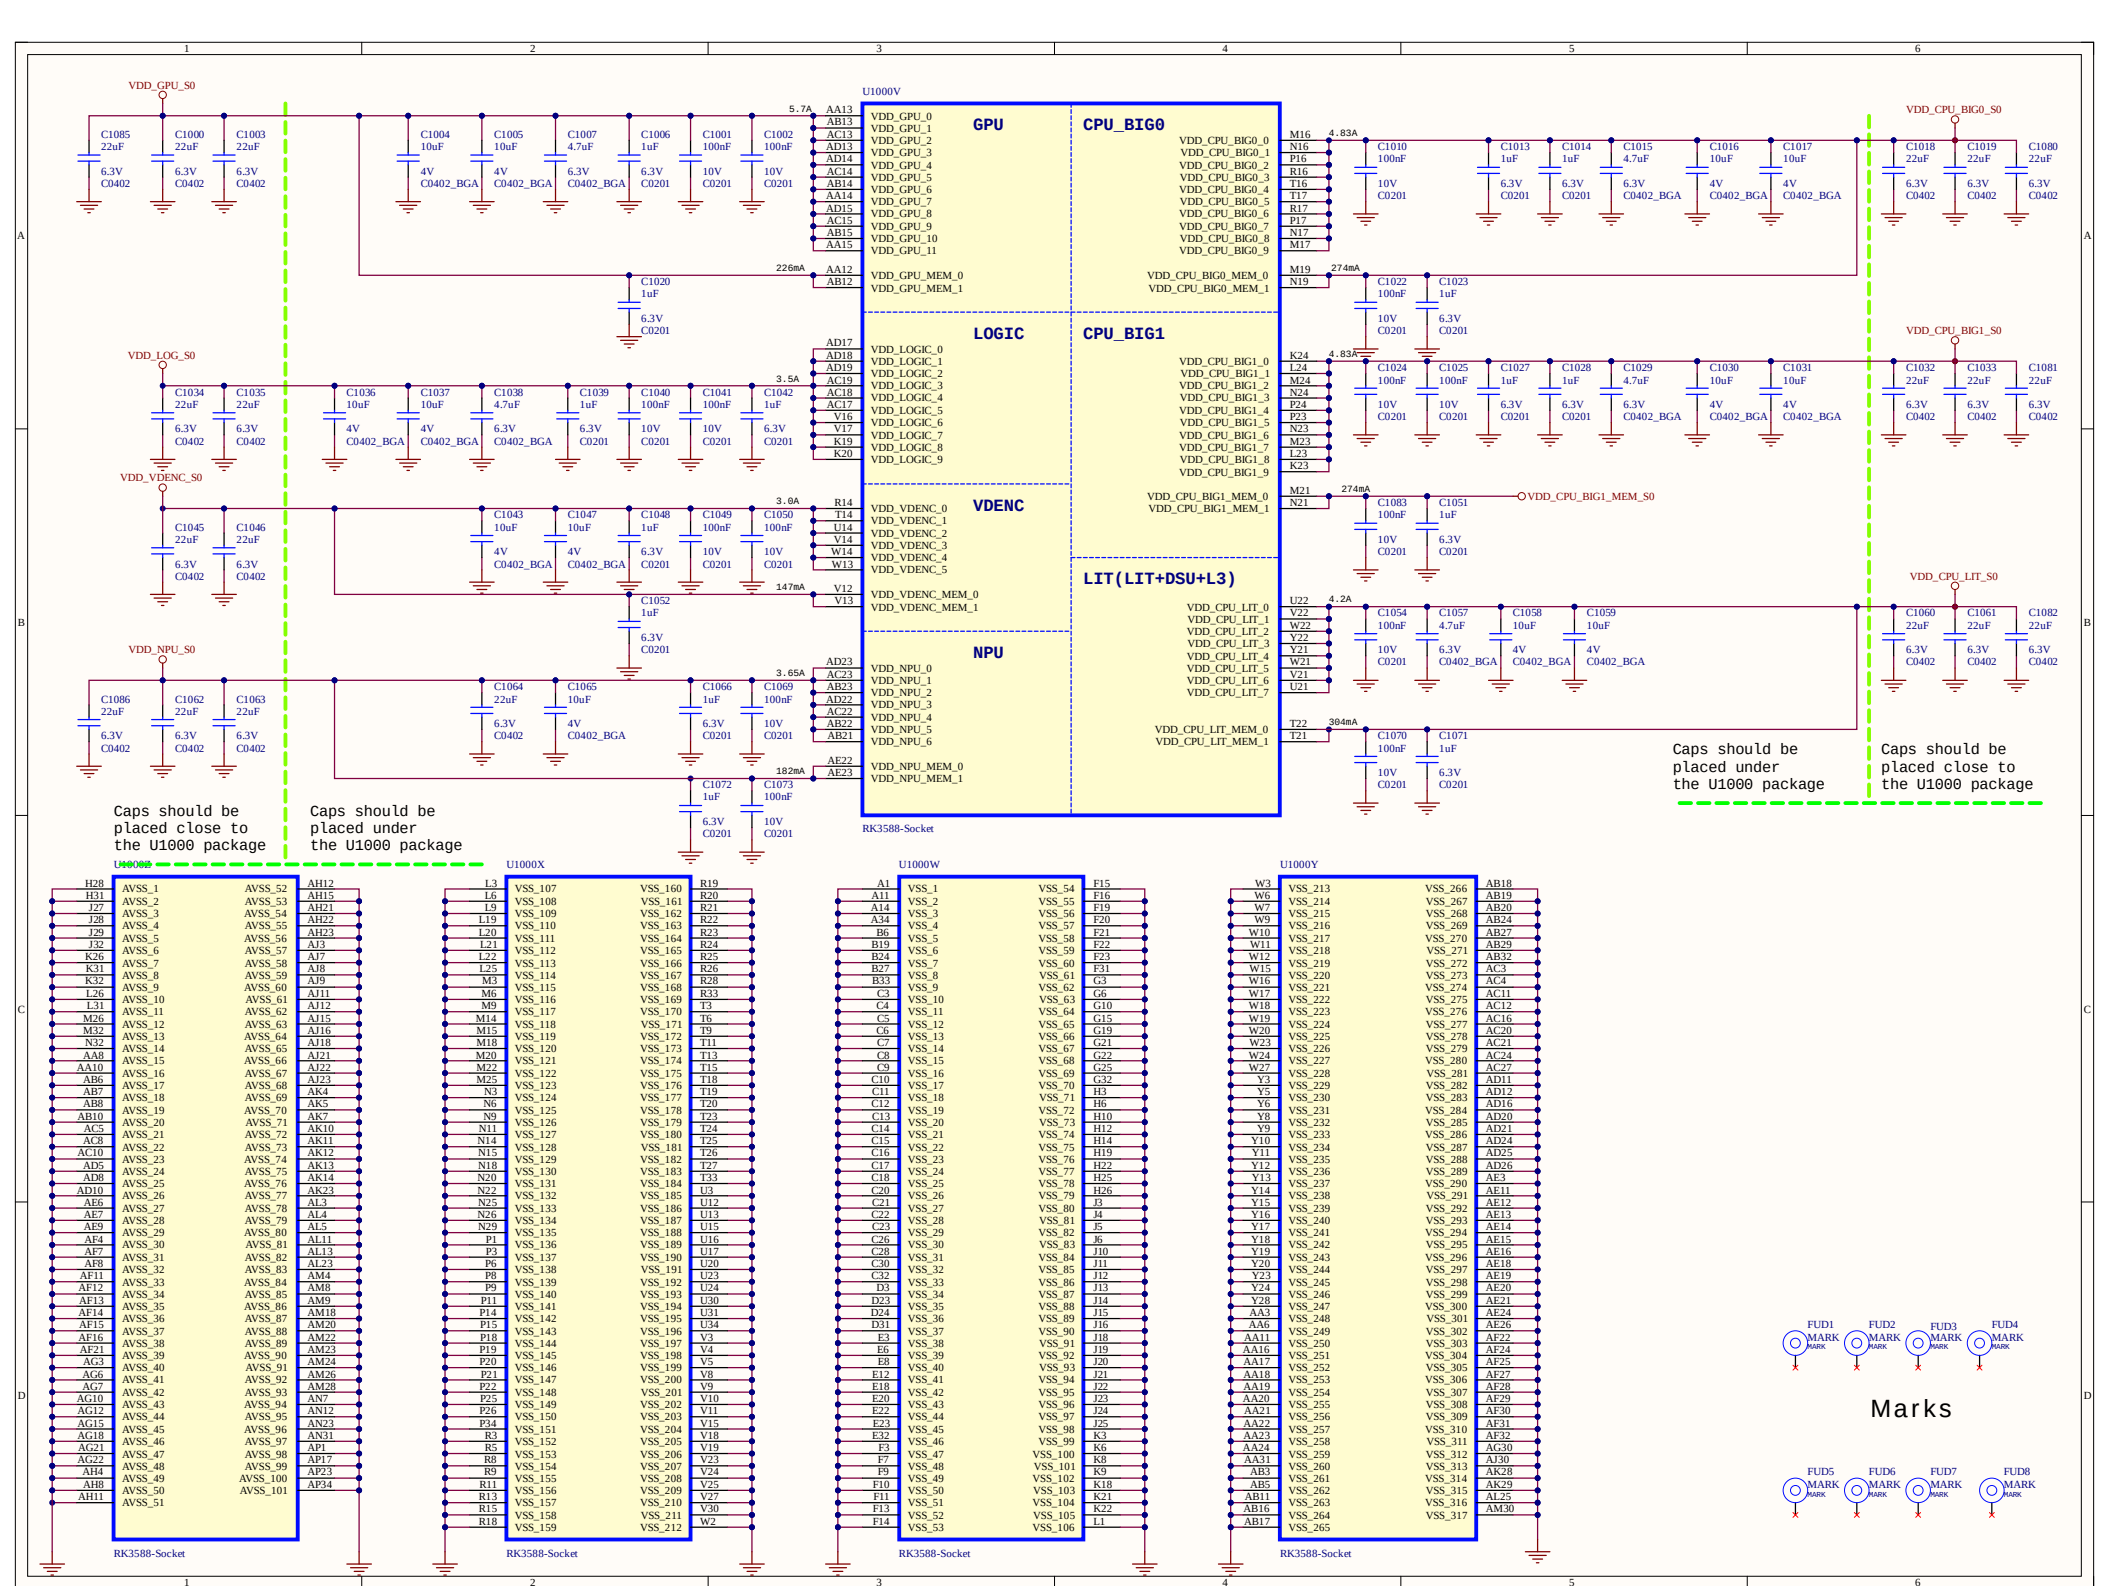


## RK3588\_F (PMUI02)

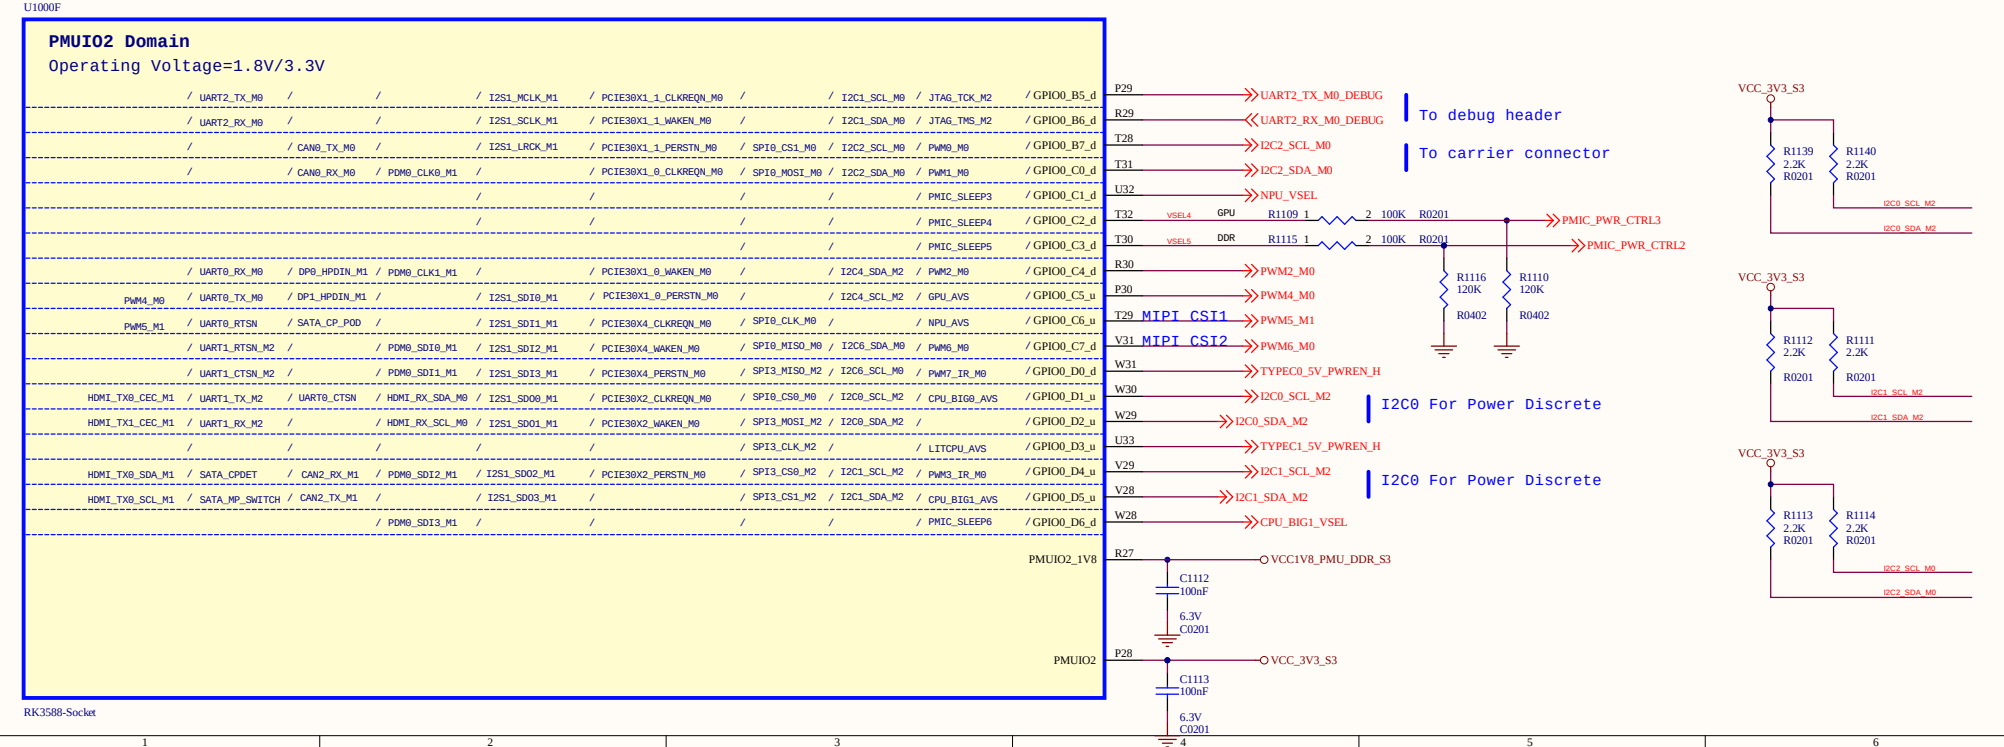




# RK3588\_C(EMMCIO Domain)

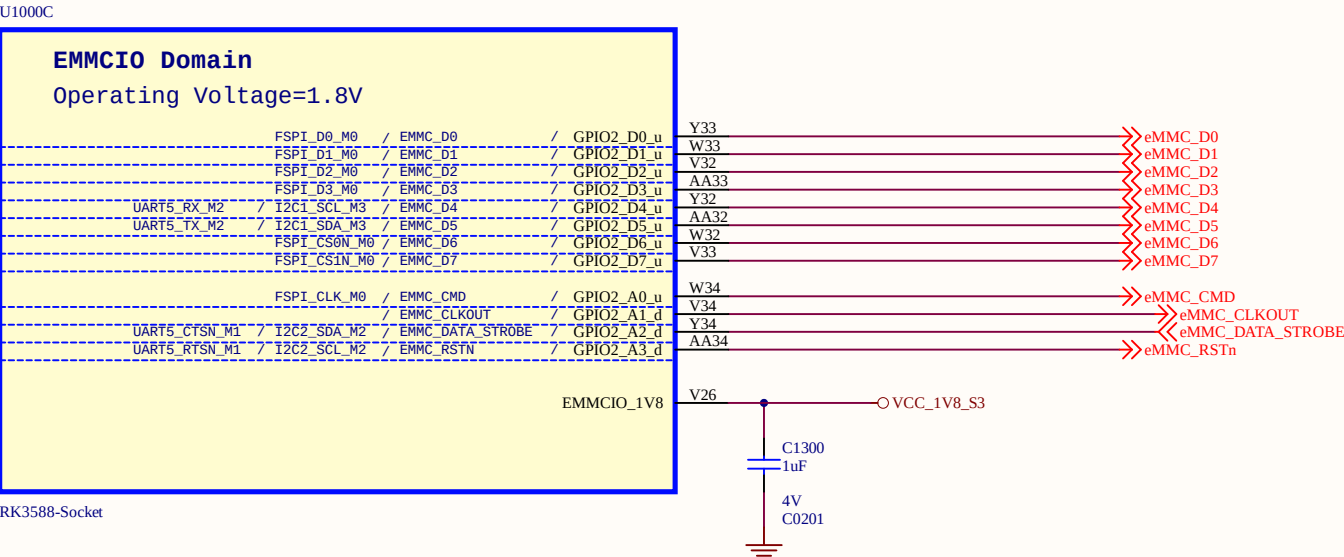

# RK3588\_D(VCCIO2 Domain)

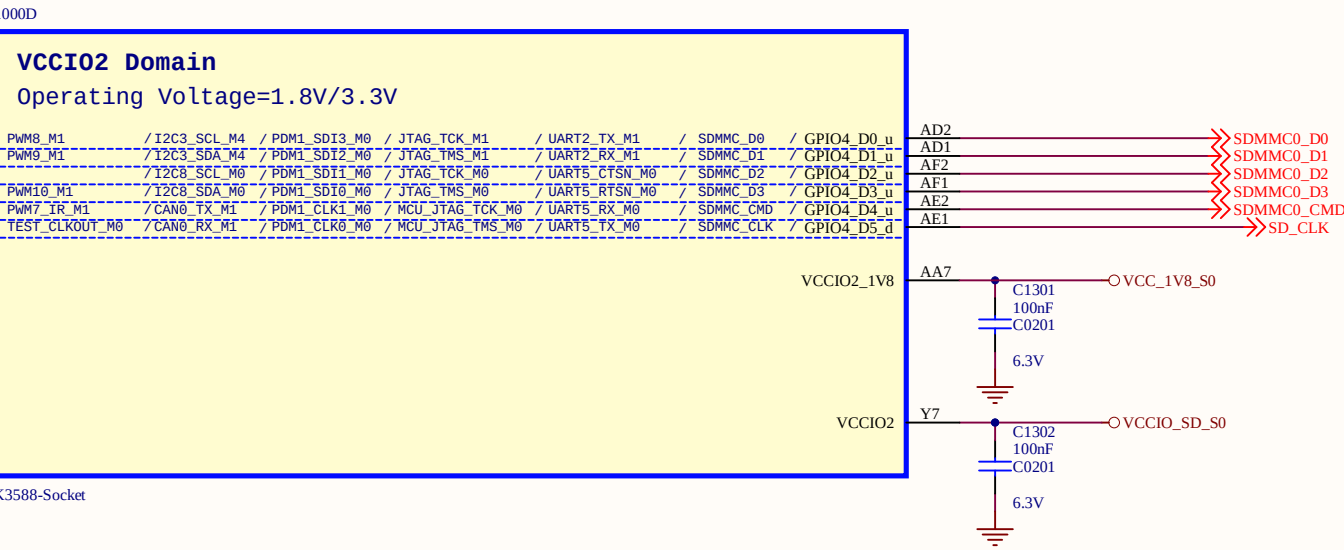


# RK3588\_M(TYPEC/DP)

U1000M


## USB3.0 OTG/DP1.4 Alt of TYPEC0

USB:U3/Gen1---Controller0  
DP:RBR/HBR/HBR2/HBR3

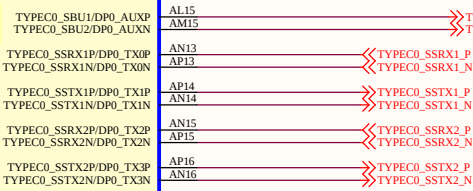

## USB3.0 OTG/DP1.4 Alt of TYPEC1

USB:U3/Gen1---Controller1  
DP:RBR/HBR/HBR2/HBR3

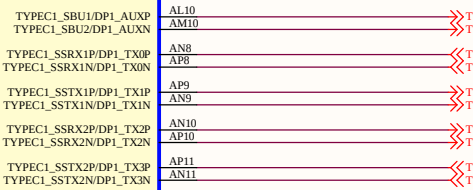

RK3588-Socket

To Carrier Connector

### Note:

If TYPEC0 is not used:  
Signal:leave floating  
REXT:8.2K ohm 1% resistor must be connected externally  
Power: Must supply power

TYPEC&DP MUX Differential Pair:  
DATE:95 Ohm +10%

For Typec

USB30 Differential Pair:  
DATE:90 Ohm +10%

For USB30

DP Differential Pair:  
DATE:100 Ohm +10%

For DP

USB30 Differential Pair:  
DATE:90 Ohm +10%

For USB30

## USB30/DP1.4 Alt Mode Configuration

| Option1 | DP x4Lane            | DP_TX_Lane0-3                         |
|---------|----------------------|---------------------------------------|
| Option2 | USB30 x4Lane         | DP_TX_Lane0-3                         |
| Option3 | USB30X2Lane+DPX2Lane | USB30: Lane0 Lane1<br>DP: Lane2 Lane3 |
| Option4 | USB30X2Lane+DPX2Lane | USB30: Lane2 Lane3<br>DP: Lane0 Lane1 |

# RK3588\_L(USB2.0 HOST/OTG)

U1000L

USB20 Differential Pair:  
DATE:90 Ohm +10%

## USB2.0 of TYPEC0 (OTG/HOST/DEVICE)

HS/FS/LS

### Download Port

40K

TYPEC0\_USB20\_OTG\_DP

TYPEC0\_USB20\_OTG\_DM

TYPEC0\_USB20\_OTG\_ID

TYPEC0\_USB20\_VBUSDET

TYPEC0\_USB20\_OTG0\_REXT

TYPEC0\_USB20\_OTG1\_REXT

TYPEC0\_USB20\_OTG2\_REXT

TYPEC0\_USB20\_OTG3\_REXT

TYPEC0\_USB20\_OTG4\_REXT

TYPEC0\_USB20\_OTG5\_REXT

TYPEC0\_USB20\_OTG6\_REXT

TYPEC0\_USB20\_OTG7\_REXT

TYPEC0\_USB20\_OTG8\_REXT

TYPEC0\_USB20\_OTG9\_REXT

TYPEC0\_USB20\_OTG10\_REXT

TYPEC0\_USB20\_OTG11\_REXT

TYPEC0\_USB20\_OTG12\_REXT

TYPEC0\_USB20\_OTG13\_REXT

TYPEC0\_USB20\_OTG14\_REXT

TYPEC0\_USB20\_OTG15\_REXT

TYPEC0\_USB20\_OTG16\_REXT

TYPEC0\_USB20\_OTG17\_REXT

TYPEC0\_USB20\_OTG18\_REXT

TYPEC0\_USB20\_OTG19\_REXT

TYPEC0\_USB20\_OTG20\_REXT

TYPEC0\_USB20\_OTG21\_REXT

TYPEC0\_USB20\_OTG22\_REXT

TYPEC0\_USB20\_OTG23\_REXT

TYPEC0\_USB20\_OTG24\_REXT

TYPEC0\_USB20\_OTG25\_REXT

TYPEC0\_USB20\_OTG26\_REXT

TYPEC0\_USB20\_OTG27\_REXT

TYPEC0\_USB20\_OTG28\_REXT

TYPEC0\_USB20\_OTG29\_REXT

TYPEC0\_USB20\_OTG30\_REXT

TYPEC0\_USB20\_OTG31\_REXT

TYPEC0\_USB20\_OTG32\_REXT

TYPEC0\_USB20\_OTG33\_REXT

TYPEC0\_USB20\_OTG34\_REXT

TYPEC0\_USB20\_OTG35\_REXT

TYPEC0\_USB20\_OTG36\_REXT

TYPEC0\_USB20\_OTG37\_REXT

TYPEC0\_USB20\_OTG38\_REXT

TYPEC0\_USB20\_OTG39\_REXT

TYPEC0\_USB20\_OTG40\_REXT

TYPEC0\_USB20\_OTG41\_REXT

TYPEC0\_USB20\_OTG42\_REXT

TYPEC0\_USB20\_OTG43\_REXT

TYPEC0\_USB20\_OTG44\_REXT

TYPEC0\_USB20\_OTG45\_REXT

TYPEC0\_USB20\_OTG46\_REXT

TYPEC0\_USB20\_OTG47\_REXT

TYPEC0\_USB20\_OTG48\_REXT

TYPEC0\_USB20\_OTG49\_REXT

TYPEC0\_USB20\_OTG50\_REXT

TYPEC0\_USB20\_OTG51\_REXT

TYPEC0\_USB20\_OTG52\_REXT

TYPEC0\_USB20\_OTG53\_REXT

TYPEC0\_USB20\_OTG54\_REXT

TYPEC0\_USB20\_OTG55\_REXT

TYPEC0\_USB20\_OTG56\_REXT

TYPEC0\_USB20\_OTG57\_REXT

TYPEC0\_USB20\_OTG58\_REXT

TYPEC0\_USB20\_OTG59\_REXT

TYPEC0\_USB20\_OTG60\_REXT

TYPEC0\_USB20\_OTG61\_REXT

TYPEC0\_USB20\_OTG62\_REXT

TYPEC0\_USB20\_OTG63\_REXT

TYPEC0\_USB20\_OTG64\_REXT

TYPEC0\_USB20\_OTG65\_REXT

TYPEC0\_USB20\_OTG66\_REXT

TYPEC0\_USB20\_OTG67\_REXT

TYPEC0\_USB20\_OTG68\_REXT

TYPEC0\_USB20\_OTG69\_REXT

TYPEC0\_USB20\_OTG70\_REXT

TYPEC0\_USB20\_OTG71\_REXT

TYPEC0\_USB20\_OTG72\_REXT

TYPEC0\_USB20\_OTG73\_REXT

TYPEC0\_USB20\_OTG74\_REXT

TYPEC0\_USB20\_OTG75\_REXT

TYPEC0\_USB20\_OTG76\_REXT

TYPEC0\_USB20\_OTG77\_REXT

TYPEC0\_USB20\_OTG78\_REXT

TYPEC0\_USB20\_OTG79\_REXT

TYPEC0\_USB20\_OTG80\_REXT

TYPEC0\_USB20\_OTG81\_REXT

TYPEC0\_USB20\_OTG82\_REXT

TYPEC0\_USB20\_OTG83\_REXT

TYPEC0\_USB20\_OTG84\_REXT

TYPEC0\_USB20\_OTG85\_REXT

TYPEC0\_USB20\_OTG86\_REXT

TYPEC0\_USB20\_OTG87\_REXT

TYPEC0\_USB20\_OTG88\_REXT

TYPEC0\_USB20\_OTG89\_REXT

TYPEC0\_USB20\_OTG90\_REXT

TYPEC0\_USB20\_OTG91\_REXT

TYPEC0\_USB20\_OTG92\_REXT

TYPEC0\_USB20\_OTG93\_REXT

TYPEC0\_USB20\_OTG94\_REXT

TYPEC0\_USB20\_OTG95\_REXT

TYPEC0\_USB20\_OTG96\_REXT

TYPEC0\_USB20\_OTG97\_REXT

TYPEC0\_USB20\_OTG98\_REXT

TYPEC0\_USB20\_OTG99\_REXT

TYPEC0\_USB20\_OTG100\_REXT

TYPEC0\_USB20\_OTG101\_REXT

TYPEC0\_USB20\_OTG102\_REXT

TYPEC0\_USB20\_OTG103\_REXT

TYPEC0\_USB20\_OTG104\_REXT

TYPEC0\_USB20\_OTG105\_REXT

TYPEC0\_USB20\_OTG106\_REXT

TYPEC0\_USB20\_OTG107\_REXT

TYPEC0\_USB20\_OTG108\_REXT

TYPEC0\_USB20\_OTG109\_REXT

TYPEC0\_USB20\_OTG110\_REXT

TYPEC0\_USB20\_OTG111\_REXT

TYPEC0\_USB20\_OTG112\_REXT

TYPEC0\_USB20\_OTG113\_REXT

TYPEC0\_USB20\_OTG114\_REXT

TYPEC0\_USB20\_OTG115\_REXT

TYPEC0\_USB20\_OTG116\_REXT

TYPEC0\_USB20\_OTG117\_REXT

TYPEC0\_USB20\_OTG118\_REXT

TYPEC0\_USB20\_OTG119\_REXT

TYPEC0\_USB20\_OTG120\_REXT

TYPEC0\_USB20\_OTG121\_REXT

TYPEC0\_USB20\_OTG122\_REXT

TYPEC0\_USB20\_OTG123\_REXT

TYPEC0\_USB20\_OTG124\_REXT

TYPEC0\_USB20\_OTG125\_REXT

TYPEC0\_USB20\_OTG126\_REXT

TYPEC0\_USB20\_OTG127\_REXT

TYPEC0\_USB20\_OTG128\_REXT

TYPEC0\_USB20\_OTG129\_REXT

TYPEC0\_USB20\_OTG130\_REXT

TYPEC0\_USB20\_OTG131\_REXT

TYPEC0\_USB20\_OTG132\_REXT

TYPEC0\_USB20\_OTG133\_REXT

TYPEC0\_USB20\_OTG134\_REXT

TYPEC0\_USB20\_OTG135\_REXT

TYPEC0\_USB20\_OTG136\_REXT

TYPEC0\_USB20\_OTG137\_REXT

TYPEC0\_USB20\_OTG138\_REXT

TYPEC0\_USB20\_OTG139\_REXT

TYPEC0\_USB20\_OTG140\_REXT

TYPEC0\_USB20\_OTG141\_REXT

TYPEC0\_USB20\_OTG142\_REXT

TYPEC0\_USB20\_OTG143\_REXT

TYPEC0\_USB20\_OTG144\_REXT

TYPEC0\_USB20\_OTG145\_REXT

TYPEC0\_USB20\_OTG146\_REXT

TYPEC0\_USB20\_OTG147\_REXT

TYPEC0\_USB20\_OTG148\_REXT

TYPEC0\_USB20\_OTG149\_REXT

TYPEC0\_USB20\_OTG150\_REXT

TYPEC0\_USB20\_OTG151\_REXT

TYPEC0\_USB20\_OTG152\_REXT

TYPEC0\_USB20\_OTG153\_REXT

TYPEC0\_USB20\_OTG154\_REXT

TYPEC0\_USB20\_OTG155\_REXT

TYPEC0\_USB20\_OTG156\_REXT

TYPEC0\_USB20\_OTG157\_REXT

TYPEC0\_USB20\_OTG158\_REXT

TYPEC0\_USB20\_OTG159\_REXT

TYPEC0\_USB20\_OTG160\_REXT

TYPEC0\_USB20\_OTG161\_REXT

TYPEC0\_USB20\_OTG162\_REXT

TYPEC0\_USB20\_OTG163\_REXT

TYPEC0\_USB20\_OTG164\_REXT

TYPEC0\_USB20\_OTG165\_REXT

TYPEC0\_USB20\_OTG166\_REXT

TYPEC0\_USB20\_OTG167\_REXT

TYPEC0\_USB20\_OTG168\_REXT

TYPEC0\_USB20\_OTG169\_REXT

TYPEC0\_USB20\_OTG170\_REXT

TYPEC0\_USB20\_OTG171\_REXT

TYPEC0\_USB20\_OTG172\_REXT

TYPEC0\_USB20\_OTG173\_REXT

TYPEC0\_USB20\_OTG174\_REXT

TYPEC0\_USB20\_OTG175\_REXT

TYPEC0\_USB20\_OTG176\_REXT

TYPEC0\_USB20\_OTG177\_REXT

TYPEC0\_USB20\_OTG178\_REXT

TYPEC0\_USB20\_OTG179\_REXT

TYPEC0\_USB20\_OTG180\_REXT

TYPEC0\_USB20\_OTG181\_REXT

TYPEC0\_USB20\_OTG182\_REXT

TYPEC0\_USB20\_OTG183\_REXT

TYPEC0\_USB20\_OTG184\_REXT

TYPEC0\_USB20\_OTG185\_REXT

TYPEC0\_USB20\_OTG186\_REXT

TYPEC0\_USB20\_OTG187\_REXT

TYPEC0\_USB20\_OTG188\_REXT

TYPEC0\_USB20\_OTG189\_REXT

TYPEC0\_USB20\_OTG190\_REXT

TYPEC0\_USB20\_OTG191\_REXT

TYPEC0\_USB20\_OTG192\_REXT

TYPEC0\_USB20\_OTG193\_REXT

TYPEC0\_USB20\_OTG194\_REXT

TYPEC0\_USB20\_OTG195\_REXT

TYPEC0\_USB20\_OTG196\_REXT

TYPEC0\_USB20\_OTG197\_REXT


TYPEC0\_USB20\_OTG198\_REXT

TYPEC0\_USB20\_OTG199\_REXT


TYPEC0\_USB20\_OTG200\_REXT

TYPEC0\_USB20\_OTG201\_REXT


RK3588\_G(VCCIO1 Domain)

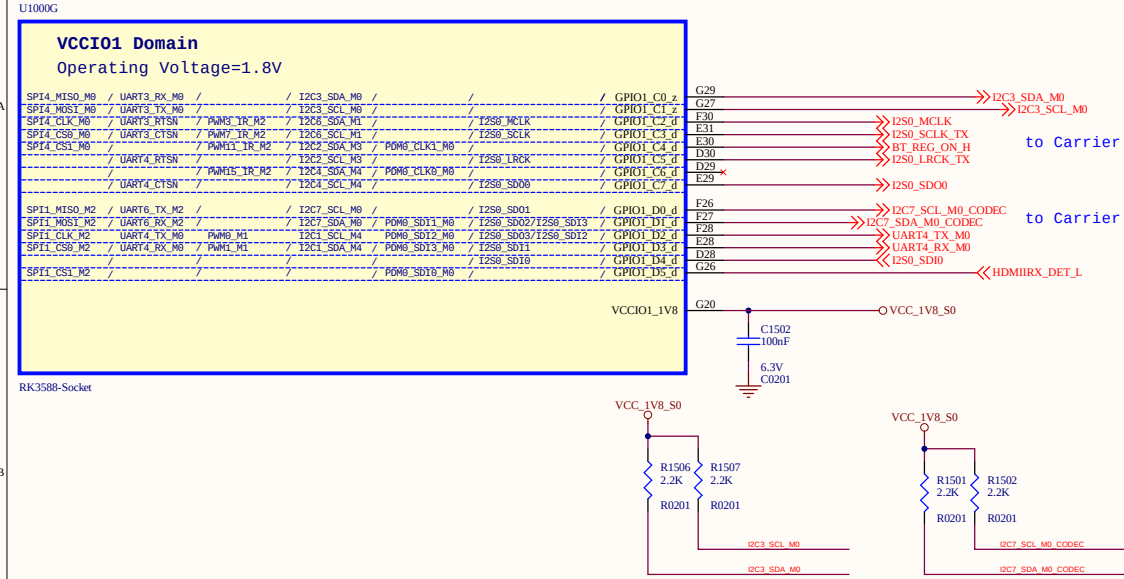

RK3588\_U(SARADC/OTP)

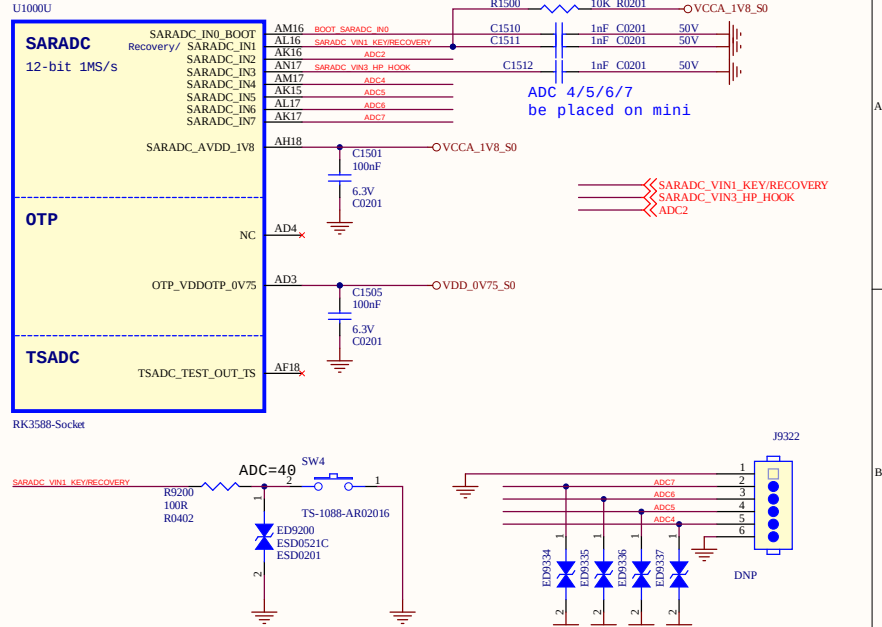

RK3588\_H(VCCIO3 Domain)

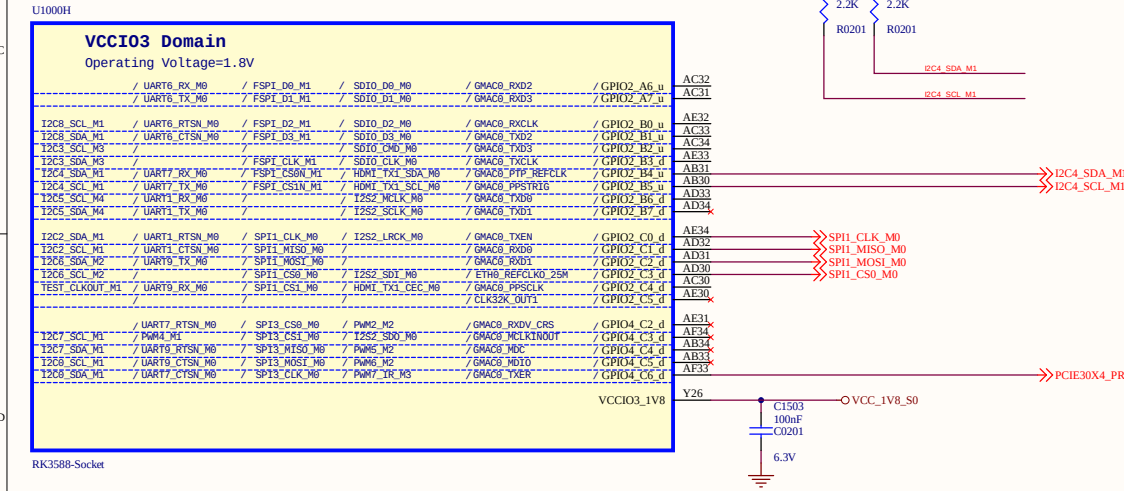

**Note:**  
If BOOT\_SARADC\_IN0=0V after power-on reset,  
then system will enter into Maskrom mode.


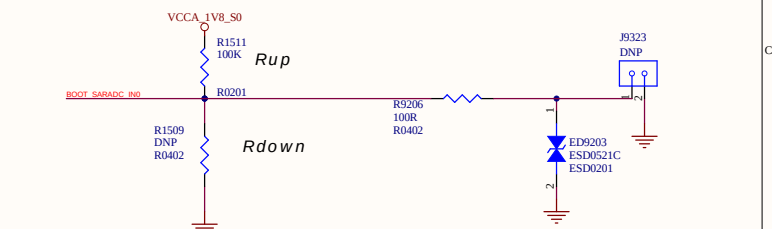


TABLE 1 BOOT MODE CONFIG


| Item   | Rup  | Rdown | ADC  | VOL  | BOOT MODE                                    |
|--------|------|-------|------|------|----------------------------------------------|
| LEVEL1 | DNP  | 100K  | 0    | 0V   | USB (Maskrom mode)                           |
| LEVEL2 | 100K | 20K   | 682  | 0.3V | SDCard-USB                                   |
| LEVEL3 | 100K | 51K   | 1365 | 0.6V | EMMC-USB                                     |
| LEVEL4 | 100K | 100K  | 2047 | 0.9V | FSPI M0-USB                                  |
| LEVEL5 | 100K | 200K  | 2730 | 1.2V | FSPI M1-USB                                  |
| LEVEL6 | 100K | 499K  | 3412 | 1.5V | FSPI M2-USB                                  |
| LEVEL7 | 100K | DNP   | 4095 | 1.8V | FSPI_M2-FSPI_M1-FSPI_M0<br>-EMMC-SD Card-USB |

# RK3588\_Q/R(MIPI\_D/C\_PHY0/1)

U1000Q

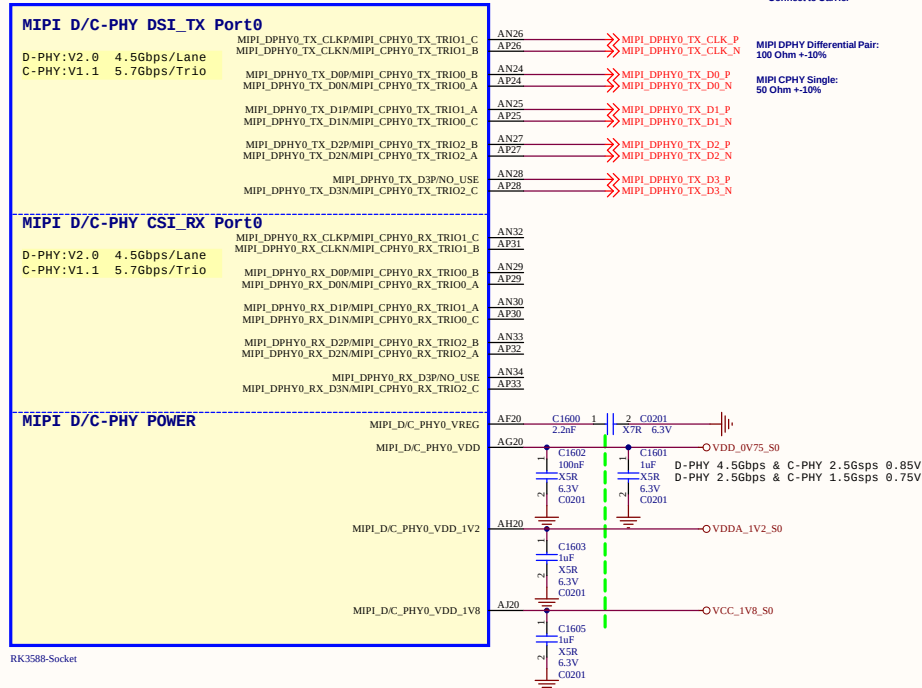

U1000R

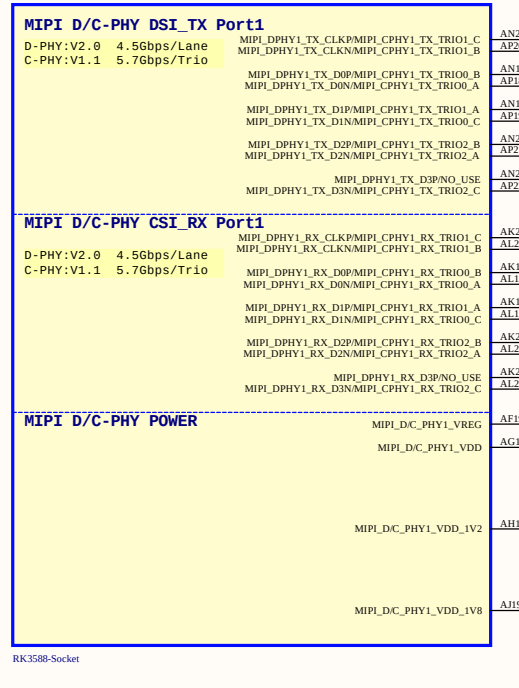


**Note:**  
If not used:  
Signal: leave floating  
Power: Floating

**Note:**  
These Caps should be placed  
under the U1000 package.

# RK3588\_P(MIPI\_CSI\_RX\_PHY)

U1000P

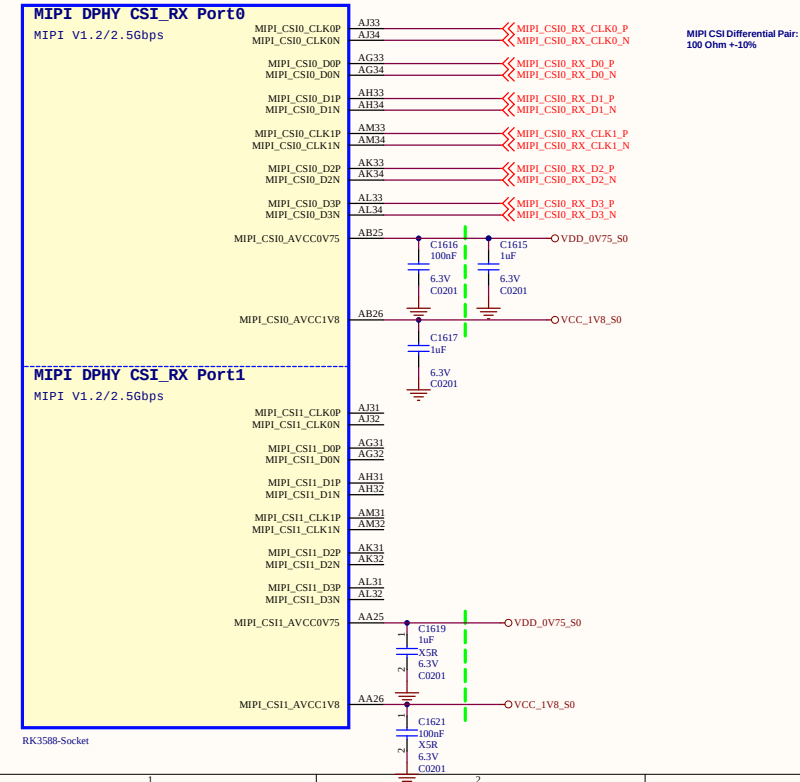

## MIPI\_CSI\_RX Configuration

|         |                                       |                                      |
|---------|---------------------------------------|--------------------------------------|
| Option1 | Sensor1 x4Lane                        | MIPI_CSI_RX_D0-3<br>MIPI_CSI_RX_CLK0 |
|         |                                       |                                      |
| Option2 | Sensor1 x2Lane<br>+<br>Sensor2 x2Lane | MIPI_CSI_RX_D0-1<br>MIPI_CSI_RX_CLK0 |
|         |                                       | MIPI_CSI_RX_D2-3<br>MIPI_CSI_RX_CLK1 |

**Note:**  
When in single clock lane mode, CLK0P/0N is the clock lane from Data lane0 to Data lane3, but clock lane1 is invalid; In dual clock lanes mode, CLK0P/0N is the clock lane of Data lane0 and Data lane1, while CLK1P/1N is the clock lane of Data lane2 and Data lane3.

**Note:**  
The Caps to the left of green line should be placed under the U1000 package. Other caps should be placed close to the U1000 package.

**Note:**  
If not used:  
Signal: leave floating  
Power: Floating

The HDMI2.1 trace length is less than 100mm.  
The HDMI2.1 differential trace impedance is 100 OHM.

## RK3588\_S(HDMI2.1 TX)

U1000S

## HDMI TX/eDP MUX Port0

|           |         |
|-----------|---------|
| HDMI:V2.1 | 12Gbps  |
| eDP: V1.3 | 5.4Gbps |

```
HDMI_TX0_SBDP/EDP_TX0_AUXN
HDMI_TX0_SBDN/EDP_TX0_AUXN


HDMI_TX0_D0P/EDP_TX0_D0N
HDMI_TX0_D0N/EDP_TX0_D0N

HDMI_TX0_D1P/EDP_TX0_D1N
HDMI_TX0_D1N/EDP_TX0_D1N

HDMI_TX0_D2P/EDP_TX0_D2N
HDMI_TX0_D2N/EDP_TX0_D2N

HDMI_TX0_D3P/EDP_TX0_D3N
HDMI_TX0_D3N/EDP_TX0_D3N
```

Mini HDMI port

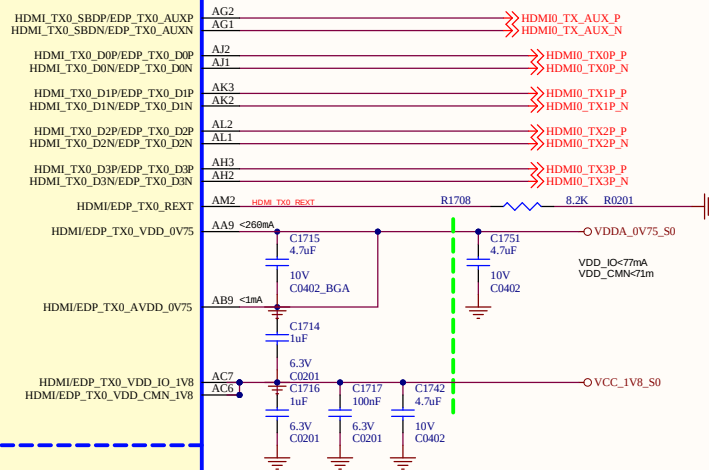

## HDMI TX/eDP MUX Port1

|           |         |
|-----------|---------|
| HDMI:V2.1 | 12Gbps  |
| eDP: V1.3 | 5.4Gbps |

```
HDMI_TX1_SBDP/EDP_TX1_AUX1
HDMI_TX1_SBDN/EDP_TX1_AUXN


    HDMI_TX1_D0P/EDP_TX1_D0P
HDMI_TX1_D0N/EDP_TX1_D0N

    HDMI_TX1_D1P/EDP_TX1_D1P
HDMI_TX1_D1N/EDP_TX1_D1N

    HDMI_TX1_D2P/EDP_TX1_D2P
HDMI_TX1_D2N/EDP_TX1_D2N

    HDMI_TX1_D3P/EDP_TX1_D3P
HDMI_TX1_D3N/EDP_TX1_D3N
```

|     |              |
|-----|--------------|
| AN2 | EDP_TX_AUX_P |
| AP2 | EDP_TX_AUX_N |
| AN4 | EDP_TX0P_P   |
| AP4 | EDP_TX0P_N   |
| AM5 | EDP_TX1P_P   |
| AN5 | EDP_TX1P_N   |
| AN6 | EDP_TX2P_P   |
| AP6 | EDP_TX2P_N   |
| AM3 | EDP_TX3P_P   |
| AN3 | EDP_TX3P_N   |

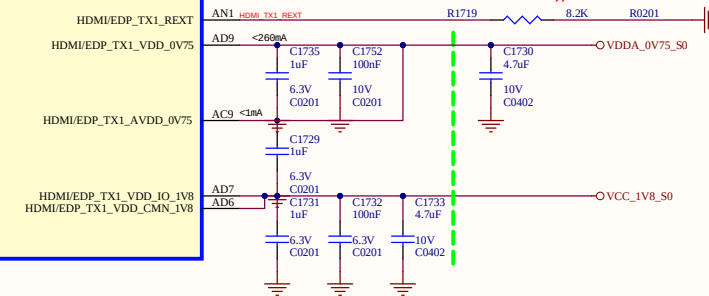

### RK3588-Socket


# RK3588\_T(HDMI20 RX)

U1000T

## HDMI RX

HDMI: V2.0

|              |   |
|--------------|---|
| HDMI_RX_D0P  | A |
| HDMI_RX_D0N  | A |
| HDMI_RX_D1P  | A |
| HDMI_RX_D1N  | A |
| HDMI_RX_D2P  | A |
| HDMI_RX_D2N  | A |
| HDMI_RX_CLKP | A |
| HDMI_RX_CLKN | A |
| HDMI_RX_REXT | A |

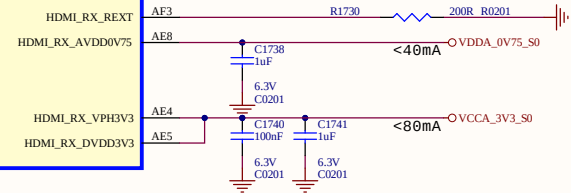


RK3588-Socket




## 001

CTC88 System




## U1000K

DK3588-Section






## 110004

RK3588-SoC



```
Forlinux set as HDMIRX.
Need to check if it can be
configured as UART
for on board wifi/BT
```

| Pin | Signal          | Function        |
|-----|-----------------|-----------------|
| 1   | PMIC_SPI_CS     | PMIC SPI CS     |
| 2   | PMIC_SPI_MOSI   | PMIC SPI MOSI   |
| 3   | PMIC_SPI_CLK    | PMIC SPI CLK    |
| 4   | PMIC_PWR_CTRL1  | PMIC PWR_CTRL1  |
| 5   | PMIC_PWR_CTRL2  | PMIC PWR_CTRL2  |
| 6   | PMIC_PWR_CTRL3  | PMIC PWR_CTRL3  |
| 7   | PMIC_INT_L      | PMIC INT_L      |
| 8   | RESET_L         | RESET_L         |
| 9   | PMIC_EXT_EN_OUT | PMIC_EXT_EN_OUT |
| 10  | PWRON_L         | PWRON_L         |
| 11  | PWM0_LED        | PWM0_LED        |

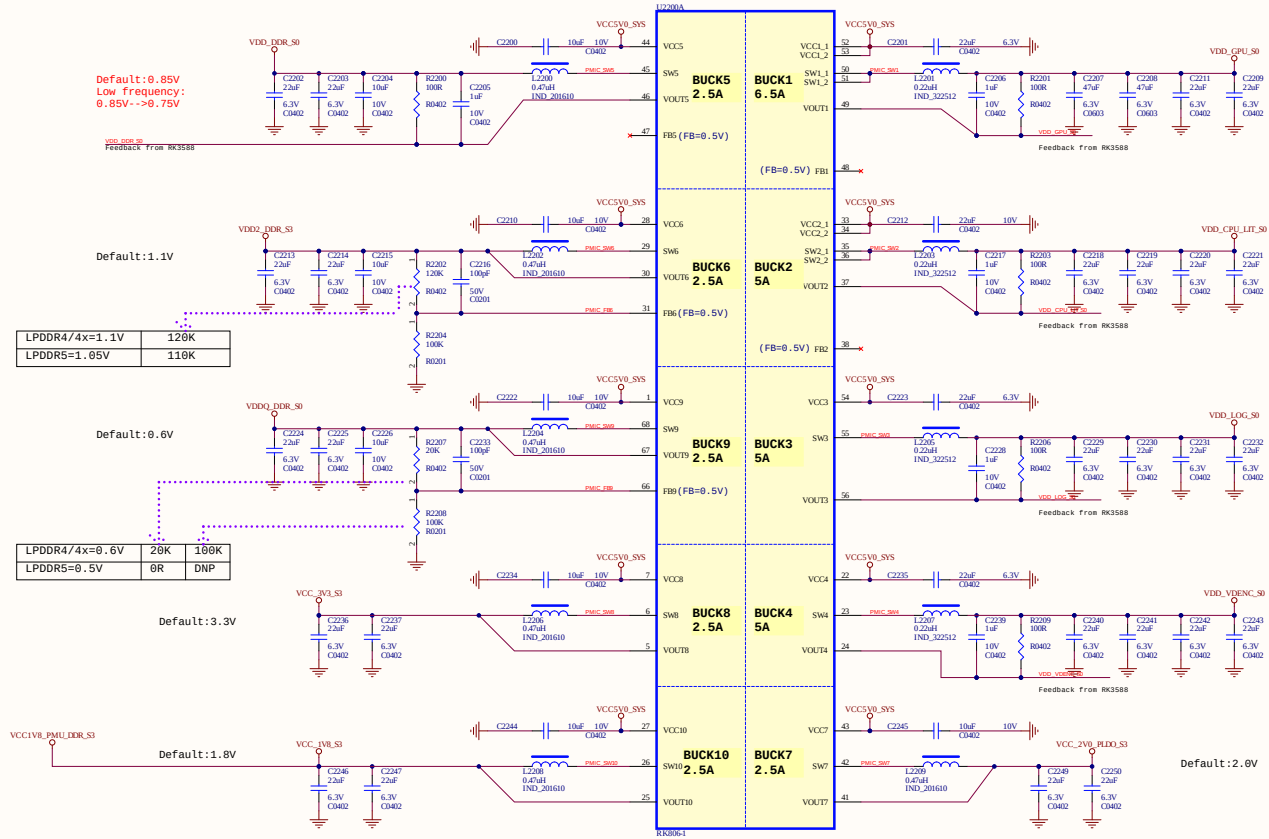


**IF TVS UNMOUNTED,  
ESD OR SURGE SHOULD BE  
DAMAGE THE PMIC!!!**


This device must be mounted. Replacing TVS mode is not recommended, if must, please choose the same specifications

Operating Supply Voltage: 5.5V (5.25-6V)  
Peak Pulse Current: >10A (mp=8/20us)  
Surge Clamping Voltage: <6.5V


**DO NOT DELETTE IT!!**




## VDD\_CPU\_BIG0

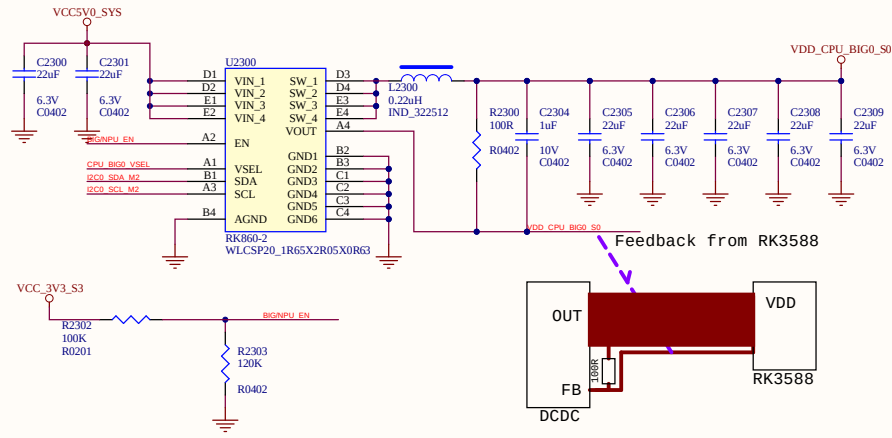


## VDD\_CPU\_BIG1

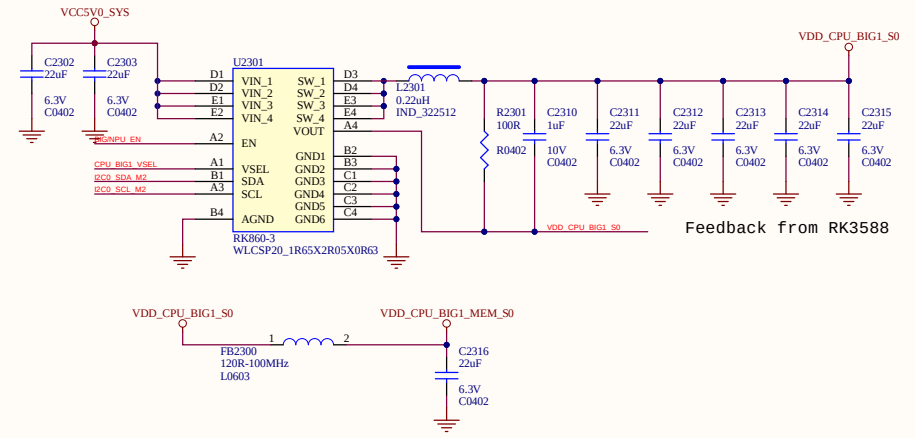

## VDD\_NPU

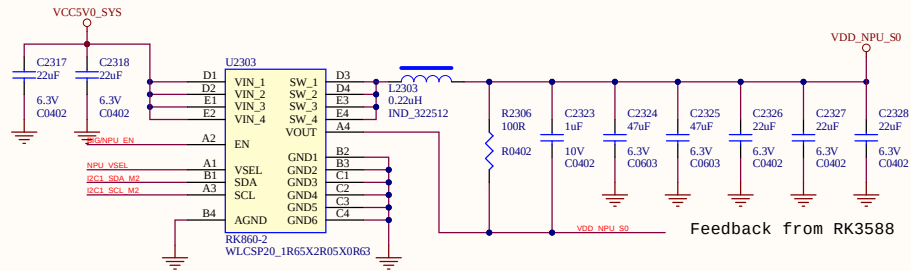


## VCC\_1V1\_NLDO\_S3

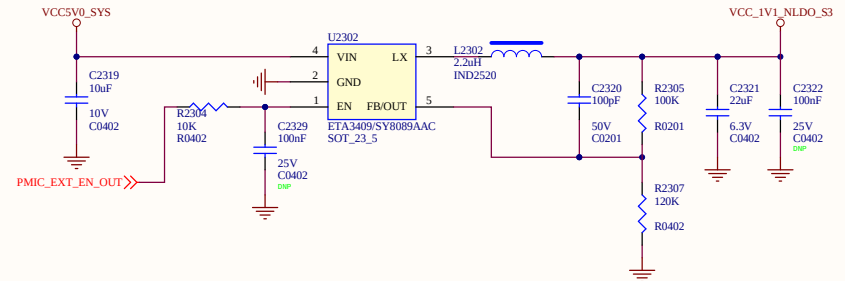


I2C1\_SCL\_M2  
 I2C1\_SDA\_M2  
 I2C0\_SCL\_M2  
 I2C0\_SDA\_M2

CPU\_BIG0\_VSEL  
 CPU\_BIG1\_VSEL  
 NPU\_VSEL  
 LCD\_PWREN\_H

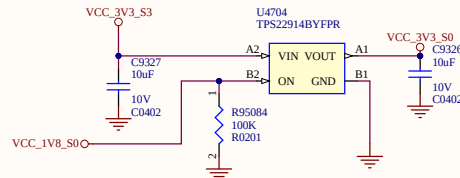


TESTPOINTS


Forlinx: Mipi DSI2/ RTC

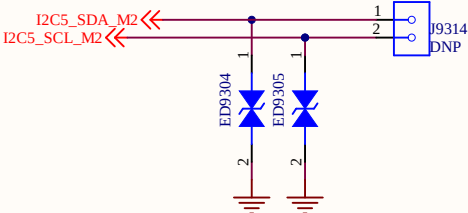









Forlinx: CAM2 I2C

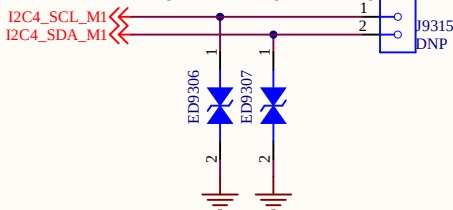


Forlinx: CAM1 I2C

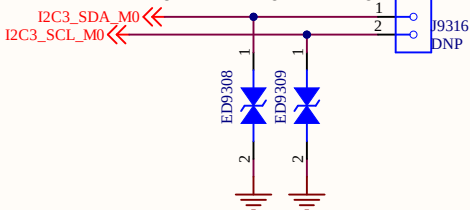


PWM set in Forlinx FW

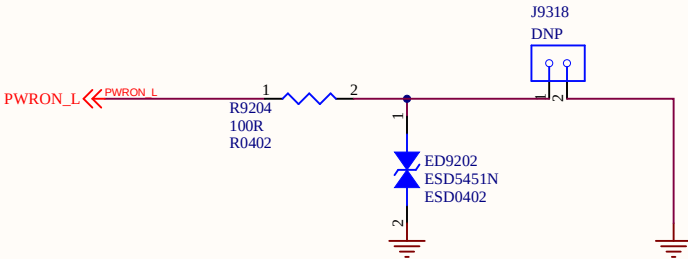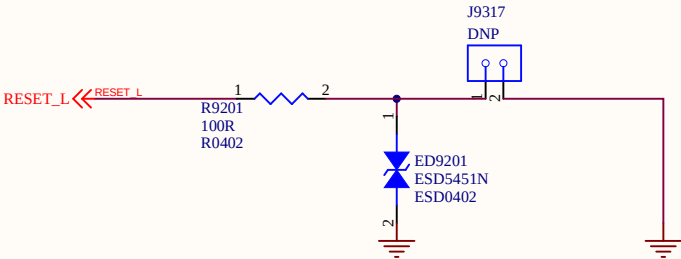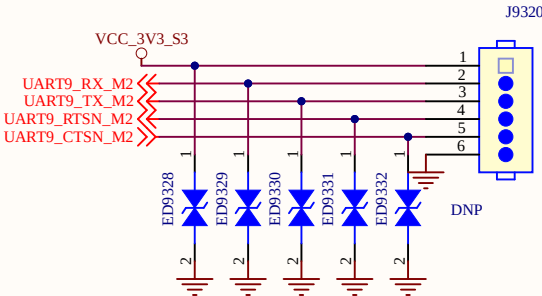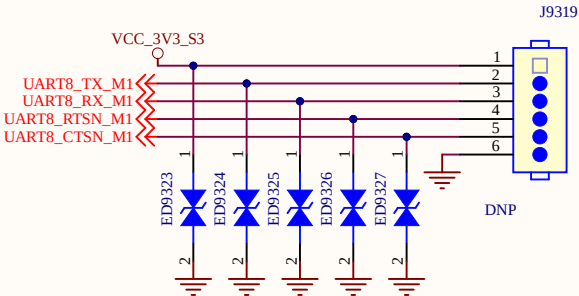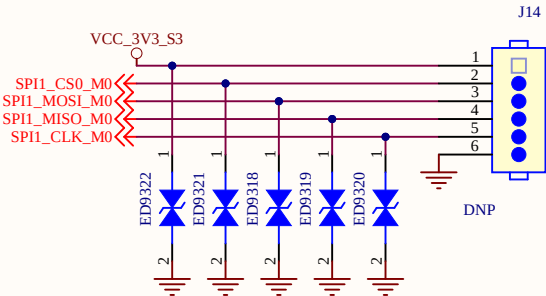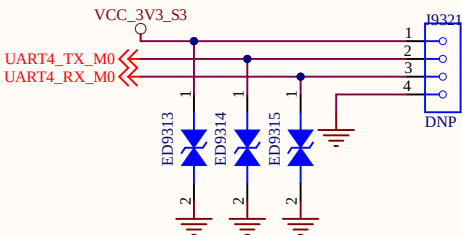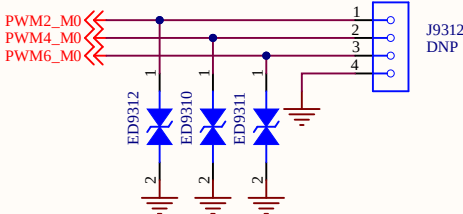



## USB2.0 TypeC Port

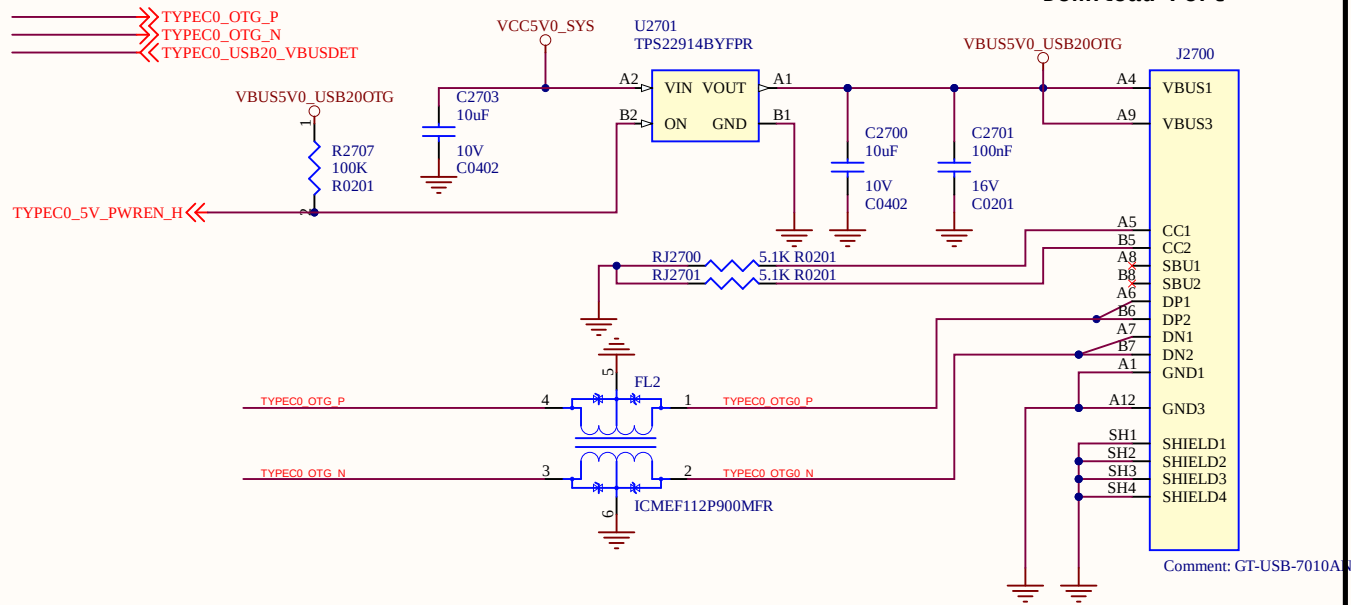



## USB Detection

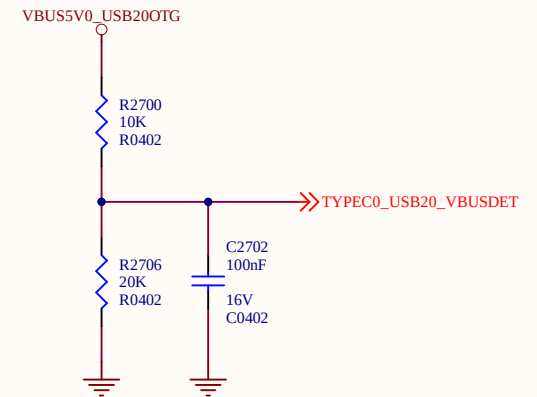


## DEBUG UART

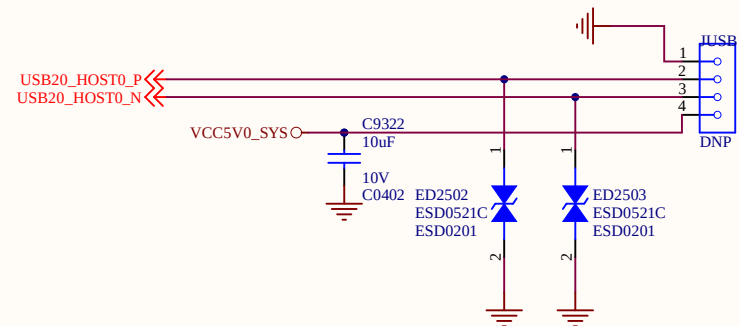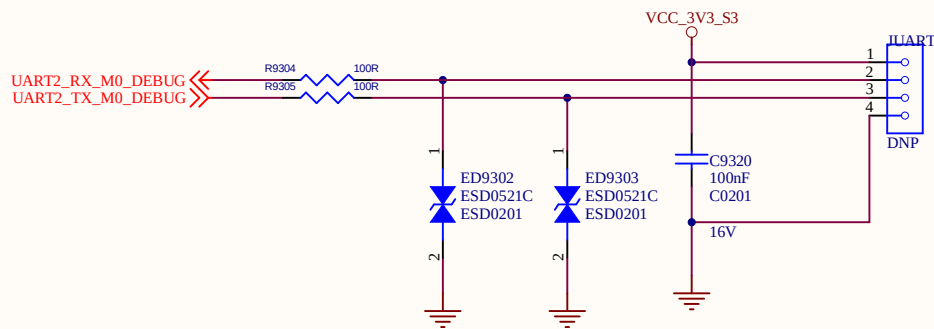

## LPDDR4 / 4X

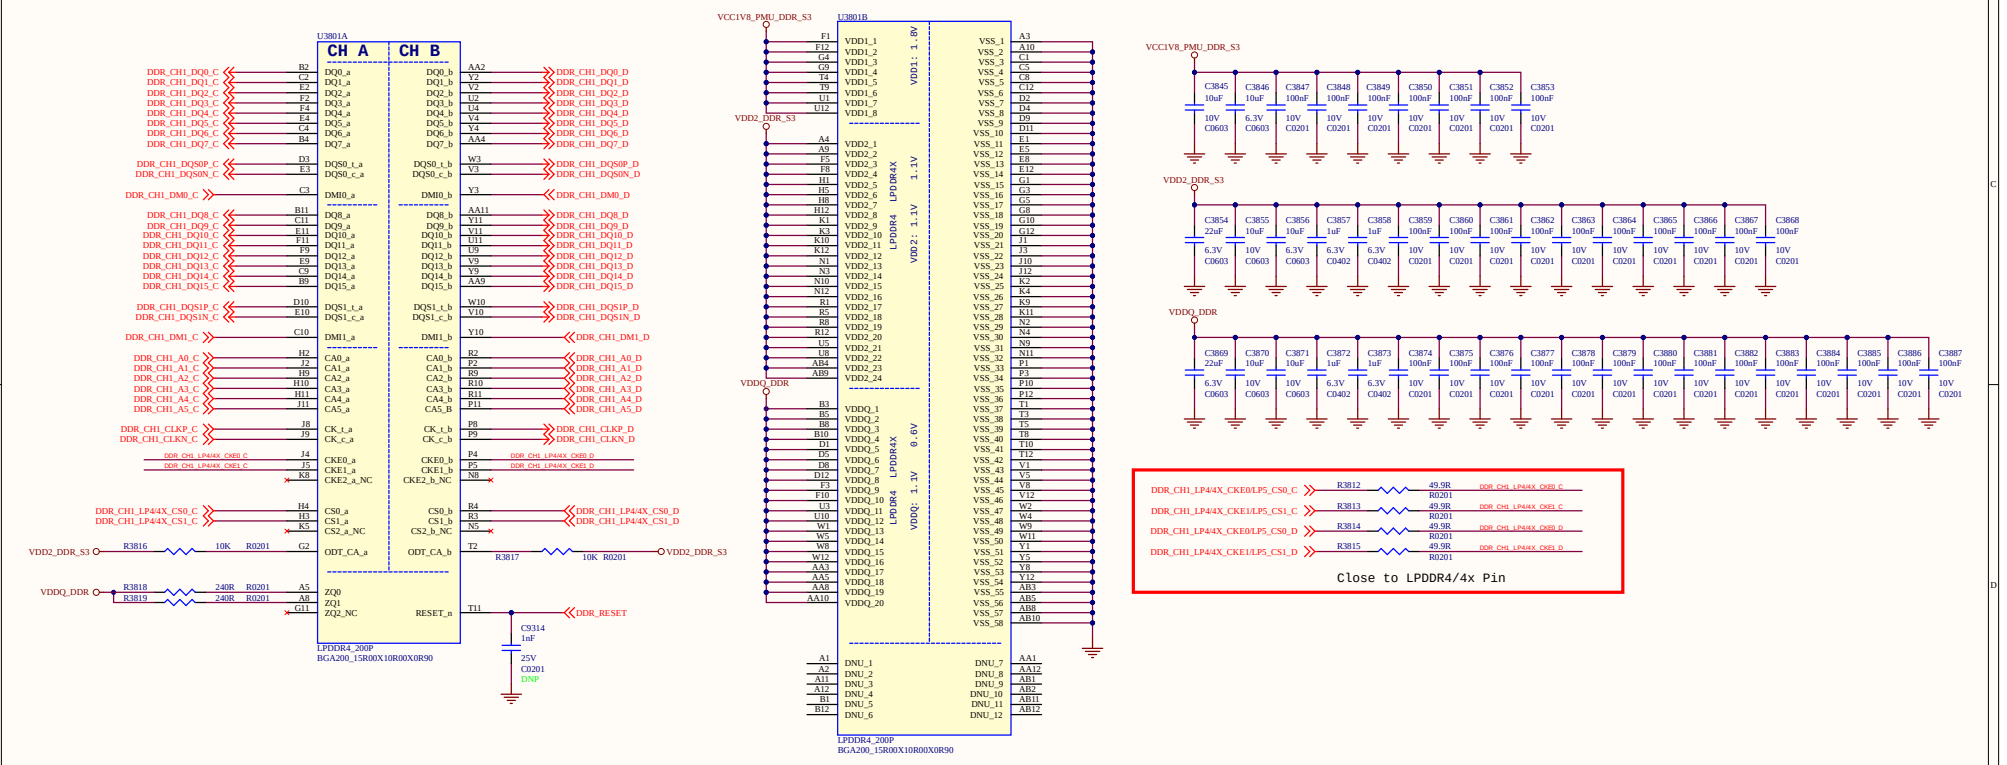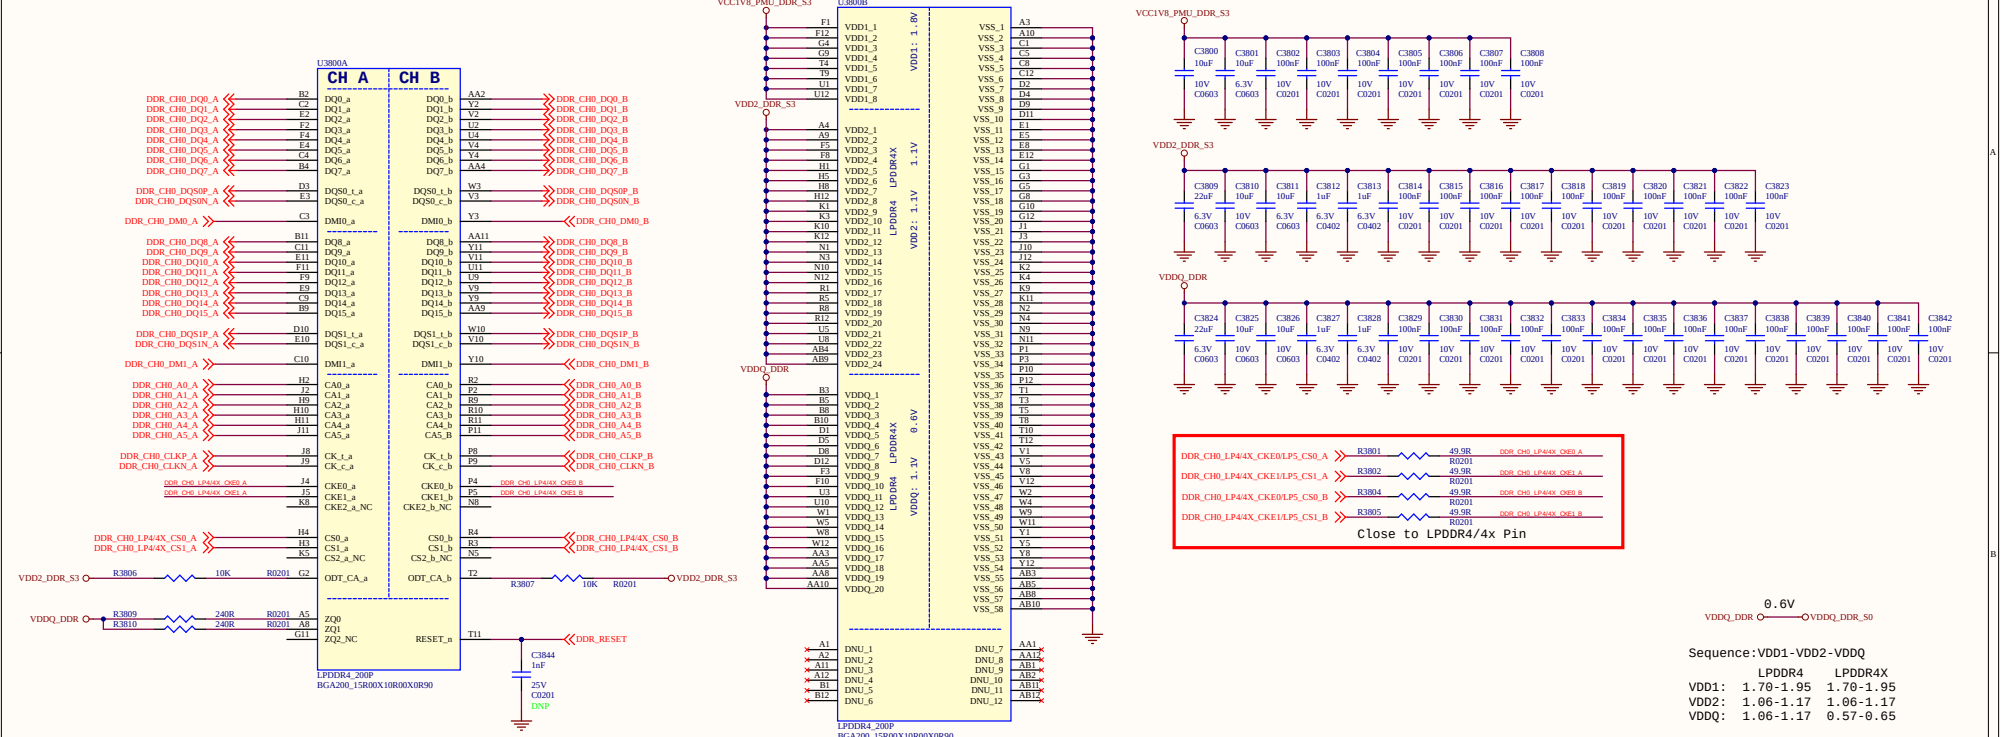


# eMMC FLASH


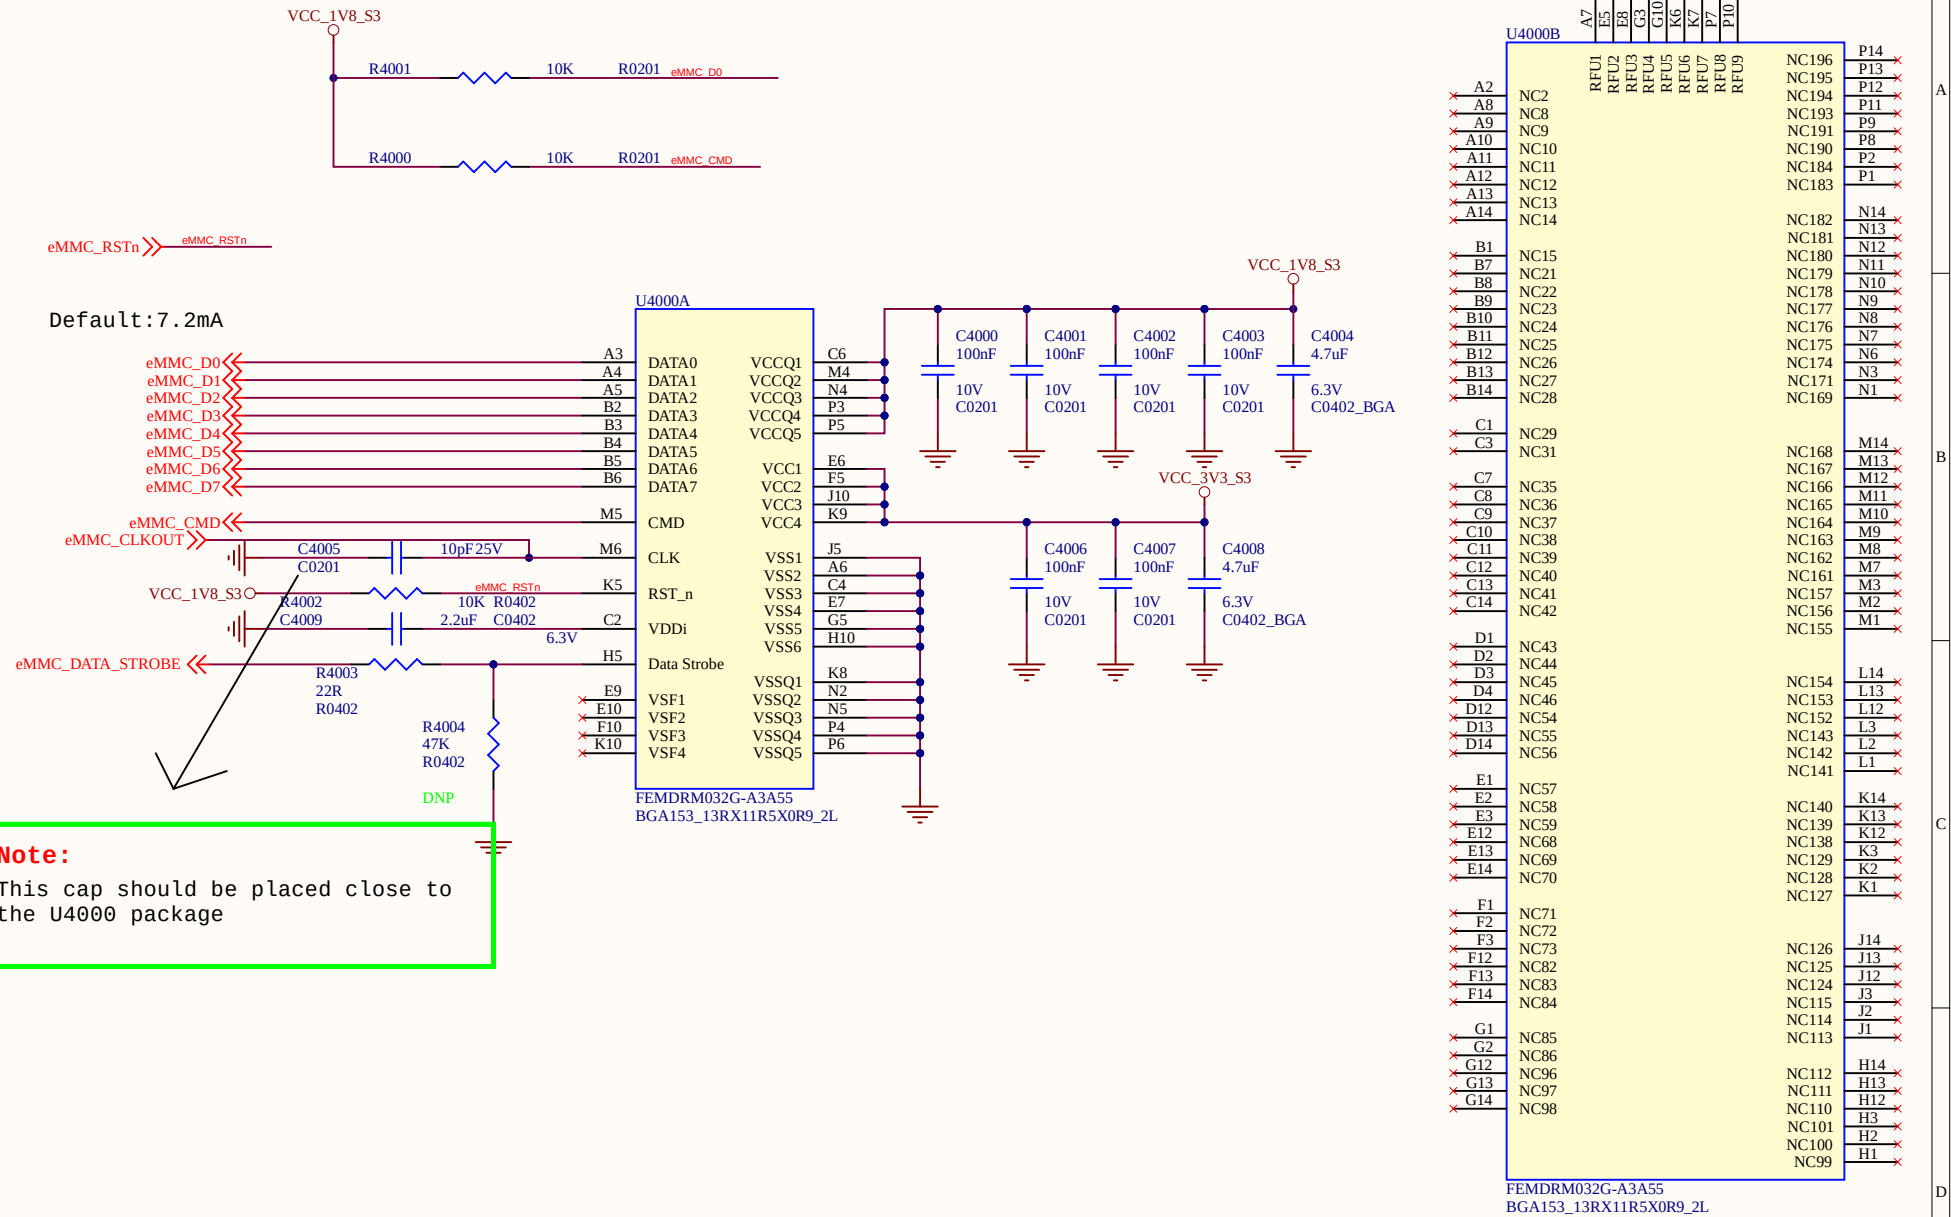


# TF CARD


SDMMC0\_D0  
SDMMC0\_D1  
SDMMC0\_D2  
SDMMC0\_D3  
SDMMC0\_CMD  
SD\_CLK  
SDMMC\_DET\_L

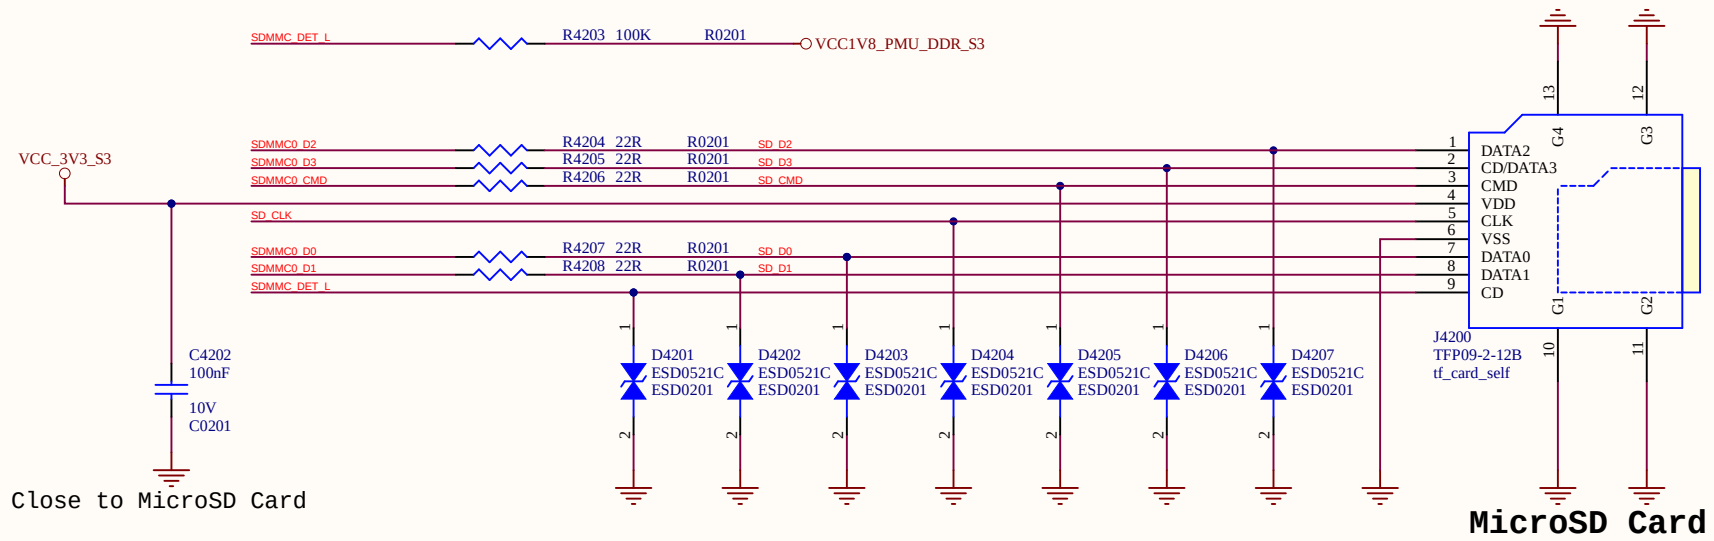


## MIPI CSI0 RX

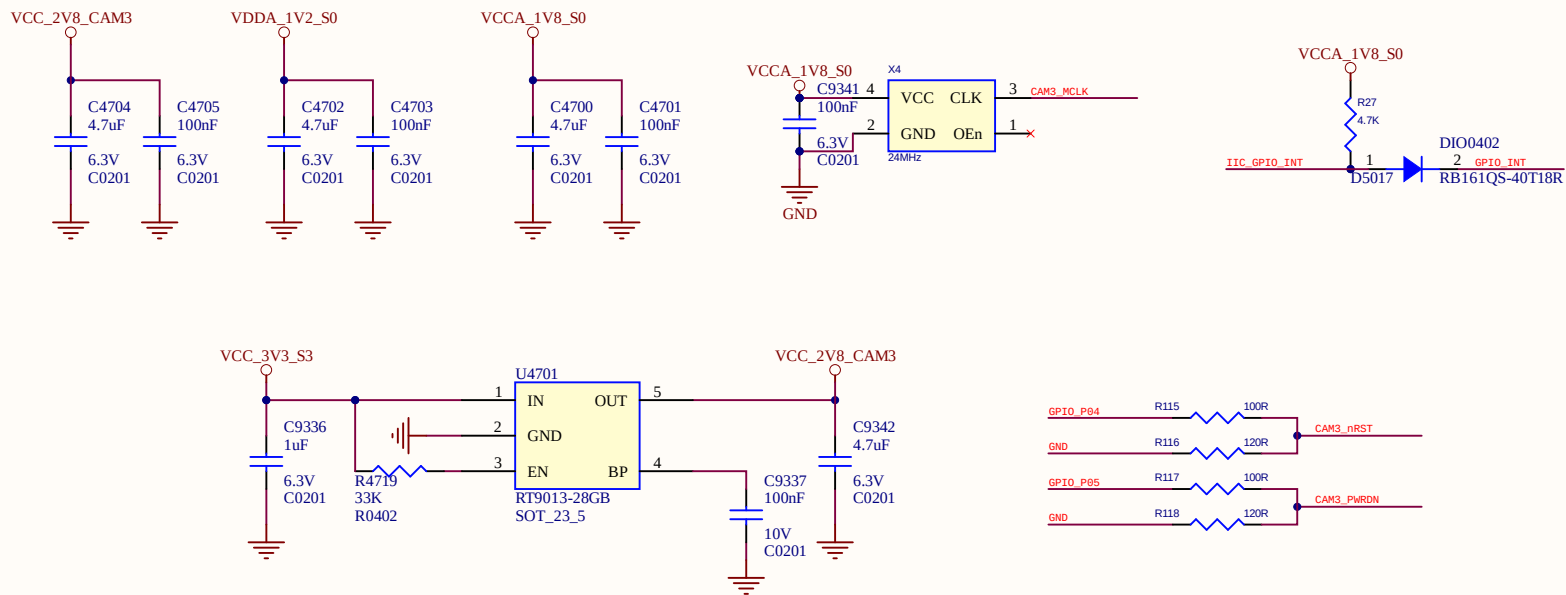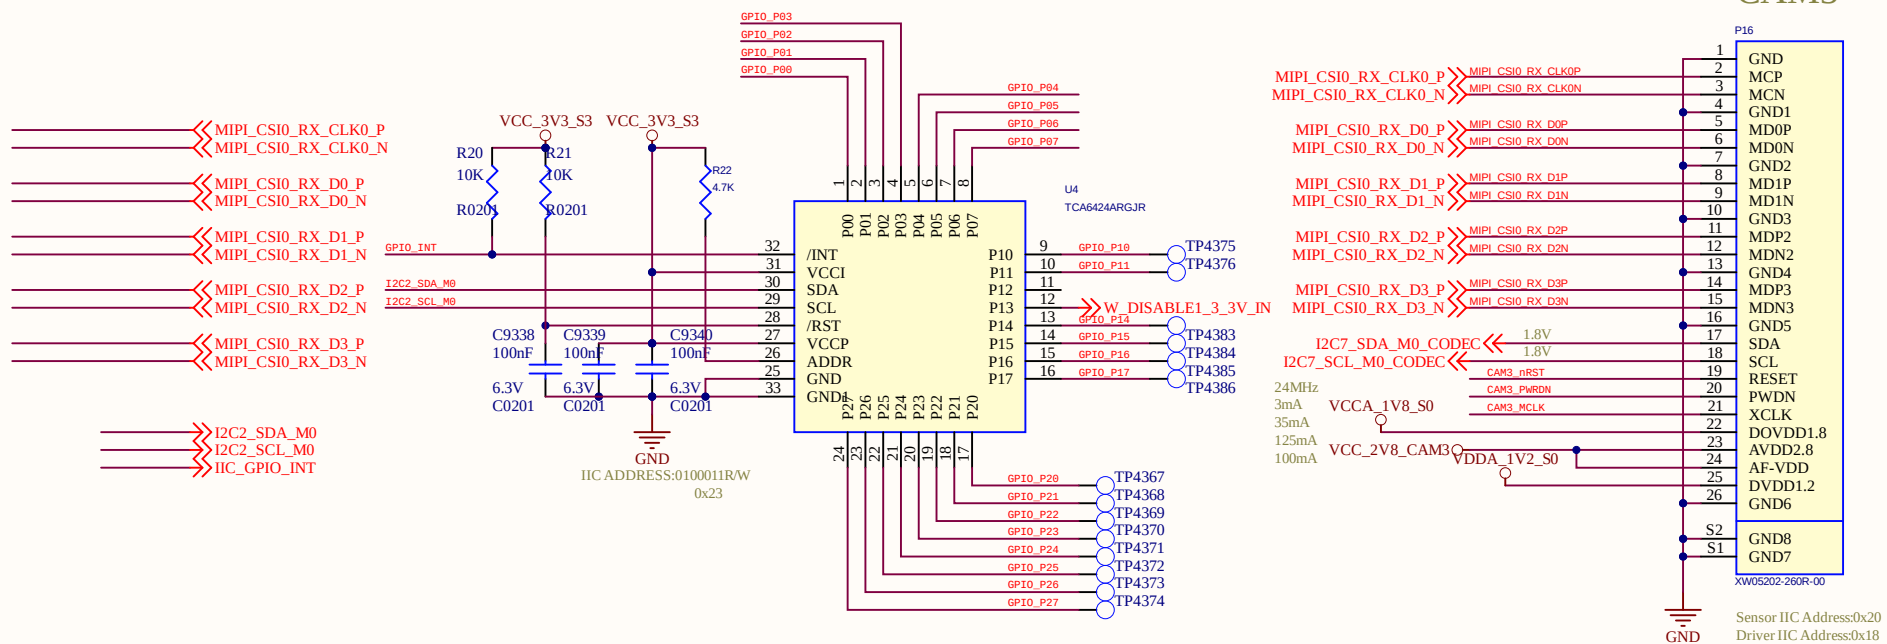


## HDMI TX1

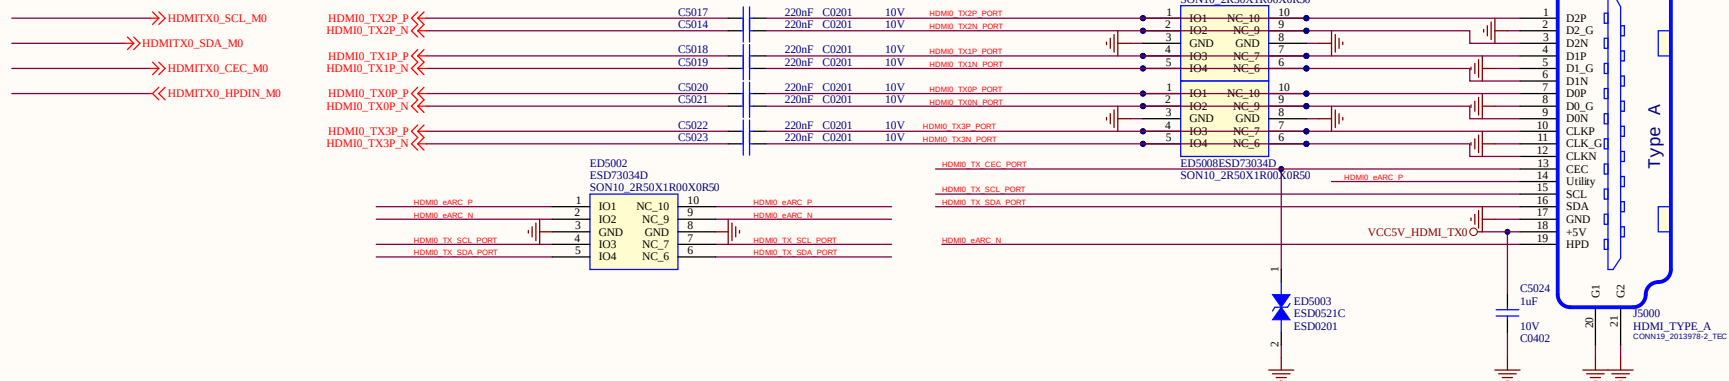



## HDMI TX DDC

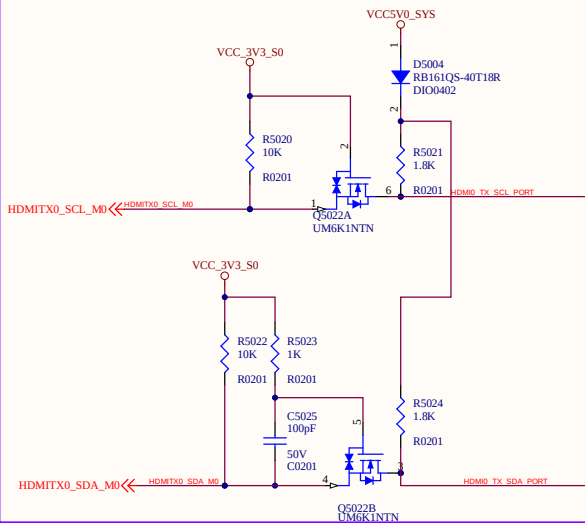

## HDMI TX eARC

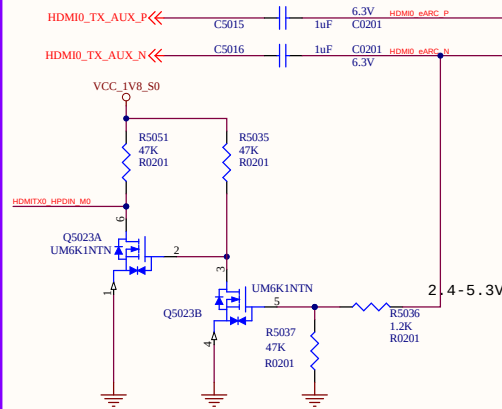

## HDMI TX CEC

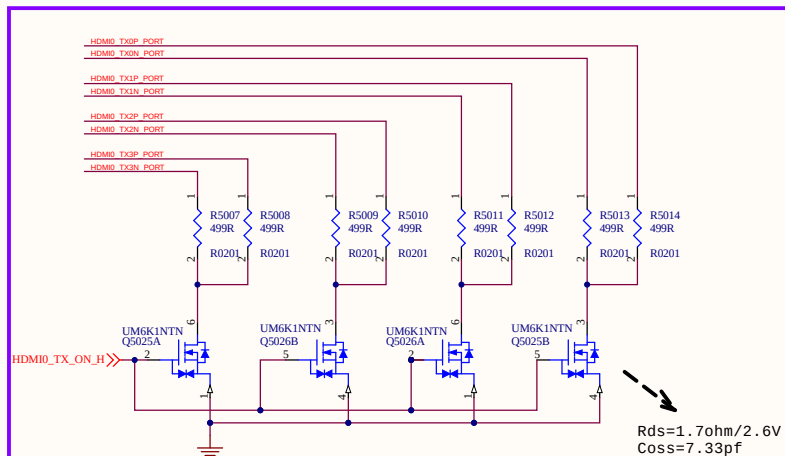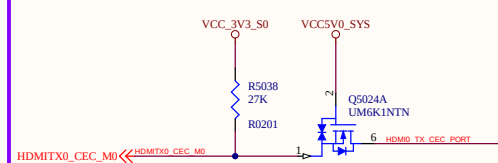


**Note:**

The controller only support AC coupled link In order to backward compatibility or to meet HDMI2.0 (1.4b) DC common mode spec and Voff, need do R based level-shift.


Switch on in HDMI2.0(TMDs) mode  
Switch off in HDMI2.1(FRL) mode.

Rds=1.7ohm/2.6V  
Coss=7.33pf


# Type-C PORT

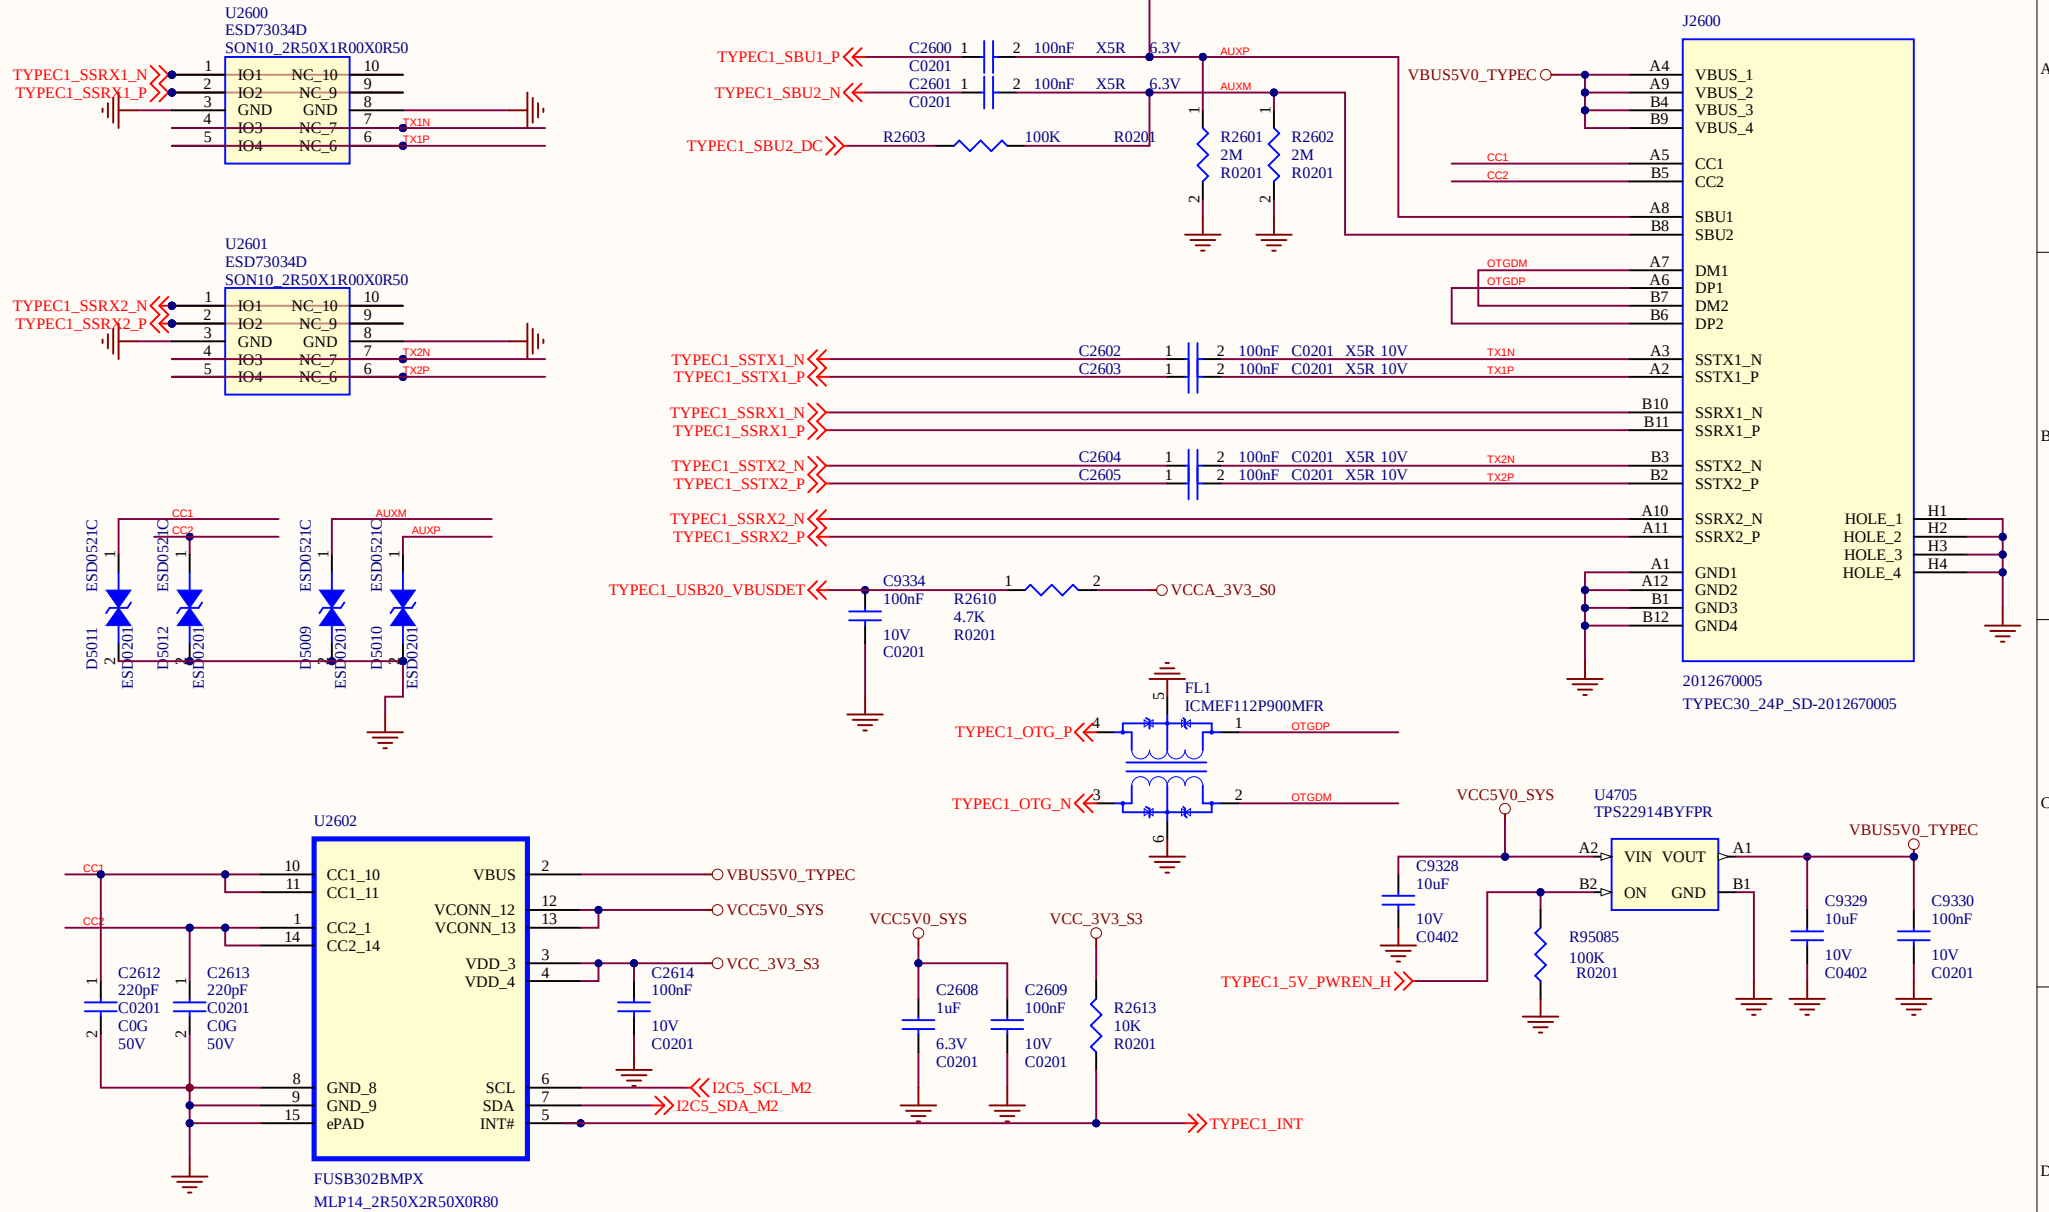

RTC

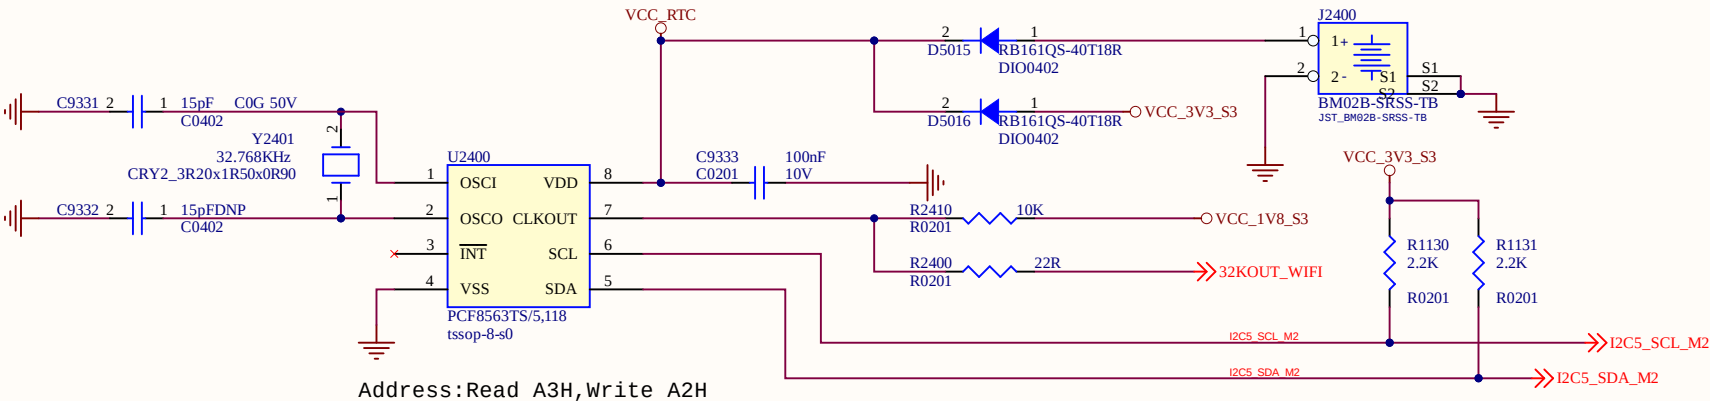

# PCIe WIFI6/BT Module-2T2R

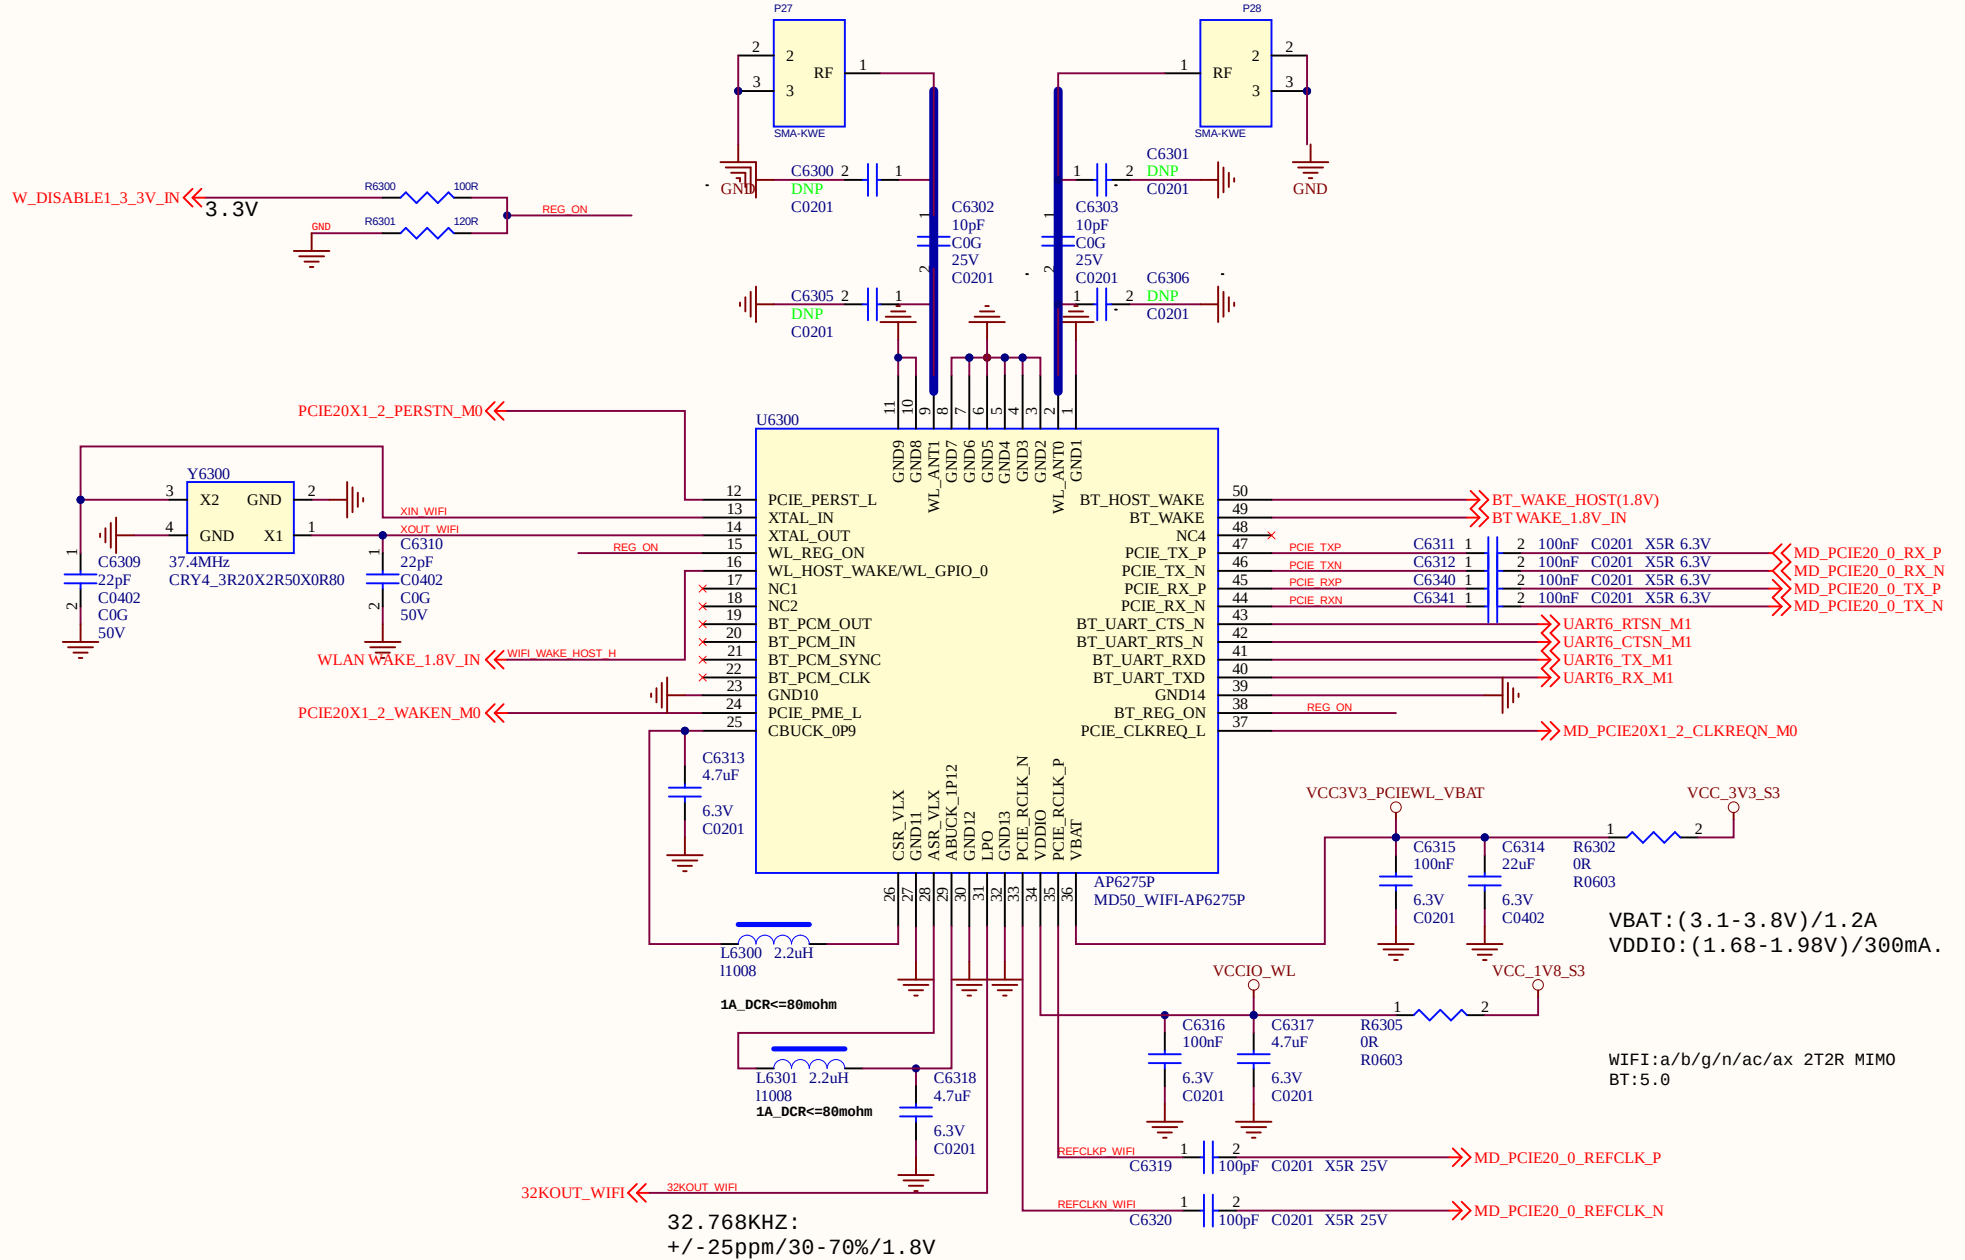

# Board Stack Report