



## **CrossLink-NX Family**

## **Data Sheet**

FPGA-DS-02049-2.1

September 2024

## Disclaimers

Lattice makes no warranty, representation, or guarantee regarding the accuracy of information contained in this document or the suitability of its products for any particular purpose. All information herein is provided AS IS, with all faults, and all associated risk is the responsibility entirely of the Buyer. The information provided herein is for informational purposes only and may contain technical inaccuracies or omissions, and may be otherwise rendered inaccurate for many reasons, and Lattice assumes no obligation to update or otherwise correct or revise this information. Products sold by Lattice have been subject to limited testing and it is the Buyer's responsibility to independently determine the suitability of any products and to test and verify the same. LATTICE PRODUCTS AND SERVICES ARE NOT DESIGNED, MANUFACTURED, OR TESTED FOR USE IN LIFE OR SAFETY CRITICAL SYSTEMS, HAZARDOUS ENVIRONMENTS, OR ANY OTHER ENVIRONMENTS REQUIRING FAIL-SAFE PERFORMANCE, INCLUDING ANY APPLICATION IN WHICH THE FAILURE OF THE PRODUCT OR SERVICE COULD LEAD TO DEATH, PERSONAL INJURY, SEVERE PROPERTY DAMAGE OR ENVIRONMENTAL HARM (COLLECTIVELY, "HIGH-RISK USES"). FURTHER, BUYER MUST TAKE PRUDENT STEPS TO PROTECT AGAINST PRODUCT AND SERVICE FAILURES, INCLUDING PROVIDING APPROPRIATE REDUNDANCIES, FAIL-SAFE FEATURES, AND/OR SHUT-DOWN MECHANISMS. LATTICE EXPRESSLY DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY OF FITNESS OF THE PRODUCTS OR SERVICES FOR HIGH-RISK USES. The information provided in this document is proprietary to Lattice Semiconductor, and Lattice reserves the right to make any changes to the information in this document or to any products at any time without notice.

## Inclusive Language

This document was created consistent with Lattice Semiconductor's inclusive language policy. In some cases, the language in underlying tools and other items may not yet have been updated. Please refer to Lattice's inclusive language [FAQ 6878](#) for a cross reference of terms. Note in some cases such as register names and state names it has been necessary to continue to utilize older terminology for compatibility.

# Contents

|                                                                  |    |
|------------------------------------------------------------------|----|
| Contents .....                                                   | 3  |
| Figures .....                                                    | 6  |
| Tables.....                                                      | 8  |
| Abbreviations in This Document.....                              | 11 |
| 1. General Description .....                                     | 13 |
| 1.1. Features .....                                              | 13 |
| 2. Architecture .....                                            | 17 |
| 2.1. Overview .....                                              | 17 |
| 2.2. PFU Blocks .....                                            | 19 |
| 2.2.1. Slice .....                                               | 19 |
| 2.2.2. Modes of Operation .....                                  | 22 |
| 2.3. Routing .....                                               | 23 |
| 2.4. Clocking Structure .....                                    | 23 |
| 2.4.1. Global PLL .....                                          | 23 |
| 2.4.2. Clock Distribution Network .....                          | 24 |
| 2.4.3. Primary Clocks .....                                      | 25 |
| 2.4.4. Edge Clock .....                                          | 26 |
| 2.4.5. Clock Dividers .....                                      | 26 |
| 2.4.6. Clock Center Multiplexer Blocks.....                      | 27 |
| 2.4.7. Dynamic Clock Select.....                                 | 27 |
| 2.4.8. Dynamic Clock Control .....                               | 28 |
| 2.4.9. DDRDLL .....                                              | 28 |
| 2.5. SGMII Tx/Rx.....                                            | 29 |
| 2.6. sysMEM Memory .....                                         | 30 |
| 2.6.1. sysMEM Memory Block.....                                  | 30 |
| 2.6.2. Bus Size Matching.....                                    | 31 |
| 2.6.3. RAM Initialization and ROM Operation .....                | 31 |
| 2.6.4. Memory Cascading .....                                    | 31 |
| 2.6.5. Single, Dual and Pseudo-Dual Port Modes .....             | 31 |
| 2.6.6. Memory Output Reset.....                                  | 31 |
| 2.7. Large RAM .....                                             | 32 |
| 2.8. sysDSP .....                                                | 32 |
| 2.8.1. sysDSP Approach Compared to General DSP .....             | 32 |
| 2.8.2. sysDSP Architecture Features.....                         | 33 |
| 2.9. Programmable I/O (PIO).....                                 | 35 |
| 2.10. Programmable I/O Cell (PIC) .....                          | 35 |
| 2.10.1. Input Register Block.....                                | 37 |
| 2.10.2. Output Register Block.....                               | 38 |
| 2.11. Tri-state Register Block .....                             | 39 |
| 2.12. DDR Memory Support .....                                   | 40 |
| 2.12.1. DQS Grouping for DDR Memory.....                         | 40 |
| 2.12.2. DLL Calibrated DQS Delay and Control Block (DQSBUF)..... | 41 |
| 2.13. sysI/O Buffer .....                                        | 43 |
| 2.13.1. Supported sysI/O Standards .....                         | 43 |
| 2.13.2. sysI/O Banking Scheme .....                              | 44 |
| 2.13.3. sysI/O Buffer Configurations .....                       | 47 |
| 2.14. Analog Interface .....                                     | 47 |
| 2.14.1. Analog to Digital Converters.....                        | 47 |
| 2.14.2. Continuous Time Comparators.....                         | 47 |
| 2.14.3. Internal Junction Temperature Monitoring Diode .....     | 47 |
| 2.15. IEEE 1149.1-Compliant Boundary Scan Testability .....      | 47 |
| 2.16. Device Configuration.....                                  | 48 |

|          |                                                                             |     |
|----------|-----------------------------------------------------------------------------|-----|
| 2.16.1.  | Enhanced Configuration Options.....                                         | 48  |
| 2.17.    | Single Event Upset (SEU) Handling.....                                      | 49  |
| 2.18.    | On-Chip Oscillator .....                                                    | 49  |
| 2.19.    | User I2C IP .....                                                           | 49  |
| 2.20.    | Trace ID .....                                                              | 50  |
| 2.21.    | Density Shifting .....                                                      | 50  |
| 2.22.    | MIPI D-PHY Blocks .....                                                     | 50  |
| 2.23.    | Peripheral Component Interconnect Express (PCIe).....                       | 51  |
| 2.24.    | Cryptographic Engine .....                                                  | 52  |
| 3.       | DC and Switching Characteristics for Commercial and Industrial.....         | 53  |
| 3.1.     | Absolute Maximum Ratings .....                                              | 53  |
| 3.2.     | Recommended Operating Conditions <sup>1, 2, 3</sup> .....                   | 54  |
| 3.3.     | Power Supply Ramp Rates.....                                                | 55  |
| 3.4.     | Power up Sequence.....                                                      | 55  |
| 3.5.     | On-Chip Programmable Termination .....                                      | 55  |
| 3.6.     | Hot Socketing Specifications .....                                          | 56  |
| 3.7.     | ESD Performance.....                                                        | 56  |
| 3.8.     | DC Electrical Characteristics .....                                         | 57  |
| 3.9.     | Supply Currents .....                                                       | 58  |
| 3.10.    | sys/O Recommended Operating Conditions .....                                | 59  |
| 3.11.    | sys/O Single-Ended DC Electrical Characteristics .....                      | 60  |
| 3.12.    | sys/O Differential DC Electrical Characteristics .....                      | 62  |
| 3.12.1.  | LVDS.....                                                                   | 62  |
| 3.12.2.  | LVDS25E (Output Only).....                                                  | 63  |
| 3.12.3.  | SubLVDS (Input Only).....                                                   | 64  |
| 3.12.4.  | SubLVDS/SubLVDS (Output Only) .....                                         | 64  |
| 3.12.5.  | SLVS .....                                                                  | 65  |
| 3.12.6.  | Soft MIPI D-PHY .....                                                       | 66  |
| 3.12.7.  | Differential HSTL15D (Output Only) .....                                    | 70  |
| 3.12.8.  | Differential SSTL135D, SSTL15D (Output Only) .....                          | 70  |
| 3.12.9.  | Differential HSUL12D (Output Only).....                                     | 70  |
| 3.12.10. | Differential LVCMOS25D, LVCMOS33D, LVTTTL33D (Output Only) .....            | 70  |
| 3.13.    | Maximum sys/O Buffer Speed.....                                             | 70  |
| 3.14.    | Typical Building Block Function Performance .....                           | 72  |
| 3.15.    | LMMI .....                                                                  | 73  |
| 3.16.    | Derating Timing Tables.....                                                 | 74  |
| 3.17.    | External Switching Characteristics .....                                    | 74  |
| 3.18.    | sysCLOCK PLL Timing (V <sub>CC</sub> = 1.0 V) – Commercial/Industrial ..... | 82  |
| 3.19.    | Internal Oscillators Characteristics.....                                   | 83  |
| 3.20.    | User I2C Characteristics.....                                               | 84  |
| 3.21.    | Analog-Digital Converter (ADC) Block Characteristics.....                   | 84  |
| 3.22.    | Comparator Block Characteristics .....                                      | 85  |
| 3.23.    | Digital Temperature Readout Characteristics .....                           | 85  |
| 3.24.    | Hardened MIPI D-PHY Characteristics.....                                    | 86  |
| 3.25.    | Hardened PCIe Characteristics .....                                         | 89  |
| 3.25.1.  | PCIe (2.5 Gbps) .....                                                       | 89  |
| 3.25.2.  | PCIe (5 Gbps) .....                                                         | 90  |
| 3.26.    | SGMII Characteristics .....                                                 | 92  |
| 3.26.1.  | SGMII Specifications .....                                                  | 92  |
| 3.27.    | sysCONFIG Port Timing Specifications .....                                  | 92  |
| 3.28.    | JTAG Port Timing Specifications .....                                       | 99  |
| 3.29.    | Switching Test Conditions .....                                             | 100 |
| 4.       | DC and Switching Characteristics for Automotive .....                       | 101 |
| 4.1.     | Absolute Maximum Ratings .....                                              | 101 |

|          |                                                                      |     |
|----------|----------------------------------------------------------------------|-----|
| 4.2.     | Recommended Operating Conditions <sup>1, 2, 3</sup> .....            | 102 |
| 4.3.     | Power Supply Ramp Rates .....                                        | 103 |
| 4.4.     | Power up Sequence .....                                              | 103 |
| 4.5.     | On-Chip Programmable Termination .....                               | 103 |
| 4.6.     | Hot Socketing Specifications .....                                   | 104 |
| 4.7.     | ESD Performance .....                                                | 104 |
| 4.8.     | DC Electrical Characteristics .....                                  | 105 |
| 4.9.     | Supply Currents .....                                                | 106 |
| 4.10.    | sysI/O Recommended Operating Conditions .....                        | 107 |
| 4.11.    | sysI/O Single-Ended DC Electrical Characteristics <sup>3</sup> ..... | 108 |
| 4.12.    | sysI/O Differential DC Electrical Characteristics .....              | 110 |
| 4.12.1.  | LVDS .....                                                           | 110 |
| 4.12.2.  | LVDS25E (Output Only) .....                                          | 111 |
| 4.12.3.  | SubLVDS (Input Only) .....                                           | 111 |
| 4.12.4.  | SubLVDS/SubLVDSSE (Output Only) .....                                | 112 |
| 4.12.5.  | SLVS .....                                                           | 113 |
| 4.12.6.  | Soft MIPI D-PHY .....                                                | 114 |
| 4.12.7.  | Differential HSTL15D (Output Only) .....                             | 117 |
| 4.12.8.  | Differential SSTL135D, SSTL15D (Output Only) .....                   | 117 |
| 4.12.9.  | Differential HSUL12D (Output Only) .....                             | 117 |
| 4.12.10. | Differential LVCMOS25D, LVCMOS33D, LVTTTL33D (Output Only) .....     | 117 |
| 4.13.    | Maximum sysI/O Buffer Speed .....                                    | 118 |
| 4.14.    | Typical Building Block Function Performance .....                    | 120 |
| 4.15.    | LMMI .....                                                           | 121 |
| 4.16.    | Derating Timing Tables .....                                         | 121 |
| 4.17.    | External Switching Characteristics .....                             | 122 |
| 4.18.    | sysCLOCK PLL Timing ( $V_{CC} = 1.0\text{ V}$ ) – Automotive .....   | 130 |
| 4.19.    | Internal Oscillators Characteristics .....                           | 131 |
| 4.20.    | User I2C Characteristics .....                                       | 131 |
| 4.21.    | Analog-Digital Converter (ADC) Block Characteristics .....           | 132 |
| 4.22.    | Comparator Block Characteristics .....                               | 133 |
| 4.23.    | Digital Temperature Readout Characteristics .....                    | 133 |
| 4.24.    | Hardened MIPI D-PHY Characteristics .....                            | 133 |
| 4.25.    | Hardened PCIe Characteristics .....                                  | 137 |
| 4.25.1.  | PCIe (2.5 Gbps) .....                                                | 137 |
| 4.25.2.  | PCIe (5 Gbps) .....                                                  | 138 |
| 4.26.    | Hardened SGMII Characteristics .....                                 | 140 |
| 4.26.1.  | SGMII Specifications .....                                           | 140 |
| 4.27.    | sysCONFIG Port Timing Specifications .....                           | 140 |
| 4.28.    | JTAG Port Timing Specifications .....                                | 147 |
| 4.29.    | Switching Test Conditions .....                                      | 148 |
| 5.       | Pinout Information .....                                             | 149 |
| 5.1.     | Signal Descriptions .....                                            | 149 |
| 5.2.     | Pin Information Summary .....                                        | 155 |
| 5.2.1.   | CrossLink-NX Family .....                                            | 155 |
| 6.       | Ordering Information .....                                           | 158 |
| 6.1.     | Part Number Description .....                                        | 158 |
| 6.2.     | Ordering Part Numbers .....                                          | 159 |
| 6.2.1.   | Commercial .....                                                     | 159 |
| 6.2.2.   | Industrial .....                                                     | 159 |
| 6.2.3.   | Automotive .....                                                     | 160 |
|          | References .....                                                     | 161 |
|          | Technical Support Assistance .....                                   | 162 |
|          | Revision History .....                                               | 163 |

## Figures

|                                                                                             |    |
|---------------------------------------------------------------------------------------------|----|
| Figure 2.1. Simplified Block Diagram, CrossLink-NX-40 Device (Top Level) .....              | 18 |
| Figure 2.2. Simplified Block Diagram, CrossLink-NX-17 Device (Top Level) .....              | 18 |
| Figure 2.3. PFU Diagram .....                                                               | 19 |
| Figure 2.4. Slice Diagram .....                                                             | 20 |
| Figure 2.5. Slice Configuration for LUT4 and LUT5 .....                                     | 21 |
| Figure 2.6. General Purpose PLL Diagram.....                                                | 24 |
| Figure 2.7. Clocking.....                                                                   | 25 |
| Figure 2.8. Edge Clock Sources per Bank .....                                               | 26 |
| Figure 2.9. DCS_CMUX Diagram .....                                                          | 27 |
| Figure 2.10. DCS Waveforms .....                                                            | 28 |
| Figure 2.11. DLLDEL Functional Diagram .....                                                | 29 |
| Figure 2.12. DDRDLL Architecture .....                                                      | 29 |
| Figure 2.13. SGMII CDR IP .....                                                             | 30 |
| Figure 2.14. Memory Core Reset .....                                                        | 32 |
| Figure 2.15. Comparison of General DSP and CrossLink-NX Approaches .....                    | 33 |
| Figure 2.16. DSP Functional Block Diagram .....                                             | 34 |
| Figure 2.17. Group of Two High Performance Programmable I/O Cells .....                     | 36 |
| Figure 2.18. Wide Range Programmable I/O Cells.....                                         | 36 |
| Figure 2.19. Input Register Block for PIO on Top, Left, and Right Sides of the Device ..... | 37 |
| Figure 2.20. Input Register Block for PIO on Bottom Side of the Device .....                | 38 |
| Figure 2.21. Output Register Block on Top, Left, and Right Sides .....                      | 38 |
| Figure 2.22. Output Register Block on Bottom Side .....                                     | 39 |
| Figure 2.23. Tri-state Register Block on Top, Left, and Right Sides.....                    | 39 |
| Figure 2.24. Tri-state Register Block on Bottom Side .....                                  | 40 |
| Figure 2.25. DQS Grouping on the Bottom Edge .....                                          | 41 |
| Figure 2.26. DQS Control and Delay Block (DQSBUF) .....                                     | 42 |
| Figure 2.27. sys/O Banking .....                                                            | 45 |
| Figure 2.28. PCIe Core.....                                                                 | 51 |
| Figure 2.29. PCIe Soft IP Wrapper.....                                                      | 52 |
| Figure 2.30. Cryptographic Engine Block Diagram .....                                       | 52 |
| Figure 3.1. On-Chip Termination .....                                                       | 55 |
| Figure 3.2. LVDS25E Output Termination Example .....                                        | 64 |
| Figure 3.3. SubLVDS Input Interface .....                                                   | 64 |
| Figure 3.4. SubLVDS Output Interface .....                                                  | 65 |
| Figure 3.5. SLVS Interface .....                                                            | 66 |
| Figure 3.6. MIPI Interface .....                                                            | 67 |
| Figure 3.7. Receiver RX.CLK.Centered Waveforms .....                                        | 80 |
| Figure 3.8. Receiver RX.CLK.Aligned and DDR Memory Input Waveforms.....                     | 80 |
| Figure 3.9. Transmit TX.CLK.Centered and DDR Memory Output Waveforms.....                   | 80 |
| Figure 3.10. Transmit TX.CLK.Aligned Waveforms.....                                         | 81 |
| Figure 3.11. DDRX71 Video Timing Waveforms.....                                             | 81 |
| Figure 3.12. Receiver DDRX71_RX Waveforms.....                                              | 82 |
| Figure 3.13. Transmitter DDRX71_TX Waveforms.....                                           | 82 |
| Figure 3.14. Controller SPI POR/REFRESH Timing.....                                         | 95 |
| Figure 3.15. Target SPI/I2C/I3C POR/REFRESH Timing .....                                    | 95 |
| Figure 3.16. Controller SPI PROGRAMN Timing.....                                            | 96 |
| Figure 3.17. Target SPI/I2C/I3C PROGRAMN Timing .....                                       | 96 |
| Figure 3.18. Controller SPI Configuration Timing .....                                      | 97 |
| Figure 3.19. Target SPI Configuration Timing .....                                          | 97 |
| Figure 3.20. I2C /I3C Configuration Timing.....                                             | 97 |
| Figure 3.21. Controller SPI Wake-Up Timing .....                                            | 98 |
| Figure 3.22. Target SPI/I2C/I3C Wake-Up Timing.....                                         | 98 |

|                                                                           |     |
|---------------------------------------------------------------------------|-----|
| Figure 3.23. Configuration Error Notification .....                       | 98  |
| Figure 3.24. JTAG Port Timing Waveforms .....                             | 99  |
| Figure 3.25. Output Test Load, LVTTTL and LVCMOS Standards .....          | 100 |
| Figure 4.1. On-Chip Termination .....                                     | 103 |
| Figure 4.2. LVDS25E Output Termination Example .....                      | 111 |
| Figure 4.3. SubLVDS Input Interface .....                                 | 112 |
| Figure 4.4. SubLVDS Output Interface .....                                | 113 |
| Figure 4.5. SLVS Interface .....                                          | 114 |
| Figure 4.6. MIPI Interface .....                                          | 115 |
| Figure 4.7. Receiver RX.CLK.Centered Waveforms .....                      | 127 |
| Figure 4.8. Receiver RX.CLK.Aligned and DDR Memory Input Waveforms.....   | 128 |
| Figure 4.9. Transmit TX.CLK.Centered and DDR Memory Output Waveforms..... | 128 |
| Figure 4.10. Transmit TX.CLK.Aligned Waveforms .....                      | 128 |
| Figure 4.11. DDRX71 Video Timing Waveforms .....                          | 129 |
| Figure 4.12. Receiver DDRX71_RX Waveforms .....                           | 129 |
| Figure 4.13. Transmitter DDRX71_TX Waveforms.....                         | 130 |
| Figure 4.14. Controller SPI POR/REFRESH Timing.....                       | 142 |
| Figure 4.15. Target SPI/I2C/I3C POR/REFRESH Timing .....                  | 143 |
| Figure 4.16. Controller SPI PROGRAMN Timing.....                          | 143 |
| Figure 4.17. Target SPI/I2C/I3C PROGRAMN Timing .....                     | 144 |
| Figure 4.18. Controller SPI Configuration Timing .....                    | 144 |
| Figure 4.19. Target SPI Configuration Timing .....                        | 145 |
| Figure 4.20. I2C /I3C Configuration Timing.....                           | 145 |
| Figure 4.21. Controller SPI Wake-Up Timing .....                          | 146 |
| Figure 4.22. Target SPI/I2C/I3C Wake-Up Timing.....                       | 146 |
| Figure 4.23. Configuration Error Notification .....                       | 146 |
| Figure 4.24. JTAG Port Timing Waveforms .....                             | 147 |
| Figure 4.25. Output Test Load, LVTTTL and LVCMOS Standards .....          | 148 |

## Tables

|                                                                                                      |    |
|------------------------------------------------------------------------------------------------------|----|
| Table 1.1. CrossLink-NX Commercial/Industrial Family Selection Guide .....                           | 15 |
| Table 1.2. CrossLink-NX Automotive Family Selection Guide .....                                      | 15 |
| Table 2.1. Resources and Modes Available per Slice .....                                             | 19 |
| Table 2.2. Slice Signal Descriptions .....                                                           | 21 |
| Table 2.3. Number of Slices Required to Implement Distributed RAM .....                              | 22 |
| Table 2.4. sysMEM Block Configurations .....                                                         | 31 |
| Table 2.5. Maximum Number of Elements in a sysDSP block .....                                        | 35 |
| Table 2.6. Input Block Port Description .....                                                        | 37 |
| Table 2.7. Output Block Port Description .....                                                       | 39 |
| Table 2.8. Tri-state Block Port Description .....                                                    | 40 |
| Table 2.9. DQSBUF Port List Description .....                                                        | 42 |
| Table 2.10. Single-Ended I/O Standards .....                                                         | 43 |
| Table 2.11. Differential I/O Standards .....                                                         | 44 |
| Table 2.12. Single-Ended I/O Standards Supported on Various Sides .....                              | 46 |
| Table 2.13. Differential I/O Standards Supported on Various Sides .....                              | 46 |
| Table 3.1. Absolute Maximum Ratings .....                                                            | 53 |
| Table 3.2. Recommended Operating Conditions .....                                                    | 54 |
| Table 3.3. Power Supply Ramp Rates .....                                                             | 55 |
| Table 3.4. Power-On Reset .....                                                                      | 55 |
| Table 3.5. On-Chip Termination Options for Input Modes .....                                         | 56 |
| Table 3.6. Hot Socketing Specifications for GPIO .....                                               | 56 |
| Table 3.7. DC Electrical Characteristics – Wide Range .....                                          | 57 |
| Table 3.8. DC Electrical Characteristics – High Speed .....                                          | 57 |
| Table 3.9. Capacitors – Wide Range .....                                                             | 57 |
| Table 3.10. Capacitors – High Performance .....                                                      | 58 |
| Table 3.11. Single Ended Input Hysteresis – Wide Range .....                                         | 58 |
| Table 3.12. Single Ended Input Hysteresis – High Performance .....                                   | 58 |
| Table 3.13. sysI/O Recommended Operating Conditions .....                                            | 59 |
| Table 3.14. sysI/O DC Electrical Characteristics – Wide Range I/O .....                              | 60 |
| Table 3.15. sysI/O DC Electrical Characteristics – High Performance I/O .....                        | 61 |
| Table 3.16. I/O Resistance Characteristics .....                                                     | 61 |
| Table 3.17. $V_{IN}$ Maximum Overshoot/Undershoot Allowance – Wide Range <sup>1, 2</sup> .....       | 62 |
| Table 3.18. $V_{IN}$ Maximum Overshoot/Undershoot Allowance – High Performance <sup>1, 2</sup> ..... | 62 |
| Table 3.19. LVDS DC Electrical Characteristics <sup>1</sup> .....                                    | 63 |
| Table 3.20. LVDS25E DC Conditions .....                                                              | 63 |
| Table 3.21. SubLVDS Input DC Electrical Characteristics .....                                        | 64 |
| Table 3.22. SubLVDS Output DC Electrical Characteristics .....                                       | 65 |
| Table 3.23. SLVS Input DC Characteristics .....                                                      | 65 |
| Table 3.24. SLVS Output DC Characteristics .....                                                     | 65 |
| Table 3.25. Soft D-PHY Input Timing and Levels .....                                                 | 68 |
| Table 3.26. Soft D-PHY Output Timing and Levels .....                                                | 68 |
| Table 3.27. Soft D-PHY Clock Signal Specification .....                                              | 69 |
| Table 3.28. Soft D-PHY Data-Clock Timing Specifications .....                                        | 69 |
| Table 3.29. Maximum I/O Buffer Speed <sup>1, 2, 3, 4, 7</sup> .....                                  | 70 |
| Table 3.30. Pin-to-Pin Performance .....                                                             | 72 |
| Table 3.31. Register-to-Register Performance .....                                                   | 73 |
| Table 3.32. LMMI $F_{MAX}$ Summary .....                                                             | 73 |
| Table 3.33. External Switching Characteristics ( $V_{CC} = 1.0$ V) .....                             | 74 |
| Table 3.34. sysCLOCK PLL Timing ( $V_{CC} = 1.0$ V) – Commercial/Industrial .....                    | 82 |
| Table 3.35. Internal Oscillators ( $V_{CC} = 1.0$ V) .....                                           | 83 |
| Table 3.36. User I2C Specifications ( $V_{CC} = 1.0$ V) .....                                        | 84 |
| Table 3.37. ADC Specifications <sup>1</sup> .....                                                    | 84 |



|                                                                                                             |     |
|-------------------------------------------------------------------------------------------------------------|-----|
| Table 3.38. Comparator Specifications <sup>1</sup> .....                                                    | 85  |
| Table 3.39. DTR Specifications <sup>1, 2</sup> .....                                                        | 85  |
| Table 3.40. Hardened D-PHY Input Timing and Levels .....                                                    | 86  |
| Table 3.41. Hardened D-PHY Output Timing and Levels .....                                                   | 87  |
| Table 3.42. Hardened D-PHY Pin Characteristic Specifications .....                                          | 88  |
| Table 3.43. Hardened D-PHY Clock Signal Specification .....                                                 | 88  |
| Table 3.44. Hardened D-PHY Data-Clock Timing Specifications .....                                           | 88  |
| Table 3.45. PCIe (2.5 Gbps) .....                                                                           | 89  |
| Table 3.46. PCIe (5 Gbps) .....                                                                             | 90  |
| Table 3.47. SGMII .....                                                                                     | 92  |
| Table 3.48. sysCONFIG Port Timing Specifications .....                                                      | 92  |
| Table 3.49. JTAG Port Timing Specifications .....                                                           | 99  |
| Table 3.50. Test Fixture Required Components, Non-Terminated Interfaces .....                               | 100 |
| Table 4.1. Absolute Maximum Ratings .....                                                                   | 101 |
| Table 4.2. Recommended Operating Conditions .....                                                           | 102 |
| Table 4.3. Power Supply Ramp Rates .....                                                                    | 103 |
| Table 4.4. Power-On Reset .....                                                                             | 103 |
| Table 4.5. On-Chip Termination Options for Input Modes .....                                                | 104 |
| Table 4.6. Hot Socketing Specifications for GPIO .....                                                      | 104 |
| Table 4.7. DC Electrical Characteristics – Wide Range .....                                                 | 105 |
| Table 4.8. DC Electrical Characteristics – High Speed .....                                                 | 105 |
| Table 4.9. Capacitors – Wide Range .....                                                                    | 105 |
| Table 4.10. Capacitors – High Performance .....                                                             | 106 |
| Table 4.11. Single Ended Input Hysteresis – Wide Range .....                                                | 106 |
| Table 4.12. Single Ended Input Hysteresis – High Performance .....                                          | 106 |
| Table 4.13. sysI/O Recommended Operating Conditions .....                                                   | 107 |
| Table 4.14. sysI/O DC Electrical Characteristics – Wide Range I/O .....                                     | 108 |
| Table 4.15. sysI/O DC Electrical Characteristics – High Performance I/O <sup>3</sup> .....                  | 109 |
| Table 4.16. I/O Resistance Characteristics .....                                                            | 109 |
| Table 4.17. V <sub>IN</sub> Maximum Overshoot/Undershoot Allowance – Wide Range <sup>1, 2</sup> .....       | 110 |
| Table 4.18. V <sub>IN</sub> Maximum Overshoot/Undershoot Allowance – High Performance <sup>1, 2</sup> ..... | 110 |
| Table 4.19. LVDS DC Electrical Characteristics <sup>1</sup> .....                                           | 110 |
| Table 4.20. LVDS25E DC Conditions .....                                                                     | 111 |
| Table 4.21. SubLVDS Input DC Electrical Characteristics .....                                               | 112 |
| Table 4.22. SubLVDS Output DC Electrical Characteristics .....                                              | 112 |
| Table 4.23. SLVS Input DC Characteristics .....                                                             | 113 |
| Table 4.24. SLVS Output DC Characteristics .....                                                            | 113 |
| Table 4.25. Soft D-PHY Input Timing and Levels .....                                                        | 115 |
| Table 4.26. Soft D-PHY Output Timing and Levels .....                                                       | 116 |
| Table 4.27. Soft D-PHY Clock Signal Specification .....                                                     | 117 |
| Table 4.28. Soft D-PHY Data-Clock Timing Specifications .....                                               | 117 |
| Table 4.29. Maximum I/O Buffer Speed <sup>1, 2, 3, 4, 7</sup> .....                                         | 118 |
| Table 4.30. Pin-to-Pin Performance .....                                                                    | 120 |
| Table 4.31. Register-to-Register Performance .....                                                          | 120 |
| Table 4.32. LMMI F <sub>MAX</sub> Summary .....                                                             | 121 |
| Table 4.33. External Switching Characteristics (V <sub>CC</sub> = 1.0 V) .....                              | 122 |
| Table 4.34. sysCLOCK PLL Timing (V <sub>CC</sub> = 1.0 V) – Automotive .....                                | 130 |
| Table 4.35. Internal Oscillators (V <sub>CC</sub> = 1.0 V) .....                                            | 131 |
| Table 4.36. User I2C Specifications (V <sub>CC</sub> = 1.0 V) .....                                         | 131 |
| Table 4.37. ADC Specifications <sup>3</sup> .....                                                           | 132 |
| Table 4.38. Comparator Specifications .....                                                                 | 133 |
| Table 4.39. DTR Specifications <sup>1, 2</sup> .....                                                        | 133 |
| Table 4.40. Hardened D-PHY Input Timing and Levels .....                                                    | 133 |
| Table 4.41. Hardened D-PHY Output Timing and Levels .....                                                   | 134 |

|                                                                               |     |
|-------------------------------------------------------------------------------|-----|
| Table 4.42. Hardened D-PHY Pin Characteristic Specifications .....            | 136 |
| Table 4.43. Hardened D-PHY Clock Signal Specification .....                   | 136 |
| Table 4.44. Hardened D-PHY Data-Clock Timing Specifications .....             | 136 |
| Table 4.45. PCIe (2.5 Gbps) .....                                             | 137 |
| Table 4.46. PCIe (5 Gbps) .....                                               | 138 |
| Table 4.47. SGMII .....                                                       | 140 |
| Table 4.48. sysCONFIG Port Timing Specifications .....                        | 140 |
| Table 4.49. JTAG Port Timing Specifications .....                             | 147 |
| Table 4.50. Test Fixture Required Components, Non-Terminated Interfaces ..... | 148 |

## Abbreviations in This Document

A list of abbreviations used in this document.

| Abbreviation | Definition                                          |
|--------------|-----------------------------------------------------|
| AES          | Advanced Encryption Standard                        |
| ADC          | Analog to Digital Converter                         |
| BGA          | Ball Grid Array                                     |
| CDR          | Clock and Data Recovery                             |
| CRC          | Cycle Redundancy Code                               |
| CSI          | Camera Serial Interface                             |
| DCC          | Dynamic Clock Control                               |
| DCS          | Dynamic Clock Select                                |
| DDR          | Double Data Rate                                    |
| DLL          | Delay Locked Loop                                   |
| DSI          | Display Serial Interface                            |
| DSP          | Digital Signal Processing                           |
| DTR          | Digital Temperature Readout                         |
| EBR          | Embedded Block RAM                                  |
| ECC          | Error Correction Coding                             |
| ECLK         | Edge Clock                                          |
| FFT          | Fast Fourier Transform                              |
| FIFO         | First In First Out                                  |
| FIR          | Finite Impulse Response                             |
| HFOSC        | High Frequency Oscillator                           |
| HSP          | High Speed Port                                     |
| LFOSC        | Low Frequency Oscillator                            |
| LC           | Logic Cell                                          |
| LRAM         | Large RAM                                           |
| LVC MOS      | Low-Voltage Complementary Metal Oxide Semiconductor |
| LVDS         | Low-Voltage Differential Signaling                  |
| LVPECL       | Low Voltage Positive Emitter Coupled Logic          |
| LVTTTL       | Low Voltage Transistor-Transistor Logic             |
| LUT          | Look Up Table                                       |
| MAC          | Message Authentication Codes                        |
| PCI          | Peripheral Component Interconnect                   |
| PCS          | Physical Coding Sublayer                            |
| PCLK         | Primary Clock                                       |
| PDPR         | Pseudo Dual Port RAM                                |
| PFU          | Programmable Functional Unit                        |
| PIC          | Programmable I/O Cells                              |
| PLL          | Phase Locked Loop                                   |
| POR          | Power On Reset                                      |
| SED          | Soft Error Detection                                |
| SER          | Soft Error Rate                                     |
| SEU          | Single Event Upset                                  |
| SHA          | Secure Hashing Algorithm                            |
| SLVS         | Scalable Low-Voltage Signaling                      |
| SPI          | Serial Peripheral Interface                         |
| SPR          | Single Port RAM                                     |

| Abbreviation | Definition                                  |
|--------------|---------------------------------------------|
| SRAM         | Static Random-Access Memory                 |
| TAP          | Test Access Port                            |
| TDM          | Time Division Multiplexing                  |
| TLP          | Transaction Layer Packet                    |
| TRNG         | True Random Number Generator                |
| UCFG         | User Configuration Space Register Interface |

# 1. General Description

The CrossLink™-NX family of low-power FPGAs can be used in a wide range of applications and are optimized for bridging and processing needs in Embedded Vision applications – supporting a variety of high bandwidth sensor and display interfaces, video processing and machine learning inferencing. It is built on the Lattice Nexus FPGA platform, using low-power 28 nm FD-SOI technology. It combines the extreme flexibility of an FPGA with the low power and high reliability (due to extremely low SER) of FD-SOI technology and offers small footprint package options.

CrossLink-NX supports a variety of interfaces including MIPI D-PHY (CSI-2, DSI), LVDS, SLVS, subLVDS, PCI Express (Gen1, Gen2), SGMII (Gigabit Ethernet), and more.

Processing features of CrossLink-NX include up to 39k Logic Cells, 56 multipliers ( $18 \times 18$ ), 2.9 Mb of embedded memory (consisting of EBR and LRAM blocks), distributed memory, DRAM interfaces (supporting DDR3, DDR3L, and LPDDR2 up to 1066 Mbps  $\times$  16-bit data width).

CrossLink-NX FPGAs support fast configuration of its reconfigurable SRAM-based logic fabric, and ultra-fast configuration of its programmable sysl/O™. Security features to secure user designs include bitstream encryption and password protection. In addition to the high reliability inherent to FD-SOI technology (due to its extremely low SER), active reliability features such as built-in frame-based SED/SEC (for SRAM-based logic fabric), and ECC (for EBR and LRAM) are also supported. Dual 12-bit ADCs are available in each device for system monitoring functions.

The Lattice Radiant™ design software allows large complex user designs to be efficiently implemented in the CrossLink-NX FPGA family. Synthesis library support for CrossLink-NX devices is available for popular logic synthesis tools. Radiant tools use the synthesis tool output along with constraints from its floor planning tools to place and route the user design in the CrossLink-NX device. The tools extract timing from the routing and back-annotate it into the design for timing verification.

Lattice provides many pre-engineered IP (Intellectual Property) modules for the CrossLink-NX family. By using these configurable soft IP cores as standardized blocks, users are free to concentrate on the unique aspects of the design, increasing productivity.

## 1.1. Features

- Available in Commercial, Industrial and Automotive temperature grades.
- Programmable Architecture
  - 17k to 39k logic cells
  - 24 to 56 multipliers ( $18 \times 18$ ) in sysDSP™ blocks
  - 2.5 to 2.9 Mb of embedded memory (EBR, LRAM)
  - 36 to 192 programmable sysl/O (High Performance and Wide Range I/O)
- MIPI D-PHY
  - Up to two hardened 4-lane MIPI D-PHY
    - Up to eight lanes total
    - Transmit or receive
    - Supports CSI-2, DSI
    - 20 Gbps aggregate bandwidth
    - 2.5 Gbps per lane, 10 Gbps per D-PHY interface
  - Additional Soft D-PHY interfaces supported by High Performance (HP) sysl/O
    - Transmit or receive
    - Supports CSI-2, DSI
    - Up to 1.5 Gbps per lane
- Programmable sysl/O supports wide variety of interfaces
  - High Performance (HP) on bottom I/O dual rank
    - Supports up to 1.8 V  $V_{CCIO}$
    - Mixed voltage support (1.0 V, 1.2 V, 1.5 V, 1.8 V)
    - High-speed differential up to 1.5 Gbps
    - Supports soft D-PHY (Tx/Rx), LVDS 7:1 (Tx/Rx), SLVS (Tx/Rx), subLVDS (Rx)
    - Supports SGMII (Gb Ethernet) Two channels (Tx/Rx) @ 1.25 Gbps
    - Dedicated DDR3/DDR3L and LPDDR2 memory support with DQS logic, up to 1066 Mbps data rate and 16-bit data width
  - Wide Range (WR) on Left, Right and Top I/O Banks
    - Supports up to 3.3 V  $V_{CCIO}$
    - Mixed voltage support (1.2 V, 1.5 V, 1.8 V, 2.5 V, 3.3 V)
    - Programmable slew rate (slow, med, fast)
    - Controlled impedance mode
    - Emulated LVDS support
    - Hot Socketing Support

- Power Modes – Low Power versus High-Performance
    - User selectable
    - Low-Power mode for power and/or thermal challenges
    - High-Performance mode for faster processing
  - Small footprint package options
    - 4 mm × 4 mm to 10 mm × 10 mm package options
  - 2x SGMII CDR at up to 1.25 Gbps – to support 2 channels SGMII using HP I/O
    - CDR for RX
    - 10b/8b decoding
    - Independent Loss of Lock (LOL) detector for each CDR block
  - sysCLOCK™ analog PLLs
    - Three in 39k LC and two in 17k LC device
    - Six outputs per PLL
    - Fractional N
    - Programmable and dynamic phase control
  - sysDSP Enhanced DSP blocks
    - Hardened pre-adder
    - Dynamic Shift for AI/ML support
    - Four 18 × 18, eight 9 × 9, two 18 × 36, or 36 × 36 multipliers
    - Advanced 18 × 36, two 18 × 18, or four 8 × 8 MAC
  - Flexible memory resources
    - Up to 1.5 Mb sysMEM™ Embedded Block RAM (EBR)
    - Programmable width
    - ECC\*
    - Single or dual clock FIFO
    - 80k to 240k bits distributed RAM
    - Large RAM Blocks
      - 0.5 Mbits per block
      - Up to five blocks (2.5 Mb total) per device
  - SerDes – PCIe Gen2 x1 channel (Tx/Rx) hard IP in 39k LC device
    - Hard IP supports
    - Gen1, Gen2, Multi-Function, End Point
  - Internal bus interface support
    - APB control bus
    - AHB-Lite for data bus
    - AXI4-streaming
  - Configuration – Fast, Secure
    - SPI – x1, x2, x4 up to 150 MHz
      - Controller and Target SPI support
    - JTAG
    - I2C and I3C
    - Ultrafast I/O configuration for instant-on support (under 3 ms)
    - Less than 15 ms full device configuration for LIFCI-40
    - Bitstream Security
      - Encryption
      - Authentication
  - Cryptographic engine
    - Bitstream encryption – using AES-256
    - Bitstream authentication – using ECDSA
    - Hashing algorithms – SHA, HMAC
    - True Random Number Generator
    - AES 128/256 Encryption
  - Single Event Upset (SEU) Mitigation Support
    - Extremely low Soft Error Rate (SER) due to FD-SOI technology
    - Soft Error Detect – Embedded hard macro
    - Soft Error Correction – Without stopping user operation
    - Soft Error Injection – Emulate SEU event to debug system error handling
  - Dual ADCs – 1 MSPS, 12-bit SAR with Simultaneous Sampling<sup>1</sup>
    - Two ADCs per device
    - Three Continuous-time Comparators
    - Simultaneous Sampling
  - System Level Support
    - IEEE 1149.1 and IEEE 1532 compliant
    - Reveal Logic Analyzer
    - On-chip oscillator for initialization and general use
    - 1.0 V core power supply
- Notes:**
1. Available in select speed grades. See [Ordering Information](#) section.

**Table 1.1. CrossLink-NX Commercial/Industrial Family Selection Guide**

| Device                                                  | LIFCL-17                                                                                                          | LIFCL-40                |
|---------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|-------------------------|
| Logic Cells <sup>1</sup>                                | 17k                                                                                                               | 39k                     |
| Embedded Memory (EBR) Blocks (18 kb)                    | 24                                                                                                                | 84                      |
| Embedded Memory (EBR) Bits (kb)                         | 432                                                                                                               | 1,512                   |
| Distributed RAM Bits (kb)                               | 108                                                                                                               | 252                     |
| Large Memory (LRAM) Blocks                              | 5                                                                                                                 | 2                       |
| Large Memory (LRAM) Bits (kb) (512 kb each)             | 2560                                                                                                              | 1024                    |
| 18 × 18 Multipliers                                     | 24                                                                                                                | 56                      |
| ADC Blocks <sup>3</sup>                                 | 1                                                                                                                 | 1                       |
| 450 MHz High Frequency Oscillator                       | 1                                                                                                                 | 1                       |
| 128 kHz Low Power Oscillator                            | 1                                                                                                                 | 1                       |
| GPLL                                                    | 2                                                                                                                 | 3                       |
| Hardened 10 Gbps D-PHY Quads <sup>2</sup>               | 2                                                                                                                 | 2                       |
| Hardened 2.5 Gbps D-PHY Data Lanes (total) <sup>2</sup> | 8                                                                                                                 | 8                       |
| PCIe Gen2 Hard IP                                       | —                                                                                                                 | 1                       |
| <b>Packages (Size, Ball Pitch)</b>                      | <b>Total I/O (Wide Range, High Performance, ADC<sup>4</sup>) (D-PHY Quads<sup>5</sup>, PCIe<sup>6</sup> Lane)</b> |                         |
| 72 WLCSP (3.8 mm × 4.1 mm, 0.4 mm)                      | 45 (15, 24, 6) (1, 0)                                                                                             | —                       |
| 72 QFN (10 mm × 10 mm, 0.5 mm)                          | 46 (18, 22, 6) (1, 0)                                                                                             | 44 (17, 22, 6) (1, 0)   |
| 121 csfBGA (6 mm × 6 mm, 0.5 mm)                        | 77 (23, 48, 6) (2, 0)                                                                                             | 77 (23, 48, 6) (2, 0)   |
| 256 caBGA (14 mm × 14 mm, 0.8 mm)                       | 77 (23, 48, 6) (2, 0)                                                                                             | 162 (82, 74, 6) (2, 1)  |
| 289 csBGA (9.5 mm × 9.5 mm, 0.5 mm)                     | —                                                                                                                 | 179 (99, 74, 6) (2, 1)  |
| 400 caBGA (17 mm × 17 mm, 0.8 mm)                       | —                                                                                                                 | 191 (111, 74, 6) (2, 1) |

**Notes:**

1. Logic Cells = LUTs × 1.2 effectiveness.
2. Additional soft D-PHY Tx/Rx interfaces (at up to 1.5 Gbps per lane) are available using sysI/O.
3. Available in –8 and –9 speed grades.
4. Each ADC pin count reflects using dedicated complement pair and vRef.
5. Each D-PHY quad consists of 4 D-PHY data lanes.
6. Each PCIe lane consists of a Tx and Rx complement pair.

**Table 1.2. CrossLink-NX Automotive Family Selection Guide**

| Device                                                  | LIFCL-17 | LIFCL-40 |
|---------------------------------------------------------|----------|----------|
| Logic Cells <sup>1</sup>                                | 17k      | 39k      |
| Embedded Memory (EBR) Blocks (18 kb)                    | 24       | 84       |
| Embedded Memory (EBR) Bits (kb)                         | 432      | 1,512    |
| Distributed RAM Bits (kb)                               | 80       | 240      |
| Large Memory (LRAM) Blocks                              | 5        | 2        |
| Large Memory (LRAM) Bits (kb)                           | 2560     | 1024     |
| 18 × 18 Multipliers                                     | 24       | 56       |
| ADC Blocks <sup>3</sup>                                 | 2        | 2        |
| 450 MHz High Frequency Oscillator                       | 1        | 1        |
| 128 kHz Low Power Oscillator                            | 1        | 1        |
| GPLL                                                    | 2        | 3        |
| Hardened 10 Gbps D-PHY Quads <sup>2</sup>               | 2        | 2        |
| Hardened 2.5 Gbps D-PHY Data Lanes (total) <sup>2</sup> | 8        | 8        |

| Device                            | LIFCL-17                                                                                                        | LIFCL-40               |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------|------------------------|
| PCIe Gen2 Hard IP                 | —                                                                                                               | 1                      |
| Packages (Size, Ball Pitch)       | Total I/O (Wide Range, High Performance, ADC <sup>4</sup> ) (D-PHY Quads <sup>5</sup> , PCIe <sup>6</sup> Lane) |                        |
| 121 csfBGA (6 mm × 6 mm, 0.5 mm)  | 77 (23, 48, 6) (2, 0)                                                                                           | 77 (23, 48, 6) (2, 0)  |
| 256 caBGA (14 mm × 14 mm, 0.8 mm) | 77 (23, 48, 6) (2, 0)                                                                                           | 179 (99, 74, 6) (2, 1) |

**Notes:**

1. Logic Cells = LUTs × 1.2 effectiveness.
2. Additional soft D-PHY Tx/Rx interfaces (at up to 1.5 Gbps per lane) are available using sysI/O.
3. Available in –7 speed grade.
4. Each ADC pin count reflects using dedicated complement pair and vRef.
5. Each D-PHY quad consists of 4 D-PHY data lanes.
6. Each PCIe lane consists of a Tx and Rx complement pair.



## 2. Architecture

### 2.1. Overview

Each CrossLink-NX device contains an array of logic blocks surrounded by Programmable I/O Cells (PIC). Interspersed between the rows of logic blocks are rows of sysMEM Embedded Block RAM (EBR) and rows of sysDSP Digital Signal Processing blocks, as shown in [Figure 2.1](#). The CrossLink-NX-40 devices have two rows of DSP blocks and contain three rows of sysMEM EBR blocks. In addition, CrossLink-NX-40 devices includes two Large SRAM blocks. The sysMEM EBR blocks are large, dedicated 18 kb fast memory blocks and have built-in ECC and FIFO support. Each sysMEM block can be configured to a single, pseudo dual or true dual port memory in a variety of depths and widths as RAM or ROM. Each DSP block supports a variety of multiplier and adder configurations with one 108-bit or two 54-bit accumulators supported, which are the building blocks for complex signal processing capabilities.


Each PIC block encompasses two PIO (PIO pairs) with their respective sysI/O buffers. The sysI/O buffers of the CrossLink-NX devices are arranged in seven banks allowing the implementation of a wide variety of I/O standards. The Wide Range (WR) I/O banks that are located on the top, left and right sides of the device provide flexible ranges of general purpose I/O configurations up to 3.3 V VCCIOs. The banks located on the bottom side of the device are dedicated to High Performance (HP) interfaces such as LVDS, MIPI, DDR3, and LPDDR2 supporting up to 1.8 V VCCIOs.

The Programmable Functional Unit (PFU) contains the building blocks for logic, arithmetic, RAM and ROM functions. The PFU block is optimized for flexibility, allowing complex designs to be implemented quickly and efficiently. Logic Blocks are arranged in a two-dimensional array. The registers in the PFU and sysI/O blocks in CrossLink-NX devices can be configured to be SET or RESET. After power up and configuration, it enters into user mode with these registers SET/RESET according to the user design, allowing the device to power up in a known state for predictable system function.


In addition, CrossLink-NX-40 devices provide various system level hard IP functional and interface blocks such as PCIe, D-PHY, I2C, SGMII/CDR, and ADC blocks. The PCIe hard IP supports PCIe Generation 2.0 and the D-PHY supports up to 2.5 Gbps per lane. CrossLink-NX devices also provide security features to help protect user designs and deliver more robust reliability by offering enhanced frame based SED/SEC functions.

Other blocks provided include PLLs, DLLs, and configuration functions. The PLL and DLL blocks are located at the corners of each device. CrossLink-NX devices also include Lattice Memory Mapped Interface (LMMI) which is a Lattice standard to support simple read and write operations to control internal IP.

Every device in the family has a JTAG port. This family also provides an on-chip oscillator and soft error detect capability. The CrossLink-NX devices use 1.0 V as their core voltage.

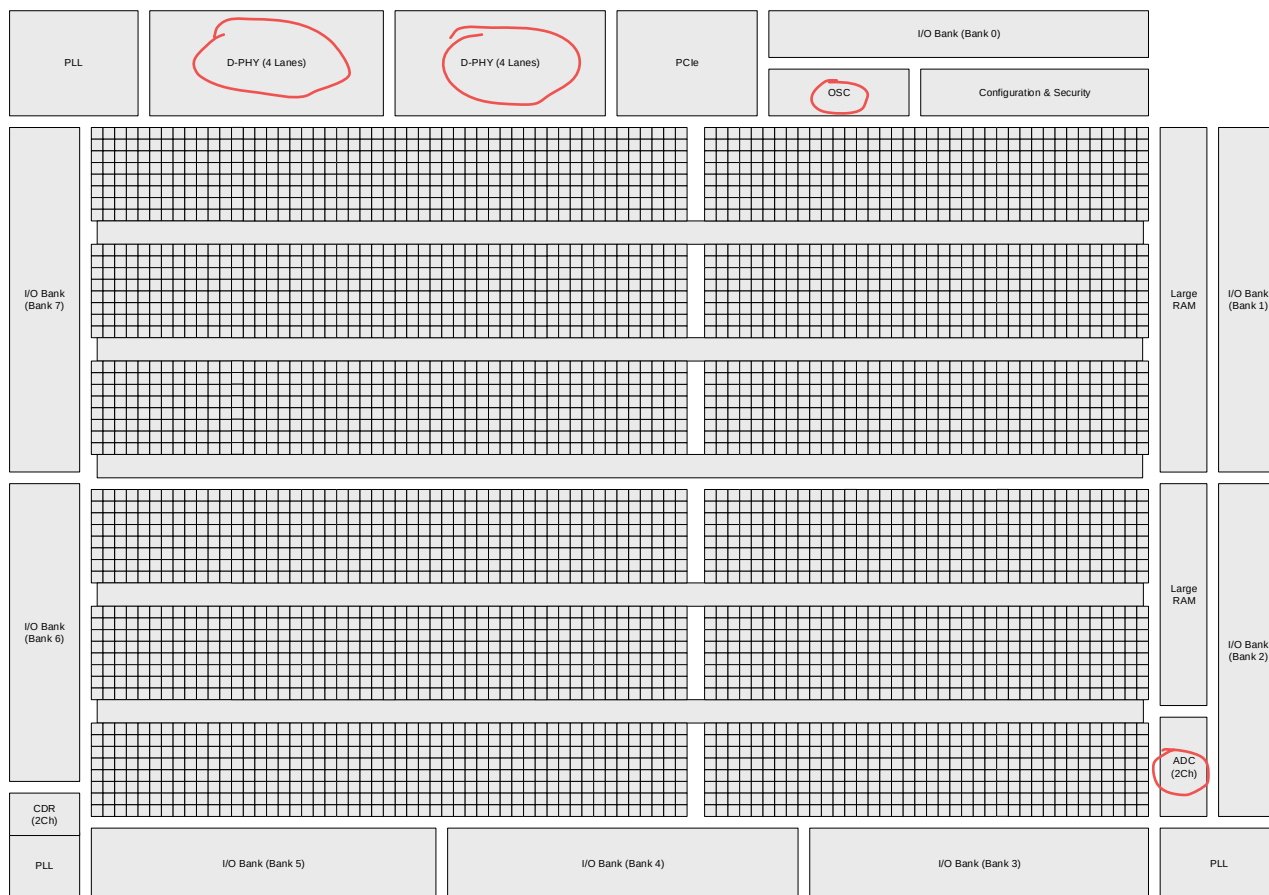

**Figure 2.1. Simplified Block Diagram, CrossLink-NX-40 Device (Top Level)**

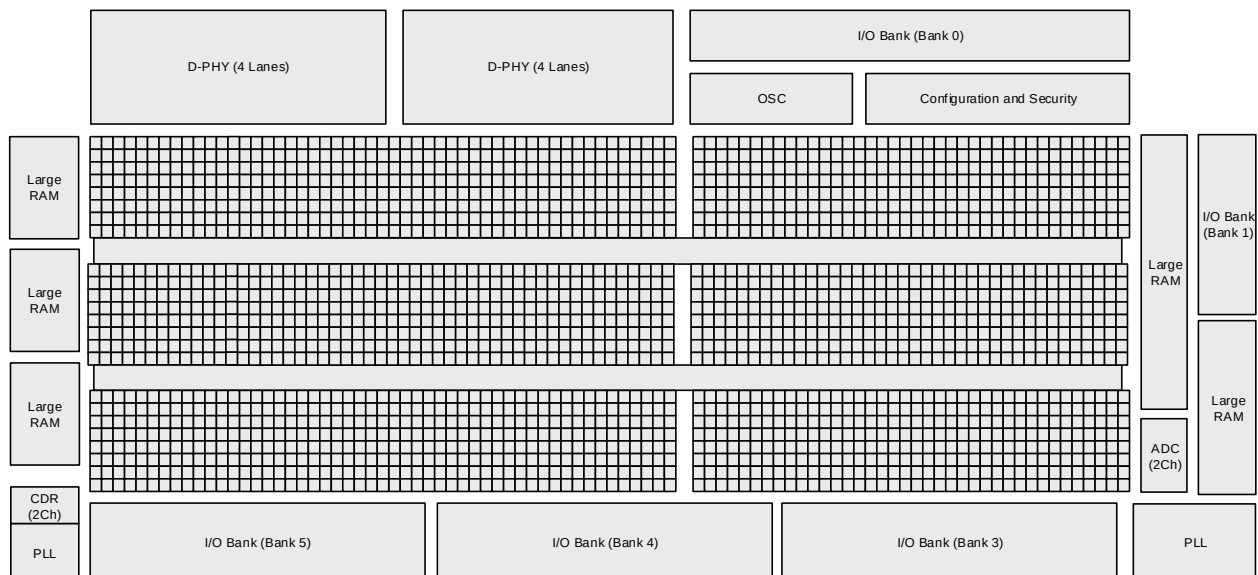

**Figure 2.2. Simplified Block Diagram, CrossLink-NX-17 Device (Top Level)**

## 2.2. PFU Blocks

The core of the CrossLink-NX device consists of PFU blocks. Each PFU block consists of four interconnected slices numbered 0-3 as shown in [Figure 2.3](#). Each slice contains two LUTs. All the interconnections to and from PFU blocks are from routing.

The PFU block can be used to perform Logical, Arithmetic, RAM or ROM functions. [Table 2.1](#) shows the functions each slice can perform in either Distributed SRAM or non-distributed SRAM modes.

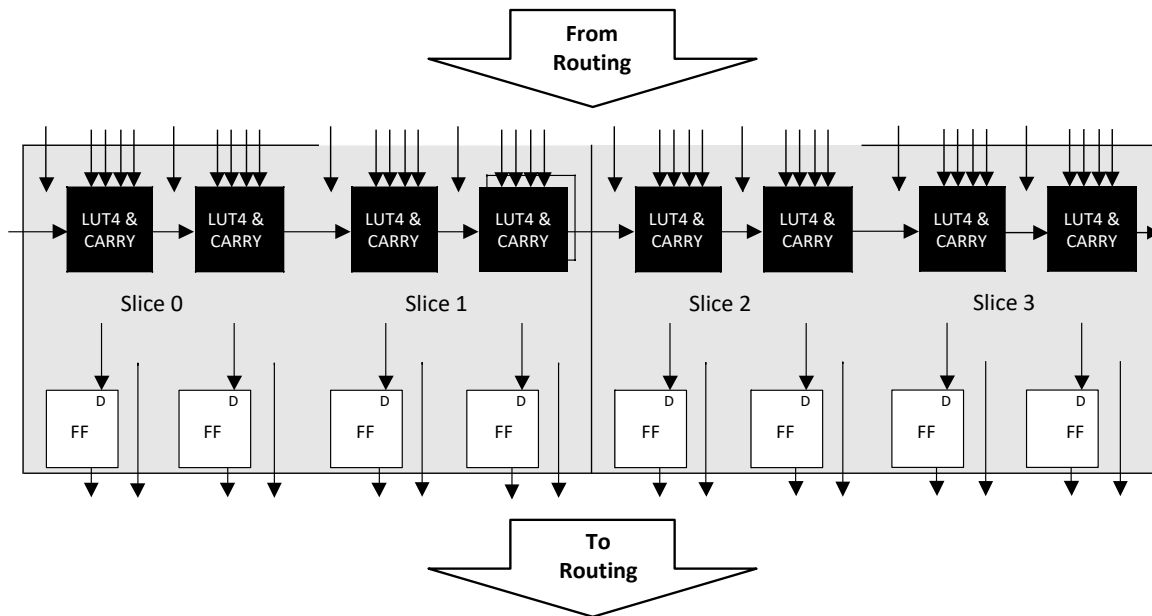


Figure 2.3. PFU Diagram

### 2.2.1. Slice


Each slice contains two LUT4s feeding two registers. In Distributed SRAM mode, Slice 0 and Slice 1 are configured as distributed memory and Slice 2 is not available as it is used to support Slice 0 and Slice 1, while Slice 3 is available as Logic or ROM. [Table 2.1](#) shows the capability of the slices along with the operation modes they enable. In addition, each Slice contains logic that allows the LUTs to be combined to perform a LUT5 function. There is control logic to perform set/reset functions (programmable as synchronous/asynchronous), clock select, chip-select, and wider RAM/ROM functions.

Table 2.1. Resources and Modes Available per Slice

| Slice   | PFU (Used as Distributed SRAM) |                    | PFU (Not used as Distributed SRAM) |                    |
|---------|--------------------------------|--------------------|------------------------------------|--------------------|
|         | Resources                      | Modes              | Resources                          | Modes              |
| Slice 0 | 2 LUT4s and 2 Registers        | RAM                | 2 LUT4s and 2 Registers            | Logic, Ripple, ROM |
| Slice 1 | 2 LUT4s and 2 Registers        | RAM                | 2 LUT4s and 2 Registers            | Logic, Ripple, ROM |
| Slice 2 | 2 LUT4s and 2 Registers        | RAM                | 2 LUT4s and 2 Registers            | Logic, Ripple, ROM |
| Slice 3 | 2 LUT4s and 2 Registers        | Logic, Ripple, ROM | 2 LUT4s and 2 Registers            | Logic, Ripple, ROM |


[Figure 2.4](#) shows an overview of the internal logic of the slice. The registers in the slice can be configured for positive/negative edge clocking.

Each slice has 17 input signals: 16 signals from routing and one from the carry-chain (from the adjacent slice or PFU). Three of them are used for FF control and shared between two slices (0/1 or 2/3). There are five outputs: four to routing and one to carry-chain (to the adjacent PFU). [Table 2.2](#) and [Figure 2.4](#) list the signals associated with all the slices. [Figure 2.5](#) shows the slice signals that support a LUT5 or two LUT5 functions. F0 can be configured to have a LUT4 or LUT5 output while F1 is for a LUT4 output.

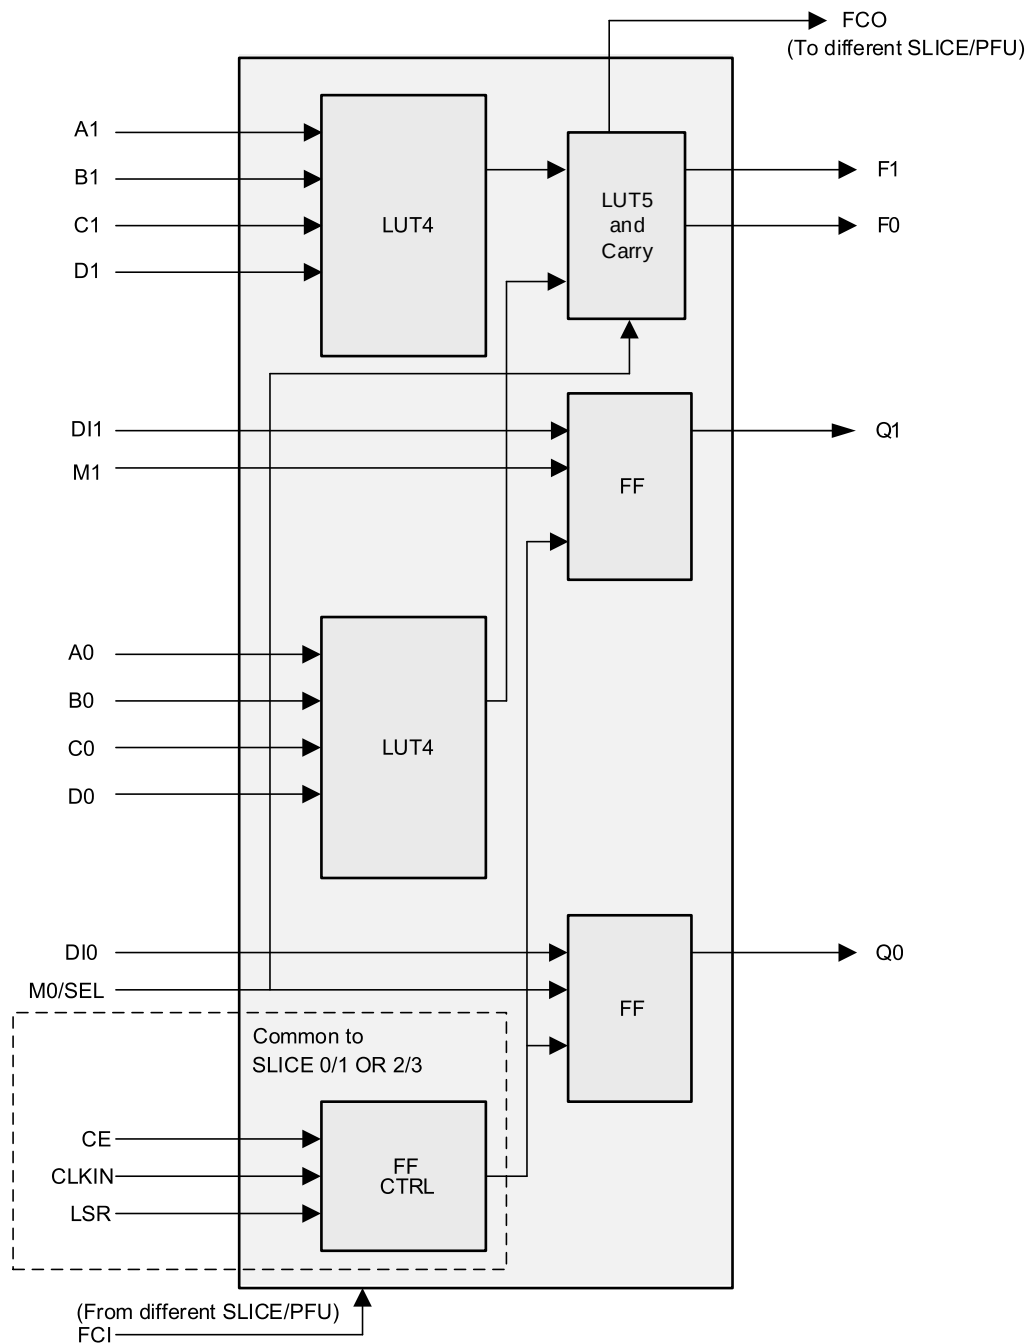

\*Note: In RAM mode, LUT4s use the following signals:  
QWD0/1  
QWDN0/1  
QWAS00~03, QWAS10~13

**Figure 2.4. Slice Diagram**

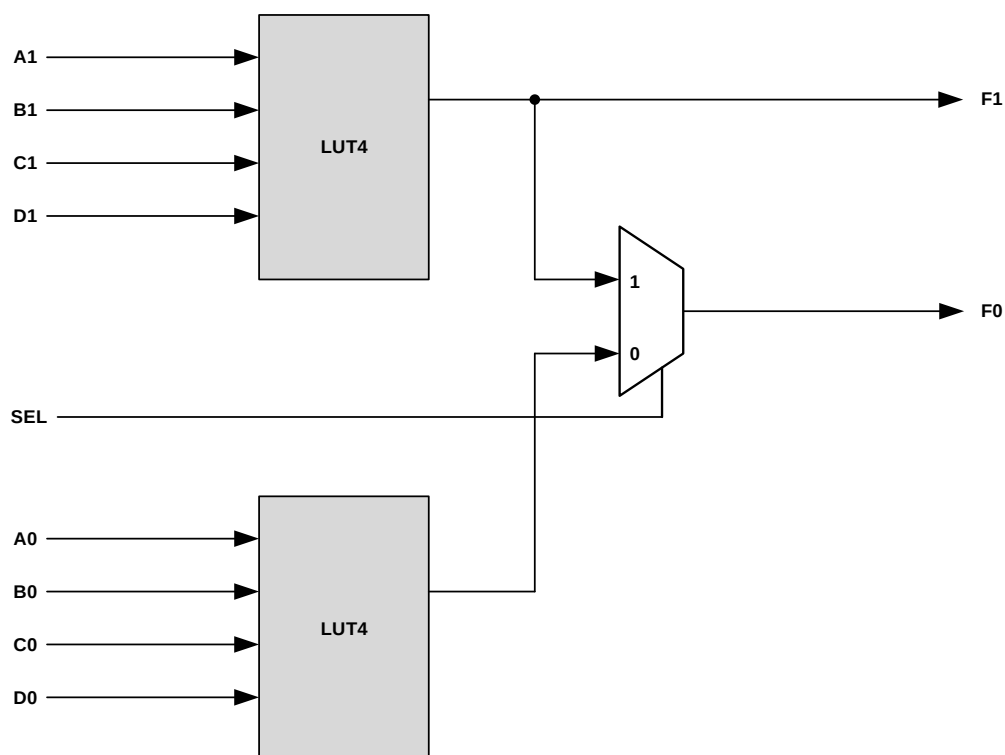

\*Note: In RAM mode, LUT4s use the following signals:  
QWD0/1  
QWDN0/1  
QWAS00~03, QWAS10~13

**Figure 2.5. Slice Configuration for LUT4 and LUT5**

**Table 2.2. Slice Signal Descriptions**

| Function | Type             | Signal Names   | Description                          |
|----------|------------------|----------------|--------------------------------------|
| Input    | Data signal      | A0, B0, C0, D0 | Inputs to LUT4                       |
| Input    | Data signal      | A1, B1, C1, D1 | Inputs to LUT4                       |
| Input    | Data signal      | M0, M1         | Direct input to FF from fabric       |
| Input    | Control signal   | SEL            | LUT5 mux control input               |
| Input    | Data signal      | DI0, DI1       | Inputs to FF from LUT4 F0/F1 outputs |
| Input    | Control signal   | CE             | Clock Enable                         |
| Input    | Control signal   | LSR            | Local Set/Reset                      |
| Input    | Control signal   | CLKIN          | System Clock                         |
| Input    | Inter-PFU signal | FCI            | Fast Carry-in <sup>1</sup>           |
| Output   | Data signals     | F0             | LUT4/LUT5 output signal              |
| Output   | Data signals     | F1             | LUT4 output signal                   |
| Output   | Data signals     | Q0, Q1         | Register outputs                     |
| Output   | Inter-PFU signal | FCO            | Fast carry chain output <sup>1</sup> |

**Note:**

1. See Figure 2.4 for connection details.

### 2.2.2. Modes of Operation

Slices 0-2 have up to four potential modes of operation: Logic, Ripple, RAM and ROM. Slice 3 is not needed for RAM mode, it can be used in Logic, Ripple, or ROM modes.

#### Logic Mode

In this mode, the LUTs in each slice are configured as 4-input combinatorial lookup tables. A LUT4 can have 16 possible input combinations. Any four input logic functions can be generated by programming this lookup table. Since there are two LUT4s per slice, a LUT5 can be constructed within one slice.

#### Ripple Mode

Ripple mode supports the efficient implementation of small arithmetic functions. In ripple mode, the following functions can be implemented by each slice:

- Addition 2-bit
- Subtraction 2-bit
- Add/Subtract 2-bit using dynamic control
- Up counter 2-bit
- Down counter 2-bit
- Up/Down counter with asynchronous clear 2-bit using dynamic control
- Up/Down counter with preload (sync) 2-bit using dynamic control
- Comparator functions of A and B inputs 2-bit
  - A greater-than-or-equal-to B
  - A not-equal-to B
  - A less-than-or-equal-to B
- Up/Down counter with A greater-than-or-equal-to B comparator 2-bit using dynamic control
- Up/Down counter with A less-than-or-equal-to B comparator 2-bit using dynamic control
- Multiplier support  $A_i \times B_j + 1 + A_i + 1 \times B_j$  in one logic cell with 2 logic cells per slice
- Serial divider 2-bit mantissa, shift 1bit/cycle
- Serial multiplier 2-bit, shift 1bit/cycle or 2bit/cycle

Ripple Mode includes an optional configuration that performs arithmetic using fast carry chain methods. In this configuration (also referred to as CCU2 mode) two additional signals, Carry Generate and Carry Propagate, are generated on a per slice basis to allow fast arithmetic functions to be constructed by concatenating Slices.

#### RAM Mode

In this mode, a  $16 \times 4$ -bit distributed single or pseudo dual port RAM can be constructed in one PFU using each LUT block in Slice 0 and Slice 1 as a  $16 \times 2$ -bit memory in each slice. Slice 2 is used to provide memory address and control signals. CrossLink-NX devices support distributed memory initialization.

The Lattice design tools support the creation of a variety of different sized memories. Where appropriate, the software constructs these using distributed memory primitives that represent the capabilities of the PFU. [Table 2.3](#) lists the number of slices required to implement different distributed RAM primitives. For more information about using RAM in CrossLink-NX devices, refer to [Memory User Guide for Nexus Platform \(FPGA-TN-02094\)](#).

**Table 2.3. Number of Slices Required to Implement Distributed RAM**

|                  | SPR $16 \times 4$ | PDPR $16 \times 4$ |
|------------------|-------------------|--------------------|
| Number of slices | 3                 | 3                  |

**Note:** SPR = Single Port RAM, PDPR = Pseudo Dual Port RAM

#### ROM Mode

ROM mode uses the LUT logic; hence, Slice 0 through Slice 3 can be used in ROM mode. Preloading is accomplished through the programming interface during PFU configuration.

For more information, refer to [Memory User Guide for Nexus Platform \(FPGA-TN-02094\)](#).

## 2.3. Routing

There are many resources provided in the CrossLink-NX devices to route signals individually or as buses with related control signals. The routing resources consist of switching circuitry, buffers and metal interconnect (routing) segments. The CrossLink-NX family has an enhanced routing architecture that produces a compact design. The Radiant software tool takes the output of the synthesis tool and places and routes the design.

## 2.4. Clocking Structure

The CrossLink-NX clocking structure consists of clock synthesis blocks (PLLs), balanced clock tree networks (PCLK and ECLK), and efficient clock logic modules: Clock Dividers (PCLKDIV and ECLKDIV), Dynamic Clock Selection (DCS), Dynamic Clock Control (DCC), and DDRDLLs. Each of these functions is described as follows.

### 2.4.1. Global PLL

The Global PLLs (GPLL) provide the ability to synthesize clock frequencies. The devices in the CrossLink-NX family support two or three full-featured General Purpose GPLLs.

The architecture of the GPLL is shown in [Figure 2.6](#). A description of the GPLL functionality follows.


REFCLK is the reference frequency input to the PLL and its source can come from external CLK inputs or from internal routing. The CLKI input feeds into the input Clock Divider block.

CLKFB is the feedback signal to the GPLL which can come from a path internal to the PLL or from FPGA routing. The feedback divider is used to multiply the reference frequency and thus synthesize a higher or lower frequency clock output.

The PLL has six clock outputs CLKOP, CLKOS, CLKOS2, CLKOS3, CLKOS4, and CLKOS5. Each output has its own output divider, thus allowing the GPLL to generate different frequencies for each output. The output dividers can have a value from 1 to 128. Each GPLL output can be used to drive the primary clock or edge clock networks.

The setup and hold times of the device can be improved by programming a phase shift into the output clocks which advances or delays the output clock with reference to the un-shifted output clock. This phase shift can be either programmed during configuration or can be adjusted dynamically using the DIRSEL, DIR, DYNROTATE, and LOADREG ports.

The LOCK signal is asserted when the GPLL determines it has achieved lock and deasserted if a loss of lock is detected. The LOCK signal is asynchronous to the PLL clock outputs.

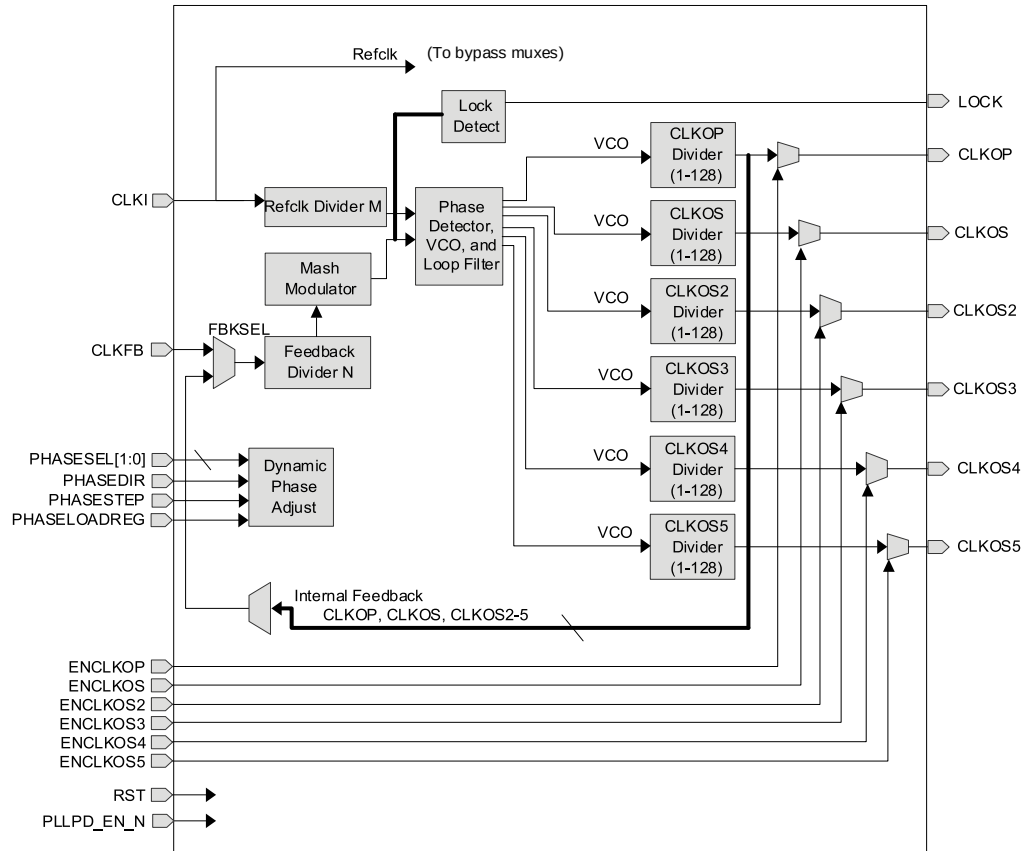

**Figure 2.6. General Purpose PLL Diagram**

For more details on the PLL, refer to the [sysCLOCK PLL Design and User Guide for Nexus Platform \(FPGA-TN-02095\)](#).


### 2.4.2. Clock Distribution Network

There are two main clock distribution networks for any member of the CrossLink-NX product family, namely Primary Clock (PCLK) and Edge Clock (ECLK). These clock networks can be driven from many different sources, such as Clock Pins, PLL outputs, DLLDEL outputs, Clock Divider outputs, SerDes/PCS clocks and user logic. There are Clock Divider blocks (ECLKDIV and PCLKDIV) to provide a slower clock from these clock sources.

CrossLink-NX supports glitchless Dynamic Clock Control (DCC) for the PCLK Clock to save dynamic power. There are also Dynamic Clock Selection logic to allow glitchless selection between two clocks for the PCLK network (DCS).

An overview of the Clocking Network is shown in [Figure 2.7](#) for CrossLink-NX device. The shaded blocks (PCIe and upper left PLL) are not available in the 17k Logic Cell device.



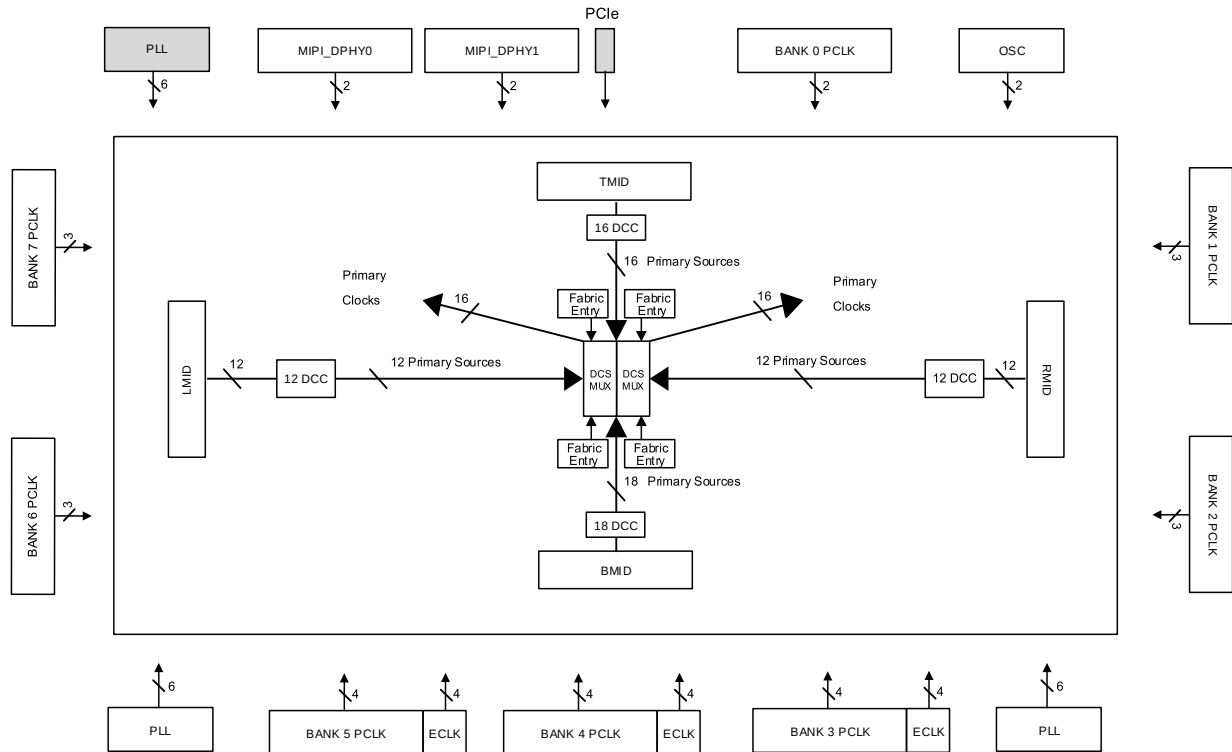

**Figure 2.7. Clocking**

### 2.4.3. Primary Clocks

The CrossLink-NX device family provides low-skew, high fan-out clock distribution to all synchronous elements in the FPGA fabric through the Primary Clock Network. The CrossLink-NX PCLK clock network is a balanced clock structure which is designed to minimize the clock skew across all destinations in the FPGA core.

The primary clock network is divided into two clock domains depending on the device density. Each of these domains has 16 clocks that can be distributed to the fabric in the domain.

The Lattice Radiant software can automatically route each clock to one of the domains up to a maximum of 16 clocks per domain. You can change how the clocks are routed by specifying a preference in the Lattice Radiant software to locate the clock to a specific domain. The CrossLink-NX device provides the user with a maximum of 64 unique clock input sources that can be routed to the primary Clock network.

Primary clock sources are:

- Dedicated clock input pins
- PLL outputs
- PCLKDIV, ECLKDIV outputs
- Internal FPGA fabric entries (with minimum general routing)
- SGMII-CDR, D-PHY, PCIe clocks
- OSC clock

These sources are routed to each of four clock switches called a Mid Mux (LMID, RMID, TMID, BMID). The outputs of the Mid MUX are routed to the center of the FPGA where additional clock switches (DSC\_CMUX) are used to route the primary clock sources to primary clock distribution to the CrossLink-NX fabric. These routing muxs are shown in [Figure 2.7](#). There are potentially 64 unique clock domains that can be used in the largest CrossLink-NX Device. For more information about the primary clock tree and connections, refer to [sysCLOCK PLL Design and User Guide for Nexus Platform \(FPGA-TN-02095\)](#).


## 2.4.4. Edge Clock

CrossLink-NX FPGAs have several high-speed edge clocks that are intended for use with the PIO in the implementation of high-speed interfaces. There are four (4) ECLK networks per bank I/O on the Bottom side of the device. The Edge clock network is powered by a separate power domain (to reduce power noise injection from the core and reduce overall noise induced jitter) while controlled by the same logic that gates the FPGA core and PCLK domains for power management.

Each Edge Clock can be sourced from the following:

- Dedicated PIO Clock input pins (PCLK)
- DLLDEL output (PIO Clock delayed by 90°)
- PLL outputs (CLKOP, CLKOS, CLKOS2, CLKOS3, CLKOS4, and CLKOS5)
- Internal Nodes

Figure 2.8 illustrates the various ECLK sources. Bank 3 is shown in the example. Bank 4 and Bank 5 are similar.

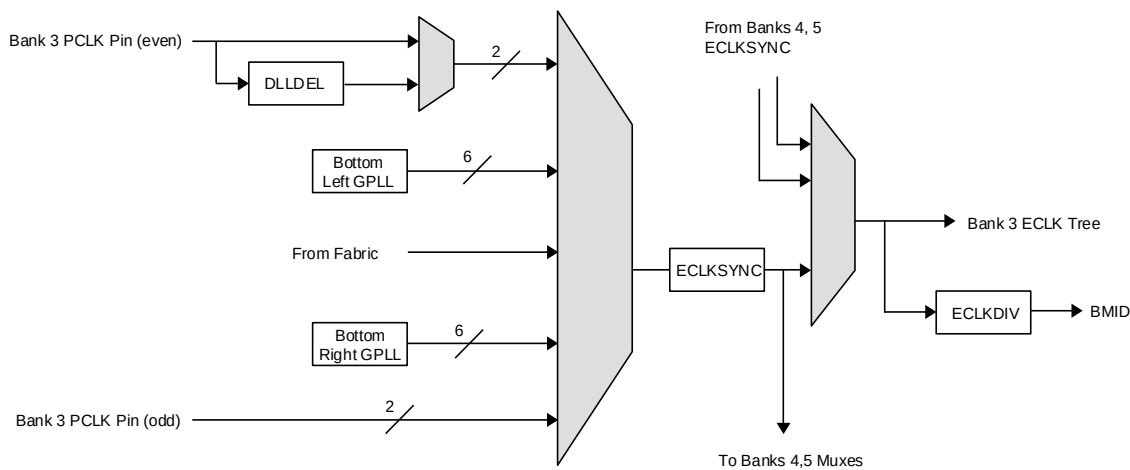

**Figure 2.8. Edge Clock Sources per Bank**

The edge clocks have low injection delay and low skew. They are typically used for DDR Memory or Generic DDR interfaces. For detailed information on Edge Clock connections, refer to [sysCLOCK PLL Design and User Guide for Nexus Platform \(FPGA-TN-02095\)](#).

## 2.4.5. Clock Dividers

CrossLink-NX devices have two distinct types of clock divider, Primary and Edge. There are from one (1) to eight (8) Primary Clock Dividers (PCLKDIV) and which are located in the DCS\_CMUX block(s) at the center of the device. There are twelve (12) ECLKDIV dividers per device, located near the bottom high-speed I/O banks.

The PCLKDIV supports  $\div 2$ ,  $\div 4$ ,  $\div 8$ ,  $\div 16$ ,  $\div 32$ ,  $\div 64$ ,  $\div 128$ , and  $\div 1$  (bypass) operation. The PCLKDIV is fed from a DCSMUX within the DCS\_CMUX block. The clock divider output drives one input of the DCS Dynamic Clock Select within the DCS\_CMUX block. The Reset (RST) control signal is asynchronous and forces all outputs to low. The divider output starts at next cycle after the reset is synchronously released. The PCLKDIV is shown in context in Figure 2.9.

The ECLKDIV is intended to generate a slower-speed system clock from a high-speed edge clock. The block operates in a  $\div 2$ ,  $\div 3.5$ ,  $\div 4$ , or  $\div 5$  mode and maintains a known phase relationship between the divided down clock and the high-speed clock based on the release of its reset signal. The ECLKDIV can be fed from selected PLL outputs, external primary clock pins (with or without DLLDEL Delay) or from routing. The clock divider outputs feed into the Bottom Mid-mux (BMID). The Reset (RST) control signal is asynchronous and forces all outputs to low. The divider output starts at next cycle after the reset is synchronously released.

The ECLKDIV block is shown in context in Figure 2.8. For further information on clock dividers, refer to [sysCLOCK PLL Design and User Guide for Nexus Platform \(FPGA-TN-02095\)](#).

### 2.4.6. Clock Center Multiplexer Blocks

All clock sources are selected and combined for primary clock routing through the Dynamic Clock Selector Center Multiplexer logic (DCS\_CMUX). There are one (1) or two (2) DCS\_CMUX blocks per device. Each DCS\_CMUX block contains two DCSMUX blocks, one PCLKDIV, one DCS block, and 1 or 2 CMUX blocks. See Figure 2.9 for a representative DCS\_CMUX block diagram.

The heart of the DCS\_CMUX is the Center Multiplexer (CMUX) block. It can accept up to 64 input clock sources (Mid-muxes (RMID, LMID, TMIC, BMID) and DCC) and to drive up to 16 primary clock trunk lines.

Up to two (2) clock inputs to the DCS\_CMUX can be routed through a Dynamic Clock Select block then routed to the CMUX. One (1) input to the DCS can be optionally divided by the Primary Clock Divider (PCLKDIV). For more information about the DCS\_CMUX, refer to [sysCLOCK PLL Design and User Guide for Nexus Platform \(FPGA-TN-02095\)](#).

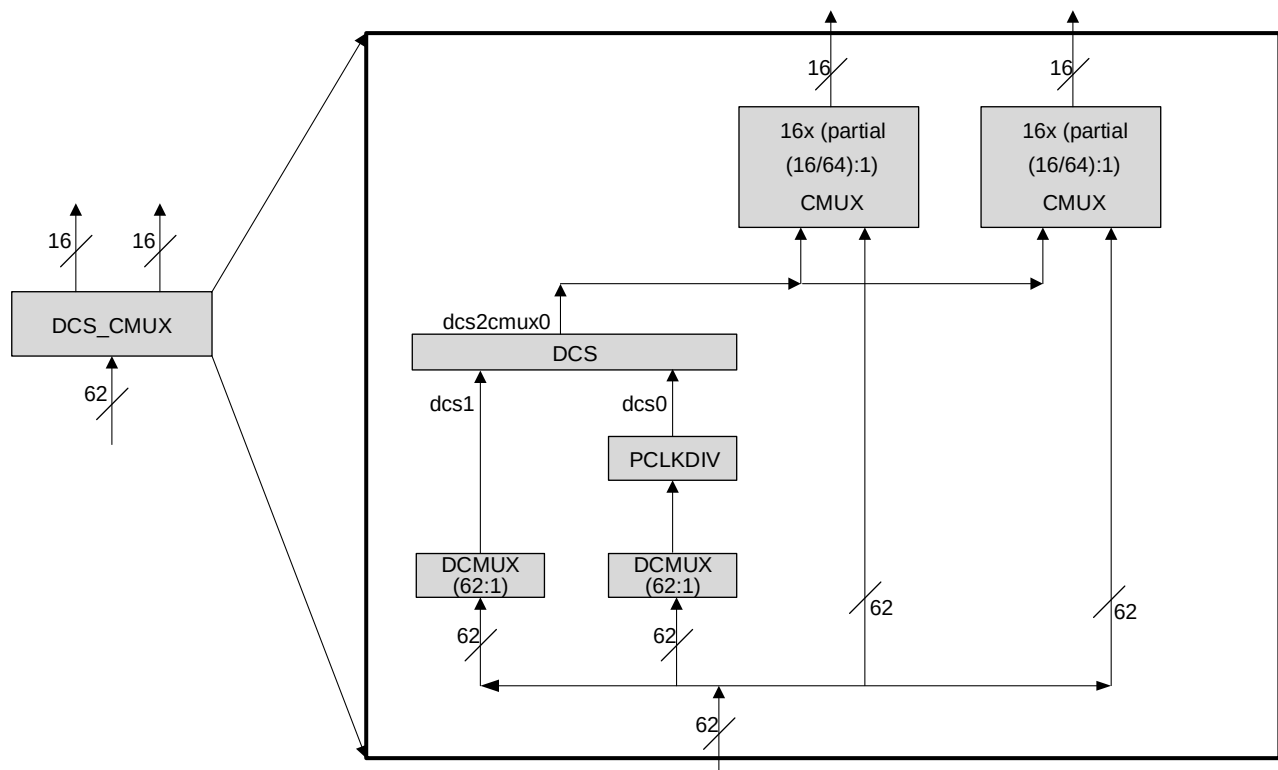



Figure 2.9. DCS\_CMUX Diagram

### 2.4.7. Dynamic Clock Select

The Dynamic Clock Select (DCS) is a smart multiplexer function available in the primary clock routing. It switches between two independent input clock sources. Depending on the operational mode, it switches between two (2) independent input clock sources either with or without any glitches. This is achieved regardless of when the select signal is toggled. Both input clocks must be running to achieve a functioning glitchless DCS output clock, but running clocks are not required when used as a non-glitchless normal clock multiplexer.

There are one (1) or two (2) DCS blocks per device that feed all clock domains. The DCS blocks are located in the DCS\_MUX block. The inputs to the DCS blocks come from MIDMUX outputs and user logic clocks through DCC elements. The DCS elements are located at the center of the PLC array core. The output of the DCS is connected to the inputs of Primary Clock Center MUXs (CMUX).

Figure 2.10 shows the timing waveforms of the default DCS operating mode. The DCS block can be programmed to other modes. For more information about the DCS, refer to [sysCLOCK PLL Design and User Guide for Nexus Platform \(FPGA-TN-02095\)](#).

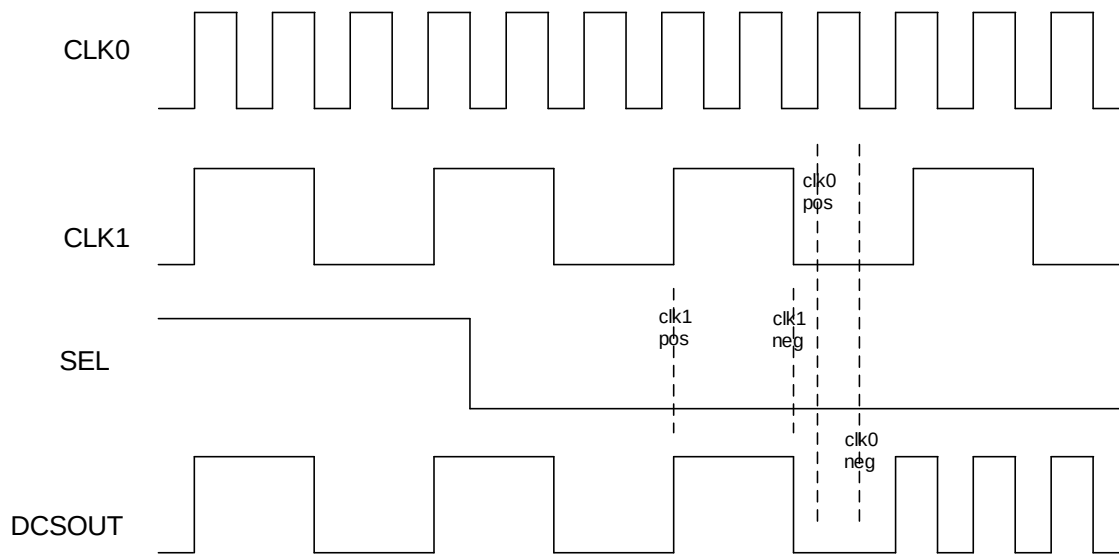

**Figure 2.10. DCS Waveforms**

#### 2.4.8. Dynamic Clock Control

The Dynamic Clock Control (DCC), Domain Clock enable/disable feature allows internal logic control of the domain primary clock network. When a clock network is disabled, the clock signal is static and does not toggle. All the logic fed by that clock also does not toggle, reducing the overall power consumption of the device. The disable function is glitchless, and does not increase the clock latency on the primary clock network.


Four additional DCC elements control the clock inputs from the CrossLink-NX domain logic to the Center MUX elements (DSC\_CMUX).

This DCC controls the clock sources from the Primary CLOCK MIDMUX before they are fed to the Primary Center MUXs that drive the domain clock network. For more information about the DCC, refer to [sysCLOCK PLL Design and User Guide for Nexus Platform \(FPGA-TN-02095\)](#).

#### 2.4.9. DDRDLL


CrossLink-NX has two identical DDRDLL blocks, located in the lower left and lower right corners of the device. Each DDRDLL (Controller DLL block) can generate a 9-bit phase shift value corresponding to a 90 degree phase shift of the reference clock input and provide this value to every DQS block and DLLDEL Target delay element. The reference clock can be either from a PLL, or an input pin. The DQSBUF uses this value to control the delay of the DQS inputs from a DDR memory interface to achieve a 90-degree shift in order to clock DQ inputs at the center of the data eye.

- The value is also sent to another Target DLL, DLLDEL, which takes a primary clock input and generates a 90-degree shifted clock output to drive the clocking structure. This is useful in an edge-aligned Generic DDR interface, where 90-degree clocking needs to be created. Not all primary clock inputs have associated DLLDEL control. [Figure 2.11](#) shows DDRDLL connectivity to a DLLDEL block (connectivity to DQSBUF blocks is similar).

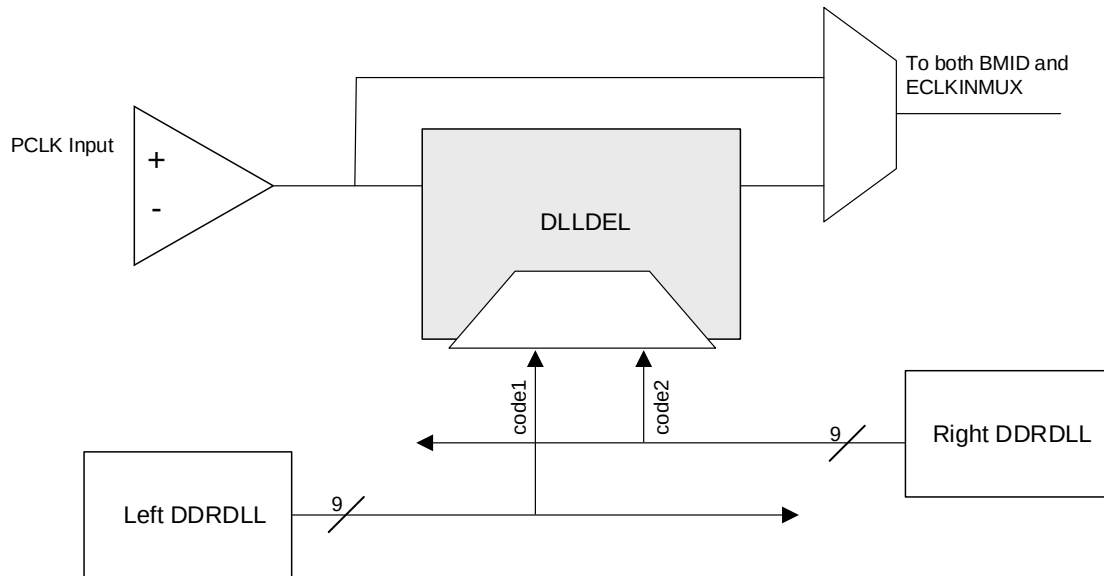

**Figure 2.11. DLLDEL Functional Diagram**

Each DDRDLL can generate a delay value based on the reference clock frequency. The Target DLLs (DQSBUF and DLLDEL) use the value (code) to either create phase shifted inputs from the DDR memory or create a 90 degree shifted clock. [Figure 2.12](#) shows the connections between the DDRDLL and the Target DLLs.

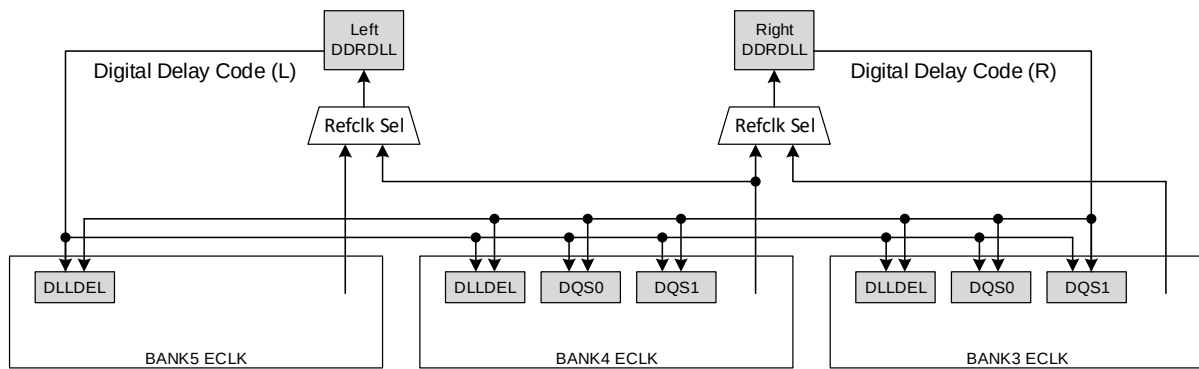

**Figure 2.12. DDRDLL Architecture**

## 2.5. SGMII Tx/Rx

The CrossLink-NX device utilizes different components/resources for the transmit and receive paths of Serial Gigabit Media Independent Interface (SGMII). For the SGMII transmit path, generic DDR I/O with x5 gearing are used. For more information, refer to GDDR5\_TX.ECLK.Aligned Interface on the [CrossLink-NX High-Speed I/O Interface \(FPGA-TN-02097\)](#).

For the SGMII receive path, one of the two available hardened CDR (Clock and Data Recovery) components can be used.

There are three main blocks in each CDR: the CDR, deserializer, and FIFO. Each CDR features two loops. The first loop is locked to the reference clock. Once locked, the loop switches to the data path loop where the CDR tracks the data signals to generate the correcting signals needed to achieve and maintain phase lock with the data. The data is then passed through a deserializer which deserialize the data to 10-bit parallel data. The 10-bit parallel data is then sent to the FIFO bridge, which allows the CDR to interface with the rest of the FPGA.

[Figure 2.13](#) shows a block diagram of the SGMII CDR IP.

The two hardened blocks are located at the bottom left of the chip and uses the high speed I/O Bank 5 for the differential pair input. It is recommended that the reference clock should be entered through a GPIO that has connection to the PLL on the lower left corner as well.

For more information about how to implement the hardened CDR for SGMII solution, refer to the [SGMII and Gb Ethernet PCS IP Core \(FPGA-IPUG-02077\)](#).

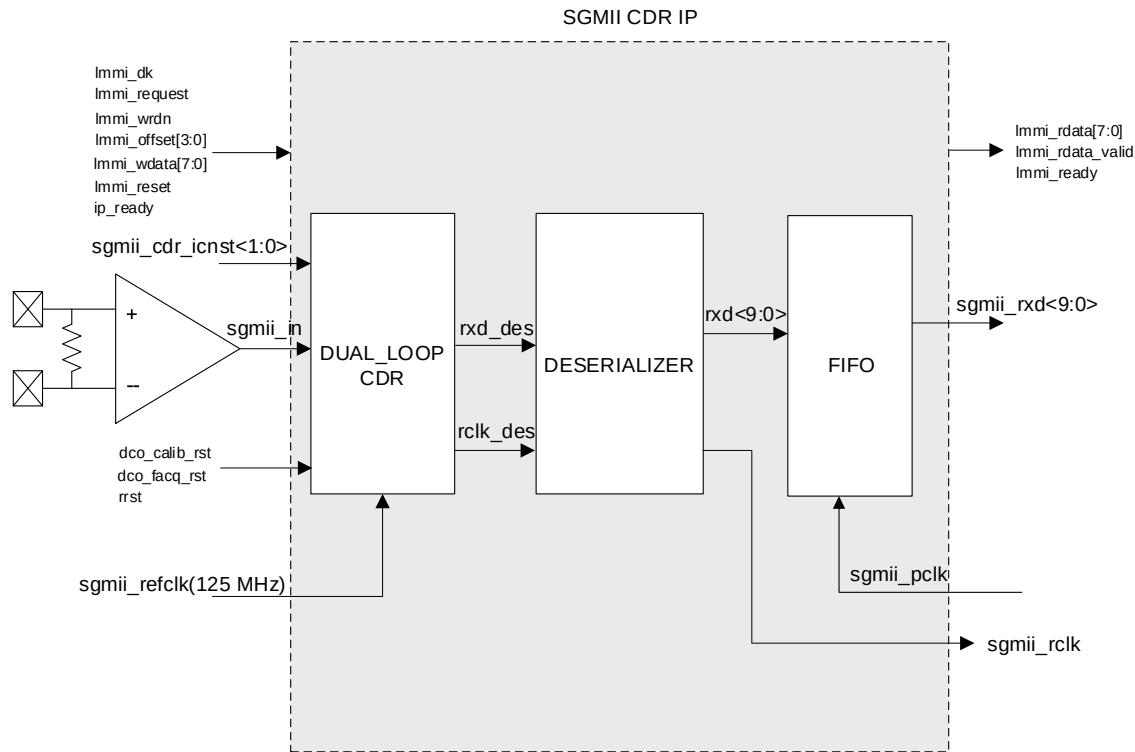


Figure 2.13. SGMII CDR IP

## 2.6. sysMEM Memory

CrossLink-NX devices contain a number of sysMEM Embedded Block RAM (EBR). The EBR consists of an 18 kb RAM with memory core, dedicated input registers and output registers as well as optional pipeline registers at the outputs. Each EBR includes functionality to support true dual-port, pseudo dual-port, single-port RAM, ROM and built in FIFO. In CrossLink-NX, unused EBR blocks is powered down to minimize power consumption.

### 2.6.1. sysMEM Memory Block

The sysMEM block can implement single port, dual port or pseudo dual port memories. Each block can be used in a variety of depths and widths as listed in [Table 2.4](#). FIFOs can be implemented using the built in read and write address counters and programmable full, almost full, empty and almost empty flags. The EBR block facilitates parity checking by supporting an optional parity bit for each data byte. EBR blocks provide byte-enable support for configurations with 18-bit and 36-bit data widths. For more information, refer to [Memory User Guide for Nexus Platform \(FPGA-TN-02094\)](#).

EBR also provides a built in ECC engine, which is available in Commercial/Industrial –8 and –9 speed grades and Automotive –7 speed grade. The ECC engine supports a write data width of 32 bits and it can be cascaded for larger data widths such as x64. The ECC parity generator creates and stores parity data for each 32-bit word written. When a read operation is performed, it compares the data with its associated parity data and report back if any Single Event Upset (SEU) event has disturbed the data. Any single bit data disturb is automatically corrected at the data output. In addition, two dedicated error flags indicate if a single-bit or two-bit error has occurred.

**Table 2.4. sysMEM Block Configurations**

| Memory Mode      | Configurations |
|------------------|----------------|
| Single Port      | 16,384 × 1     |
|                  | 8,192 × 2      |
|                  | 4,096 × 4      |
|                  | 2,048 × 9      |
|                  | 1,024 × 18     |
|                  | 512 × 36       |
| True Dual Port   | 16,384 × 1     |
|                  | 8,192 × 2      |
|                  | 4,096 × 4      |
|                  | 2,048 × 9      |
|                  | 1,024 × 18     |
|                  | 512 × 36       |
| Pseudo Dual Port | 16,384 × 1     |
|                  | 8,192 × 2      |
|                  | 4,096 × 4      |
|                  | 2,048 × 9      |
|                  | 1,024 × 18     |
|                  | 512 × 36       |

### 2.6.2. Bus Size Matching

All of the multi-port memory modes support different widths on each of the ports (except ECC mode, which only supports a write data width of 32 bits). The RAM bits are mapped LSB word 0 to MSB word 0, LSB word 1 to MSB word 1, and so on. Although the word size and number of words for each port varies, this mapping scheme applies to each port.

### 2.6.3. RAM Initialization and ROM Operation

If desired, the contents of the RAM can be pre-loaded during device configuration. By preloading the RAM block during the chip configuration cycle and disabling the write controls, the sysMEM block can also be utilized as a ROM.

### 2.6.4. Memory Cascading


Larger and deeper blocks of RAM can be created using EBR sysMEM Blocks. Typically, the Lattice design tools cascade memory transparently, based on specific design inputs.

### 2.6.5. Single, Dual and Pseudo-Dual Port Modes

In all the sysMEM RAM modes, the input data and address for the ports are registered at the input of the memory array. The output data of the memory is optionally registered at the output.

### 2.6.6. Memory Output Reset

The EBR utilizes latches at the A and B output ports. These latches can be reset asynchronously or synchronously. RSTA and RSTB are local signals, which reset the output latches associated with Port A and Port B, respectively. The Global Reset (GSRN) signal can reset both ports. The output data latches and associated resets for both ports are as shown in [Figure 2.14](#). The optional Pipeline Registers at the outputs of both ports are also reset in the same way.

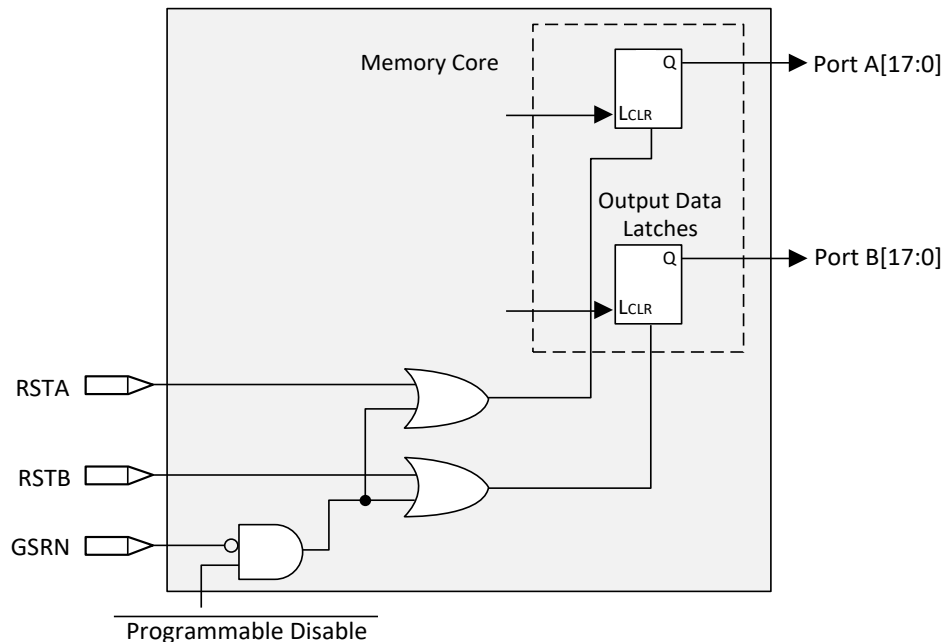

**Figure 2.14. Memory Core Reset**

For further information on the sysMEM EBR block, see the list of technical documentation in the [References](#) section.

## 2.7. Large RAM

The CrossLink-NX device includes additional memory resources in the form of Large Random-Access Memory (LRAM) blocks.

The LRAM is designed to work as Single-Port RAM, Dual-Port RAM, Pseudo Dual-Port RAM, and ROM memories. It is meant to function as additional memory resources for users beyond what is available in the EBR and PFU.

Each individual Large RAM block contains 0.5 Mbits of memory, and has a programmable data width of up to 32 bits. Cascading Large RAM blocks allows data widths of up to 64 bits. Additionally, there is the ability to use either Error Correction Coding (ECC) or byte enable.

## 2.8. sysDSP

The CrossLink-NX family provides an enhanced sysDSP architecture, making it ideally suited for low-cost, high-performance Digital Signal Processing (DSP) applications. Typical functions used in these applications are Finite Impulse Response (FIR) filters, Fast Fourier Transforms (FFT) functions, Correlators, Reed-Solomon/Turbo/Convolution encoders and decoders. These complex signal processing functions use similar building blocks such as multiply-adders and multiply-accumulators.

### 2.8.1. sysDSP Approach Compared to General DSP

Conventional general-purpose DSP chips typically contain one to four (Multiply and Accumulate) MAC units with fixed data-width multipliers; this leads to limited parallelism and limited throughput. Their throughput is increased by higher clock speeds. In the CrossLink-NX device family, there are many DSP blocks that can be used to support different data widths. This allows users to use highly parallel implementations of DSP functions. You can optimize DSP performance versus area by choosing appropriate levels of parallelism. [Figure 2.15](#) compares the fully serial implementation to the mixed parallel and serial implementation.



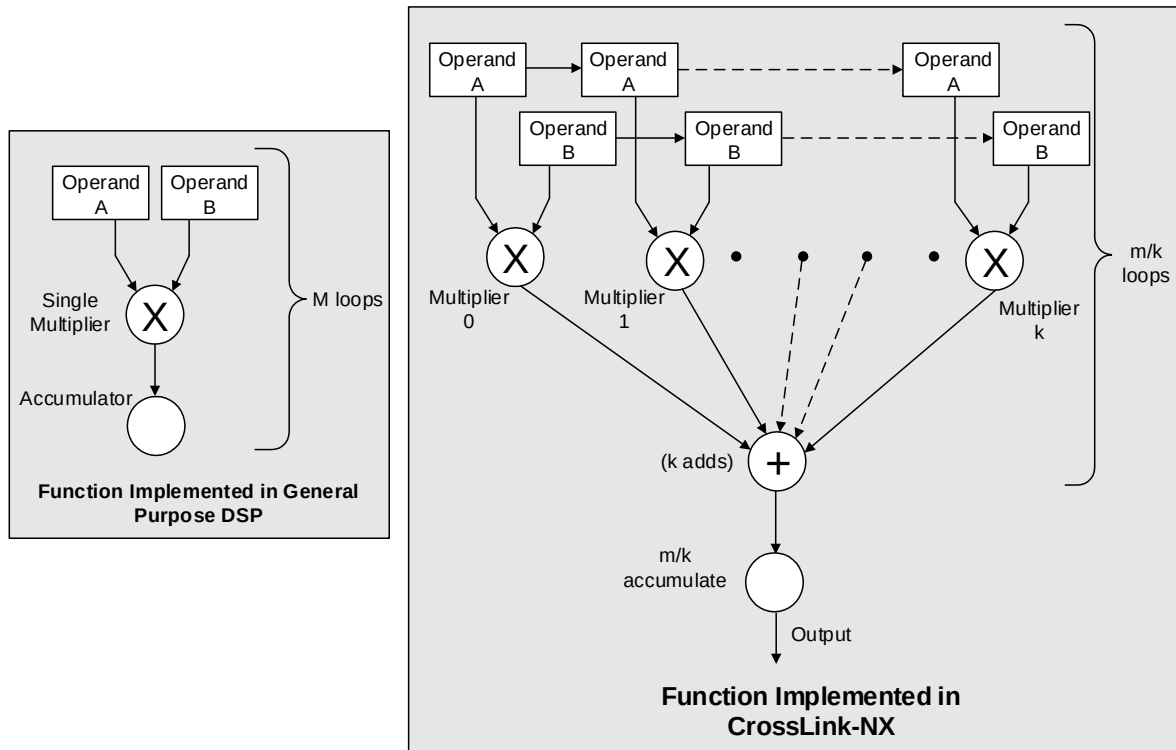


Figure 2.15. Comparison of General DSP and CrossLink-NX Approaches

## 2.8.2. sysDSP Architecture Features


The CrossLink-NX sysDSP block contains two sysDSP slices. The CrossLink-NX sysDSP Slice has been significantly enhanced to provide functions needed for advanced processing applications. These enhancements provide improved flexibility and resource utilization.

The CrossLink-NX sysDSP block (two sysDSP slices) supports many functions that include the following:

- Symmetry support. The primary target application is wireless. 1D Symmetry is useful for many applications that use FIR filters when their coefficients have symmetry or asymmetry characteristics. The main motivation for using 1D symmetry is cost/size optimization. The expected size reduction is up to 2x.
  - Odd Mode – Filter with Odd number of taps
  - Even Mode – Filter with Even number of taps
  - Two dimensional (2D) Symmetry Mode – Supports 2D filters for mainly video applications
- Dual-multiplier architecture. Lower accumulator overhead to half and the latency to half compared to single multiplier architecture.
- Fully cascable DSP across slices. Support for symmetric, asymmetric and non-symmetric filters.
- Multiply (36 × 36, two 18 × 36, four 18 × 18 or eight 9 × 9)
- Multiply Accumulate (supports one 18 × 36 multiplier result accumulation, two 18 × 18 multiplier result accumulation or four 9 × 9 multiplier result accumulation)
- Two Multiplies feeding one Accumulate per cycle for increased processing with lower latency (two 18 × 18 Multiplies feed into an accumulator that can accumulate up to 54 bits)
- Pipeline registers
- 1D Symmetry support. The coefficients of FIR filters have symmetry or negative symmetry characteristics.
  - Odd Mode – Filter with Odd number of taps
  - Even Mode – Filter with Even number of taps

- 2D Symmetry support. The coefficients of 2D FIR filters have symmetry or negative symmetry characteristics.
  - $3 \times 3$  and  $3 \times 5$  – Internal DSP Slice support
  - $5 \times 5$  and larger size 2D blocks – Semi internal DSP Slice support
- Flexible saturation and rounding options to satisfy a diverse set of applications situations
- Flexible cascading DSP blocks
  - Minimizes fabric use for common DSP functions
  - Enables implementation of FIR Filter or similar structures using dedicated sysDSP slice resources only
  - Provides matching pipeline registers
  - Can be configured to continue cascading from one row of sysDSP slices to another for longer cascade chains
- RTL Synthesis friendly synchronous reset on all registers, while still supporting asynchronous reset for legacy users
- Dynamic MUX selection to allow Time Division Multiplexing (TDM) of resources for applications that require processor-like flexibility that enables different functions for each clock cycle

For most cases, as shown in [Figure 2.16](#), the CrossLink-NX sysDSP block is backwards-compatible with the LatticeECP3™ sysDSP block, such that, legacy applications can be targeted to CrossLink-NX sysDSP. [Figure 2.16](#) shows the diagram of sysDSP block.

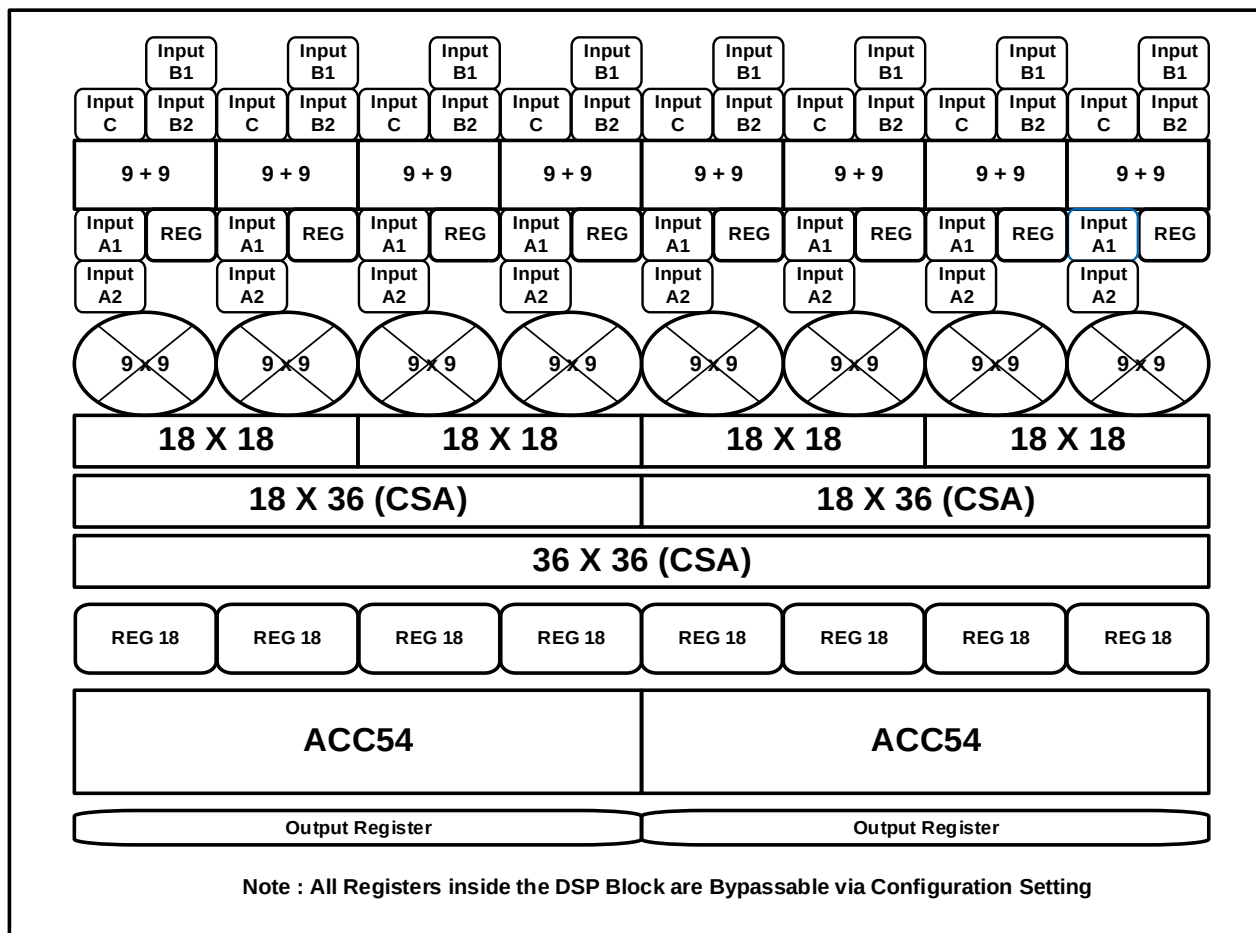

**Figure 2.16. DSP Functional Block Diagram**

The CrossLink-NX sysDSP block supports the following basic elements.

- MULT (Multiply)
- MAC (Multiply, Accumulate)
- MULTADDSUB (Multiply, Addition/Subtraction)
- MULTADDSUBSUM (Multiply, Addition/Subtraction, Summation)

Table 2.5 shows the capabilities of CrossLink-NX sysDSP block versus the above functions.

**Table 2.5. Maximum Number of Elements in a sysDSP block**

| Width of Multiply | x9 | x18 | x36 |
|-------------------|----|-----|-----|
| MULT              | 8  | 4   | 1   |
| MAC               | 2  | 2   | —   |
| MULTADDSUB        | 2  | 2   | —   |
| MULTADDSUBSUM     | 2  | 2   | —   |

Some options are available in the four elements. The input register in all the elements can be directly loaded or can be loaded as a shift register from previous operand registers. By selecting *dynamic operation*, the following operations are possible:

- In the Add/Sub option, the Accumulator can be switched between addition and subtraction on every cycle.
- The loading of operands can switch between parallel and serial operations.

For further information, refer to [sysDSP User Guide for Nexus Platform \(FPGA-TN-02096\)](#).

## 2.9. Programmable I/O (PIO)


The programmable logic associated with an I/O is called a PIO. The individual PIO are connected to their respective sysI/O buffers and pads.

On all CrossLink-NX devices, two adjacent PIO can be combined to provide a complementary output driver pair.


## 2.10. Programmable I/O Cell (PIC)

The programmable I/O cells (PIC) provides I/O function and necessary gearing logic associated with PIO. CrossLink-NX consists of base PIC and gearing PIC.

Base PICs contain three blocks: an input register block, output register block, and tri-state register block. These blocks contain registers for operating in a variety of modes along with the necessary clock and selection logic. Base PICs cover the top and left/right bank. Gearing PICs contain gearing logic and edge monitor used for locating the center of data window. Gearing PICs cover the bottom banks to support DDR operation.

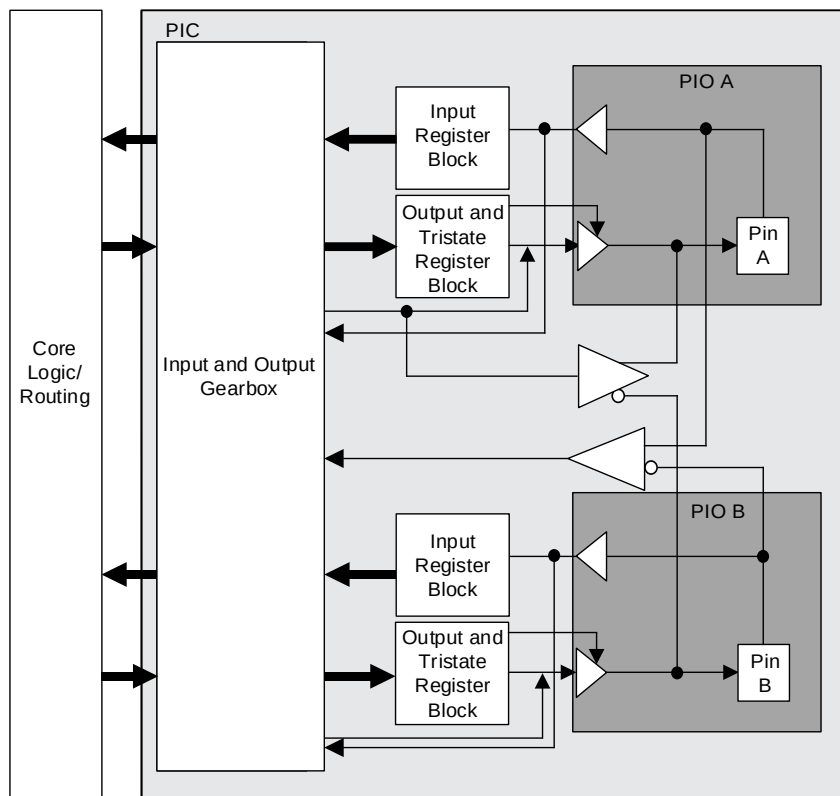

**Figure 2.17. Group of Two High Performance Programmable I/O Cells**

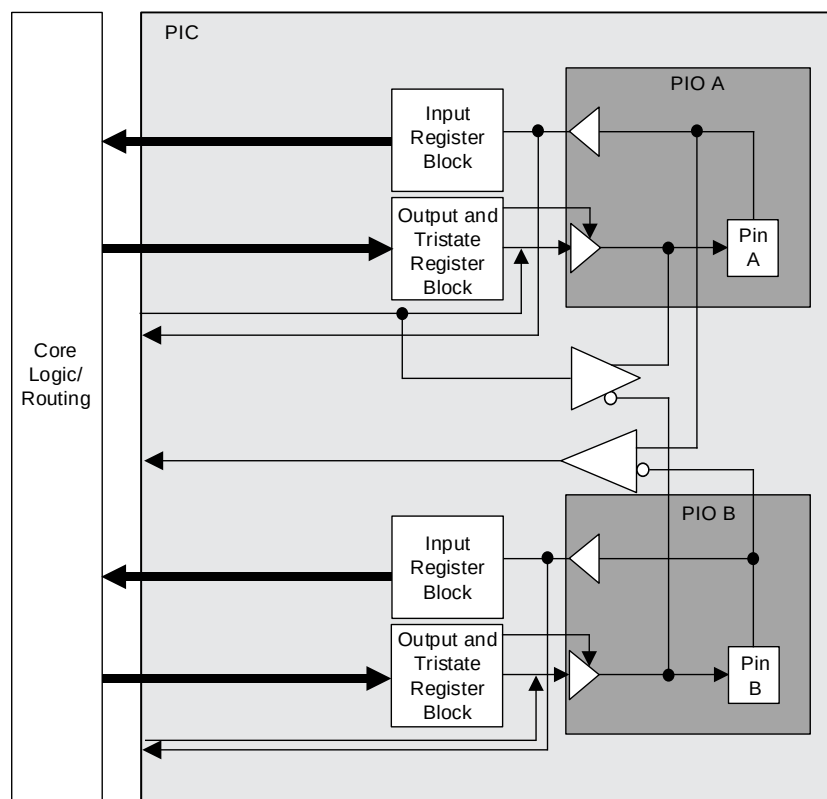

**Figure 2.18. Wide Range Programmable I/O Cells**

### 2.10.1. Input Register Block

The input register blocks for the PIO on all edges contain delay elements and registers that can be used to condition high-speed interface signals before they are passed to the device core. In addition, the input register blocks for the PIO on the bottom edges include built-in FIFO logic to interface to DDR and LPDDR memory.

The Input register block on the bottom side includes gearing logic and registers to implement IDDRX1, IDDRX2, IDDRX4, IDDRX5 gearing functions. With two PICs sharing the DDR register path, it can also implement the IDDRX71 function used for 7:1 LVDS interfaces. It uses three sets of registers – shift, update, and transfer to implement gearing and the clock domain transfer. The first stage registers sample the high-speed input data by the high-speed edge clock on its rising and falling edges. The second stage registers perform data alignment based on the control signals. The third stage pipeline registers pass the data to the device core synchronized to the low-speed system clock. For more information on gearing function, refer to [CrossLink-NX High-Speed I/O Interface \(FPGA-TN-02097\)](#).


#### Input FIFO

The CrossLink-NX PIO has a dedicated input FIFO per single-ended pin for input data register for DDR Memory interfaces. The FIFO resides before the gearing logic. It transfers data from DQS domain to continuous ECLK domain. On the Write side of the FIFO, it is clocked by DQS clock, which is the delayed version of the DQS Strobe signal from DDR memory. On the Read side of FIFO, it is clocked by ECLK. ECLK may be any high-speed clock with identical frequency as DQS (the frequency of the memory chip). Each DQS group has one FIFO control block. It distributes FIFO read/write pointers to every PIC in same DQS group. DQS Grouping and the DQS Control Block is described in [DDR Memory Support](#) section.

**Table 2.6. Input Block Port Description**


| Name                               | Type   | Description                                                |
|------------------------------------|--------|------------------------------------------------------------|
| D                                  | Input  | High Speed Data Input                                      |
| Q[1:0]/Q[3:0]/Q[6:0]/Q[7:0]/Q[9:0] | Output | Low Speed Data to the device core                          |
| RST                                | Input  | Reset to the Output Block                                  |
| SCLK                               | Input  | Slow Speed System Clock                                    |
| ECLK                               | Input  | High Speed Edge Clock                                      |
| DQS                                | Input  | Clock from DQS control Block used to clock DDR memory data |
| ALIGNWD                            | Input  | Data Alignment signal from device core.                    |

Figure 2.19 shows the input register block for the PIO on the top, left, and right edges.

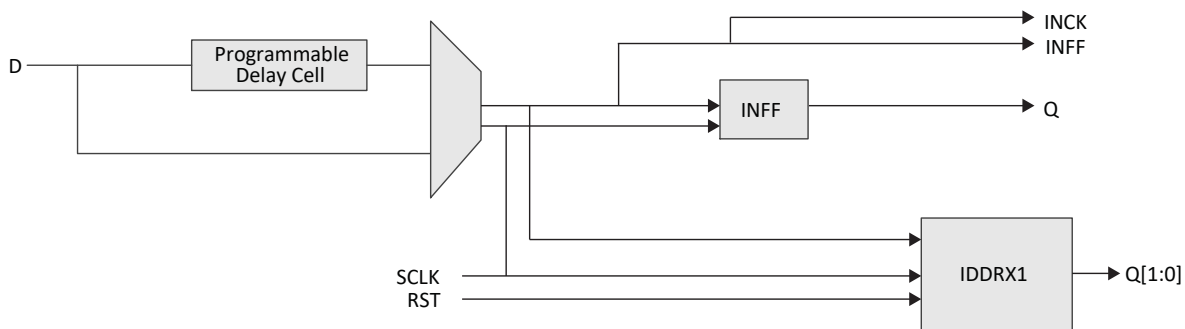

**Figure 2.19. Input Register Block for PIO on Top, Left, and Right Sides of the Device**

Figure 2.20 shows the input register block for the PIO located on the bottom edge.

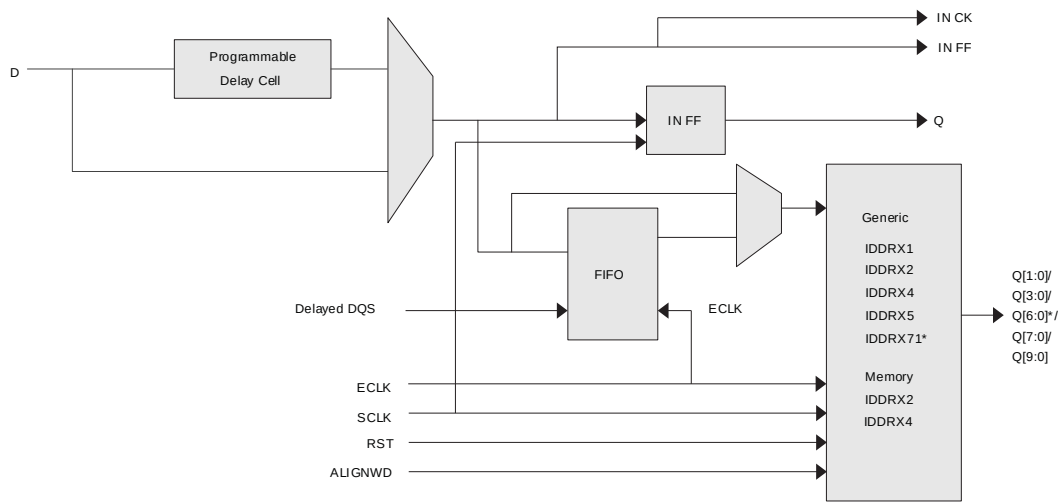

\*For 7:1 LVDS interface only. It is required to use PIO pair pins (PIOA/B or PIOC/D).


**Figure 2.20. Input Register Block for PIO on Bottom Side of the Device**

### 2.10.2. Output Register Block


The output register block registers signals from the core of the device before they are passed to the sys/I/O buffers.

The CrossLink-NX output data path has programmable registers and output gearing logic. On the bottom side, the output register block can support 1x, 2x, x4, x5, and 7:1 gearing enabling high speed DDR and DDR memory interfaces. On the top, left, and right sides, the banks support 1x gearing. The CrossLink-NX output data path diagram is shown in Figure 2.21. The programmable delay cells are also available in the output data path.

For a detailed description of the output register block modes and usage, refer to [CrossLink-NX High-Speed I/O Interface \(FPGA-TN-02097\)](#).

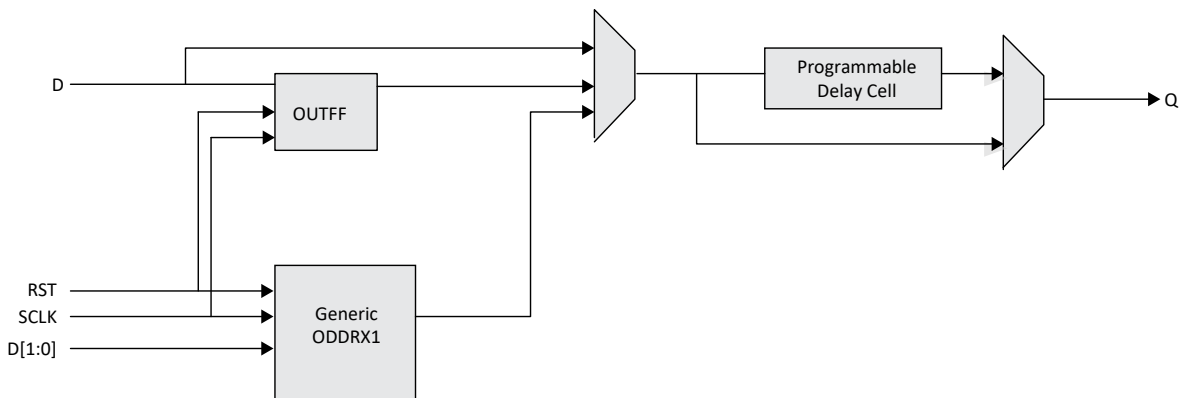

**Figure 2.21. Output Register Block on Top, Left, and Right Sides**

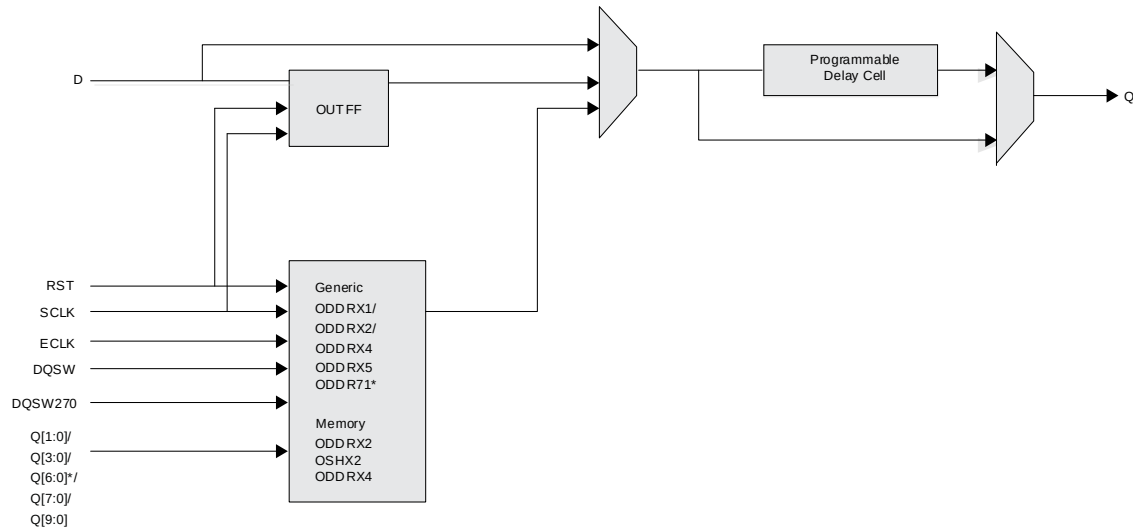

\*For 7:1 LVDS interface only. It is required to use PIO pair pins PIOA/B.

**Figure 2.22. Output Register Block on Bottom Side**


**Table 2.7. Output Block Port Description**

| Name                               | Type   | Description                                                         |
|------------------------------------|--------|---------------------------------------------------------------------|
| Q                                  | Output | High Speed Data Output                                              |
| D                                  | Input  | Data from core to output SDR register                               |
| Q[1:0]/Q[3:0]/Q[6:0]/Q[7:0]/Q[9:0] | Input  | Low Speed Data from device core to output DDR register              |
| RST                                | Input  | Reset to the Output Block                                           |
| SCLK                               | Input  | Slow Speed System Clock                                             |
| ECLK                               | Input  | High Speed Edge Clock                                               |
| DQSW                               | Input  | Clock from DQS control Block used to generate DDR memory DQS output |
| DQSW270                            | Input  | Clock from DQS control Block used to generate DDR memory DQ output  |

## 2.11. Tri-state Register Block

The tri-state register block registers tri-state control signals from the core of the device before they are passed to the sysI/O buffers. The block contains a register for SDR operation. In SDR, the TD input feeds one of the flip-flops that then feeds the output. In DDR, operations used mainly for DDR memory interfaces can be implemented on the bottom side of the device. Here, two inputs feed the tri-state registers clocked by both ECLK and SCLK.

Figure 2.23 and Figure 2.24 show the Tri-state Register Block functions on the device. For a detailed description of the tri-state register block modes and usage, refer to [CrossLink-NX High-Speed I/O Interface \(FPGA-TN-02097\)](#).

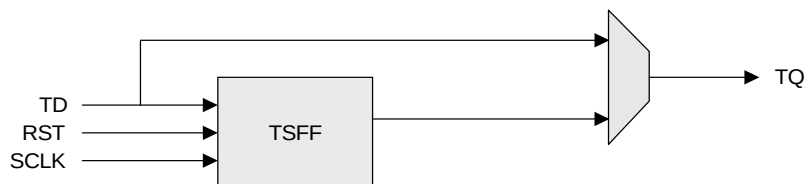

**Figure 2.23. Tri-state Register Block on Top, Left, and Right Sides**

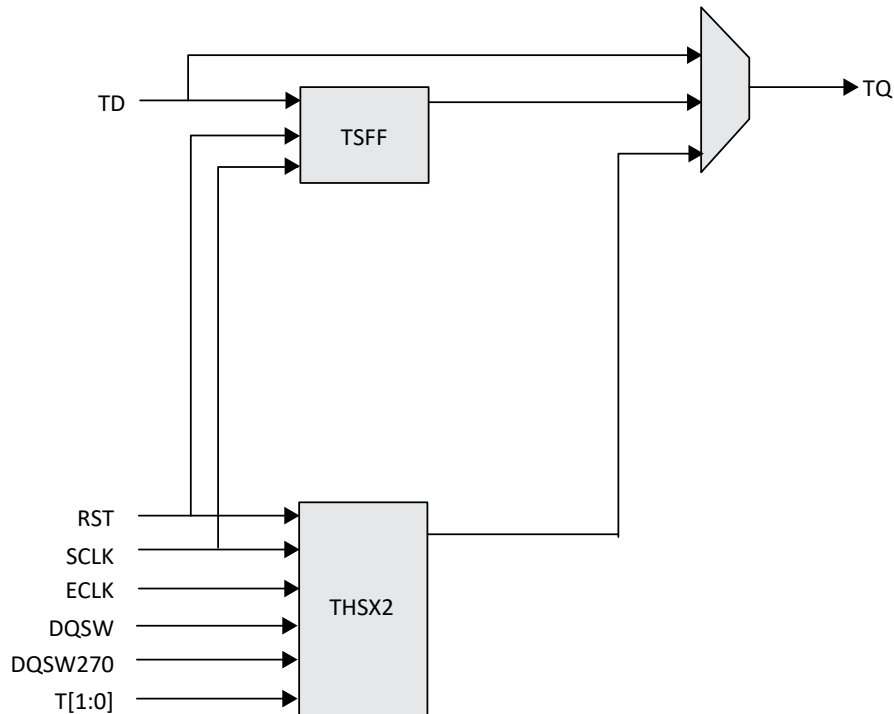


Figure 2.24. Tri-state Register Block on Bottom Side

Table 2.8. Tri-state Block Port Description

| Name    | Type   | Description                                                         |
|---------|--------|---------------------------------------------------------------------|
| TD      | Input  | Tri-state Input to Tri-state SDR Register                           |
| RST     | Input  | Reset to the Tri-state Block                                        |
| T[1:0]  | Input  | Tri-state input to TSHX2 function                                   |
| SCLK    | Input  | Slow Speed System Clock                                             |
| ECLK    | Input  | High Speed Edge Clock                                               |
| DQSW    | Input  | Clock from DQS control Block used to generate DDR memory DQS output |
| DQSW270 | Input  | Clock from DQS control Block used to generate DDR memory DQ output  |
| TQ      | Output | Output of the Tri-state block                                       |


## 2.12. DDR Memory Support

### 2.12.1. DQS Grouping for DDR Memory

Certain PICs have additional circuitry to allow the implementation of high-speed source synchronous and DDR3/DDR3L, LPDDR2 memory interfaces. The support varies by the edge of the device as detailed below.

PICs on the bottom side have fully functional elements supporting DDR3/DDR3L, LPDDR2 memory interfaces. Every 16 PIO on the bottom side are grouped into one DQS group, as shown in Figure 2.25. Within each DQS group, there are two pre-placed pins for DQS and DQS# signals. The rest of the pins in the DQS group can be used as DQ signals and DM signal. The number of pins in each DQS group bonded out is package dependent. DQS groups with less than 11 pins bonded out can only be used for LPDDR2/3 Command/ Address busses. In DQS groups with more than 11 pins bonded out, up to two pre-defined pins are assigned to be used as virtual VCCIO, by driving them high to make extra connections to the VCCIO power supply. These soft connections to VCCIO help reduce SSO noise. For details, refer to [CrossLink-NX High-Speed I/O Interface \(FPGA-TN-02097\)](#).



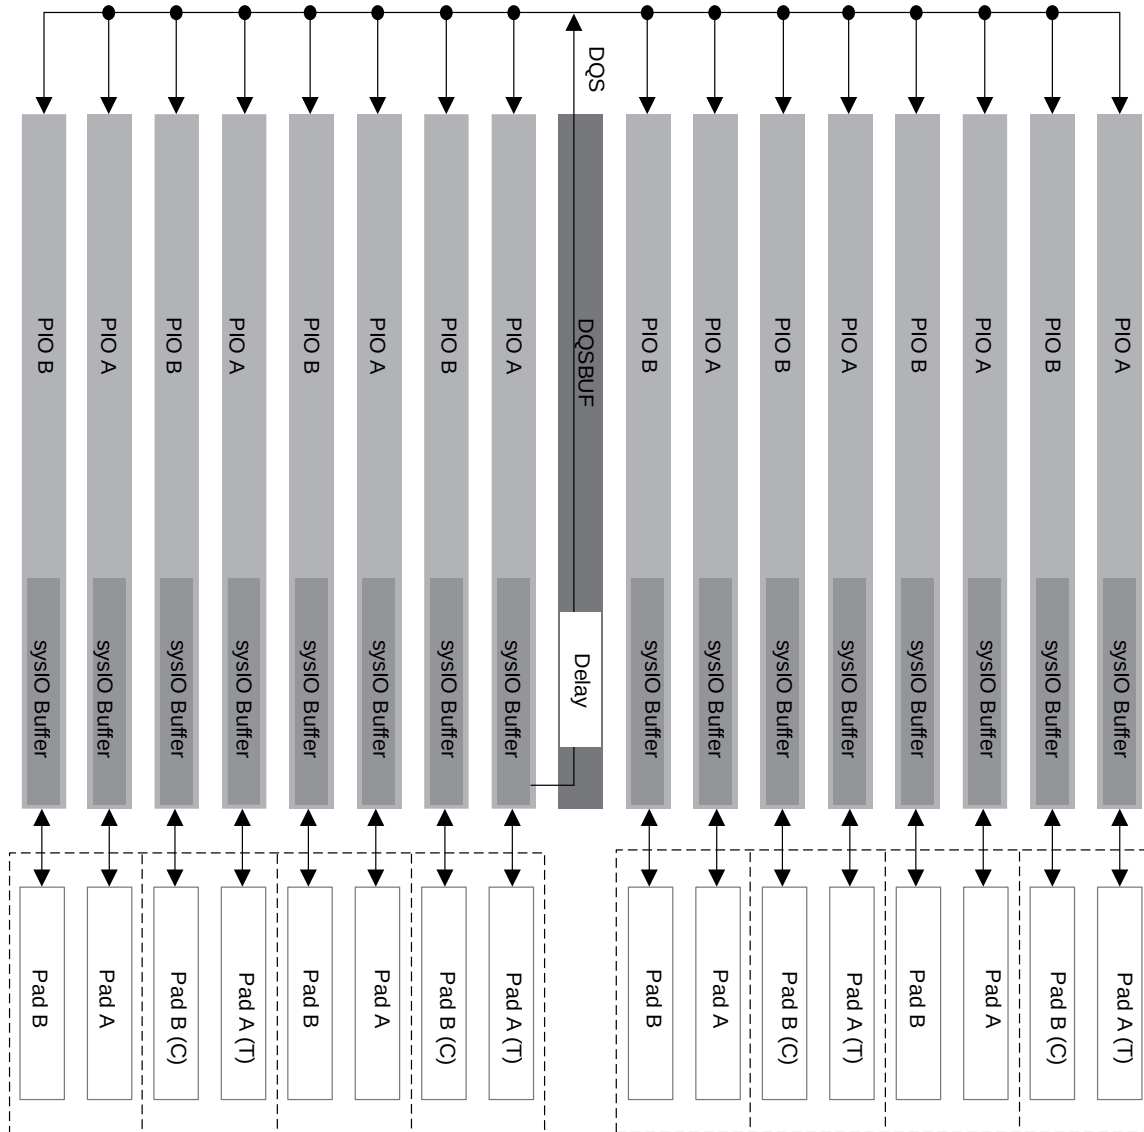

**Figure 2.25. DQS Grouping on the Bottom Edge**


### 2.12.2. DLL Calibrated DQS Delay and Control Block (DQSBUF)

To support DDR memory interfaces (DDR3/DDR3L, LPDDR2/3), the DQS strobe signal from the memory must be used to capture the data (DQ) in the PIC registers during memory reads. This signal is output from the DDR memory device aligned to data transitions and must be time shifted before it can be used to capture data in the PIC. This time shift is achieved by using the DQSBUF programmable delay line in the DQS Delay Block (DQS read circuit). The DQSBUF is implemented as a Target delay line and works in conjunction with a Controller DDRDLL.

This block also includes a slave delay line to generate delayed clocks used during writes to generate DQ and DQS with correct phases within one DQS group. There is a third delay line inside this block used to provide write leveling for DDR write if needed.

Each of the read and write side delays can be dynamically shifted using margin control signals from the core logic.

The FIFO Control Block included here generates the Read and Write Pointers for the FIFO inside the Input Register Block. These pointers are generated to control the DQS to ECLK domain crossing using the FIFO module.

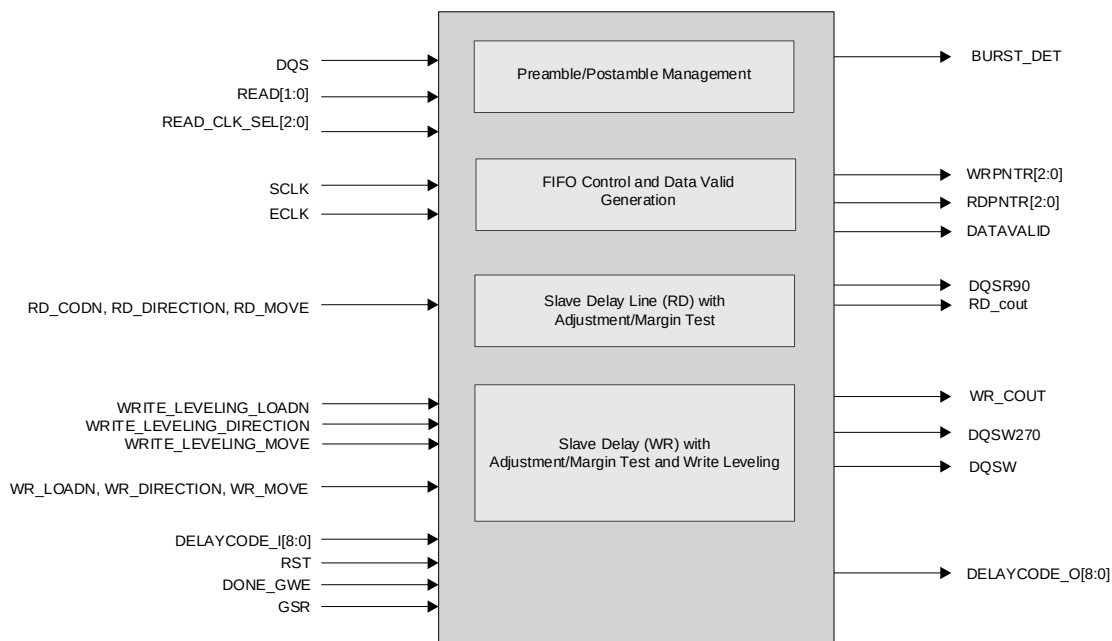

**Figure 2.26. DQS Control and Delay Block (DQSBUF)**

**Table 2.9. DQSBUF Port List Description**

| Name                                                                      | Type   | Description                                          |
|---------------------------------------------------------------------------|--------|------------------------------------------------------|
| DQS                                                                       | Input  | DDR memory DQS strobe                                |
| READ[1:0]                                                                 | Input  | Read Input from DDR Controller                       |
| READCLKSEL[2:0]                                                           | Input  | Read pulse selection                                 |
| SCLK                                                                      | Input  | Slow System Clock                                    |
| ECLK                                                                      | Input  | High Speed Edge Clock (same frequency as DDR memory) |
| RDLOADN, RDMOVE, RDDIRECTION                                              | Input  | Dynamic Margin Control ports for Read delay          |
| WRLOADN, WRMOVE, WRDIRECTION                                              | Input  | Dynamic Margin Control ports for Write delay         |
| DELAYCODE_I[8:0]                                                          | Input  | Dynamic Delay Control                                |
| WRITE_LEVELING_LOADN,<br>WRITE_LEVELING_DIRECTION,<br>WRITE_LEVELING_MOVE | Input  | Write Leveling Control                               |
| DQSR90                                                                    | Output | 90 delay DQS used for Read                           |
| DQSW270                                                                   | Output | 90 delay clock used for DQ Write                     |
| DQSW                                                                      | Output | Clock used for DQS Write                             |
| RDPNTR[2:0]                                                               | Output | Read Pointer for IFIFO module                        |
| WRPNTR[2:0]                                                               | Output | Write Pointer for IFIFO module                       |
| DATAVALID                                                                 | Output | Signal indicating start of valid data                |
| BURSTDDET                                                                 | Output | Burst Detect indicator                               |
| RD_COUT                                                                   | Output | Read Count                                           |
| WR_COUT                                                                   | Output | Write Count                                          |
| DELAYCODE_O[8:0]                                                          | Output | Dynamic Delay Control                                |

## 2.13. sysI/O Buffer

Each I/O is associated with a flexible buffer referred to as a sysI/O buffer. These buffers are arranged around the periphery of the device in groups referred to as banks. The sysI/O buffers allow users to implement a wide variety of standards that are found in today's systems including LVDS, HSUL, SSTL Class I and II, LVCMOS, LVTTTL, and MIPI.

The CrossLink-NX family contains multiple Programmable I/O Cell (PIC) blocks. Each PIC contains two Programmable I/O, PIOA and PIOB. Each PIO includes a sysI/O buffer and I/O logic. Two adjacent PIO can be joined to provide a differential I/O pair referred to as True and Comp, where True Pad is associated with the positive side of the differential I/O, and the complement with the negative.

The top, left and right side banks support I/O standards from 3.3 V to 1.0 V while the bottom supports I/O standards from 1.8 V to 1.0 V. Every pair of I/O on the bottom bank also have a true LVDS and SLVS Tx Driver. In addition, the bottom bank supports single-ended input termination. Both static and dynamic termination are supported. Dynamic termination is used to support the DDR/LPDDR interface standards. For more information about DDR implementation in I/O Logic and DDR memory interface support, refer to [CrossLink-NX High-Speed I/O Interface \(FPGA-TN-02097\)](#).

### 2.13.1. Supported sysI/O Standards

CrossLink-NX sysI/O buffers support both single-ended differential and differential standards. Single-ended standards can be further subdivided into internally ratioed standards such as LVCMOS, LVTTTL, and externally referenced standards such as HSUL and SSTL. The buffers support the LVTTTL, LVCMOS 1.0 V, 1.2 V, 1.5 V, 1.8 V, 2.5 V, and 3.3 V standards. Differential standards supported include LVDS, SLVS, differential LVCMOS, differential SSTL, and differential HSUL. For better support of video standards, subLVDS and MIPI\_D-PHY are also supported. [Table 2.10](#) and [Table 2.11](#) provide a list of sysI/O standards supported in CrossLink-NX devices.

**Table 2.10. Single-Ended I/O Standards**

| Standard   | Input | Output | Bi-directional   |
|------------|-------|--------|------------------|
| LVTTTL33   | Yes   | Yes    | Yes              |
| LVCMOS33   | Yes   | Yes    | Yes              |
| LVCMOS25   | Yes   | Yes    | Yes              |
| LVCMOS18   | Yes   | Yes    | Yes              |
| LVCMOS15   | Yes   | Yes    | Yes              |
| LVCMOS12   | Yes   | Yes    | Yes              |
| LVCMOS10   | Yes   | No     | No               |
| HTSL15 I   | Yes   | Yes    | Yes              |
| SSTL 15 I  | Yes   | Yes    | Yes              |
| SSTL 135 I | Yes   | Yes    | Yes              |
| HSUL12     | Yes   | Yes    | Yes              |
| LVCMOS18H  | Yes   | Yes    | Yes              |
| LVCMOS15H  | Yes   | Yes    | Yes              |
| LVCMOS12H  | Yes   | Yes    | Yes              |
| LVCMOS10H  | Yes   | Yes    | Yes              |
| LVCMOS10R  | Yes   | —      | Yes <sup>1</sup> |

**Note:**


1. Output supported by LVCMOS10H.

**Table 2.11. Differential I/O Standards**

| Standard    | Input | Output | Bi-directional |
|-------------|-------|--------|----------------|
| LVDS        | Yes   | Yes    | Yes            |
| SUBLVDS     | Yes   | No     | —              |
| SLVS        | Yes   | Yes    | —              |
| SUBLVDSE    | —     | Yes    | —              |
| SUBLVDSEH   | —     | Yes    | —              |
| LVDSE       | —     | Yes    | —              |
| MIPI_D-PHY  | Yes   | Yes    | Yes            |
| HSTL15D_I   | Yes   | Yes    | Yes            |
| SSTL15D_I   | Yes   | Yes    | Yes            |
| SSTL15D_II  | Yes   | Yes    | Yes            |
| SSTL135D_I  | Yes   | Yes    | Yes            |
| SSTL135D_II | Yes   | Yes    | Yes            |
| HSUL12D     | Yes   | Yes    | Yes            |
| LVTTTL33D   | —     | Yes    | —              |
| LVC MOS33D  | —     | Yes    | —              |
| LVC MOS25D  | —     | Yes    | —              |

### 2.13.2. sysI/O Banking Scheme

CrossLink-NX devices have up to eight banks in total. For 40K device, there are one bank on top, two banks each at left and right side of device, and three on the bottom side of device. For 17k device, one bank on top, one on right side and three on the bottom side of device. The higher density CrossLink-NX device has more pins in each bank. Bank 0, Bank 1, Bank 2, Bank 6, and Bank 7 support up to VCCIO 3.3 V while Bank 3, Bank 4, and Bank 5 support up to VCCIO 1.8 V. In addition, Bank 3, Bank 4, and Bank 5 support two VREF inputs for flexibility to receive two different referenced input levels on the same bank. [Figure 2.27](#) shows the location of each bank.

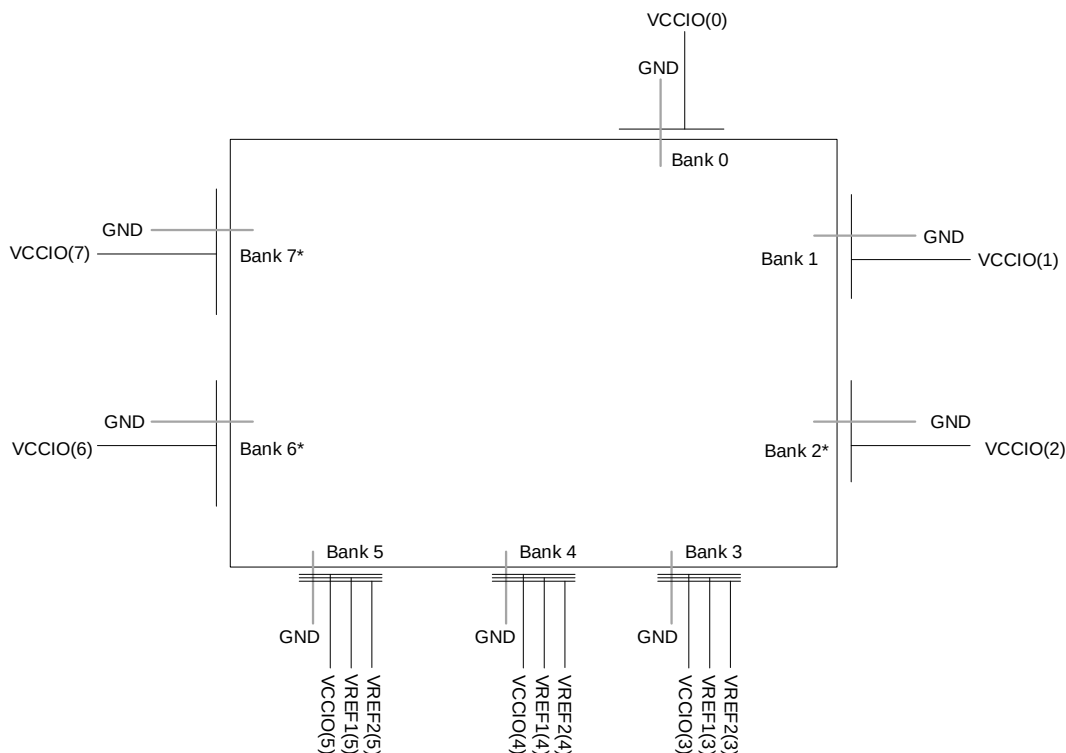

\*Note: Bank not available in LIFCL-17.

**Figure 2.27. sysI/O Banking**

### Typical sysI/O Behavior During Power-up

The internal Power-On-Reset (POR) signal is deactivated when  $V_{CC}$  and  $V_{CCAUX}$  have reached satisfactory levels. After the POR signal is deactivated the FPGA core logic becomes active. It is the responsibility of the user to ensure that all other  $V_{CCIO}$  banks are active with valid input logic levels to properly control the output logic states of all the I/O banks that are critical to the application. For more information about controlling the output logic state with valid input logic levels during power-up in CrossLink-NX devices, see the list of technical documentation in the [References](#) section.

$V_{CC}$  and  $V_{CCAUX}$  supply the power to the FPGA core fabric, whereas  $V_{CCIO}$  supplies power to the I/O buffers. In order to simplify the system design while providing consistent and predictable I/O behavior, it is recommended that the I/O buffers be powered-up prior to the FPGA core fabric. For the different power supply voltage levels supported by the I/O banks, refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for detailed information.

### VREF1 and VREF2

Bank 3, Bank 4, and Bank 5 can support two separate VREF input voltages, VREF1, and VREF2. To assign a VREF driver, use `IO_Type = VREF1_DRIVER` or `VREF2_DRIVER`. To assign VREF to a buffer, use `VREF1_LOAD` or `VREF2_LOAD`.

### sysI/O Standards Supported by I/O Bank

All banks can support multiple I/O standards under the  $V_{CCIO}$  rules discussed above. [Table 2.12](#) and [Table 2.13](#) summarize the I/O standards supported on various sides of the CrossLink-NX device.

**Table 2.12. Single-Ended I/O Standards Supported on Various Sides**

| Standard       | Top | Left <sup>1</sup> | Right | Bottom |
|----------------|-----|-------------------|-------|--------|
| LVTTTL33       | Yes | Yes               | Yes   | —      |
| LVC MOS33      | Yes | Yes               | Yes   | —      |
| LVC MOS25      | Yes | Yes               | Yes   | —      |
| LVC MOS18      | Yes | Yes               | Yes   | —      |
| LVC MOS15      | Yes | Yes               | Yes   | —      |
| LVC MOS12      | Yes | Yes               | Yes   | —      |
| LVC MOS10      | Yes | Yes               | Yes   | —      |
| LVC MOS18H     | —   | —                 | —     | Yes    |
| LVC MOS15H     | —   | —                 | —     | Yes    |
| LVC MOS12H     | —   | —                 | —     | Yes    |
| LVC MOS10H     | —   | —                 | —     | Yes    |
| LVC MOS10R     | —   | —                 | —     | Yes    |
| HTSL15 I       | —   | —                 | —     | Yes    |
| SSTL 15 I, II  | —   | —                 | —     | Yes    |
| SSTL 135 I, II | —   | —                 | —     | Yes    |
| HSUL12         | —   | —                 | —     | Yes    |

**Note:**

1. Left bank is not available in LIFCL-17.

**Table 2.13. Differential I/O Standards Supported on Various Sides**

| Standard    | Top | Left <sup>1</sup> | Right | Bottom |
|-------------|-----|-------------------|-------|--------|
| LVDS        | —   | —                 | —     | Yes    |
| SUBLVDS     | —   | —                 | —     | Yes    |
| SLVS        | —   | —                 | —     | Yes    |
| SUBLVDSE    | Yes | Yes               | Yes   | —      |
| SUBLVDSEH   | —   | —                 | —     | Yes    |
| LVDSE       | Yes | Yes               | Yes   | —      |
| MIPI_D-PHY  | —   | —                 | —     | Yes    |
| HSTL15D_I   | —   | —                 | —     | Yes    |
| SSTL15D_I   | —   | —                 | —     | Yes    |
| SSTL15D_II  | —   | —                 | —     | Yes    |
| SSTL135D_I  | —   | —                 | —     | Yes    |
| SSTL135D_II | —   | —                 | —     | Yes    |
| HSUL12D     | —   | —                 | —     | Yes    |
| LVTTTL33D   | Yes | Yes               | Yes   | —      |
| LVC MOS33D  | Yes | Yes               | Yes   | —      |
| LVC MOS25D  | Yes | Yes               | Yes   | —      |

**Note:**

1. Left bank is not available in LIFCL-17.

### Hot Socketing

The CrossLink-NX devices have been carefully designed to ensure predictable behavior during power-up and power-down. During power-up and power-down sequences, the I/O remain in tri-state until the power supply voltage is high enough to ensure reliable operation. In addition, leakage into I/O pins is controlled within specified limits. Bank 0, Bank 1, Bank 2, Bank 6, and Bank 7 wide range I/O (excluding MCLK/MCSN/MOSI/INITN/DONE) are hot socketable. Bank 3, Bank 4, and Bank 5 do not support hot socketing.

### 2.13.3. sysI/O Buffer Configurations

This section describes the various sysI/O features available on the CrossLink-NX device. Refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for detailed information.

## 2.14. Analog Interface

The CrossLink-NX family can provide an analog interface consisting of two Analog Digital (ADC), three continuous time comparators, and an internal junction temperature monitoring diode. This feature is available in Commercial/Industrial –8 and –9 speed grades and Automotive –7 speed grade. The two ADCs can operate either sequentially or simultaneously.

### 2.14.1. Analog to Digital Converters

The Analog to Digital Converter is a 12-bit, 1 MSPS SAR (Successive Approximation Register) architecture converter. The ADC supports both continuous and single shot conversion modes.

Each ADC input can be selected among eight GPIO (General Purpose I/O) input pairs, one designated analog input pair, and three internal signals used to monitor voltage rails or an internal junction temperature sensing diode. The input signal can be converted in either uni-polar or bi-polar mode.

The reference voltage is selectable between the 1.2 V internal reference generator and an external reference. The ADC can convert up to a 1.8 V input signal with a 1.8 V external reference voltage. The ADC has an auto-calibration function which calibrates the gain and offset.

### 2.14.2. Continuous Time Comparators

The continuous-time comparator can be used to monitor a dedicated input pair or a GPIO input pair. The output of the comparator is provided as continuous and latched outputs.

### 2.14.3. Internal Junction Temperature Monitoring Diode

On-die junction temperature can be monitored using the internal junction temperature monitoring diode. The PTAT (proportional to absolute temperature) diode voltage can be monitored by the ADC to provide a digital temperature readout. Refer to [ADC User Guide for Nexus Platform \(FPGA-TN-02129\)](#) for more details.

## 2.15. IEEE 1149.1-Compliant Boundary Scan Testability

All CrossLink-NX devices contain various ports that can be used for configuration, including a Test Access Port (TAP). This allows functional testing of the circuit board on which the device is mounted through a serial scan path that can access all critical logic nodes. Internal registers are linked internally, allowing test data to be shifted in and loaded directly onto test nodes, or test data to be captured and shifted out for verification. The test access port consists of dedicated I/O: TDI, TDO, TCK, and TMS. The test access port uses VCCIO1 for power supply. The test access port is supported for VCCIO1 = 1.8 V - 3.3 V.

For more information, refer to [sysCONFIG User Guide for Nexus Platform \(FPGA-TN-02099\)](#).

## 2.16. Device Configuration

All CrossLink-NX devices contain two ports that can be used for device configuration. The Test Access Port (TAP), which supports bit-wide configuration, and the sysCONFIG port, support serial, quad, and byte configuration. The TAP supports both the IEEE Standard 1149.1 Boundary Scan specification and the IEEE Standard 1532 In-System Configuration specification. JTAG\_EN is the only dedicated configuration pin. *PPROGRAMN/INITN/DONE* are enabled by default, but can be turned into GPIO. The remaining sysCONFIG pins are used as dual function pins. Refer to [sysCONFIG User Guide for Nexus Platform \(FPGA-TN-02099\)](#) for more information about using the dual-use pins as general purpose I/O.

There are various ways to configure a CrossLink-NX device:

- JTAG (TAP)
- Controller Serial Peripheral Interface (SPI) – to load from external SPI flash using x1, x2, or x4 (QSPI) interfaces.
- Inter-Integrated Circuit Bus (I2C)
- Improved Inter-Integrated Circuit Bus (I3C)
- Target SPI from a system host
- Lattice Memory Mapped Interface (LMMI), refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for more details.
- JTAG, SSPI, MSPI, I2C, and I3C are supported for VCCIO = 1.8 V - 3.3 V.

On power-up, based on the voltage level (high or low) of the PROGRAMN pin, the FPGA SRAM is configured by the appropriate sysCONFIG port. If PROGRAMN pin is low, the FPGA is in Target configuration mode (Target SPI, Target I2C or Target I3C) and is waiting for the correct Target Configuration port activation key. PROGRAMN must be driven high within 50 ns of the end of transmission of the Target Configuration port activation key, that is, the deassertion of SCSEN. If no Target port is declared active before the PROGRAMN pin is sensed HIGH, the FPGA is in Master SPI booting mode. In Controller SPI booting mode, the FPGA boots from an external SPI flash. Once a configuration port is activated, it remains active throughout that configuration cycle. The IEEE 1149.1 port can be activated any time after power-up by enabling the JTAG\_EN pin and sending the appropriate command through the TAP port.

### 2.16.1. Enhanced Configuration Options

CrossLink-NX devices have enhanced configuration features such as:

- Early I/O release
- Bitstream Decryption
- Decompression Support
- Watchdog Timer support
- Dual and Multi-boot image support

Early I/O Release is a new configuration feature in which certain I/O banks are released earlier so that customer systems have minimal disruption. For more details, refer to [sysCONFIG User Guide for Nexus Platform \(FPGA-TN-02099\)](#).

Watchdog Timer is a new configuration feature that helps users add a programmable timer option for timeout applications.

#### Dual-Boot and Multi-Boot Image Support

Dual-boot and multi-boot images are supported for applications requiring reliable remote updates of configuration data for the system FPGA. After the system is running with a basic configuration, a new boot image can be downloaded remotely and stored in a separate location in the configuration storage device. Any time after the update the CrossLink-NX devices can be re-booted from this new configuration file. If there is a problem, such as corrupt data during download or incorrect version number with this new boot image, the CrossLink-NX device can revert to the original backup golden configuration and try again. This all can be done without power cycling the system. For more information, refer to [sysCONFIG User Guide for Nexus Platform \(FPGA-TN-02099\)](#).



## 2.17. Single Event Upset (SEU) Handling

CrossLink-NX devices are unique in that the underlying technology used to build these devices is much more robust and less prone to soft errors.

CrossLink-NX devices have an improved, hardware implemented, Soft Error Detection (SED) circuit which can be used to detect SRAM errors so they can be corrected. There are two layers of SED implemented in CrossLink-NX making it more robust and reliable.

The SED hardware in CrossLink-NX devices is part of the Configuration block. The SED module in CrossLink-NX is an enhanced version as compared to the SED modules implemented in other Lattice devices. The configuration data is divided into frames so that the entire FPGA can be programmed precisely with ease. The SED hardware reads data from the FPGAs configuration memory and performs an Error Correcting Code (ECC) calculation on every frame of configuration data (see [Figure 2.1](#)). Once an error is detected, a notification is generated and SED resumes operation. For single bit errors, the corrected value is rewritten to the particular frame using ECC information. If more than one-bit error is detected within one frame of configuration data, an error message is generated. CrossLink-NX devices also have dedicated logic to perform Cycle Redundancy Code (CRC) checks for the entire bitstream, which runs in parallel along with ECC.

After the ECC is calculated on all frames of configuration data, CRC is calculated and checked for the entire bitstream. ECC and CRC checks do not include the contents of RAMs (EBR, Large RAM, and distributed RAM).

For further information on SED support, refer to [Soft Error Detection \(SED\)/Correction \(SEC\) User Guide for Nexus Platform \(FPGA-TN-02076\)](#).

## 2.18. On-Chip Oscillator

The CrossLink-NX device features two on board oscillators. Both Oscillators are controlled with internally generated current.

The Low Frequency Oscillator (LFOSC) is tailored for low power operation and runs at a nominal frequency of 128 kHz. The LFOSC always runs and can be used to perform always on functions with the lowest possible power. The High Frequency Oscillator (HFOSC) runs at a nominal frequency of 450 MHz, but can be divided down to a range of 256 MHz to 2 MHz by user attributes.

## 2.19. User I2C IP

The CrossLink-NX device has one hard I2C interface, which can be configured either as a controller or a Target . The pins for the I<sup>2</sup>C interface are pre-assigned.

The interface core has the option to delay the either the input or the output data (SDA), or both, by 50 ns nominal, using dedicated on-chip delay elements. This provides an easier interface to any external I2C components. In addition, 50 ns glitch filters are available for both SDA and SCL.

When the IP interface is configured as controller, it is able to control other devices on the I2C bus through the pre-assigned pins. When the core is configured as a Target , the device is able to provide, for example, I/O expansion to an I<sup>2</sup>C controller. The I<sup>2</sup>C core supports the following functionality:

- Ccontroller and Target operation
- 7-bit and 10-bit addressing
- Multi-controller arbitration support
- Clock stretching
- Up to 1 MHz data transfer speed (Standard-Mode, Fast-Mode, Fast-Mode Plus)
- General Call support
- Optional receive and transmit data FIFOs with programmable sizes
- Optionally 50 ns delay on input or output data (SDA), or both
- Hard-Connection and Programmable I/O Connection Support
- Programmable to a mode compliant with I3C requirements on legacy I2C Target Devices.
- Fast-Mode and Fast-Mode Plus Support

- Disabled Clock Stretching
- 50 ns SCL and SDA Glitch Filters
- Programmable 7-bit Address

For further information on the User I<sup>2</sup>C, refer to [I2C Hardened IP User Guide for Nexus Platform \(FPGA-TN-02142\)](#).

## 2.20. Trace ID

Each CrossLink-NX device contains a unique (per device) TraceID that can be used for tracking purposes or for IP security applications. The TraceID is 64 bits long. Eight out of 64 bits are user-programmable, the remaining 56 bits are factory-programmed. The TraceID is accessible through the SPI, I2C, or JTAG interfaces. For further information on TraceID, refer to [Using TraceID \(FPGA-TN-02084\)](#).

## 2.21. Density Shifting

The CrossLink-NX family is designed to ensure that different density devices in the same family and in the same package have the same pinout. Furthermore, the architecture ensures a high success rate when performing design migration from lower density devices to higher density devices. In many cases, it is also possible to shift a low utilization design targeted for a high-density device to a lower density device. However, the exact details of the final resource utilization impact the likelihood of success in each case. An example is that some user I/O may become No Connects in smaller devices in the same package. Refer to the CrossLink-NX Pin Migration Tables and Lattice Radiant software for specific restrictions and limitations.

## 2.22. MIPI D-PHY Blocks

The top side of the device includes two hardened MIPI D-PHYs. The hardened D-PHY can be configured to support either Camera Serial Interface (CSI-2) or Display Serial Interface (DSI) applications as either transmitter or receiver. Below is a summary of the features supported by the hardened D-PHYs.

- Transmit and receive compliant to the MIPI Alliance D-PHY specification version 1.2
- High-Speed (HS) and Low-Power (LP) mode support (including build-in contention detection)
- Supports continuous clock mode or low power (non-continuous) clock mode
- Up to 10 Gbps per D-PHY (2500 Mbps data rate per lane)
- Supports up to four data lanes and one clock lane per hardened D-PHY


CrossLink-NX's programmable I/O can also be configured as soft MIPI D-PHYs. The soft D-PHY can be configured to support either Camera Serial Interface (CSI-2) or Display Serial Interface (DSI) applications as either transmitter or receiver. Below is a summary of the features supported by the soft D-PHY.

- Transmit and receive compatible to the MIPI Alliance D-PHY specification version 1.1
- High-Speed (HS) and Low-Power (LP) mode support (does not support contention detection)
- Supports continuous clock mode or low power (non-continuous) clock mode
- Up to 6 Gbps per port (1500 Mbps data rate per lane) in 121 csfBGA package
- Up to 5 Gbps per port (1250 Mbps data rate per lane) in other packages
- Supports up to four data lanes and one clock lane per port

## 2.23. Peripheral Component Interconnect Express (PCIe)

The CrossLink-NX-40 Device features one lane of hardened PCIe on the top side of the device. The PCIe block implements all three layers defined by the PCI Express Specification: Physical, Data Link, and Transaction as shown in Figure 2.28. Below is a summary of the features supported by the PCIe block:


- Gen 1 (2.5 Gbps) and Gen 2 (5.0 Gbps) speed
- PCIe Express Base Specification 3.0 compliant including compliance with earlier PCI Express Specifications
- Multi-function support with up to four physical functions
- Endpoint
- Type 0 Configuration Registers in Endpoint Mode
- Complete Error-Handling Support
- 32-bit Core Data Width
- Many power management features including power budgeting

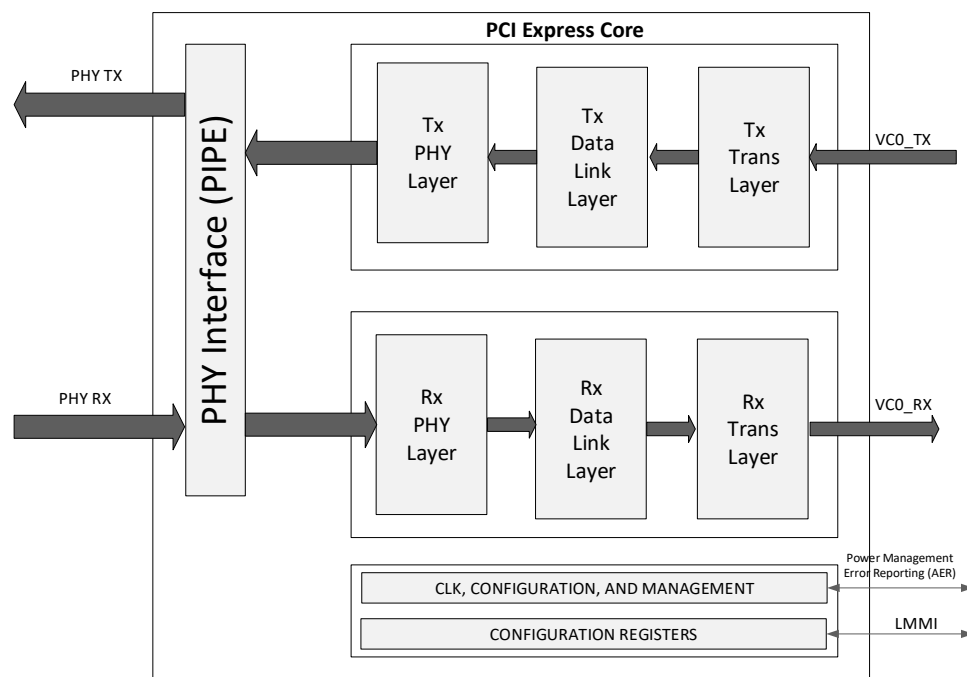

**Figure 2.28. PCIe Core**

The hardened PCIe block can be instantiated with the primitive *PCIe* through Lattice Radiant software however, it is not recommended to directly instantiate the PCIe primitive itself. It is highly recommended to generate the PCIe Endpoint Soft IP through the Radiant IP Catalog and IP Block Wizard instead. In Figure 2.29, the PCIe core is configured as an Endpoint using a soft IP wrapper that provides useful functions such as bridging support for bus interfaces and DMA applications. In addition to the standard Transaction Layer Packet (TLP) interface, the data interface can also be configured to be AXI4 or AHB-Lite as well. The PCIe hardened block also features a register interface for LMMI and User Configuration Space Register Interface (UCFG). The PCIe block has many registers which contain information about the current status of the PCIe block as well as the capability to dynamically switch PCIe settings. One easy way to access these registers is through the Reveal Controller Tool.

For more information about the PCIe soft IP, refer to the [PCIe Endpoint IP Core](#) document.

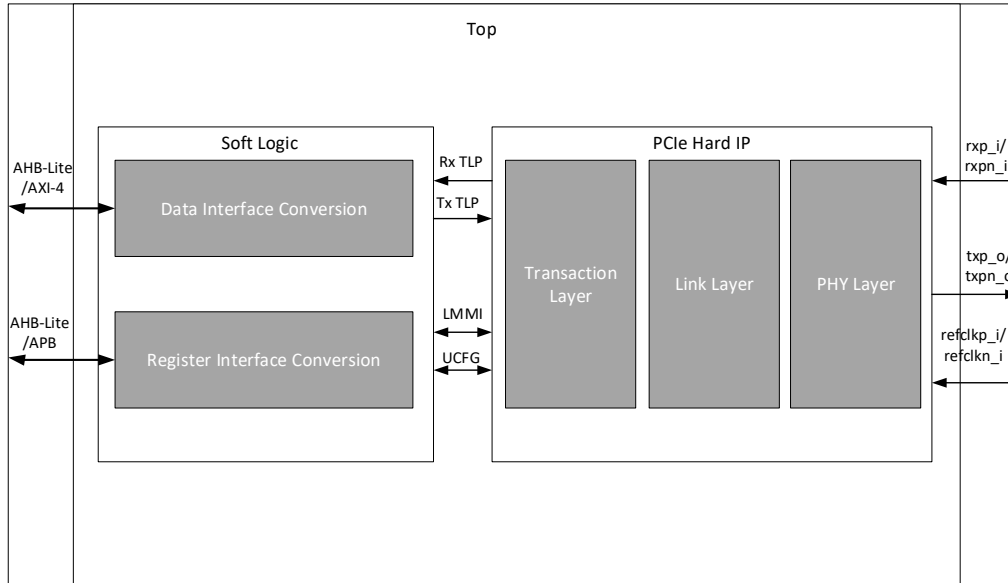

**Figure 2.29. PCIe Soft IP Wrapper**


## 2.24. Cryptographic Engine

The CrossLink-NX family of devices support several cryptographic features that helps customer secure their design. Some of the key cryptographic features include Advanced Encryption Standard (AES), Hashing Algorithms and True Random Number Generator (TRNG). The CrossLink-NX device also features bitstream encryption (using AES-256), used for protecting confidential FPGA bitstream data, and bitstream authentication (using ECDSA), which maintains bitstream integrity and protects the FPGA design bitstream from copying and tampering.

The Cryptographic Engine (CRE) is the main engine, which is responsible for the bitstream encryption as well as authentication of the CrossLink-NX device. Once the bitstream is authenticated and the device is ready for user functions, the CRE is available for users to implement various cryptographic functions in the FPGA design. To enable specific cryptographic function, the CRE has to be configured by setting a few registers.

The Cryptographic Engine supports the below user-mode features:

- True Random Number generator (TRNG)
- Secure Hashing Algorithm (SHA)-256 bit
- Message Authentication Codes (MACs) – HMAC
- Lattice Memory Mapped Interface (LMMI) interface to user logic
- High Speed Port (HSP) for FIFO-based streaming data transfer

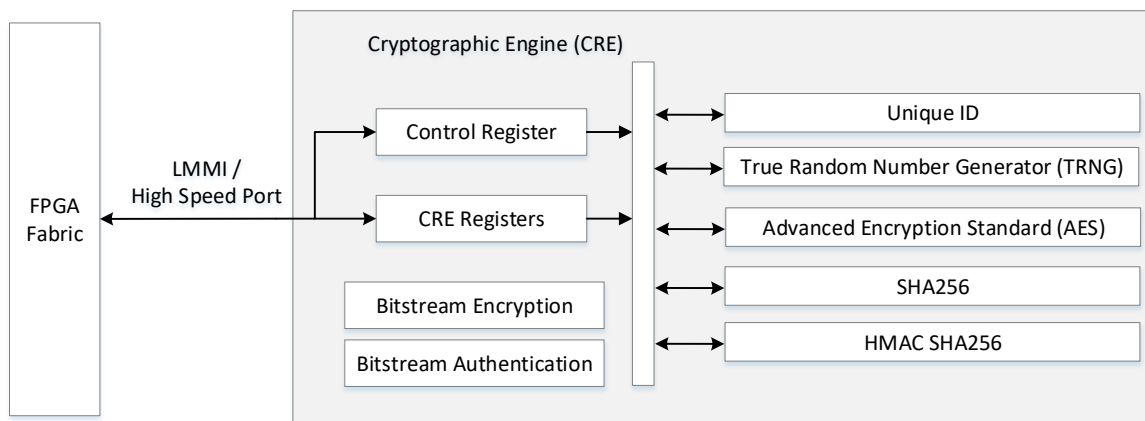

**Figure 2.30. Cryptographic Engine Block Diagram**

## 3. DC and Switching Characteristics for Commercial and Industrial

All specifications in this Chapter are characterized within recommended operating conditions unless otherwise specified.

### 3.1. Absolute Maximum Ratings

**Table 3.1. Absolute Maximum Ratings**

| Symbol                                                         | Parameter                                                            | Min  | Max  | Unit |
|----------------------------------------------------------------|----------------------------------------------------------------------|------|------|------|
| $V_{CC}, V_{CCECLK}$                                           | Supply Voltage                                                       | −0.5 | 1.10 | V    |
| $V_{CCAUX}, V_{CCAUXA}, V_{CCAUXH3}, V_{CCAUXH4}, V_{CCAUXH5}$ | Supply Voltage                                                       | −0.5 | 1.98 | V    |
| $V_{CCIO0, 1, 2, 6, 7}$                                        | I/O Supply Voltage                                                   | −0.5 | 3.63 | V    |
| $V_{CCIO3, 4, 5}$                                              | I/O Supply Voltage                                                   | −0.5 | 1.98 | V    |
| $V_{CCPLL\_DPHY0, 1}$                                          | Hardened D-PHY PLL Supply Voltage                                    | −0.5 | 1.10 | V    |
| $V_{CCPLLS0}$                                                  | SerDes Block PLL Supply Voltage                                      | −0.5 | 1.98 | V    |
| $V_{CCA\_DPHY0, 1}$                                            | Analog Supply Voltage for Hardened D-PHY                             | −0.5 | 1.98 | V    |
| $V_{CC\_DPHY0, 1}$                                             | Digital Supply Voltage for Hardened D-PHY                            | −0.5 | 1.10 | V    |
| $V_{CCSD0}$                                                    | SerDes Supply Voltage                                                | −0.5 | 1.10 | V    |
| $V_{CCADC18}$                                                  | ADC Block 1.8 V Supply Voltage                                       | −0.5 | 1.98 | V    |
| $V_{CCAUXSD}$                                                  | SerDes and AUX Supply Voltage                                        | −0.5 | 1.98 | V    |
| —                                                              | Input or I/O Voltage Applied, Bank 0, Bank 1, Bank 2, Bank 6, Bank 7 | −0.5 | 3.63 | V    |
| —                                                              | Input or I/O Voltage Applied, Bank 3, Bank 4, Bank 5                 | −0.5 | 1.98 | V    |
| —                                                              | Voltage Applied on SerDes Pins                                       | −0.5 | 1.98 | V    |
| $T_A$                                                          | Storage Temperature (Ambient)                                        | −65  | +150 | °C   |
| $T_J$                                                          | Junction Temperature                                                 | —    | +125 | °C   |

**Notes:**

1. Stress above those listed under the *Absolute Maximum Ratings* may cause permanent damage to the device. Functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.
2. Compliance with the Lattice [Thermal Management](#) document is required.
3. All voltages referenced to GND.
4. All  $V_{CCAUX}$  should be connected on PCB.

## 3.2. Recommended Operating Conditions<sup>1, 2, 3</sup>

**Table 3.2. Recommended Operating Conditions**

| Symbol                                | Parameter                                      | Conditions                                                        | Min    | Typ. | Max    | Unit |
|---------------------------------------|------------------------------------------------|-------------------------------------------------------------------|--------|------|--------|------|
| V <sub>CC</sub> , V <sub>CCECLK</sub> | Core Supply Voltage                            | V <sub>CC</sub> = 1.0                                             | 0.95   | 1.00 | 1.05   | V    |
| V <sub>CCAUX</sub>                    | Auxiliary Supply Voltage                       | Bank 0, Bank 1, Bank 2, Bank 6, Bank 7                            | 1.746  | 1.80 | 1.89   | V    |
| V <sub>CCAUXH3/4/5</sub>              | Auxiliary Supply Voltage                       | Bank 3, Bank 4, Bank 5                                            | 1.746  | 1.80 | 1.89   | V    |
| V <sub>CCAUXA</sub>                   | Auxiliary Supply Voltage for core logic        | —                                                                 | 1.746  | 1.80 | 1.89   | V    |
| V <sub>CCIO</sub>                     | I/O Driver Supply Voltage                      | V <sub>CCIO</sub> = 3.3 V, Bank 0, Bank 1, Bank 2, Bank 6, Bank 7 | 3.135  | 3.30 | 3.465  | V    |
|                                       |                                                | V <sub>CCIO</sub> = 2.5 V, Bank 0, Bank 1, Bank 2, Bank 6, Bank 7 | 2.375  | 2.50 | 2.625  | V    |
|                                       |                                                | V <sub>CCIO</sub> = 1.8 V, All Banks                              | 1.71   | 1.80 | 1.89   | V    |
|                                       |                                                | V <sub>CCIO</sub> = 1.5 V, All Banks <sup>4</sup>                 | 1.425  | 1.50 | 1.575  | V    |
|                                       |                                                | V <sub>CCIO</sub> = 1.35 V, All Banks (For DDR3L Only)            | 1.2825 | 1.35 | 1.4175 | V    |
|                                       |                                                | V <sub>CCIO</sub> = 1.2 V, All Banks <sup>4</sup>                 | 1.14   | 1.20 | 1.26   | V    |
|                                       |                                                | V <sub>CCIO</sub> = 1.0 V, Bank 3, Bank 4, Bank 5                 | 0.95   | 1.00 | 1.05   | V    |
| D-PHY External Power Supplies         |                                                |                                                                   |        |      |        |      |
| V <sub>CCA_D-PHY</sub>                | D-PHY Analog Power Supply                      | —                                                                 | 1.71   | 1.80 | 1.89   | V    |
| V <sub>CC_D-PHY</sub>                 | D-PHY Digital Power Supply                     | —                                                                 | 0.95   | 1.00 | 1.05   | V    |
| V <sub>CCPLL_D-PHY</sub>              | D-PHY PLL Power Supply                         | —                                                                 | 0.95   | 1.00 | 1.05   | V    |
| ADC External Power Supplies           |                                                |                                                                   |        |      |        |      |
| V <sub>CCADC18</sub>                  | ADC 1.8 V Power Supply                         | —                                                                 | 1.71   | 1.80 | 1.89   | V    |
| SerDes Block External Power Supplies  |                                                |                                                                   |        |      |        |      |
| V <sub>CCSD0</sub>                    | Supply Voltage for SerDes Block and SerDes I/O | —                                                                 | 0.95   | 1.00 | 1.05   | V    |
| V <sub>CCPLLS0</sub>                  | SerDes Block PLL Supply Voltage                | —                                                                 | 1.71   | 1.80 | 1.89   | V    |
| V <sub>CCAUXSD</sub>                  | SerDes Block Auxiliary Supply Voltage          | —                                                                 | 1.71   | 1.80 | 1.89   | V    |
| Operating Temperature                 |                                                |                                                                   |        |      |        |      |
| t <sub>JCOM</sub>                     | Junction Temperature, Commercial Operation     | —                                                                 | 0      | —    | 85     | °C   |
| t <sub>JIND</sub>                     | Junction Temperature, Industrial Operation     | —                                                                 | −40    | —    | 100    | °C   |

**Notes:**

- For correct operation, all supplies must be held in their valid operation voltage range.
- All supplies with same voltage should be from the same voltage source. Proper isolation filters are needed to properly isolate noise from each other.
- Common supply rails must be tied together except SerDes.
- MSPI (Bank0) and JTAG, SSPI, I2C, and I3C (Bank 1) ports are supported for  $V_{CCIO} = 1.8$  V to 3.3 V.

### 3.3. Power Supply Ramp Rates

**Table 3.3. Power Supply Ramp Rates**

| Symbol     | Parameter                                             | Min | Typ | Max | Unit |
|------------|-------------------------------------------------------|-----|-----|-----|------|
| $t_{RAMP}$ | Power Supply ramp rates for all supplies <sup>1</sup> | 0.1 | —   | 50  | V/ms |

**Notes:**

1. Assumes monotonic ramp rates.
2. All supplies need to be in the operating range as defined in [Recommended Operating Conditions1](#), when the device has completed configuration and entering into User Mode. Supplies that are not in the operating range needs to be adjusted to faster ramp rate, or users have to delay configuration or wake up.

### 3.4. Power up Sequence

Power-On-Reset (POR) puts the CrossLink-NX device into a reset state. There is no power up sequence required for the CrossLink-NX device.


**Table 3.4. Power-On Reset**

| Symbol             | Parameter                                                                                                                          |                                         | Min  | Typ | Max  | Unit |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|------|-----|------|------|
| V <sub>PORUP</sub> | Power-On-Reset ramp-up trip point (Monitoring V <sub>CC</sub> , V <sub>CCAUX</sub> , V <sub>CCIO0</sub> , and V <sub>CCIO1</sub> ) | V <sub>CC</sub>                         | 0.73 | —   | 0.83 | V    |
|                    |                                                                                                                                    | V <sub>CCAUX</sub>                      | 1.34 | —   | 1.71 | V    |
|                    |                                                                                                                                    | V <sub>CCIO0</sub> , V <sub>CCIO1</sub> | 0.89 | —   | 1.05 | V    |
| V <sub>PORDN</sub> | Power-On-Reset ramp-up trip point (Monitoring V <sub>CC</sub> and V <sub>CCAUX</sub> )                                             | V <sub>CC</sub>                         | 0.51 | —   | 0.81 | V    |
|                    |                                                                                                                                    | V <sub>CCAUX</sub>                      | 1.38 | —   | 1.54 | V    |

### 3.5. On-Chip Programmable Termination

The CrossLink-NX devices support a variety of programmable on-chip terminations options, including:

- Dynamically switchable Single-Ended Termination with programmable resistor values of 40  $\Omega$ , 50  $\Omega$ , 60  $\Omega$ , or 75  $\Omega$ .
- Common mode termination of 100  $\Omega$  for differential inputs.

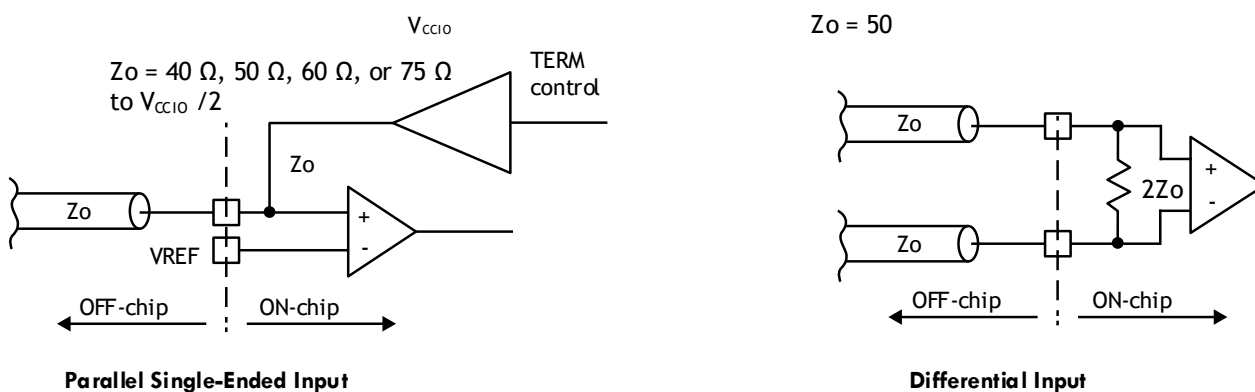

**Figure 3.1. On-Chip Termination**

See [Table 3.5](#) for termination options for input modes.

**Table 3.5. On-Chip Termination Options for Input Modes**

| IO_TYPE    | Differential Termination Resistor <sup>1, 2</sup> | Terminate to $V_{CCIO}/2$ <sup>1, 2</sup> |
|------------|---------------------------------------------------|-------------------------------------------|
| subLVDS    | 100, OFF                                          | OFF                                       |
| SLVS       | 100, OFF                                          | OFF                                       |
| MIPI_DPHY  | 100                                               | OFF                                       |
| HSTL15D_I  | 100, OFF                                          | OFF                                       |
| SSTL15D_I  | 100, OFF                                          | OFF                                       |
| SSTL135D_I | 100, OFF                                          | OFF                                       |
| HSUL12D    | 100, OFF                                          | OFF                                       |
| LVC MOS15H | OFF                                               | OFF                                       |
| LVC MOS12H | OFF                                               | OFF                                       |
| LVC MOS10H | OFF                                               | OFF                                       |
| LVC MOS12H | OFF                                               | OFF                                       |
| LVC MOS10H | OFF                                               | OFF                                       |
| LVC MOS18H | OFF                                               | OFF, 40, 50, 60, 75                       |
| HSTL15_I   | OFF                                               | 50                                        |
| SSTL15_I   | OFF                                               | OFF, 40, 50, 60, 75                       |
| SSTL135_I  | OFF                                               | OFF, 40, 50, 60, 75                       |
| HSUL12     | OFF                                               | OFF, 40, 50, 60, 75                       |

**Notes:**

1. TERMINATE to  $V_{CCIO}/2$  (Single-Ended) and DIFFERENTIAL TERMINATION RESISTOR when turned on can only have one setting per bank. Only left and right banks have this feature.
2. Use of TERMINATE to  $V_{CCIO}/2$  and DIFFERENTIAL TERMINATION RESISTOR are mutually exclusive in an I/O bank. On-chip termination tolerance  $-10\%/+60\%$ .

Refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for on-chip termination usage and value ranges.

## 3.6. Hot Socketing Specifications

**Table 3.6. Hot Socketing Specifications for GPIO**

| Symbol   | Parameter                                                                             | Condition                                                                                                                                                  | Min  | Typ | Max | Unit |
|----------|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----|-----|------|
| $I_{DK}$ | Input or I/O Leakage Current for Wide Range I/O (excluding MCLK/MCSN/MOSI/INITN/DONE) | $0 < V_{IN} < V_{IH}(\text{max})$<br>$0 < V_{CC} < V_{CC}(\text{max})$<br>$0 < V_{CCIO} < V_{CCIO}(\text{max})$<br>$0 < V_{CCAUX} < V_{CCAUX}(\text{max})$ | -1.5 | —   | 1.5 | mA   |

**Notes:**

- $I_{DK}$  is additive to  $I_{PU}$ ,  $I_{PD}$ , or  $I_{BH}$ .
- Hot socketing specs are defined at a device junction temperature of 85 °C or below. When the device junction temperature is above 85 °C, the  $I_{DK}$  current can exceed the above spec.
- Going beyond the hot socketing ranges specified here will cause exponentially higher Leakage currents and potential reliability issues. A total of 64 mA per 8 I/O should not be exceeded.

## 3.7. ESD Performance

Refer to the [CrossLink-NX Product Family Qualification Summary](#) for complete Commercial and Industrial grade qualification data, including ESD performance.



### 3.8. DC Electrical Characteristics

**Table 3.7. DC Electrical Characteristics – Wide Range**

| Symbol             | Parameter                                            | Condition                                | Min            | Typ | Max            | Unit    |
|--------------------|------------------------------------------------------|------------------------------------------|----------------|-----|----------------|---------|
| $I_{IL}, I_{IH}^1$ | Input or I/O Leakage current (Commercial/Industrial) | $0 \leq V_{IN} \leq V_{CCIO}$            | —              | —   | 10             | $\mu A$ |
| $I_{IH}^2$         | Input or I/O Leakage current                         | $V_{CCIO} \leq V_{IN} \leq V_{IH} (max)$ | —              | —   | 100            | $\mu A$ |
| $I_{PU}$           | I/O Weak Pull-up Resistor Current                    | $0 \leq V_{IN} \leq 0.7 \times V_{CCIO}$ | –30            | —   | –150           | $\mu A$ |
| $I_{PD}$           | I/O Weak Pull-down Resistor Current                  | $V_{IL} (max) \leq V_{IN} \leq V_{CCIO}$ | 30             | —   | 150            | $\mu A$ |
| $I_{BHLS}$         | Bus Hold Low Sustaining Current                      | $V_{IN} = V_{IL} (max)$                  | 30             | —   | —              | $\mu A$ |
| $I_{BHHS}$         | Bus Hold High Sustaining Current                     | $V_{IN} = 0.7 \times V_{CCIO}$           | –30            | —   | —              | $\mu A$ |
| $I_{BHLO}$         | Bus hold low Overdrive Current                       | $0 \leq V_{IN} \leq V_{CCIO}$            | —              | —   | 150            | $\mu A$ |
| $I_{BHHO}$         | Bus hold high Overdrive Current                      | $0 \leq V_{IN} \leq V_{CCIO}$            | —              | —   | –150           | $\mu A$ |
| $V_{BHT}$          | Bus Hold Trip Points                                 | —                                        | $V_{IL} (max)$ | —   | $V_{IH} (min)$ | V       |

**Notes:**

- Input or I/O leakage current is measured with the pin configured as an input or as an I/O with the output tri-stated. Bus Maintenance circuits are disabled.
- The input leakage current  $I_{IH}$  is the worst case input leakage per GPIO when the pad signal is high and also higher than the bank  $V_{CCIO}$ . This is considered a mixed mode input.

**Table 3.8. DC Electrical Characteristics – High Speed**

| Symbol             | Parameter                           | Condition                                | Min            | Typ | Max            | Unit    |
|--------------------|-------------------------------------|------------------------------------------|----------------|-----|----------------|---------|
| $I_{IL}, I_{IH}^1$ | Input or I/O Leakage                | $0 \leq V_{IN} \leq V_{CCIO}$            | —              | —   | 10             | $\mu A$ |
| $I_{PU}$           | I/O Weak Pull-up Resistor Current   | $0 \leq V_{IN} \leq 0.7 \times V_{CCIO}$ | –30            | —   | –150           | $\mu A$ |
| $I_{PD}$           | I/O Weak Pull-down Resistor Current | $V_{IL} (max) \leq V_{IN} \leq V_{CCIO}$ | 30             | —   | 150            | $\mu A$ |
| $I_{BHLS}$         | Bus Hold Low Sustaining Current     | $V_{IN} = V_{IL} (max)$                  | 30             | —   | —              | $\mu A$ |
| $I_{BHHS}$         | Bus Hold High Sustaining Current    | $V_{IN} = 0.7 \times V_{CCIO}$           | –30            | —   | —              | $\mu A$ |
| $I_{BHLO}$         | Bus hold low Overdrive Current      | $0 \leq V_{IN} \leq V_{CCIO}$            | —              | —   | 150            | $\mu A$ |
| $I_{BHHO}$         | Bus hold high Overdrive Current     | $0 \leq V_{IN} \leq V_{CCIO}$            | —              | —   | –150           | $\mu A$ |
| $V_{BHT}$          | Bus Hold Trip Points                | —                                        | $V_{IL} (max)$ | —   | $V_{IH} (min)$ | V       |

**Note:**

- Input or I/O leakage current is measured with the pin configured as an input or as an I/O with the output tri-stated. Bus Maintenance circuits are disabled.

**Table 3.9. Capacitors – Wide Range**

| Symbol  | Parameter                                | Condition                                                                                             | Min | Typ | Max | Unit |
|---------|------------------------------------------|-------------------------------------------------------------------------------------------------------|-----|-----|-----|------|
| $C_1^1$ | I/O Capacitance <sup>1</sup>             | $V_{CCIO} = 3.3 V, 2.5 V, 1.8 V, 1.5 V, 1.2 V, V_{CC} = typ., V_{IO} = 0 \text{ to } V_{CCIO} + 0.2V$ | —   | 6   | —   | pF   |
| $C_2^1$ | Dedicated Input Capacitance <sup>1</sup> | $V_{CCIO} = 3.3 V, 2.5 V, 1.8 V, 1.5 V, 1.2 V, V_{CC} = typ., V_{IO} = 0 \text{ to } V_{CCIO} + 0.2V$ | —   | 6   | —   | pF   |

**Note:**

- $T_A 25^\circ C, f = 1.0 \text{ MHz}$ .

**Table 3.10. Capacitors – High Performance**

| Symbol  | Parameter                                | Condition                                                                                                                  | Min | Typ | Max | Unit |
|---------|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|-----|-----|-----|------|
| $C_1^1$ | I/O Capacitance <sup>1</sup>             | $V_{CCIO} = 1.8\text{ V}, 1.5\text{ V}, 1.2\text{ V}, V_{CC} = \text{typ.}, V_{IO} = 0 \text{ to } V_{CCIO} + 0.2\text{V}$ | —   | 6   | —   | pF   |
| $C_2^1$ | Dedicated Input Capacitance <sup>1</sup> | $V_{CCIO} = 1.8\text{ V}, 1.5\text{ V}, 1.2\text{ V}, V_{CC} = \text{typ.}, V_{IO} = 0 \text{ to } V_{CCIO} + 0.2\text{V}$ | —   | 6   | —   | pF   |
| $C_3^1$ | D-PHY I/O Capacitance                    | $V_{CCA\_D-PHY} = 1.8\text{ V}, V_{CC} = \text{typ.}, V_{IO} = 0 \text{ to } V_{CCA\_D-PHY} + 0.2\text{V}$                 | —   | 5   | —   | pF   |
| $C_4^1$ | SerDes I/O Capacitance                   | $V_{CCSD0} = 1.0\text{ V}, V_{CC} = \text{typ.}, V_{IO} = 0 \text{ to } V_{CCSD0} + 0.2\text{ V}$                          | —   | 5   | —   | pF   |

**Note:**1.  $T_A 25\text{ }^\circ\text{C}, f = 1.0\text{ MHz}.$ **Table 3.11. Single Ended Input Hysteresis – Wide Range**

| IO_TYPE   | VCCIO | TYP Hysteresis |
|-----------|-------|----------------|
| LVC MOS33 | 3.3 V | 250 mV         |
| LVC MOS25 | 3.3 V | 200 mV         |
|           | 2.5 V | 250 mV         |
| LVC MOS18 | 1.8 V | 180 mV         |
| LVC MOS15 | 1.5 V | 50 mV          |
| LVC MOS12 | 1.2 V | 0              |
| LVC MOS10 | 1.2 V | 0              |

**Table 3.12. Single Ended Input Hysteresis – High Performance**

| IO_TYPE    | VCCIO | TYP Hysteresis |
|------------|-------|----------------|
| LVC MOS18H | 1.8 V | 180 mV         |
| LVC MOS15H | 1.8 V | 50 mV          |
|            | 1.5 V | 150 mV         |
| LVC MOS12H | 1.2 V | 0              |
| LVC MOS10H | 1.0 V | 0              |
| MIPI-LP-RX | 1.2 V | >25 mV         |

### 3.9. Supply Currents

For estimating and calculating current, use Power Calculator in Lattice Design software.

This operating and peak current is design dependent, and can be calculated in Lattice Design Software. Some blocks can be placed into low current standby modes. Refer to [Power Management and Calculation for CrossLink-NX Devices \(FPGA-TN-02075\)](#).

### 3.10. sysI/O Recommended Operating Conditions

Table 3.13. sysI/O Recommended Operating Conditions

| Standard                             | Support Banks | V <sub>CCIO</sub> (Input)                           | V <sub>CCIO</sub> (Output)                     |
|--------------------------------------|---------------|-----------------------------------------------------|------------------------------------------------|
|                                      |               | Typ.                                                | Typ.                                           |
| Single-Ended                         |               |                                                     |                                                |
| LVC MOS33                            | 0, 1, 2, 6, 7 | 3.3                                                 | 3.3                                            |
| LVTTL33                              | 0, 1, 2, 6, 7 | 3.3                                                 | 3.3                                            |
| LVC MOS25 <sup>1, 2</sup>            | 0, 1, 2, 6, 7 | 2.5, 3.3                                            | 2.5                                            |
| LVC MOS18 <sup>1, 2</sup>            | 0, 1, 2, 6, 7 | 1.2, 1.5, 1.8, 2.5, 3.3                             | 1.8                                            |
| LVC MOS18H                           | 3, 4, 5       | 1.8                                                 | 1.8                                            |
| LVC MOS15 <sup>1, 2</sup>            | 0, 1, 2, 6, 7 | 1.2, 1.5, 1.8, 2.5, 3.3                             | 1.5                                            |
| LVC MOS15H <sup>1</sup>              | 3, 4, 5       | 1.5, 1.8                                            | 1.5                                            |
| LVC MOS12 <sup>1, 2</sup>            | 0, 1, 2, 6, 7 | 1.2, 1.5, 1.8, 2.5, 3.3                             | 1.2                                            |
| LVC MOS12H <sup>1</sup>              | 3, 4, 5       | 1.2, 1.35 <sup>7</sup> , 1.5, 1.8                   | 1.2                                            |
| LVC MOS10 <sup>1</sup>               | 0, 1, 2, 6, 7 | 1.2, 1.5, 1.8, 2.5, 3.3                             | —                                              |
| LVC MOS10H <sup>1</sup>              | 3, 4, 5       | 1.0, 1.2, 1.35 <sup>7</sup> , 1.5, 1.8              | 1.0                                            |
| LVC MOS10R <sup>1</sup>              | 3, 4, 5       | 1.0, 1.2, 1.35 <sup>7</sup> , 1.5, 1.8              | —                                              |
| SSTL135_I, SSTL135_II <sup>3</sup>   | 3, 4, 5       | 1.35 <sup>7</sup>                                   | 1.35                                           |
| SSTL15_I, SSTL15_II <sup>3</sup>     | 3, 4, 5       | 1.5 <sup>8</sup>                                    | 1.5 <sup>8</sup>                               |
| HSTL15_I <sup>3</sup>                | 3, 4, 5       | 1.5 <sup>8</sup>                                    | 1.5 <sup>8</sup>                               |
| HSUL12 <sup>3</sup>                  | 3, 4, 5       | 1.2                                                 | 1.2                                            |
| MIPI D-PHY LP Input <sup>6</sup>     | 3, 4, 5       | 1.2                                                 | 1.2                                            |
| Differential <sup>6</sup>            |               |                                                     |                                                |
| LVDS                                 | 3, 4, 5       | 1.2, 1.35, 1.5, 1.8                                 | 1.8                                            |
| LVDSE <sup>5</sup>                   | 0, 1, 2, 6, 7 | —                                                   | 2.5                                            |
| subLVDS                              | 3, 4, 5       | 1.2, 1.35, 1.5, 1.8                                 | —                                              |
| subLVDSE <sup>5</sup>                | 0, 1, 2, 6, 7 | —                                                   | 1.8                                            |
| subLVDSEH <sup>5</sup>               | 3, 4, 5       | —                                                   | 1.8                                            |
| SLVS <sup>6</sup>                    | 3, 4, 5       | 1.0, 1.2, 1.35 <sup>7</sup> , 1.5, 1.8 <sup>4</sup> | 1.2, 1.35 <sup>7</sup> , 1.5, 1.8 <sup>4</sup> |
| MIPI D-PHY <sup>6</sup>              | 3, 4, 5       | 1.2                                                 | 1.2                                            |
| LVC MOS33D <sup>5</sup>              | 0, 1, 2, 6, 7 | —                                                   | 3.3                                            |
| LVTTL33D <sup>5</sup>                | 0, 1, 2, 6, 7 | —                                                   | 3.3                                            |
| LVC MOS25D <sup>5</sup>              | 0, 1, 2, 6, 7 | —                                                   | 2.5                                            |
| SSTL135D_I, SSTL135D_II <sup>5</sup> | 3, 4, 5       | —                                                   | 1.35 <sup>7</sup>                              |
| SSTL15D_I, SSTL15D_II <sup>5</sup>   | 3, 4, 5       | —                                                   | 1.5                                            |
| HSTL15D_I <sup>5</sup>               | 3, 4, 5       | —                                                   | 1.5                                            |
| HSUL12D <sup>5</sup>                 | 3, 4, 5       | —                                                   | 1.2                                            |

**Notes:**

- Single-ended input can mix into I/O Banks with V<sub>CCIO</sub> different from the standard requires due to some of these input standards use internal supply voltage source (V<sub>CC</sub>, V<sub>CCAUX</sub>) to power the input buffer, which makes them to be independent of V<sub>CCIO</sub> voltage. For more details, refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#). The following is a brief guideline to follow:
  - Weak pull-up on the I/O must be set to OFF.
  - Bank 3, Bank 4, and Bank 5 I/O can only mix into banks with V<sub>CCIO</sub> higher than or equal to the pin standard, due to clamping diode on the pin in these banks. Bank 0, Bank 1, Bank 2, Bank 6, and Bank 7 does not have this restriction.
  - LVC MOS25 uses V<sub>CCIO</sub> supply on input buffer in Bank 0, Bank 1, Bank 2, Bank 6, and Bank 7. It can be supported with V<sub>CCIO</sub> = 3.3 V to meet the V<sub>IH</sub> and V<sub>IL</sub> requirements, but there is additional current drawn on V<sub>CCIO</sub>. Hysteresis has to be disabled when using 3.3 V supply voltage.
  - LVC MOS15 uses V<sub>CCIO</sub> supply on input buffer in Bank 3, Bank 4, and Bank 5. It can be supported with V<sub>CCIO</sub> = 1.8 V to meet the V<sub>IH</sub> and V<sub>IL</sub> requirements, but there is additional current drawn on V<sub>CCIO</sub>.

- Single-ended LVCMOS inputs can mixed into I/O Banks with different  $V_{CCIO}$ , providing weak pull-up is not used. For additional information on Mixed I/O in Bank  $V_{CCIO}$ , refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#).
- These inputs use differential input comparator in Bank 3, Bank 4, and Bank 5. The differential input comparator uses  $V_{CCAUXH}$  power supply. These inputs require the  $V_{REF}$  pin to provide the reference voltage in the Bank. Refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for details.
- All differential inputs use differential input comparator in Bank 3, Bank 4, and Bank 5. The differential input comparator uses  $V_{CCAUXH}$  power supply. There is no differential input signaling supported in Bank 0, Bank 1, Bank 2, Bank 6, and Bank 7.
- These outputs are emulating differential output pair with single-ended output drivers with true and complement outputs driving on each of the corresponding true and complement output pair pins. The common mode voltage,  $V_{CM}$ , is  $\frac{1}{2} \times V_{CCIO}$ . Refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for details.
- Soft MIPI D-PHY HS using sysI/O is supported with SLVS input and output that can be placed in banks with  $V_{CCIO}$  voltage shown in SLVS. D-PHY with HS and LP modes supported needs to be placed in banks with  $V_{CCIO}$  voltage = 1.2 V. Soft MIPI D-PHY LP input and output using sysI/O are supported with LVCMOS12.
- $V_{CCIO} = 1.35$  V is only supported in Bank 3, Bank 4, and Bank 5, for use with DDR3L interface in the bank. These Input and Output standards can fit into the same bank with the  $V_{CCIO} = 1.35$  V.
- LVCMOS15 input uses  $V_{CCIO}$  supply voltage. If  $V_{CCIO}$  is 1.8 V, the DC levels for LVCMOS15 are still met, but there could be increase in input buffer current.

### 3.11. sysI/O Single-Ended DC Electrical Characteristics

Table 3.14. sysI/O DC Electrical Characteristics – Wide Range I/O

| Input/Output Standard <sup>2</sup> | $V_{IL}$ |                        | $V_{IH}$               |                    | $V_{OL}$ Max (V) | $V_{OH}$ Min (V)  | $I_{OL}$ (mA)                        | $I_{OH}$ (mA)                             |
|------------------------------------|----------|------------------------|------------------------|--------------------|------------------|-------------------|--------------------------------------|-------------------------------------------|
|                                    | Min (V)  | Max (V)                | Min (V)                | Max (V)            |                  |                   |                                      |                                           |
| LVTTL33<br>LVCMOS33                | —        | 0.8                    | 2.0                    | 3.465 <sup>4</sup> | 0.4              | $V_{CCIO} - 0.4$  | 2, 4, 8, 12, 16, "50RS" <sup>3</sup> | -2, -4, -8, -12, -16, "50RS" <sup>3</sup> |
| LVCMOS25                           | —        | 0.7                    | 1.7                    | 3.465 <sup>4</sup> | 0.4              | $V_{CCIO} - 0.45$ | 2, 4, 8, 10, "50RS" <sup>3</sup>     | -2, -4, -8, -10, "50RS" <sup>3</sup>      |
| LVCMOS18                           | —        | $0.35 \times V_{CCIO}$ | $0.65 \times V_{CCIO}$ | 3.465 <sup>4</sup> | 0.4              | $V_{CCIO} - 0.45$ | 2, 4, 8, "50RS" <sup>3</sup>         | -2, -4, -8, "50RS" <sup>3</sup>           |
| LVCMOS15                           | —        | $0.35 \times V_{CCIO}$ | $0.65 \times V_{CCIO}$ | 3.465 <sup>4</sup> | 0.4              | $V_{CCIO} - 0.4$  | 2, 4                                 | -2, -4                                    |
| LVCMOS12                           | —        | $0.35 \times V_{CCIO}$ | $0.65 \times V_{CCIO}$ | 3.465 <sup>4</sup> | 0.4              | $V_{CCIO} - 0.4$  | 2, 4                                 | -2, -4                                    |
| LVCMOS10                           | —        | $0.35 \times V_{CCIO}$ | $0.65 \times V_{CCIO}$ | 3.465 <sup>4</sup> | No O/P Support   |                   |                                      |                                           |

**Notes:**

- For electro-migration, the average DC current drawn by the I/O pads within a bank of I/O shall not exceed 10 mA per I/O average.
- For the types of I/O standard supported in which bank, refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for details.
- Select "50RS" in driver strength is selecting 50  $\Omega$  series impedance driver.
- $V_{IH}$  (MAX) for inputs on these standards (in Bank 0, Bank 1, Bank 2, Bank 6, and Bank 7) can go up to 3.465 V if the input clamp is OFF. Otherwise, the input cannot be higher than  $V_{CCIO} + 0.3$  V.

Table 3.15. sysI/O DC Electrical Characteristics – High Performance I/O

| Input/Output Standard <sup>2</sup> | V <sub>IL</sub> |                        | V <sub>IH</sub>        |                  | V <sub>OL</sub> Max (V) | V <sub>OH</sub> Min (V) | I <sub>OL</sub> (mA)             | I <sub>OH</sub> (mA)                 |
|------------------------------------|-----------------|------------------------|------------------------|------------------|-------------------------|-------------------------|----------------------------------|--------------------------------------|
|                                    | Min (V)         | Max (V)                | Min (V)                | Max (V)          |                         |                         |                                  |                                      |
| LVC MOS18H                         | —               | $0.35 \times V_{CCIO}$ | $0.65 \times V_{CCIO}$ | $V_{CCIO} + 0.3$ | 0.4                     | $V_{CCIO} - 0.45$       | 2, 4, 8, 12, "50RS" <sup>3</sup> | -2, -4, -8, -12, "50RS" <sup>3</sup> |
| LVC MOS15H                         | —               | $0.35 \times V_{CCIO}$ | $0.65 \times V_{CCIO}$ | $V_{CCIO} + 0.3$ | 0.4                     | $V_{CCIO} - 0.4$        | 2, 4, 8, "50RS" <sup>3</sup>     | -2, -4, -8, "50RS" <sup>3</sup>      |
| LVC MOS12H                         | —               | $0.35 \times V_{CCIO}$ | $0.65 \times V_{CCIO}$ | $V_{CCIO} + 0.3$ | 0.4                     | $V_{CCIO} - 0.4$        | 2, 4, 8, "50RS" <sup>3</sup>     | -2, -4, -8, "50RS" <sup>3</sup>      |
| LVC MOS10H                         | —               | $0.35 \times V_{CCIO}$ | $0.65 \times V_{CCIO}$ | $V_{CCIO} + 0.3$ | $0.27 \times V_{CCIO}$  | $0.75 \times V_{CCIO}$  | 2, 4                             | -2, -4                               |
| SSTL15_I                           | —               | $V_{REF} - 0.10$       | $V_{REF} + 0.1$        | $V_{CCIO} + 0.3$ | 0.30                    | $V_{CCIO} - 0.30$       | 7.5                              | -7.5                                 |
| SSTL15_II                          | —               | $V_{REF} - 0.10$       | $V_{REF} + 0.1$        | $V_{CCIO} + 0.3$ | 0.30                    | $V_{CCIO} - 0.30$       | 8.8                              | -8.8                                 |
| HSTL15_I                           | —               | $V_{REF} - 0.10$       | $V_{REF} + 0.1$        | $V_{CCIO} + 0.3$ | 0.40                    | $V_{CCIO} - 0.40$       | 8                                | -8                                   |
| SSTL135_I                          | —               | $V_{REF} - 0.09$       | $V_{REF} + 0.09$       | $V_{CCIO} + 0.3$ | 0.27                    | $V_{CCIO} - 0.27$       | 6.75                             | -6.75                                |
| SSTL135_II                         | —               | $V_{REF} - 0.09$       | $V_{REF} + 0.09$       | $V_{CCIO} + 0.3$ | 0.27                    | $V_{CCIO} - 0.27$       | 8                                | -8                                   |
| LVC MOS10R                         | —               | $V_{REF} - 0.10$       | $V_{REF} + 0.10$       | $V_{CCIO} + 0.3$ | —                       | —                       | —                                | —                                    |
| HSUL12                             | —               | $V_{REF} - 0.10$       | $V_{REF} + 0.10$       | $V_{CCIO} + 0.3$ | 0.3                     | $V_{CCIO} - 0.3$        | 8.8, 7.5, 6.25, 5                | -8.8, -7.5, -6.25, -5                |

**Notes:**

- For electro-migration, the average DC current drawn by the I/O pads within a bank of I/O shall not exceed 10 mA per I/O average.
- For the types of I/O standard supported in which bank, refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for details.
- Select "50RS" in driver strength is selecting 50  $\Omega$  series impedance driver.

Table 3.16. I/O Resistance Characteristics

| Parameter            | Description                                               | Test Conditions                                                      | Min | Typ | Max | Unit     |
|----------------------|-----------------------------------------------------------|----------------------------------------------------------------------|-----|-----|-----|----------|
| 50RS                 | Output Drive Resistance when 50RS Drive Strength Selected | $V_{CCIO} = 1.8 \text{ V}, 2.5 \text{ V}, \text{ or } 3.3 \text{ V}$ | —   | 50  | —   | $\Omega$ |
| R <sub>DIFF</sub>    | Input Differential Termination Resistance                 | Bank 3, Bank 4, and Bank 5 for I/O selected to be differential       | —   | 100 | —   | $\Omega$ |
| SE Input Termination | Input Single Ended Termination Resistance                 | Bank 3, Bank 4, and Bank 5 for I/O selected to be Single Ended       | 36  | 40  | 64  | $\Omega$ |
|                      |                                                           |                                                                      | 46  | 50  | 80  |          |
|                      |                                                           |                                                                      | 56  | 60  | 96  |          |
|                      |                                                           |                                                                      | 71  | 75  | 120 |          |

**Table 3.17.  $V_{IN}$  Maximum Overshoot/Undershoot Allowance – Wide Range<sup>1, 2</sup>**

| AC Voltage Overshoot | % of UI at –40 °C to 100 °C | AC Voltage Undershoot | % of UI at –40 °C to 100 °C |
|----------------------|-----------------------------|-----------------------|-----------------------------|
| $V_{CCIO} + 0.4$     | 100.0%                      | –0.4                  | 100.0%                      |
| $V_{CCIO} + 0.5$     | 100.0%                      | –0.5                  | 44.2%                       |
| $V_{CCIO} + 0.6$     | 94.0%                       | –0.6                  | 10.1%                       |
| $V_{CCIO} + 0.7$     | 21.0%                       | –0.7                  | 1.3%                        |
| $V_{CCIO} + 0.8$     | 10.2%                       | –0.8                  | 0.3%                        |
| $V_{CCIO} + 0.9$     | 2.5%                        | –0.9                  | 0.1%                        |

**Notes:**

1. The peak overshoot or undershoot voltage and the duration above  $V_{CCIO} + 0.2$  V or below  $GND - 0.2$  V must not exceed the values in this table.
2. For UI less than 20  $\mu s$ .

**Table 3.18.  $V_{IN}$  Maximum Overshoot/Undershoot Allowance – High Performance<sup>1, 2</sup>**

| AC Voltage Overshoot | % of UI at –40 °C to 100 °C | AC Voltage Undershoot | % of UI at –40 °C to 100 °C |
|----------------------|-----------------------------|-----------------------|-----------------------------|
| $V_{CCIO} + 0.5$     | 100.0%                      | –0.5                  | 100.0%                      |
| $V_{CCIO} + 0.6$     | 47.3%                       | –0.6                  | 47.3%                       |
| $V_{CCIO} + 0.7$     | 10.9%                       | –0.7                  | 10.9%                       |
| $V_{CCIO} + 0.8$     | 2.7%                        | –0.8                  | 2.7%                        |
| $V_{CCIO} + 0.9$     | 0.7%                        | –0.9                  | 0.7%                        |

**Notes:**

1. The peak overshoot or undershoot voltage and the duration above  $V_{CCIO} + 0.2$  V or below  $GND - 0.2$  V must not exceed the values in this table.
2. For UI less than 20  $\mu s$ .

## 3.12. sysI/O Differential DC Electrical Characteristics

### 3.12.1. LVDS

LVDS input buffer on CrossLink-NX is powered by  $V_{CCAUX} = 1.8$  V, and protected by the bank  $V_{CCIO}$ . Therefore, the LVDS input voltage cannot exceed the bank  $V_{CCIO}$  voltage. LVDS output buffer is powered by the Bank  $V_{CCIO}$  at 1.8 V.

LVDS can only be supported in Bank 3, Bank 4, and Bank 5. LVDS25 output can be emulated with LVDS25E in Bank 0, Bank 1, Bank 2, Bank 6, and Bank 7. This is described in [LVDS25E \(Output Only\)](#) section.

**Table 3.19. LVDS DC Electrical Characteristics<sup>1</sup>**

| Parameter          | Description                                      | Test Conditions                                            | Min   | Typ   | Max               | Unit |
|--------------------|--------------------------------------------------|------------------------------------------------------------|-------|-------|-------------------|------|
| $V_{INP}, V_{INM}$ | Input Voltage                                    | —                                                          | 0     | —     | 1.60 <sup>3</sup> | V    |
| $V_{ICM}$          | Input Common Mode Voltage                        | Half the sum of the two Inputs                             | 0.05  | —     | 1.55 <sup>2</sup> | V    |
| $V_{THD}$          | Differential Input Threshold                     | Difference between the two Inputs                          | ±100  | —     | —                 | mV   |
| $I_{IN}$           | Input Current                                    | Power On or Power Off                                      | —     | —     | ±10               | μA   |
| $V_{OH}$           | Output High Voltage for $V_{OP}$ or $V_{OM}$     | $R_T = 100\ \Omega$                                        | —     | 1.425 | 1.60              | V    |
| $V_{OL}$           | Output Low Voltage for $V_{OP}$ or $V_{OM}$      | $R_T = 100\ \Omega$                                        | 0.9 V | 1.075 | —                 | V    |
| $V_{OD}$           | Output Voltage Differential                      | $(V_{OP} - V_{OM}), R_T = 100\ \Omega$                     | 250   | 350   | 450               | mV   |
| $\Delta V_{OD}$    | Change in $V_{OD}$ Between High and Low          | —                                                          | —     | —     | 50                | mV   |
| $V_{OCM}$          | Output Common Mode Voltage                       | $(V_{OP} + V_{OM})/2, R_T = 100\ \Omega$                   | 1.125 | 1.25  | 1.375             | V    |
| $\Delta V_{OCM}$   | Change in $V_{OCM}, V_{OCM(MAX)} - V_{OCM(MIN)}$ | —                                                          | —     | —     | 50                | mV   |
| $I_{SAB}$          | Output Short Circuit Current                     | $V_{OD} = 0\text{ V}$ Driver outputs shorted to each other | —     | —     | 12                | mA   |
| $\Delta V_{OS}$    | Change in $V_{OS}$ between H and L               | —                                                          | —     | —     | 50                | mV   |

**Notes:**

1. LVDS input or output are supported in Bank 3, Bank 4, and Bank 5. LVDS input uses  $V_{CCAUX}$  on the differential input comparator, and can be located in any  $V_{CCIO}$  voltage bank. LVDS output uses  $V_{CCIO}$  on the differential output driver, and can only be located in bank with  $V_{CCIO} = 1.8\text{ V}$ .
2.  $V_{ICM}$  is depending on  $V_{ID}$ , input differential voltage, so the voltage on pin cannot exceed  $V_{INP/INM(min/max)}$  requirements.  $V_{ICM(min)} = V_{INP/INM(min)} + \frac{1}{2} V_{ID}$ ,  $V_{ICM(max)} = V_{INP/INM(max)} - \frac{1}{2} V_{ID}$ . Values in the table is based on minimum  $V_{ID}$  of +/- 100 mV.
3.  $V_{INP}$  and  $V_{INM}$  (max) must be less than or equal to  $V_{CCIO}$  in all cases.

### 3.12.2. LVDS25E (Output Only)

Three sides of the CrossLink-NX devices, Top, Left and Right, support LVDS25 outputs with emulated complementary LVCMOS outputs in conjunction with a parallel resistor across the driver outputs. The scheme shown in [Figure 3.2](#) is one possible solution for point-to-point signals.

**Table 3.20. LVDS25E DC Conditions**

| Parameter  | Description                    | Typical | Unit |
|------------|--------------------------------|---------|------|
| $V_{CCIO}$ | Output Driver Supply (±5%)     | 2.50    | V    |
| $Z_{OUT}$  | Driver Impedance               | 20      | Ω    |
| $R_S$      | Driver Series Resistor (±1%)   | 158     | Ω    |
| $R_P$      | Driver Parallel Resistor (±1%) | 140     | Ω    |
| $R_T$      | Receiver Termination (±1%)     | 100     | Ω    |
| $V_{OH}$   | Output High Voltage            | 1.43    | V    |
| $V_{OL}$   | Output Low Voltage             | 1.07    | V    |
| $V_{OD}$   | Output Differential Voltage    | 0.35    | V    |
| $V_{CM}$   | Output Common Mode Voltage     | 1.25    | V    |
| $Z_{BACK}$ | Back Impedance                 | 100.5   | Ω    |
| $I_{DC}$   | DC Output Current              | 6.03    | mA   |

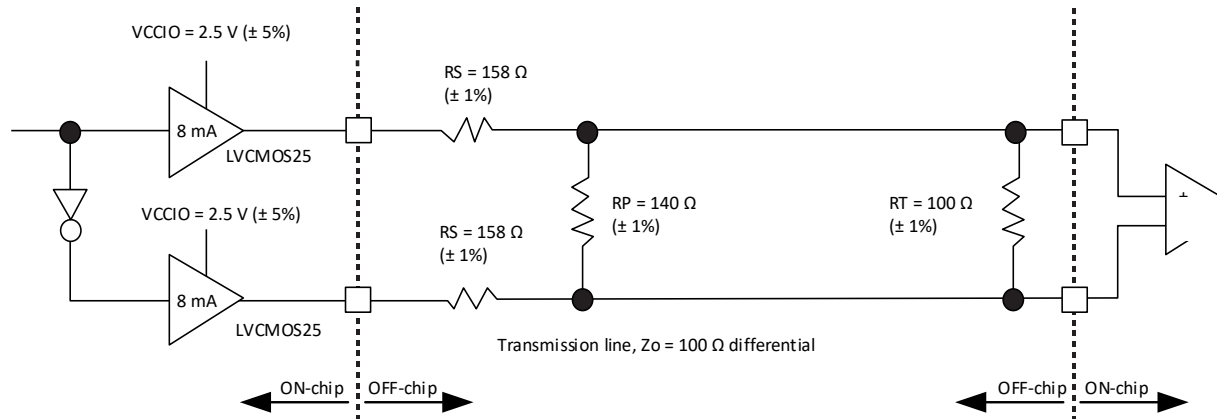


Figure 3.2. LVDS25E Output Termination Example

### 3.12.3. SubLVDS (Input Only)

SubLVDS is a reduced-voltage form of LVDS signaling, very similar to LVDS. It is a standard used in many camera types of applications. Being similar to LVDS, the CrossLink-NX devices can support the subLVDS input signaling with the same LVDS input buffer. The output for subLVDS is implemented in subLVDSSE/subLVDSSEH with a pair of LVCN0518 output drivers (see [SubLVDSSE/SubLVDSSEH \(Output Only\)](#) section).

Table 3.21. SubLVDS Input DC Electrical Characteristics

| Parameter | Description                          | Test Conditions                | Min | Typ | Max              | Unit |
|-----------|--------------------------------------|--------------------------------|-----|-----|------------------|------|
| $V_{ID}$  | Input Differential Threshold Voltage | Over $V_{ICM}$ range           | 70  | 150 | 200              | mV   |
| $V_{ICM}$ | Input Common Mode Voltage            | Half the sum of the two Inputs | 0.4 | 0.9 | 1.4 <sup>1</sup> | V    |

**Note:**

- $V_{ICM} + 1/2 V_{ID}$  cannot exceed the bank  $V_{CCIO}$  in all cases.

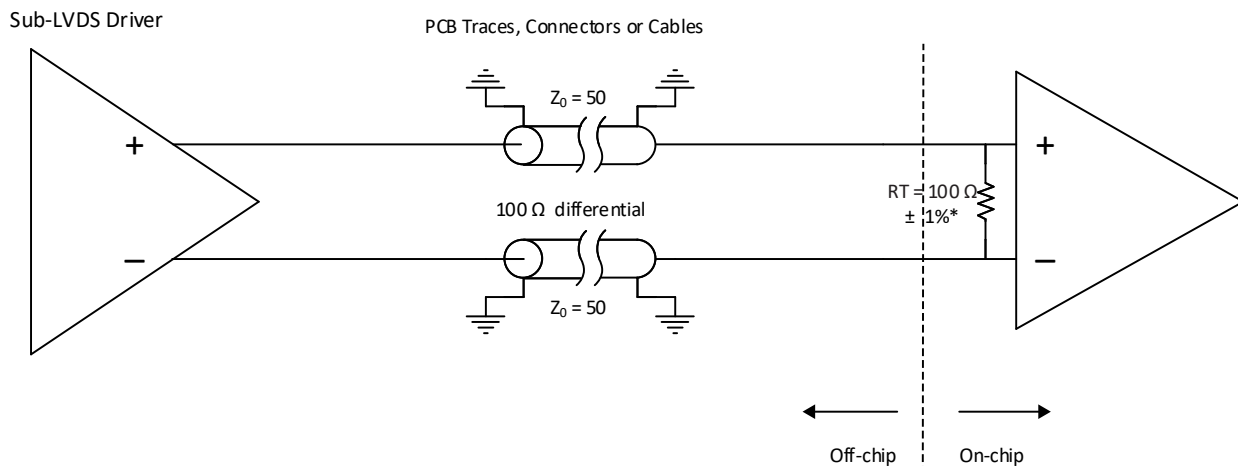


Figure 3.3. SubLVDS Input Interface

### 3.12.4. SubLVDSSE/SubLVDSSEH (Output Only)


SubLVDS output uses a pair of LVCN0518 drivers with True and Complement outputs. The VCCIO of the bank used for subLVDSSE or subLVDSSEH needs to be powered by 1.8 V. SubLVDSSE is for Bank 0, Bank 1, Bank 2, Bank 6, and Bank 7; and subLVDSSEH is for Bank 3, Bank 4, and Bank 5.

Performance of the subLVDSSE/subLVDSSEH driver is limited to the performance of LVCN0518.



**Table 3.22. SubLVDS Output DC Electrical Characteristics**

| Parameter | Description                       | Test Conditions                 | Min | Typ | Max | Unit |
|-----------|-----------------------------------|---------------------------------|-----|-----|-----|------|
| $V_{OD}$  | Output Differential Voltage Swing | —                               | —   | 150 | —   | mV   |
| $V_{OCM}$ | Output Common Mode Voltage        | Half the sum of the two Outputs | —   | 0.9 | —   | V    |

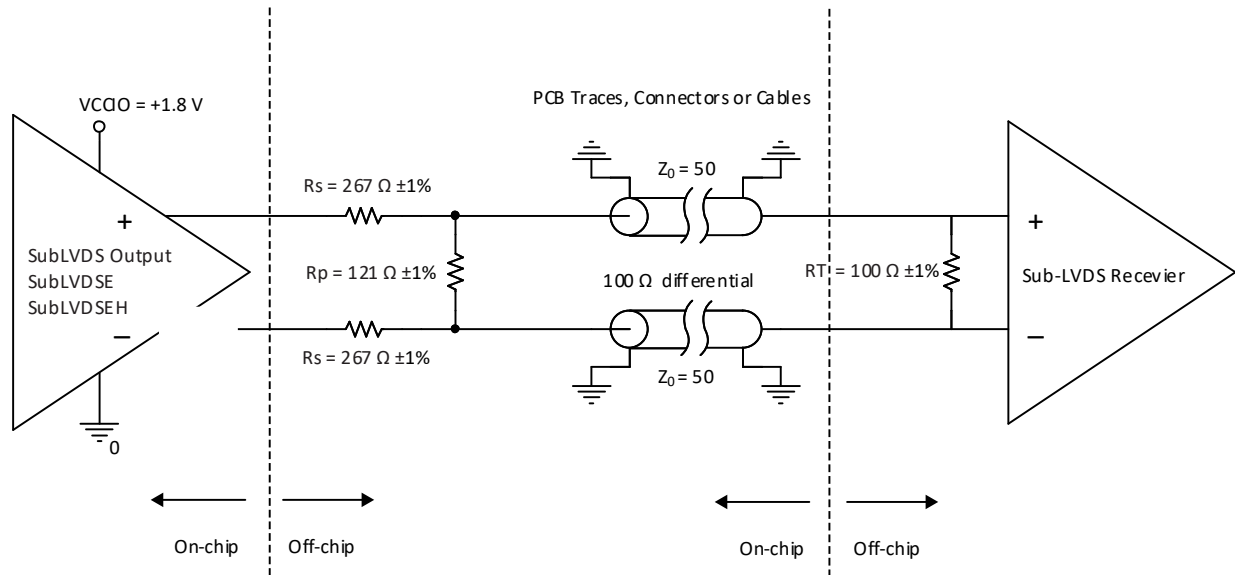

**Figure 3.4. SubLVDS Output Interface**

### 3.12.5. SLVS

Scalable Low-Voltage Signaling (SLVS) is based on a point-to-point signaling method defined in the JEDEC JESD8-13 (SLVS-400) standard. This standard evolved from the traditional LVDS standard with smaller voltage swings and a lower common-mode voltage. The 200 mV (400 mV p-p) SLVS swing contributes to a reduction in power.

The CrossLink-NX devices receive SLVS differential input with the LVDS input buffer. This LVDS input buffer is design to cover wide input common mode range that can meet the SLVS input standard specified by the JEDEC standard.


**Table 3.23. SLVS Input DC Characteristics**

| Parameter | Description                          | Test Conditions                | Min | Typ | Max | Unit |
|-----------|--------------------------------------|--------------------------------|-----|-----|-----|------|
| $V_{ID}$  | Input Differential Threshold Voltage | Over $V_{ICM}$ range           | 70  | —   | —   | mV   |
| $V_{ICM}$ | Input Common Mode Voltage            | Half the sum of the two Inputs | 70  | 200 | 330 | mV   |

The SLVS output on CrossLink-NX is supported with the LVDS drivers found in Bank 3, Bank 4, and Bank 5. The LVDS driver on CrossLink-NX is a current controlled driver. It can be configured as LVDS driver, or configured with the 100 Ω differential termination with center-tap set to  $V_{OCM}$  at 200 mV. This means the differential output driver can be placed into bank with  $V_{CCIO} = 1.2$  V, 1.5 V, or 1.8 V, even if it is powered by  $V_{CCIO}$ .

**Table 3.24. SLVS Output DC Characteristics**

| Parameter  | Description                       | Test Conditions                 | Min  | Typ                 | Max  | Unit |
|------------|-----------------------------------|---------------------------------|------|---------------------|------|------|
| $V_{CCIO}$ | Bank $V_{CCIO}$                   | —                               | —5%  | 1.2,<br>1.5,<br>1.8 | + 5% | V    |
| $V_{OD}$   | Output Differential Voltage Swing | —                               | 140  | 200                 | 270  | mV   |
| $V_{OCM}$  | Output Common Mode Voltage        | Half the sum of the two Outputs | 150  | 200                 | 250  | mV   |
| $Z_{OS}$   | Single-Ended Output Impedance     | —                               | 37.5 | 50                  | 80   | Ω    |

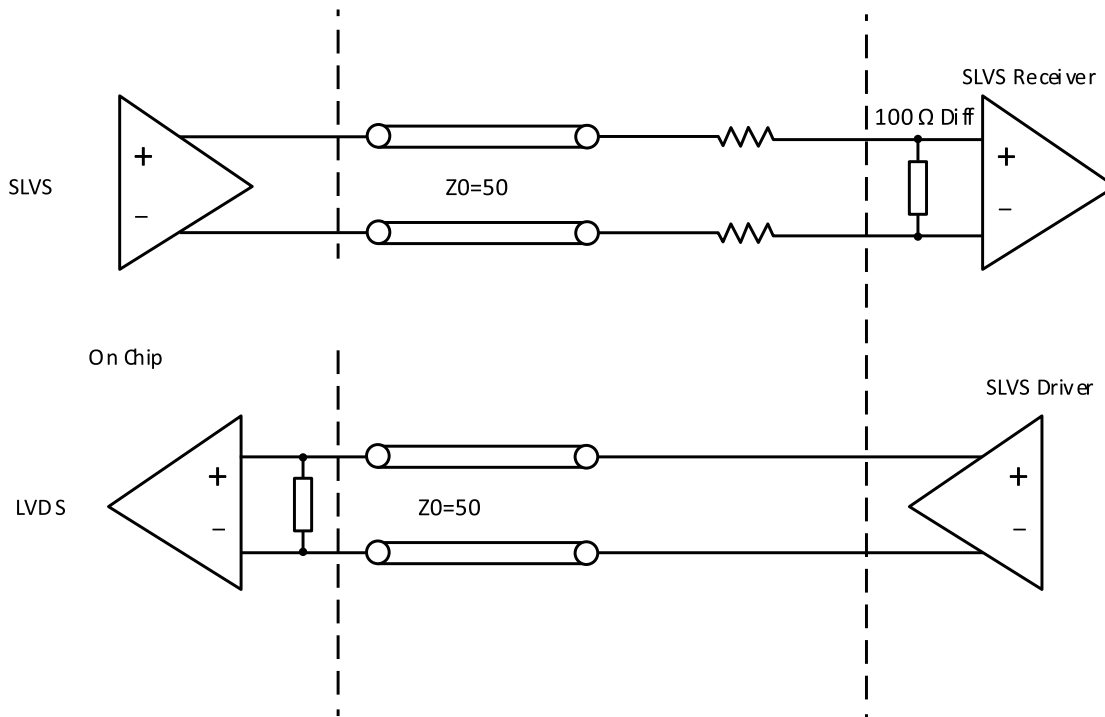

**Figure 3.5. SLVS Interface**


### 3.12.6. Soft MIPI D-PHY

When Soft D-PHY is implemented inside the FPGA logic, the I/O interface needs to use sysI/O buffers to connect to external D-PHY pins.

The CrossLink-NX sysI/O provides support for SLVS, as described in [SLVS](#) section, plus the LVCMOS12 input / output buffers together to support the High Speed (HS) and Low Power (LP) mode as defined in MIPI Alliance Specification for D-PHY.

To support MIPI D-PHY with SLVS (LVDS) and LVCMOS12, the bank  $V_{CCIO}$  cannot be set to 1.5 V or 1.8 V. It has to connect to 1.2 V or 1.1 V.

All other DC parameters are the same as listed in [SLVS](#) section. DC parameters for the LP driver and receiver are the same as listed in LVCMOS12.

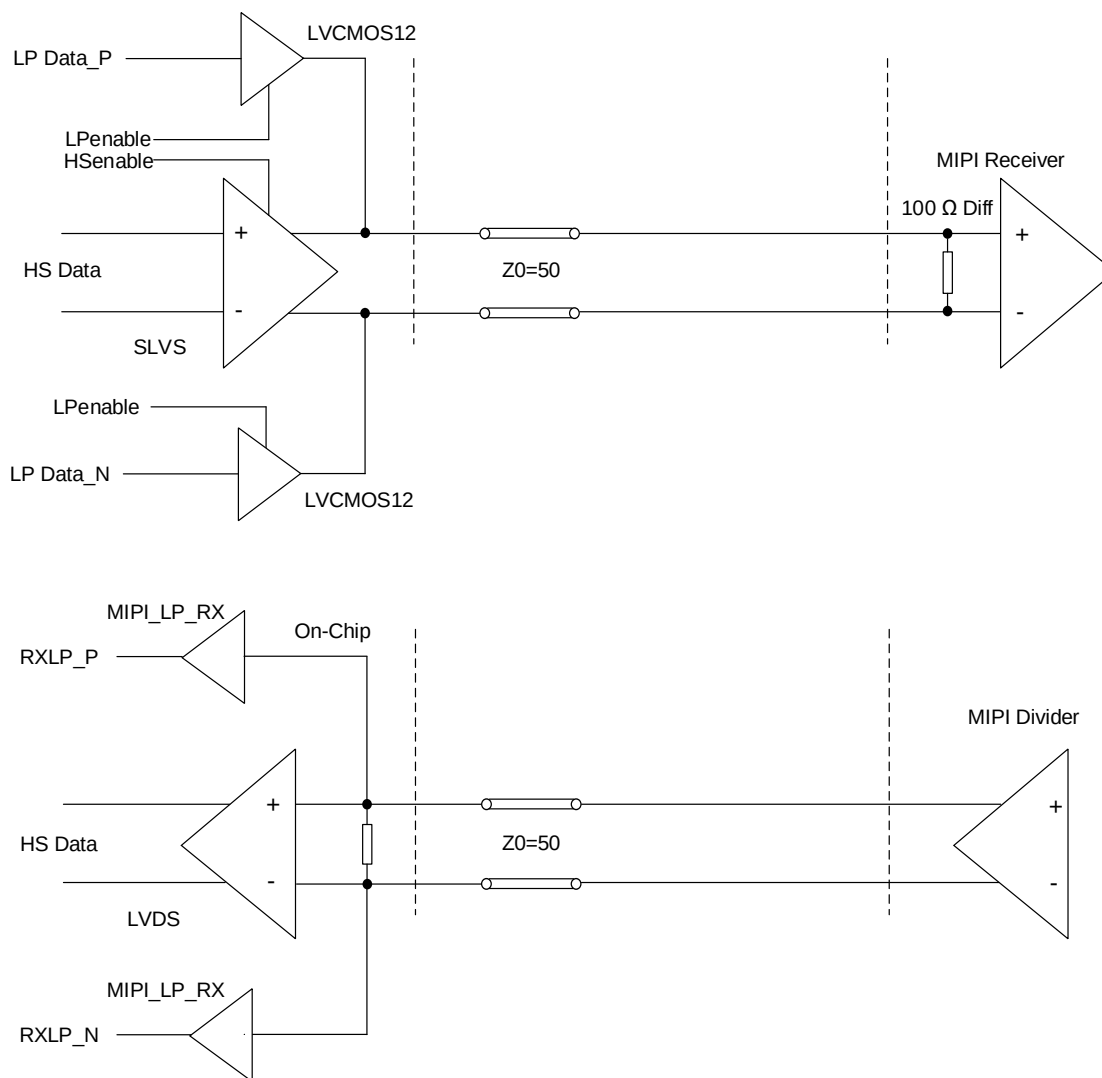

**Figure 3.6. MIPI Interface**

Table 3.25. Soft D-PHY Input Timing and Levels

| Symbol                                                   | Description                                                 | Conditions | Min | Typ | Max | Unit     |
|----------------------------------------------------------|-------------------------------------------------------------|------------|-----|-----|-----|----------|
| <b>High Speed (Differential) Input DC Specifications</b> |                                                             |            |     |     |     |          |
| $V_{CMRX(DC)}$                                           | Common-mode Voltage in High Speed Mode                      | —          | 70  | —   | 330 | mV       |
| $V_{IDTH}$                                               | Differential Input HIGH Threshold                           | —          | 70  | —   | —   | mV       |
| $V_{IDTL}$                                               | Differential Input LOW Threshold                            | —          | —   | —   | -70 | mV       |
| $V_{IHHS}$                                               | Input HIGH Voltage (for HS mode)                            | —          | —   | —   | 460 | mV       |
| $V_{ILHS}$                                               | Input LOW Voltage                                           | —          | -40 | —   | —   | mV       |
| $V_{TERM-EN}$                                            | Single-ended voltage for HS Termination Enable <sup>4</sup> | —          | —   | —   | 450 | mV       |
| $Z_D$                                                    | Differential Input Impedance                                | —          | 80  | 100 | 125 | $\Omega$ |
| <b>High Speed (Differential) Input AC Specifications</b> |                                                             |            |     |     |     |          |
| $\Delta V_{CMRX(HF)}^1$                                  | Common-mode Interference (>450 MHz)                         | —          | —   | —   | 100 | mV       |
| $\Delta V_{CMRX(LF)}^{2, 3}$                             | Common-mode Interference (50 MHz - 450 MHz)                 | —          | -50 | —   | 50  | mV       |
| $C_{CM}$                                                 | Common-mode Termination                                     | —          | —   | —   | 60  | pF       |
| <b>Low Power (Single-Ended) Input DC Specifications</b>  |                                                             |            |     |     |     |          |
| $V_{IH}$                                                 | Low Power Mode Input HIGH Voltage                           | —          | 740 | —   | —   | mV       |
| $V_{IL}$                                                 | Low Power Mode Input LOW Voltage                            | —          | —   | —   | 480 | mV       |
| $V_{IL-ULP}$                                             | Ultra Low Power Input LOW Voltage                           | —          | —   | —   | 300 | mV       |
| $V_{HYST}$                                               | Low Power Mode Input Hysteresis                             | —          | 25  | —   | —   | mV       |
| $e_{SPIKE}$                                              | Input Pulse Rejection                                       | —          | —   | —   | 300 | V·ps     |
| $T_{MIN-RX}$                                             | Minimum Pulse Width Response                                | —          | 20  | —   | —   | ns       |
| $V_{INT}$                                                | Peak Interference Amplitude                                 | —          | —   | —   | 200 | mV       |
| $f_{INT}$                                                | Interference Frequency                                      | —          | 450 | —   | —   | MHz      |

**Notes:**

1. This is peak amplitude of sine wave modulated to the receiver inputs.
2. Input common-mode voltage difference compared to average common-mode voltage on the receiver inputs.
3. Exclude any static ground shift of 50 mV.
4. High Speed Differential  $R_{TERM}$  is enabled when both  $D_P$  and  $D_N$  are below this voltage.

Table 3.26. Soft D-PHY Output Timing and Levels

| Symbol                                                    | Description                                           | Conditions                                          | Min  | Typ | Max  | Unit              |
|-----------------------------------------------------------|-------------------------------------------------------|-----------------------------------------------------|------|-----|------|-------------------|
| <b>High Speed (Differential) Output DC Specifications</b> |                                                       |                                                     |      |     |      |                   |
| $V_{CMTX}$                                                | Common-mode Voltage in High Speed Mode                | —                                                   | 150  | 200 | 250  | mV                |
| $ \Delta V_{CMTX(1,0)} $                                  | $V_{CMTX}$ Mismatch Between Differential HIGH and LOW | —                                                   | —    | —   | 5    | mV                |
| $ V_{OD} $                                                | Output Differential Voltage                           | $ D-PHY-P - D-PHY-N $                               | 140  | 200 | 270  | mV                |
| $ \Delta V_{OD} $                                         | $V_{OD}$ Mismatch Between Differential HIGH and LOW   | —                                                   | —    | —   | 10   | mV                |
| $V_{OHHS}$                                                | Single-Ended Output HIGH Voltage                      | —                                                   | —    | —   | 360  | mV                |
| $Z_{OS}$                                                  | Single Ended Output Impedance                         | —                                                   | 37.5 | 50  | 80   | $\Omega$          |
| $\Delta Z_{OS}$                                           | $Z_{OS}$ mismatch                                     | —                                                   | —    | —   | 20   | %                 |
| <b>High Speed (Differential) Output AC Specifications</b> |                                                       |                                                     |      |     |      |                   |
| $\Delta V_{CMTX(LF)}$                                     | Common-Mode Variation, 50 MHz–450 MHz                 | —                                                   | —    | —   | 25   | mV <sub>RMS</sub> |
| $\Delta V_{CMTX(HF)}$                                     | Common-Mode Variation, above 450 MHz                  | —                                                   | —    | —   | 15   | mV <sub>RMS</sub> |
| $t_R$                                                     | Output 20%–80% Rise Time                              | $0.08 \text{ Gbps} \leq t_R \leq 1.00 \text{ Gbps}$ | —    | —   | 0.30 | UI                |
|                                                           | Output 80%–20% Fall Time                              | $1.00 \text{ Gbps} < t_R \leq 1.50 \text{ Gbps}$    | —    | —   | 0.35 | UI                |

| Symbol                                            | Description                              | Conditions                                                                | Min  | Typ | Max  | Unit |
|---------------------------------------------------|------------------------------------------|---------------------------------------------------------------------------|------|-----|------|------|
| t <sub>F</sub>                                    | Output Data Valid After CLK Output       | 0.08 Gbps ≤ t <sub>F</sub> ≤ 1.00 Gbps                                    | —    | —   | 0.30 | UI   |
|                                                   |                                          | 1.00 Gbps < t <sub>F</sub> ≤ 1.50 Gbps                                    | —    | —   | 0.35 | UI   |
| Low Power (Single-Ended) Output DC Specifications |                                          |                                                                           |      |     |      |      |
| V <sub>OH</sub>                                   | Low Power Mode Output HIGH Voltage       | 0.08 Gbps – 1.5 Gbps                                                      | 1.07 | 1.2 | 1.3  | V    |
| V <sub>OL</sub>                                   | Low Power Mode Input LOW Voltage         | —                                                                         | –50  | —   | 50   | mV   |
| Z <sub>OLP</sub>                                  | Output Impedance in Low Power Mode       | —                                                                         | 110  | —   | —    | Ω    |
| Low Power (Single-Ended) Output AC Specifications |                                          |                                                                           |      |     |      |      |
| t <sub>RLP</sub>                                  | 15%–85% Rise Time                        | —                                                                         | —    | —   | 25   | ns   |
| t <sub>FLP</sub>                                  | 85%–15% Fall Time                        | —                                                                         | —    | —   | 25   | ns   |
| t <sub>REOT</sub>                                 | HS – LP Mode Rise and Fall Time, 30%–85% | —                                                                         | —    | —   | 35   | ns   |
| T <sub>LP-PULSE-TX</sub>                          | Pulse Width of the LP Exclusive-OR Clock | First LP XOR Clock Pulse after STOP State or Last Pulse before STOP State | 40   | —   | —    | ns   |
|                                                   |                                          | All Other Pulses                                                          | 20   | —   | —    | ns   |
| T <sub>LP-PER-TX</sub>                            | Period of the LP Exclusive-OR Clock      | —                                                                         | 90   | —   | —    | ns   |
| C <sub>LOAD</sub>                                 | Load Capacitance                         | —                                                                         | 0    | —   | 70   | pF   |

**Table 3.27. Soft D-PHY Clock Signal Specification**

| Symbol                            | Description | Conditions | Min  | Typ | Max  | Unit |
|-----------------------------------|-------------|------------|------|-----|------|------|
| <b>Clock Signal Specification</b> |             |            |      |     |      |      |
| UI Instantaneous                  | $UI_{INST}$ | —          | —    | —   | 12.5 | ns   |
| UI Variation                      | $\Delta UI$ | —          | –10% | —   | 10%  | UI   |
|                                   |             | —          | –5%  | —   | 5%   | UI   |

**Table 3.28. Soft D-PHY Data-Clock Timing Specifications**

| Symbol                                  | Description                 | Conditions                                                     | Min   | Typ | Max  | Unit        |
|-----------------------------------------|-----------------------------|----------------------------------------------------------------|-------|-----|------|-------------|
| <b>Data-Clock Timing Specifications</b> |                             |                                                                |       |     |      |             |
| $T_{SKEW[TX]}$                          | Data to Clock Skew          | $0.08 \text{ Gbps} \leq T_{SKEW[TX]} \leq 1.00 \text{ Gbps}$   | –0.15 | —   | 0.15 | $UI_{INST}$ |
|                                         |                             | $1.00 \text{ Gbps} < T_{SKEW[TX]} \leq 1.50 \text{ Gbps}$      | –0.20 | —   | 0.20 | $UI_{INST}$ |
| $T_{SKEW[TLIS]}$                        | Data to Clock Skew          | $0.08 \text{ Gbps} \leq T_{SKEW[TLIS]} \leq 1.00 \text{ Gbps}$ | –0.20 | —   | 0.20 | $UI_{INST}$ |
|                                         |                             | $1.00 \text{ Gbps} < T_{SKEW[TLIS]} \leq 1.50 \text{ Gbps}$    | –0.10 | —   | 0.10 | $UI_{INST}$ |
| $T_{SETUP[RX]}$                         | Input Data Setup Before CLK | $0.08 \text{ Gbps} \leq T_{SETUP[RX]} \leq 1.00 \text{ Gbps}$  | 0.15  | —   | —    | UI          |
|                                         |                             | $1.00 \text{ Gbps} < T_{SETUP[RX]} \leq 1.50 \text{ Gbps}$     | 0.20  | —   | —    | UI          |
| $T_{HOLD[RX]}$                          | Input Data Hold After CLK   | $0.08 \text{ Gbps} \leq T_{HOLD[RX]} \leq 1.00 \text{ Gbps}$   | 0.15  | —   | —    | UI          |
|                                         |                             | $1.00 \text{ Gbps} < T_{HOLD[RX]} \leq 1.50 \text{ Gbps}$      | 0.20  | —   | —    | UI          |

### 3.12.7. Differential HSTL15D (Output Only)

Differential HSTL outputs are implemented as a pair of complementary single-ended HSTL outputs.

### 3.12.8. Differential SSTL135D, SSTL15D (Output Only)

Differential SSTL is used for differential clock in DDR3/DDR3L memory interface. All differential SSTL outputs are implemented as a pair of complementary single-ended SSTL outputs. All allowable single-ended output classes (class I and class II) are supported.

### 3.12.9. Differential HSUL12D (Output Only)

Differential HSUL is used for differential clock in LPDDR2 memory interface. All differential HSUL outputs are implemented as a pair of complementary single-ended HSUL12 outputs. All allowable single-ended drive strengths are supported.

### 3.12.10. Differential LVCMOS25D, LVCMOS33D, LVTTTL33D (Output Only)

Differential LVCMOS and LVTTTL outputs are implemented as a pair of complementary single-ended outputs. All allowable single-ended output drive strengths are supported.

## 3.13. Maximum sysI/O Buffer Speed

Table 3.29. Maximum I/O Buffer Speed<sup>1, 2, 3, 4, 7</sup>

| Buffer                                | Description                                                          | Banks         | Max  | Unit |
|---------------------------------------|----------------------------------------------------------------------|---------------|------|------|
| <b>Maximum sysI/O Input Frequency</b> |                                                                      |               |      |      |
| <b>Single-Ended</b>                   |                                                                      |               |      |      |
| LVCMOS33                              | LVCMOS33, $V_{CCIO} = 3.3\text{ V}$                                  | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVTTTL33                              | LVTTTL33, $V_{CCIO} = 3.3\text{ V}$                                  | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVCMOS25                              | LVCMOS25, $V_{CCIO} = 2.5\text{ V}$                                  | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVCMOS18 <sup>5</sup>                 | LVCMOS18, $V_{CCIO} = 1.8\text{ V}$                                  | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVCMOS18H                             | LVCMOS18, $V_{CCIO} = 1.8\text{ V}$                                  | 3, 4, 5       | 200  | MHz  |
| LVCMOS15 <sup>5</sup>                 | LVCMOS15, $V_{CCIO} = 1.5\text{ V}$                                  | 0, 1, 2, 6, 7 | 100  | MHz  |
| LVCMOS15H <sup>5</sup>                | LVCMOS15, $V_{CCIO} = 1.5\text{ V}$                                  | 3, 4, 5       | 150  | MHz  |
| LVCMOS12 <sup>5</sup>                 | LVCMOS12, $V_{CCIO} = 1.2\text{ V}$                                  | 0, 1, 2, 6, 7 | 50   | MHz  |
| LVCMOS12H <sup>5</sup>                | LVCMOS12, $V_{CCIO} = 1.2\text{ V}$                                  | 3, 4, 5       | 100  | MHz  |
| LVCMOS10 <sup>5</sup>                 | LVCMOS 1.0, $V_{CCIO} = 1.2\text{ V}$                                | 0, 1, 2, 6, 7 | 50   | MHz  |
| LVCMOS10H <sup>5</sup>                | LVCMOS 1.0, $V_{CCIO} = 1.0\text{ V}$                                | 3, 4, 5       | 50   | MHz  |
| LVCMOS10R                             | LVCMOS 1.0, $V_{CCIO}$ independent                                   | 3, 4, 5       | 50   | MHz  |
| SSTL15_I, SSTL15_II                   | SSTL_15, $V_{CCIO} = 1.5\text{ V}$                                   | 3, 4, 5       | 1066 | Mbps |
| SSTL135_I, SSTL135_II                 | SSTL_135, $V_{CCIO} = 1.35\text{ V}$                                 | 3, 4, 5       | 1066 | Mbps |
| HSUL12                                | HSUL_12, $V_{CCIO} = 1.2\text{ V}$                                   | 3, 4, 5       | 1066 | Mbps |
| HSTL15                                | HSTL15, $V_{CCIO} = 1.5\text{ V}$                                    | 3, 4, 5       | 250  | Mbps |
| MIPI D-PHY (LP Mode)                  | MIPI, Low Power Mode, $V_{CCIO} = 1.2\text{ V}$                      | 3, 4, 5       | 10   | Mbps |
| <b>Differential<sup>8</sup></b>       |                                                                      |               |      |      |
| LVDS                                  | LVDS, $V_{CCIO}$ independent QFN72, caBGA256, csBGA289, and caBGA400 | 3, 4, 5       | 1250 | Mbps |
|                                       | LVDS, $V_{CCIO}$ independent csfBGA121                               | 3, 4, 5       | 1500 | Mbps |

| Buffer                                 | Description                                                                         | Banks         | Max  | Unit |
|----------------------------------------|-------------------------------------------------------------------------------------|---------------|------|------|
| subLVDS                                | subLVDS, $V_{CCIO}$ independent QFN72, caBGA256, csBGA289, and caBGA400             | 3, 4, 5       | 1250 | Mbps |
|                                        | subLVDS, $V_{CCIO}$ independent csfBGA121                                           | 3, 4, 5       | 1500 | Mbps |
| SLVS                                   | SLVS similar to MIPI HS, $V_{CCIO}$ independent QFN72, caBGA256, csBGA289, caBGA400 | 3, 4, 5       | 1250 | Mbps |
|                                        | SLVS similar to MIPI HS, $V_{CCIO}$ independent csfBGA121                           | 3, 4, 5       | 1500 | Mbps |
| MIPI D-PHY (HS Mode)                   | MIPI, High Speed Mode, $V_{CCIO} = 1.2$ V QFN72                                     | 3, 4, 5       | 1250 | Mbps |
|                                        | MIPI, High Speed Mode, $V_{CCIO} = 1.2$ V csfBGA121, caBGA256, csBGA289, caBGA400   | 3, 4, 5       | 1500 | Mbps |
| SSTL15D                                | Differential SSTL15, $V_{CCIO}$ independent                                         | 3, 4, 5       | 1066 | Mbps |
| SSTL135D                               | Differential SSTL135, $V_{CCIO}$ independent                                        | 3, 4, 5       | 1066 | Mbps |
| HUSL12D                                | Differential HSUL12, $V_{CCIO}$ independent                                         | 3, 4, 5       | 1066 | Mbps |
| HSTL15D                                | Differential HSTL15, $V_{CCIO}$ independent                                         | 3, 4, 5       | 250  | Mbps |
| <b>Maximum sysI/O Output Frequency</b> |                                                                                     |               |      |      |
| <b>Single-Ended</b>                    |                                                                                     |               |      |      |
| LVC MOS33 (all drive strengths)        | LVC MOS33, $V_{CCIO} = 3.3$ V                                                       | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVC MOS33 (RS50)                       | LVC MOS33, $V_{CCIO} = 3.3$ V, $R_{SERIES} = 50 \Omega$                             | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVTTL33 (all drive strengths)          | LVTTL33, $V_{CCIO} = 3.3$ V                                                         | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVTTL33 (RS50)                         | LVTTL33, $V_{CCIO} = 3.3$ V, $R_{SERIES} = 50 \Omega$                               | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVC MOS25 (all drive strengths)        | LVC MOS25, $V_{CCIO} = 2.5$ V                                                       | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVC MOS25 (RS50)                       | LVC MOS25, $V_{CCIO} = 2.5$ V, $R_{SERIES} = 50 \Omega$                             | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVC MOS18 (all drive strengths)        | LVC MOS18, $V_{CCIO} = 1.8$ V                                                       | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVC MOS18 (RS50)                       | LVC MOS18, $V_{CCIO} = 1.8$ V, $R_{SERIES} = 50 \Omega$                             | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVC MOS18H (all drive strengths)       | LVC MOS18, $V_{CCIO} = 1.8$ V                                                       | 3, 4, 5       | 200  | MHz  |
| LVC MOS18H (RS50)                      | LVC MOS18, $V_{CCIO} = 1.8$ V, $R_{SERIES} = 50 \Omega$                             | 3, 4, 5       | 200  | MHz  |
| LVC MOS15 (all drive strengths)        | LVC MOS15, $V_{CCIO} = 1.5$ V                                                       | 0, 1, 2, 6, 7 | 100  | MHz  |
| LVC MOS15H (all drive strengths)       | LVC MOS15, $V_{CCIO} = 1.5$ V                                                       | 3, 4, 5       | 150  | MHz  |
| LVC MOS12 (all drive strengths)        | LVC MOS12, $V_{CCIO} = 1.2$ V                                                       | 0, 1, 2, 6, 7 | 50   | MHz  |
| LVC MOS12H (all drive strengths)       | LVC MOS12, $V_{CCIO} = 1.2$ V                                                       | 3, 4, 5       | 100  | MHz  |
| LVC MOS10H (all drive strengths)       | LVC MOS12, $V_{CCIO} = 1.2$ V                                                       | 3, 4, 5       | 50   | MHz  |
| SSTL15_I, SSTL15_II                    | SSTL_15, $V_{CCIO} = 1.5$ V                                                         | 3, 4, 5       | 1066 | Mbps |
| SSTL135_I, SSTL135_II                  | SSTL_135, $V_{CCIO} = 1.35$ V                                                       | 3, 4, 5       | 1066 | Mbps |
| HSUL12 (all drive strengths)           | HSUL_12, $V_{CCIO} = 1.2$ V                                                         | 3, 4, 5       | 1066 | Mbps |
| HSTL15                                 | HSTL15, $V_{CCIO} = 1.5$ V                                                          | 3, 4, 5       | 250  | Mbps |
| MIPI D-PHY (LP Mode)                   | MIPI, Low Power Mode, $V_{CCIO} = 1.2$ V                                            | 3, 4, 5       | 10   | Mbps |
| <b>Differential<sup>8</sup></b>        |                                                                                     |               |      |      |
| LVDS                                   | LVDS, $V_{CCIO} = 1.8$ V QFN72, caBGA256, csBGA289, and caBGA400                    | 3, 4, 5       | 1250 | Mbps |
|                                        | LVDS, $V_{CCIO} = 1.8$ V csfBGA121                                                  | 3, 4, 5       | 1500 | Mbps |
| LVDS25E <sup>6</sup>                   | LVDS25, Emulated, $V_{CCIO} = 2.5$ V                                                | 0, 1, 2, 6, 7 | 400  | Mbps |
| SubLVDS E <sup>6</sup>                 | subLVDS, Emulated, $V_{CCIO} = 1.8$ V                                               | 0, 1, 2, 6, 7 | 400  | Mbps |
| SubLVDS E H <sup>6</sup>               | subLVDS, Emulated, $V_{CCIO} = 1.8$ V                                               | 3, 4, 5       | 800  | Mbps |

| Buffer               | Description                                                                                 | Banks   | Max  | Unit |
|----------------------|---------------------------------------------------------------------------------------------|---------|------|------|
| SLVS                 | SLVS similar to MIPI, $V_{CCIO} = 1.2\text{ V}$<br>QFN72, caBGA256, csBGA289, caBGA400      | 3, 4, 5 | 1250 | Mbps |
|                      | SLVS similar to MIPI, $V_{CCIO} = 1.2\text{ V}$<br>csfBGA121                                | 3, 4, 5 | 1500 | Mbps |
| MIPI D-PHY (HS Mode) | MIPI, High Speed Mode, $V_{CCIO} = 1.2\text{ V}$<br>QFN72                                   | 3, 4, 5 | 1250 | Mbps |
|                      | MIPI, High Speed Mode, $V_{CCIO} = 1.2\text{ V}$<br>csfBGA121, caBGA256, csBGA289, caBGA400 | 3, 4, 5 | 1500 | Mbps |
| SSTL15D              | Differential SSTL15, $V_{CCIO} = 1.5\text{ V}$                                              | 3, 4, 5 | 1066 | Mbps |
| SSTL135D             | Differential SSTL135, $V_{CCIO} = 1.35\text{ V}$                                            | 3, 4, 5 | 1066 | Mbps |
| HUSL12D              | Differential HSUL12, $V_{CCIO} = 1.2\text{ V}$                                              | 3, 4, 5 | 1066 | Mbps |
| HSTL15D              | Differential HSTL15, $V_{CCIO} = 1.5\text{ V}$                                              | 3, 4, 5 | 250  | Mbps |

**Notes:**

- Maximum I/O speed is the maximum switching rate of the I/O operating within the guidelines of the defining standard. The actual interface speed performance using the I/O also depends on other factors, such as internal and external timing.
- These numbers are characterized but not test on every device.
- Performance is specified in MHz, as defined in clock rate when the sysI/O is used as pin. For data rate performance, this can be converted to Mbps, which equals to 2 times the clock rate.
- LVC MOS and LV TTL are measured with load specified in [Table 3.50](#).
- These LVC MOS inputs can be placed in different  $V_{CCIO}$  voltage. Performance may vary. Please refer to Lattice Design Software
- These emulated outputs performance is based on externally properly terminated as described in [LVDS25E \(Output Only\)](#) and [SubLVDS/SubLVDS EH \(Output Only\)](#).
- All speeds are measured with fast slew.
- For maximum differential I/O performance only Differential I/O should be placed in the bottom I/O banks. If this is not possible, the following will impact on maximum performance:
  - If Fast Slew Rate LVC MOS I/O are used, they should be limited to no more than nine I/O (adjacent), four I/O (same bank), 55 I/O (left/right banks) to keep degradation below 50%.
  - If non-Differential I/O (SLOW SLEW) are placed on the bottom but not within the same bank as differential I/O, then the maximum Differential performance is degraded to 70% of original when 21 aggressors are toggling.
  - If non-Differential I/O (SLOW SLEW) are placed within the same bank as Differential I/O then the maximum performance is degraded to 50% of original when 16 aggressor are toggling.
  - No performance impact if MIPI LP and MIPI HS are in the same bank.
  - If Differential RX/TX I/O are both placed within the same bank then the maximum performance is degraded to 90%.
  - For DDR3/3L, LPDDR2/3 separate DQ/DQS groups from Address/Commands/CLK groups into separate banks.

### 3.14. Typical Building Block Function Performance

These building block functions can be generated using Lattice Design software tool. Exact performance may vary with the device and the design software tool version. The design software tool uses internal parameters that have been characterized but are not tested on every device.

**Table 3.30. Pin-to-Pin Performance**

| Function                                                             | Typ. @ VCC = 1.0 V | Unit |
|----------------------------------------------------------------------|--------------------|------|
| 16-bit Decoder (I/O configured with LVC MOS18, Left and Right Banks) | 5.5                | ns   |
| 16-bit Decoder (I/O configured with HSTL15_I, Bottom Banks)          | 5.1                | ns   |
| 16:1 Mux (I/O configured with LVC MOS18, Left and Right Banks)       | 6                  | ns   |
| 16:1 Mux (I/O configured with HSTL15_I, Bottom Banks)                | 6.1                | ns   |

**Note:** These functions are generated using Lattice Radiant Design software tool. Exact performance may vary with the device and the design software tool version. The design software tool uses internal parameters that have been characterized but are not tested on every device.



**Table 3.31. Register-to-Register Performance**

| Function                                                                          | Typ. @ VCC = 1.0 V   | Unit |
|-----------------------------------------------------------------------------------|----------------------|------|
| <b>Basic Functions</b>                                                            |                      |      |
| 16-bit Adder                                                                      | 500 <sup>2</sup>     | MHz  |
| 32-bit Adder                                                                      | 496                  | MHz  |
| 16-bit Counter                                                                    | 402                  | MHz  |
| 32-bit Counter                                                                    | 371                  | MHz  |
| <b>Embedded Memory Functions</b>                                                  |                      |      |
| 512 × 36 Single Port RAM, with Output Register                                    | 500 <sup>2</sup>     | MHz  |
| 1024 × 18 True-Dual Port RAM using same clock, with EBR Output Registers          | 500 <sup>2</sup>     | MHz  |
| 1024 × 18 True-Dual Port RAM using asynchronous clocks, with EBR Output Registers | 500 <sup>2</sup>     | MHz  |
| <b>Large Memory Functions</b>                                                     |                      |      |
| 32k × 32 Single Port RAM, with Output Register                                    | 165 <sup>2</sup>     | MHz  |
| 32k × 32 Single Port RAM with ECC, with Output Register                           | 130 <sup>2</sup>     | MHz  |
| 32k × 32 True-Dual Port RAM using same clock, with Output Registers               | 157.183 <sup>2</sup> | MHz  |
| <b>Distributed Memory Functions</b>                                               |                      |      |
| 16 × 4 Single Port RAM (One PFU)                                                  | 500 <sup>2</sup>     | MHz  |
| 16 × 2 Pseudo-Dual Port RAM (One PFU)                                             | 500 <sup>2</sup>     | MHz  |
| 16 × 4 Pseudo-Dual Port (Two PFUs)                                                | 500 <sup>2</sup>     | MHz  |
| <b>DSP Functions</b>                                                              |                      |      |
| 9 × 9 Multiplier with Input Output Registers                                      | 376                  | MHz  |
| 18 × 18 Multiplier with Input/Output Registers                                    | 287                  | MHz  |
| 36 × 36 Multiplier with Input/Output Registers                                    | 200                  | MHz  |
| MAC 18 × 18 with Input/Output Registers                                           | 203                  | MHz  |
| MAC 18 × 18 with Input/Pipelined/Output Registers                                 | 287                  | MHz  |
| MAC 36 × 36 with Input/Output Registers                                           | 119                  | MHz  |
| MAC 36 × 36 with Input/Pipelined/Output Registers                                 | 155                  | MHz  |

**Notes:**

1. The Clock port is configured with LVDS I/O type. Performance Grade: 9\_High-Performance\_1.0V.
2. Limited by the Minimum Pulse Width of the component
3. These functions are generated using Lattice Radiant design software. Exact performance may vary with the device and the design software tool version. The design software tool uses internal parameters that have been characterized but are not tested on every device.
4. For the Pipelined designs, the number of pipeline stages used are 2.

### 3.15. LMMI

Table 3.32 summarizes the performance of the LMMI interface with supported IPs. Additional timing requirement and constraint can be identified through the Lattice Radiance design tools.

**Table 3.32. LMMI F<sub>MAX</sub> Summary**

| IP    | F <sub>MAX</sub> (MHz) |
|-------|------------------------|
| CDR0  | 73                     |
| CDR1  | 70                     |
| DPHY0 | 67                     |
| DPHY1 | 55                     |
| CRE   | 54                     |
| I2C   | 38                     |
| PCIe  | 57                     |

| IP      | F <sub>MAX</sub> (MHz) |
|---------|------------------------|
| PLL_ULC | 59                     |
| PLL_LLC | 55                     |
| PLL_LRC | 37                     |

### 3.16. Derating Timing Tables

Logic timing provided in the following sections of this data sheet and the Lattice Radiant design tools are worst case numbers in the operating range. Actual delays at nominal temperature and voltage for best case process, can be much better than the values given in the tables. The Lattice Radiant design tool can provide logic timing numbers at a particular temperature and voltage.

### 3.17. External Switching Characteristics

Over recommended commercial operating conditions.

**Table 3.33. External Switching Characteristics (V<sub>CC</sub> = 1.0 V)**

| Parameter                                                                                                                                                                                                                    | Description                                                    | −9    |      | −8    |       | −7    |       | Unit |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|-------|------|-------|-------|-------|-------|------|
|                                                                                                                                                                                                                              |                                                                | Min   | Max  | Min   | Max   | Min   | Max   |      |
| Clocks                                                                                                                                                                                                                       |                                                                |       |      |       |       |       |       |      |
| Primary Clock                                                                                                                                                                                                                |                                                                |       |      |       |       |       |       |      |
| f <sub>MAX_PRI</sub>                                                                                                                                                                                                         | Frequency for Primary Clock                                    | —     | 400  | —     | 325.2 | —     | 276   | MHz  |
| t <sub>W_PRI</sub>                                                                                                                                                                                                           | Clock Pulse Width for Primary Clock                            | 1.125 | —    | 1.384 | —     | 1.63  | —     | ns   |
| t <sub>SKEW_PRI</sub> <sup>6</sup>                                                                                                                                                                                           | Primary Clock Skew Within a Device                             | —     | 450  | —     | 554   | —     | 653   | ps   |
| Edge Clock                                                                                                                                                                                                                   |                                                                |       |      |       |       |       |       |      |
| f <sub>MAX_EDGE</sub>                                                                                                                                                                                                        | Frequency for Edge Clock Tree                                  | —     | 800  | —     | 650.4 | —     | 551.7 | MHz  |
| t <sub>W_EDGE</sub>                                                                                                                                                                                                          | Clock Pulse Width for Edge Clock                               | 0.537 | —    | 0.661 | —     | 0.779 | —     | ns   |
| t <sub>SKEW_EDGE</sub> <sup>6</sup>                                                                                                                                                                                          | Edge Clock Skew Within a Device                                | —     | 120  | —     | 148   | —     | 174   | ps   |
| Generic SDR Input                                                                                                                                                                                                            |                                                                |       |      |       |       |       |       |      |
| General I/O Pin Parameters Using Dedicated Primary Clock Input without PLL                                                                                                                                                   |                                                                |       |      |       |       |       |       |      |
| t <sub>CO</sub>                                                                                                                                                                                                              | Clock to Output - PIO Output Register                          | —     | 6.45 | —     | 6.64  | —     | 7.83  | ns   |
| t <sub>SU</sub>                                                                                                                                                                                                              | Clock to Data Setup - PIO Input Register                       | 0     | —    | 0     | —     | 0     | —     | ns   |
| t <sub>H</sub>                                                                                                                                                                                                               | Clock to Data Hold - PIO Input Register                        | 2.94  | —    | 3.32  | —     | 3.92  | —     | ns   |
| t <sub>SU_DEL</sub>                                                                                                                                                                                                          | Clock to Data Setup - PIO Input Register with Data Input Delay | 1.84  | —    | 1.84  | —     | 1.84  | —     | ns   |
| t <sub>H_DEL</sub>                                                                                                                                                                                                           | Clock to Data Hold - PIO Input Register with Data Input Delay  | 0.16  | —    | 0.16  | —     | 0.16  | —     | ns   |
| General I/O Pin Parameters Using Dedicated Primary Clock Input with PLL                                                                                                                                                      |                                                                |       |      |       |       |       |       |      |
| t <sub>COPLL</sub>                                                                                                                                                                                                           | Clock to Output - PIO Output Register                          | —     | 4.02 | —     | 4.67  | —     | 5.51  | ns   |
| t <sub>SUPLL</sub>                                                                                                                                                                                                           | Clock to Data Setup - PIO Input Register                       | 1.23  | —    | 1.23  | —     | 1.23  | —     | ns   |
| t <sub>HPLL</sub>                                                                                                                                                                                                            | Clock to Data Hold - PIO Input Register                        | 0.98  | —    | 1.21  | —     | 1.42  | —     | ns   |
| t <sub>SU_DELP</sub>                                                                                                                                                                                                         | Clock to Data Setup - PIO Input Register with Data Input Delay | 4.74  | —    | 4.74  | —     | 4.74  | —     | ns   |
| t <sub>H_DELP</sub>                                                                                                                                                                                                          | Clock to Data Hold - PIO Input Register with Data Input Delay  | 0     | —    | 0     | —     | 0     | —     | ns   |
| Generic DDR Input/Output                                                                                                                                                                                                     |                                                                |       |      |       |       |       |       |      |
| Generic DDRX1 Inputs/Outputs with Clock and Data Centered at Pin (GDDR1_RX/TX.SCLK.Centered) using PCLK Clock Input – Bank 0, Bank 1, Bank 2, Bank 6, and Bank 7 – <a href="#">Figure 3.7</a> and <a href="#">Figure 3.9</a> |                                                                |       |      |       |       |       |       |      |
| t <sub>SU_GDDR1</sub>                                                                                                                                                                                                        | Input Data Setup Before CLK                                    | 0.917 | —    | 0.917 | —     | 0.917 | —     | ns   |
|                                                                                                                                                                                                                              |                                                                | 0.275 | —    | 0.275 | —     | 0.275 | —     | UI   |

| Parameter                                                                                                                                                                                          | Description                           | -9     |        | -8     |        | -7     |        | Unit        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|--------|--------|--------|--------|--------|--------|-------------|
|                                                                                                                                                                                                    |                                       | Min    | Max    | Min    | Max    | Min    | Max    |             |
| t <sub>HO_GDDR1</sub>                                                                                                                                                                              | Input Data Hold After CLK             | 0.917  | —      | 0.917  | —      | 0.917  | —      | ns          |
| t <sub>DVB_GDDR1</sub>                                                                                                                                                                             | Output Data Valid After CLK Output    | 1.217  | —      | 1.113  | —      | 1.014  | —      | ns          |
|                                                                                                                                                                                                    |                                       | -0.45  | —      | -0.554 | —      | -0.653 | —      | ns + 1/2 UI |
| t <sub>DQVA_GDDR1</sub>                                                                                                                                                                            | Output Data Valid After CLK Output    | 1.217  | —      | 1.113  | —      | 1.014  | —      | ns          |
|                                                                                                                                                                                                    |                                       | -0.45  | —      | -0.554 | —      | -0.653 | —      | ns + 1/2 UI |
| f <sub>DATA_GDDR1</sub>                                                                                                                                                                            | Input/Output Data Rate                | —      | 300    | —      | 300    | —      | 300    | Mbps        |
| f <sub>MAX_GDDR1</sub>                                                                                                                                                                             | Frequency of PCLK                     | —      | 150    | —      | 150    | —      | 150    | MHz         |
| ½ UI                                                                                                                                                                                               | Half of Data Bit Time, or 90 degree   | 1.667  | —      | 1.667  | —      | 1.667  | —      | ns          |
| Output TX to Input RX Margin per Edge                                                                                                                                                              |                                       | 0.3    | —      | 0.197  | —      | 0.097  | —      | ns          |
| <b>Generic DDRX1 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR1_RX/TX.SCLK.Aligned) using PCLK Clock Input – Bank 0, Bank 1, Bank 2, Bank 6, and Bank 7 – Figure 3.8 and Figure 3.10</b> |                                       |        |        |        |        |        |        |             |
| t <sub>DVA_GDDR1</sub>                                                                                                                                                                             | Input Data Valid After CLK            | —      | -0.917 | —      | -0.917 | —      | -0.917 | ns + 1/2 UI |
|                                                                                                                                                                                                    |                                       | —      | 0.75   | —      | 0.75   | —      | 0.75   | ns          |
|                                                                                                                                                                                                    |                                       | —      | 0.225  | —      | 0.225  | —      | 0.225  | UI          |
| t <sub>DVE_GDDR1</sub>                                                                                                                                                                             | Input Data Hold After CLK             | 0.917  | —      | 0.917  | —      | 0.917  | —      | ns + 1/2 UI |
|                                                                                                                                                                                                    |                                       | 2.583  | —      | 2.583  | —      | 2.583  | —      | ns          |
|                                                                                                                                                                                                    |                                       | 0.775  | —      | 0.775  | —      | 0.775  | —      | UI          |
| t <sub>DIA_GDDR1</sub>                                                                                                                                                                             | Output Data Invalid After CLK Output  | —      | 0.45   | —      | 0.554  | —      | 0.653  | ns          |
| t <sub>DIB_GDDR1</sub>                                                                                                                                                                             | Output Data Invalid Before CLK Output | —      | 0.45   | —      | 0.554  | —      | 0.653  | ns          |
| f <sub>DATA_GDDR1</sub>                                                                                                                                                                            | Input/Output Data Rate                | —      | 300    | —      | 300    | —      | 300    | Mbps        |
| f <sub>MAX_GDDR1</sub>                                                                                                                                                                             | Frequency for PCLK                    | —      | 150    | —      | 150    | —      | 150    | MHz         |
| ½ UI                                                                                                                                                                                               | Half of Data Bit Time, or 90 degree   | 1.667  | —      | 1.667  | —      | 1.667  | —      | ns          |
| Output TX to Input RX Margin per Edge                                                                                                                                                              |                                       | 0.3    | —      | 0.197  | —      | 0.098  | —      | ns          |
| <b>Generic DDRX1 Inputs/Outputs with Clock and Data Centered at Pin (GDDR1_RX/TX.SCLK.Centered) using PCLK Clock Input – Bank 3, Bank 4, and Bank 5 – Figure 3.7 and Figure 3.9</b>                |                                       |        |        |        |        |        |        |             |
| t <sub>SU_GDDR1</sub>                                                                                                                                                                              | Input Data Setup Before CLK           | 0.55   | —      | 0.55   | —      | 0.648  | —      | ns          |
|                                                                                                                                                                                                    |                                       | 0.275  | —      | 0.275  | —      | 0.275  | —      | UI          |
| t <sub>HO_GDDR1</sub>                                                                                                                                                                              | Input Data Hold After CLK             | 0.55   | —      | 0.55   | —      | 0.648  | —      | ns          |
| t <sub>DVB_GDDR1</sub>                                                                                                                                                                             | Output Data Valid After CLK Output    | 0.7    | —      | 0.631  | —      | 0.744  | —      | ns          |
|                                                                                                                                                                                                    |                                       | -0.300 | —      | -0.369 | —      | -0.435 | —      | ns + 1/2 UI |
| t <sub>DQVA_GDDR1</sub>                                                                                                                                                                            | Output Data Valid After CLK Output    | 0.7    | —      | 0.631  | —      | 0.744  | —      | ns          |
|                                                                                                                                                                                                    |                                       | -0.300 | —      | -0.369 | —      | -0.435 | —      | ns + 1/2 UI |
| f <sub>DATA_GDDR1</sub>                                                                                                                                                                            | Input/Output Data Rate                | —      | 500    | —      | 500    | —      | 424    | Mbps        |
| f <sub>MAX_GDDR1</sub>                                                                                                                                                                             | Frequency of PCLK                     | —      | 250    | —      | 250    | —      | 212    | MHz         |
| ½ UI                                                                                                                                                                                               | Half of Data Bit Time, or 90 degree   | —      | —      | 1      | —      | 1.179  | —      | ns          |
| Output TX to Input RX Margin per Edge                                                                                                                                                              |                                       | 0.15   | —      | 0.081  | —      | 0.095  | —      | ns          |

| Parameter                                                                                                                                                                                                   | Description                           | -9     |        | -8     |        | -7     |        | Unit        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|--------|--------|--------|--------|--------|--------|-------------|
|                                                                                                                                                                                                             |                                       | Min    | Max    | Min    | Max    | Min    | Max    |             |
| Generic DDRX1 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR1_RX/TX.SCLK.Aligned) using PCLK Clock Input – Bank 3, Bank 4, and Bank 5 – <a href="#">Figure 3.8</a> and <a href="#">Figure 3.10</a> |                                       |        |        |        |        |        |        |             |
| t <sub>DVA_GDDR1</sub>                                                                                                                                                                                      | Input Data Valid After CLK            | —      | -0.55  | —      | -0.550 | —      | -0.648 | ns + 1/2 UI |
|                                                                                                                                                                                                             |                                       | —      | 0.45   | —      | 0.45   | —      | 0.53   | ns          |
|                                                                                                                                                                                                             |                                       | —      | 0.225  | —      | 0.225  | —      | 0.225  | UI          |
| t <sub>DVE_GDDR1</sub>                                                                                                                                                                                      | Input Data Hold After CLK             | 0.55   | —      | 0.55   | —      | 0.648  | —      | ns + 1/2 UI |
|                                                                                                                                                                                                             |                                       | 1.55   | —      | 1.55   | —      | 1.827  | —      | ns          |
|                                                                                                                                                                                                             |                                       | 0.775  | —      | 0.775  | —      | 0.775  | —      | UI          |
| t <sub>DIA_GDDR1</sub>                                                                                                                                                                                      | Output Data Invalid After CLK Output  | —      | 0.3    | —      | 0.369  | —      | 0.435  | ns          |
| t <sub>DIB_GDDR1</sub>                                                                                                                                                                                      | Output Data Invalid Before CLK Output | —      | 0.3    | —      | 0.369  | —      | 0.435  | ns          |
| f <sub>DATA_GDDR1</sub>                                                                                                                                                                                     | Input/Output Data Rate                | —      | 500    | —      | 500    | —      | 424    | Mbps        |
| f <sub>MAX_GDDR1</sub>                                                                                                                                                                                      | Frequency for PCLK                    | —      | 250    | —      | 250    | —      | 212    | MHz         |
| ½ UI                                                                                                                                                                                                        | Half of Data Bit Time, or 90 degree   | 1      | —      | 1      | —      | 1.179  | —      | ns          |
| Output TX to Input RX Margin per Edge                                                                                                                                                                       |                                       | 0.15   | —      | 0.081  | —      | 0.095  | —      | ns          |
| Generic DDRX2 Inputs/Outputs with Clock and Data Centered at Pin (GDDR2_RX/TX.ECLK.Centered) using PCLK Clock Input - <a href="#">Figure 3.7</a> and <a href="#">Figure 3.9</a>                             |                                       |        |        |        |        |        |        |             |
| t <sub>SU_GDDR2</sub>                                                                                                                                                                                       | Data Setup before CLK Input           | 0.175  | —      | 0.175  | —      | 0.206  | —      | ns          |
|                                                                                                                                                                                                             |                                       | 0.175  | —      | 0.175  | —      | 0.175  | —      | UI          |
| t <sub>HO_GDDR2</sub>                                                                                                                                                                                       | Data Hold after CLK Input             | 0.177  | —      | 0.177  | —      | 0.206  | —      | ns          |
| t <sub>DVB_GDDR2</sub>                                                                                                                                                                                      | Output Data Valid Before CLK Output   | 0.380  | —      | 0.352  | —      | 0.415  | —      | ns          |
|                                                                                                                                                                                                             |                                       | -0.120 | —      | -0.148 | —      | -0.174 | —      | ns + 1/2 UI |
| t <sub>DQVA_GDDR2</sub>                                                                                                                                                                                     | Output Data Valid After CLK Output    | 0.380  | —      | 0.352  | —      | 0.415  | —      | ns          |
|                                                                                                                                                                                                             |                                       | -0.120 | —      | -0.148 | —      | -0.174 | —      | ns + 1/2 UI |
| f <sub>DATA_GDDR2</sub>                                                                                                                                                                                     | Input/Output Data Rate                | —      | 1000   | —      | 1000   | —      | 848    | Mbps        |
| f <sub>MAX_GDDR2</sub>                                                                                                                                                                                      | Frequency for ECLK                    | —      | 500    | —      | 500    | —      | 424    | MHz         |
| ½ UI                                                                                                                                                                                                        | Half of Data Bit Time, or 90 degree   | 0.500  | —      | 0.500  | —      | 0.589  | —      | ns          |
| f <sub>PCLK</sub>                                                                                                                                                                                           | PCLK frequency                        | —      | 250.0  | —      | 250.0  | —      | 212.1  | MHz         |
| Output TX to Input RX Margin per Edge                                                                                                                                                                       |                                       | 0.230  | —      | 0.202  | —      | 0.239  | —      | ns          |
| Generic DDRX2 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR2_RX/TX.ECLK.Aligned) using PCLK Clock Input - <a href="#">Figure 3.8</a> and <a href="#">Figure 3.10</a>                              |                                       |        |        |        |        |        |        |             |
| t <sub>DVA_GDDR2</sub>                                                                                                                                                                                      | Input Data Valid After CLK            | —      | -0.275 | —      | -0.275 | —      | -0.324 | ns + 1/2 UI |
|                                                                                                                                                                                                             |                                       | —      | 0.225  | —      | 0.225  | —      | 0.265  | ns          |
|                                                                                                                                                                                                             |                                       | —      | 0.225  | —      | 0.225  | —      | 0.225  | UI          |
| t <sub>DVE_GDDR2</sub>                                                                                                                                                                                      | Input Data Hold After CLK             | 0.275  | —      | 0.275  | —      | 0.324  | —      | ns + 1/2 UI |
|                                                                                                                                                                                                             |                                       | 0.775  | —      | 0.775  | —      | 0.914  | —      | ns          |
|                                                                                                                                                                                                             |                                       | 0.775  | —      | 0.775  | —      | 0.775  | —      | UI          |
| t <sub>DIA_GDDR2</sub>                                                                                                                                                                                      | Output Data Invalid After CLK Output  | —      | 0.120  | —      | 0.148  | —      | 0.174  | ns          |
| t <sub>DIB_GDDR2</sub>                                                                                                                                                                                      | Output Data Invalid Before CLK Output | —      | 0.120  | —      | 0.148  | —      | 0.174  | ns          |
| f <sub>DATA_GDDR2</sub>                                                                                                                                                                                     | Input/Output Data Rate                | —      | 1000   | —      | 1000   | —      | 848    | Mbps        |
| f <sub>MAX_GDDR2</sub>                                                                                                                                                                                      | Frequency for ECLK                    | —      | 500    | —      | 500    | —      | 424    | MHz         |
| ½ UI                                                                                                                                                                                                        | Half of Data Bit Time, or 90 degree   | 0.500  | —      | 0.500  | —      | 0.589  | —      | ns          |


| Parameter                                                                                                                                                                        | Description                           | -9     |        | -8     |        | -7     |        | Unit        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|--------|--------|--------|--------|--------|--------|-------------|
|                                                                                                                                                                                  |                                       | Min    | Max    | Min    | Max    | Min    | Max    |             |
| f <sub>PCLK</sub>                                                                                                                                                                | PCLK frequency                        | —      | 250.0  | —      | 250.0  | —      | 212.1  | MHz         |
| Output TX to Input RX Margin per Edge                                                                                                                                            |                                       | 0.105  | —      | 0.077  | —      | 0.091  | —      | ns          |
| <b>Generic DDRX4 Inputs/Outputs with Clock and Data Centered at Pin (GDDR4_RX/TX.ECLK.Centered) using PCLK Clock Input - Figure 3.7 and Figure 3.9</b>                           |                                       |        |        |        |        |        |        |             |
| t <sub>SU_GDDR4</sub>                                                                                                                                                            | Input Data Set-Up Before CLK          | 0.168  | —      | 0.210  | —      | 0.244  | —      | ns          |
|                                                                                                                                                                                  |                                       | 0.252  | —      | 0.252  | —      | 0.252  | —      | UI          |
| t <sub>HO_GDDR4</sub>                                                                                                                                                            | Input Data Hold After CLK             | 0.174  | —      | 0.210  | —      | 0.244  | —      | ns          |
| t <sub>DVB_GDDR4</sub>                                                                                                                                                           | Output Data Valid Before CLK Output   | 0.213  | —      | 0.269  | —      | 0.309  | —      | ns          |
|                                                                                                                                                                                  |                                       | -0.120 | —      | -0.148 | —      | -0.174 | —      | ns + 1/2UI  |
| t <sub>DQVA_GDDR4</sub>                                                                                                                                                          | Output Data Valid After CLK Output    | 0.213  | —      | 0.269  | —      | 0.309  | —      | ns          |
|                                                                                                                                                                                  |                                       | -0.120 | —      | -0.148 | —      | -0.174 | —      | ns + 1/2UI  |
| f <sub>DATA_GDDR4</sub>                                                                                                                                                          | Input/Output Data Rate                | —      | 1500   | —      | 1200   | —      | 1034   | Mbps        |
| f <sub>MAX_GDDR4</sub>                                                                                                                                                           | Frequency for ECLK                    | —      | 750.0  | —      | 600    | —      | 517    | MHz         |
| ½ UI                                                                                                                                                                             | Half of Data Bit Time, or 90 degree   | 0.333  | —      | 0.417  | —      | 0.483  | —      | ns          |
| f <sub>PCLK</sub>                                                                                                                                                                | PCLK Frequency                        | —      | 187.5  | —      | 150.0  | —      | 129.3  | MHz         |
| Output TX to Input RX Margin per Edge                                                                                                                                            |                                       | 0.080  | —      | 0.102  | —      | 0.116  | —      | ns          |
| <b>Generic DDRX4 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR4_RX/TX.ECLK.Aligned) using PCLK Clock Input, Left and Right sides Only - Figure 3.8 and Figure 3.10</b> |                                       |        |        |        |        |        |        |             |
| t <sub>DVA_GDDR4</sub>                                                                                                                                                           | Input Data Valid After CLK            | —      | -0.183 | —      | -0.229 | —      | -0.266 | ns + 1/2 UI |
|                                                                                                                                                                                  |                                       | —      | 0.150  | —      | 0.188  | —      | 0.218  | ns          |
|                                                                                                                                                                                  |                                       | —      | 0.225  | —      | 0.225  | —      | 0.225  | UI          |
| t <sub>DVE_GDDR4</sub>                                                                                                                                                           | Input Data Hold After CLK             | 0.183  | —      | 0.229  | —      | 0.266  | —      | ns + 1/2 UI |
|                                                                                                                                                                                  |                                       | 0.517  | —      | 0.646  | —      | 0.749  | —      | ns          |
|                                                                                                                                                                                  |                                       | 0.775  | —      | 0.775  | —      | 0.775  | —      | UI          |
| t <sub>DIA_GDDR4</sub>                                                                                                                                                           | Output Data Invalid After CLK Output  | —      | 0.120  | —      | 0.148  | —      | 0.17   | ns          |
| t <sub>DIB_GDDR4</sub>                                                                                                                                                           | Output Data Invalid Before CLK Output | —      | 0.120  | —      | 0.148  | —      | 0.174  | ns          |
| f <sub>DATA_GDDR4</sub>                                                                                                                                                          | Input/Output Data Rate                | —      | 1500   | —      | 1200   | —      | 1034   | Mbps        |
| f <sub>MAX_GDDR4</sub>                                                                                                                                                           | Frequency for ECLK                    | —      | 750    | —      | 600    | —      | 517    | MHz         |
| ½ UI                                                                                                                                                                             | Half of Data Bit Time, or 90 degree   | 0.333  | —      | 0.417  | —      | 0.483  | —      | ns          |
| f <sub>PCLK</sub>                                                                                                                                                                | PCLK frequency                        | —      | 187.5  | —      | 150.0  | —      | 129.3  | MHz         |
| Output TX to Input RX Margin per Edge                                                                                                                                            |                                       | 0.030  | —      | 0.040  | —      | 0.044  | —      | ns          |
| <b>Generic DDRX5 Inputs/Outputs with Clock and Data Centered at Pin (GDDR5_RX/TX.ECLK.Centered) using PCLK Clock Input - Figure 3.7 and Figure 3.9</b>                           |                                       |        |        |        |        |        |        |             |
| t <sub>SU_GDDR5</sub>                                                                                                                                                            | Input Data Set-Up Before CLK          | 0.179  | —      | 0.187  | —      | 0.224  | —      | ns          |
|                                                                                                                                                                                  |                                       | 0.224  | —      | 0.224  | —      | 0.224  | —      | UI          |
| t <sub>HO_GDDR5</sub>                                                                                                                                                            | Input Data Hold After CLK             | 0.181  | —      | 0.187  | —      | 0.224  | —      | ns          |
| t <sub>WINDOW_GDDR5C</sub>                                                                                                                                                       | Input Data Valid Window               | 0.36   | —      | 0.374  | —      | 0.448  | —      | ns          |
| t <sub>DVB_GDDR5</sub>                                                                                                                                                           | Output Data Valid Before CLK Output   | 0.280  | —      | 0.269  | —      | 0.326  | —      | ns          |
|                                                                                                                                                                                  |                                       | -0.120 | —      | -0.148 | —      | -0.174 | —      | ns+1/2UI    |
| t <sub>DQVA_GDDR5</sub>                                                                                                                                                          | Output Data Valid After CLK Output    | 0.280  | —      | 0.269  | —      | 0.326  | —      | ns          |
|                                                                                                                                                                                  |                                       | -0.120 | —      | -0.148 | —      | -0.174 | —      | ns+1/2UI    |
| f <sub>DATA_GDDR5</sub>                                                                                                                                                          | Input/Output Data Rate                | —      | 1250   | —      | 1200   | —      | 1000   | Mbps        |
| f <sub>MAX_GDDR5</sub>                                                                                                                                                           | Frequency for ECLK                    | —      | 625    | —      | 600    | —      | 500    | MHz         |

| Parameter                                                                                                                                             | Description                                                                               | -9                                      |        | -8     |        | -7     |        | Unit          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-----------------------------------------|--------|--------|--------|--------|--------|---------------|
|                                                                                                                                                       |                                                                                           | Min                                     | Max    | Min    | Max    | Min    | Max    |               |
| $\frac{1}{2}$ UI                                                                                                                                      | Half of Data Bit Time, or 90 degree                                                       | 0.400                                   | —      | 0.417  | —      | 0.500  | —      | ns            |
| f <sub>PCLK</sub>                                                                                                                                     | PCLK frequency                                                                            | —                                       | 125.0  | —      | 120.0  | —      | 100.0  | MHz           |
| Output TX to Input RX Margin per Edge                                                                                                                 |                                                                                           | 0.120                                   | —      | 0.102  | —      | 0.126  | —      | ns            |
| <b>Generic DDRX5 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR5_RX/TX.ECLK.Aligned) using PCLK Clock Input - Figure 3.8 and Figure 3.10</b> |                                                                                           |                                         |        |        |        |        |        |               |
| t <sub>DVA_GDDR5</sub>                                                                                                                                | Input Data Valid After CLK                                                                | —                                       | -0.220 | —      | -0.229 | —      | -0.275 | ns + 1/2 UI   |
|                                                                                                                                                       |                                                                                           | —                                       | 0.180  | —      | 0.188  | —      | 0.225  | ns            |
|                                                                                                                                                       |                                                                                           | —                                       | 0.225  | —      | 0.225  | —      | 0.225  | UI            |
| t <sub>DVE_GDDR5</sub>                                                                                                                                | Input Data Hold After CLK                                                                 | 0.220                                   | —      | 0.229  | —      | 0.275  | —      | ns + 1/2 UI   |
|                                                                                                                                                       |                                                                                           | 0.620                                   | —      | 0.646  | —      | 0.775  | —      | ns            |
|                                                                                                                                                       |                                                                                           | 0.775                                   | —      | 0.775  | —      | 0.775  | —      | UI            |
| t <sub>WINDOW_GDDR5A</sub>                                                                                                                            | Input Data Valid Window                                                                   | 0.440                                   | —      | 0.458  | —      | 0.550  | —      | ns            |
| t <sub>DIA_GDDR5</sub>                                                                                                                                | Output Data Invalid After CLK Output                                                      | —                                       | 0.120  | —      | 0.148  | —      | 0.174  | ns            |
| t <sub>DIB_GDDR5</sub>                                                                                                                                | Output Data Invalid Before CLK Output                                                     | —                                       | 0.120  | —      | 0.148  | —      | 0.174  | ns            |
| f <sub>DATA_GDDR5</sub>                                                                                                                               | Input/Output Data Rate                                                                    | —                                       | 1250   | —      | 1200   | —      | 1000   | Mbps          |
| f <sub>MAX_GDDR5</sub>                                                                                                                                | Frequency for ECLK                                                                        | —                                       | 625    | —      | 600    | —      | 500    | MHz           |
| $\frac{1}{2}$ UI                                                                                                                                      | Half of Data Bit Time, or 90 degree                                                       | 0.400                                   | —      | 0.417  | —      | 0.500  | —      | ns            |
| f <sub>PCLK</sub>                                                                                                                                     | PCLK frequency                                                                            | —                                       | 125.0  | —      | 120.0  | —      | 100.0  | MHz           |
| Output TX to Input RX Margin per Edge                                                                                                                 |                                                                                           | 0.060                                   | —      | 0.040  | —      | 0.051  | —      | ns            |
| <b>Soft D-PHY DDRX4 Inputs/Outputs with Clock and Data Centered at Pin, using PCLK Clock Input</b>                                                    |                                                                                           |                                         |        |        |        |        |        |               |
| t <sub>SU_GDDR4_MP</sub>                                                                                                                              | Input Data Set-Up Before CLK                                                              | 0.133                                   | —      | 0.167  | —      | 0.193  | —      | ns            |
|                                                                                                                                                       |                                                                                           | 0.2                                     | —      | 0.2    | —      | 0.2    | —      | UI            |
| t <sub>HO_GDDR4_MP</sub>                                                                                                                              | Input Data Hold After CLK                                                                 | 0.133                                   | —      | 0.167  | —      | 0.193  | —      | ns            |
| t <sub>DVB_GDDR4_MP</sub>                                                                                                                             | Output Data Valid Before CLK Output                                                       | 0.133                                   | —      | 0.167  | —      | 0.193  | —      | ns            |
|                                                                                                                                                       |                                                                                           | 0.2                                     | —      | 0.2    | —      | 0.2    | —      | UI            |
| t <sub>DQVA_GDDR4_MP</sub>                                                                                                                            | Output Data Valid After CLK Output                                                        | 0.133                                   | —      | 0.167  | —      | 0.193  | —      | ns            |
|                                                                                                                                                       |                                                                                           | 0.2                                     | —      | 0.2    | —      | 0.2    | —      | UI            |
| f <sub>DATA_GDDR4_MP</sub>                                                                                                                            | Input Data Bit Rate for MIPI PHY                                                          | WLCSP72                                 |        | —      | —      | 1000   | —      | Mbps          |
|                                                                                                                                                       |                                                                                           | QFN72                                   |        | —      | 1250   | —      | 1000   |               |
|                                                                                                                                                       |                                                                                           | csfBGA121, caBGA256, csBGA289, caBGA400 |        | —      | 1500   | —      | 1200   |               |
| $\frac{1}{2}$ UI                                                                                                                                      | Half of Data Bit Time, or 90 degree                                                       | 0.333                                   | —      | 0.417  | —      | 0.483  | —      | ns            |
| f <sub>PCLK</sub>                                                                                                                                     | PCLK frequency                                                                            | —                                       | 187.5  | —      | 150.0  | —      | 129.3  | MHz           |
| Output TX to Input RX Margin per Edge                                                                                                                 |                                                                                           | 0.067                                   | —      | 0.083  | —      | 0.097  | —      | ns            |
| <b>Video DDRX71 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR71_RX.ECLK) using PLL Clock Input - Figure 3.12 and Figure 3.13</b>            |                                                                                           |                                         |        |        |        |        |        |               |
| t <sub>RPBI_DVA</sub>                                                                                                                                 | Input Valid Bit "i" switch from CLK Rising Edge ("i" = 0 to 6, 0 aligns with CLK)         | —                                       | 0.264  | —      | 0.264  | —      | 0.3    | UI            |
|                                                                                                                                                       |                                                                                           | —                                       | -0.250 | —      | -0.250 | —      | -0.249 | ns+(1/2+i)×UI |
| t <sub>RPBI_DVE</sub>                                                                                                                                 | Input Hold Bit "i" switch from CLK Rising Edge ("i" = 0 to 6, 0 aligns with CLK)          | 0.722                                   | —      | 0.722  | —      | 0.7    | —      | UI            |
|                                                                                                                                                       |                                                                                           | 0.235                                   | —      | 0.235  | —      | 0.249  | —      | ns+(1/2+i)×UI |
| t <sub>TPBI_DOV</sub>                                                                                                                                 | Data Output Valid Bit "i" switch from CLK Rising Edge ("i" = 0 to 6, 0 aligns with CLK)   | —                                       | 0.159  | —      | 0.159  | —      | 0.187  | ns+i×UI       |
| t <sub>TPBI_DOI</sub>                                                                                                                                 | Data Output Invalid Bit "i" switch from CLK Rising Edge ("i" = 0 to 6, 0 aligns with CLK) | -0.159                                  | —      | -0.159 | —      | -0.187 | —      | ns+(i+1) ×UI  |
| t <sub>TPBI_skew_UI</sub>                                                                                                                             | TX skew in UI                                                                             | —                                       | 0.150  | —      | 0.150  | —      | 0.150  | UI            |
| t <sub>B</sub>                                                                                                                                        | Serial Data Bit Time, = 1 UI                                                              | 1.058                                   | —      | 1.058  | —      | 1.247  | —      | ns            |


| Parameter                                                                                 | Description                         | -9    |        | -8    |        | -7    |        | Unit        |
|-------------------------------------------------------------------------------------------|-------------------------------------|-------|--------|-------|--------|-------|--------|-------------|
|                                                                                           |                                     | Min   | Max    | Min   | Max    | Min   | Max    |             |
| f <sub>DATA_TX71</sub>                                                                    | DDR71 Serial Data Rate              | —     | 945    | —     | 945    | —     | 802    | Mbps        |
| f <sub>MAX_TX71</sub>                                                                     | DDR71 ECLK Frequency                | —     | 473    | —     | 473    | —     | 401    | MHz         |
| f <sub>CLKIN</sub>                                                                        | 7:1 Clock (PCLK) Frequency          | —     | 135.0  | —     | 135.0  | —     | 114.5  | MHz         |
| Output TX to Input RX Margin per Edge                                                     |                                     | 0.159 | —      | 0.159 | —      | 0.187 | —      | ns          |
| <b>Memory Interface</b>                                                                   |                                     |       |        |       |        |       |        |             |
| <b>DDR3/DDR3L/LPDDR2 READ (DQ Input Data are Aligned to DQS) - Figure 3.8</b>             |                                     |       |        |       |        |       |        |             |
| t <sub>DVBDQ_DDR3</sub><br>t <sub>DVBDQ_DDR3L</sub><br>t <sub>DVBDQ_LPDDR2</sub>          | Data Input Valid before DQS Input   | —     | -0.235 | —     | -0.235 | —     | -0.277 | ns + 1/2 UI |
| t <sub>DVADQ_DDR3</sub><br>t <sub>DVADQ_DDR3L</sub><br>t <sub>DVADQ_LPDDR2</sub>          | Data Input Valid after DQS Input    | 0.235 | —      | 0.235 | —      | 0.277 | —      | ns + 1/2 UI |
| f <sub>DATA_DDR3</sub><br>f <sub>DATA_DDR3L</sub><br>f <sub>DATA_LPDDR2</sub>             | DDR Memory Data Rate                | —     | 1066   | —     | 1066   | —     | 904    | Mb/s        |
| f <sub>MAX_ECLK_DDR3</sub><br>f <sub>MAX_ECLK_DDR3L</sub><br>f <sub>MAX_ECLK_LPDDR2</sub> | DDR Memory ECLK Frequency           | —     | 533    | —     | 533    | —     | 452    | MHz         |
| f <sub>MAX_SCLK_DDR3</sub><br>f <sub>MAX_SCLK_DDR3L</sub><br>f <sub>MAX_SCLK_LPDDR2</sub> | DDR Memory SCLK Frequency           | —     | 133.3  | —     | 133.3  | —     | 113    | MHz         |
| <b>DDR3/DDR3L/LPDDR2 WRITE (DQ Output Data are Centered to DQS) - Figure 3.11</b>         |                                     |       |        |       |        |       |        |             |
| t <sub>DQVBS_DDR3</sub><br>t <sub>DQVBS_DDR3L</sub><br>t <sub>DQVBS_LPDDR2</sub>          | Data Output Valid before DQS Output | —     | -0.235 | —     | -0.235 | —     | -0.277 | ns + 1/2 UI |
| t <sub>DQVAS_DDR3</sub><br>t <sub>DQVAS_DDR3L</sub><br>t <sub>DQVAS_LPDDR2</sub>          | Data Output Valid after DQS Output  | 0.235 | —      | 0.235 | —      | 0.277 | —      | ns + 1/2 UI |
| f <sub>DATA_DDR3</sub><br>f <sub>DATA_DDR3L</sub><br>f <sub>DATA_LPDDR2</sub>             | DDR Memory Data Rate                | —     | 1066   | —     | 1066   | —     | 904    | Mb/s        |
| f <sub>MAX_ECLK_DDR3</sub><br>f <sub>MAX_ECLK_DDR3L</sub><br>f <sub>MAX_ECLK_LPDDR2</sub> | DDR Memory ECLK Frequency           | —     | 533    | —     | 533    | —     | 452    | MHz         |
| f <sub>MAX_SCLK_DDR3</sub><br>f <sub>MAX_SCLK_DDR3L</sub><br>f <sub>MAX_SCLK_LPDDR2</sub> | DDR Memory SCLK Frequency           | —     | 133.3  | —     | 133.3  | —     | 113    | MHz         |

**Notes:**


- Commercial timing numbers are shown. Industrial numbers are typically slower and can be extracted from the Lattice Radiant software.
- General I/O timing numbers are based on LVCMOS 1.8, 8 mA, Fast Slew Rate, 0 pF load.  
Generic DDR timing are numbers based on LVDS I/O.  
DDR3 timing numbers are based on SSTL15.  
LPDDR2 timing numbers are based on HSUL12.
- Uses LVDS I/O standard for measurements.
- Maximum clock frequencies are tested under best case conditions. System performance may vary upon the user environment.
- All numbers are generated with the Lattice Radiant software.
- This clock skew is not the internal clock network skew. The Nexus family devices have very low internal clock network skew that can be approximated to 0 ps. These t<sub>SKW</sub> values measured externally at system level includes additional skew added by the I/O, wire bonding and package ball.

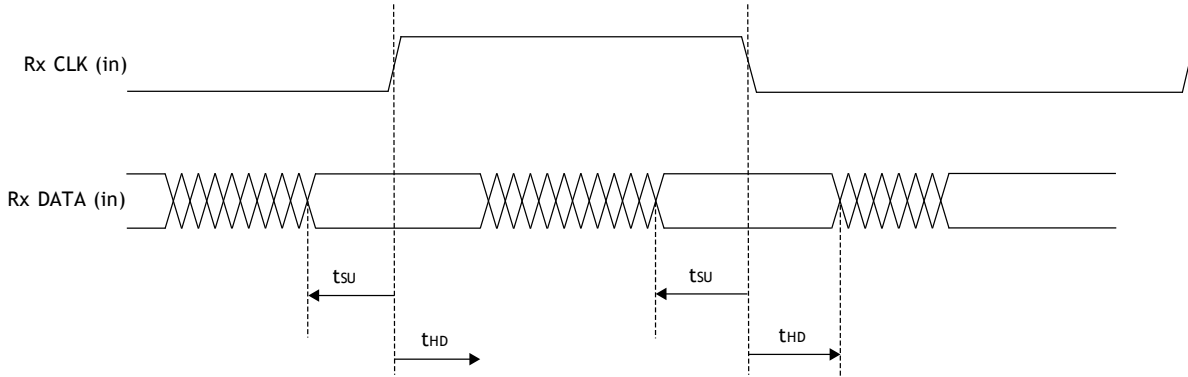

**Figure 3.7. Receiver RX.CLK.Centered Waveforms**

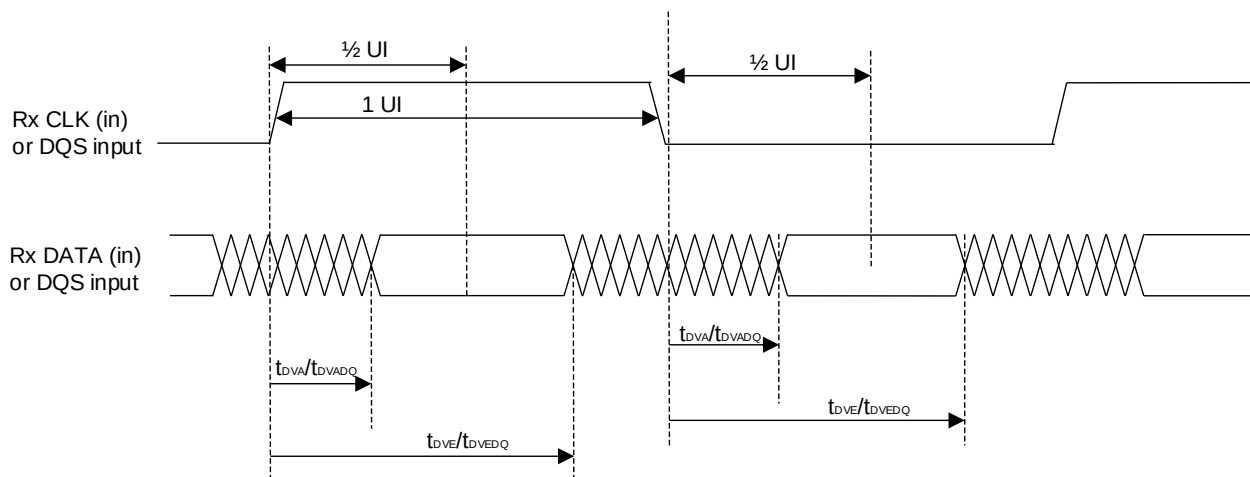

**Figure 3.8. Receiver RX.CLK.Aligned and DDR Memory Input Waveforms**

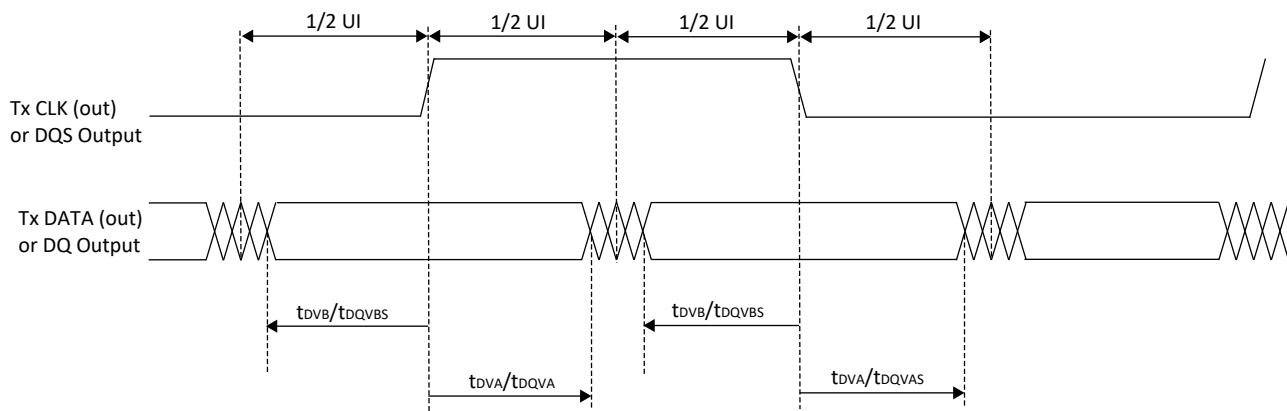

**Figure 3.9. Transmit TX.CLK.Centered and DDR Memory Output Waveforms**




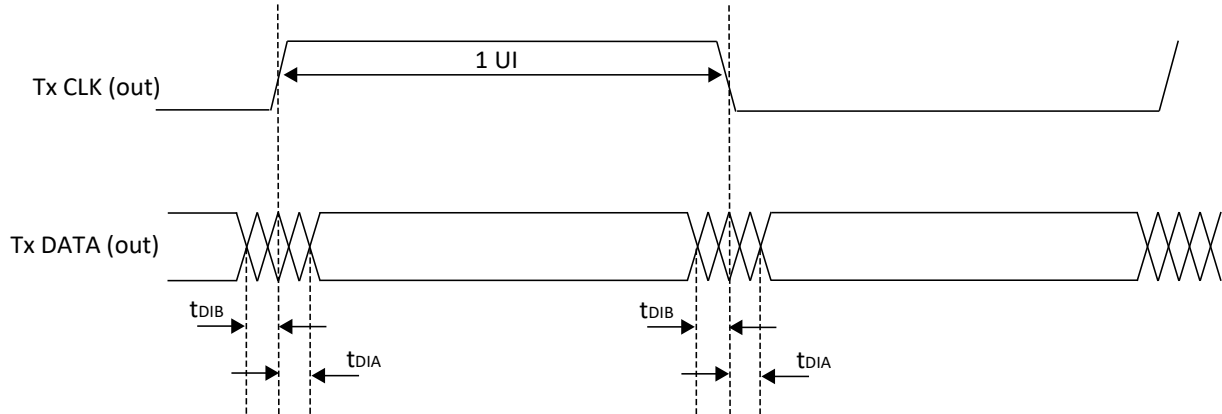


Figure 3.10. Transmit TX.CLK.Aligned Waveforms

Receiver – Shown for one LVDS Channel

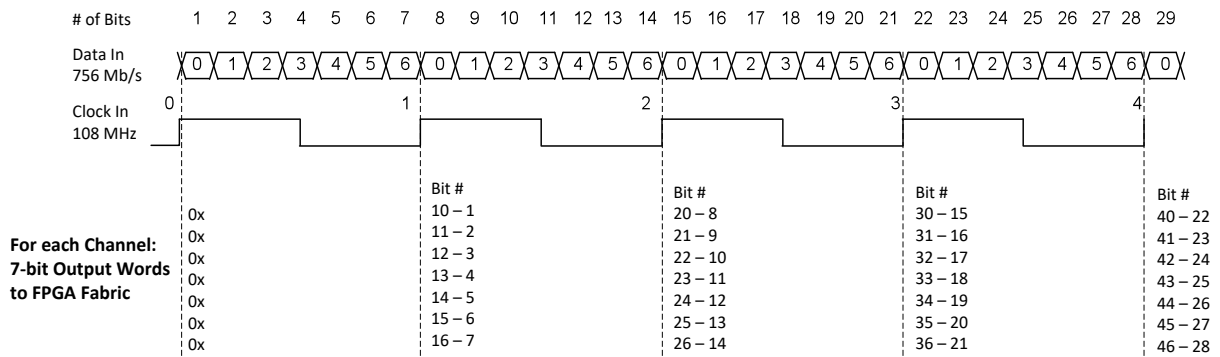

Transmitter – Shown for one LVDS Channel

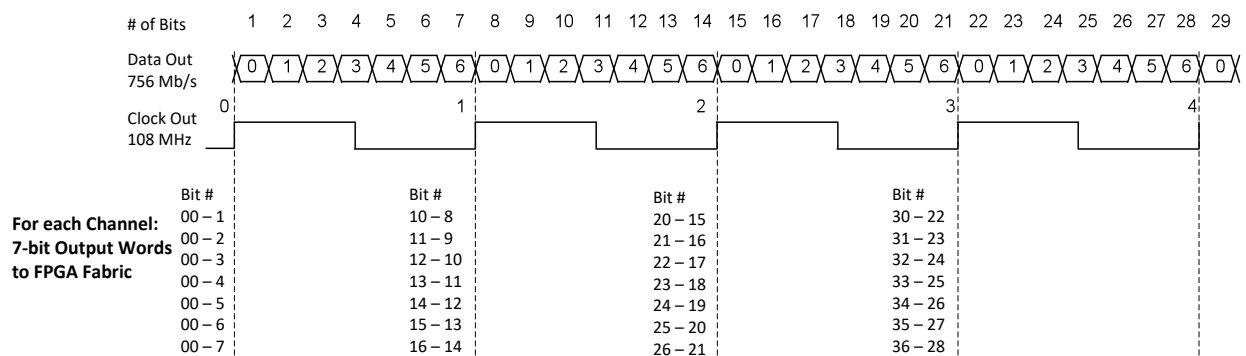


Figure 3.11. DDRX71 Video Timing Waveforms

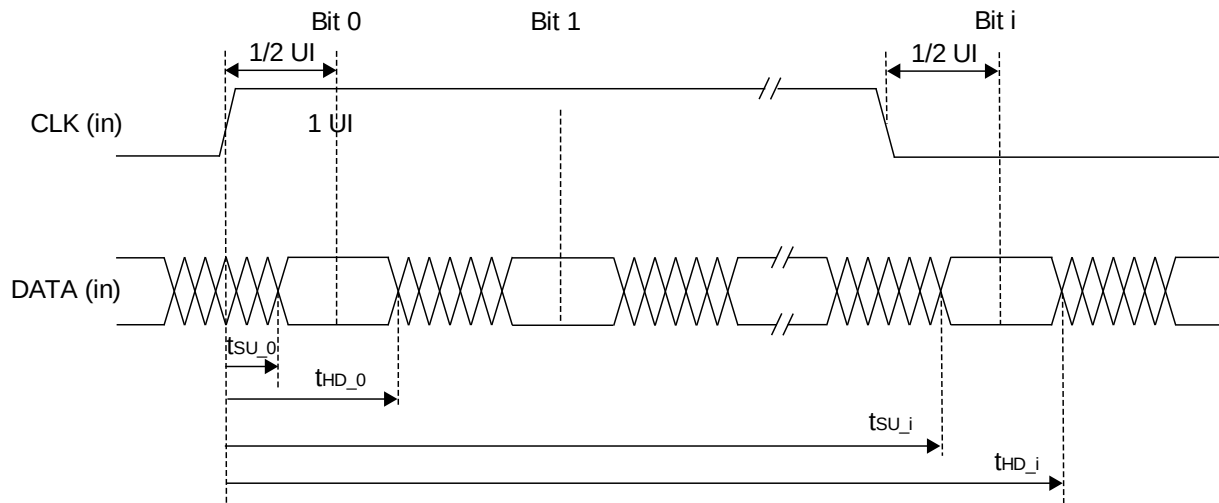


Figure 3.12. Receiver DDRX71\_RX Waveforms

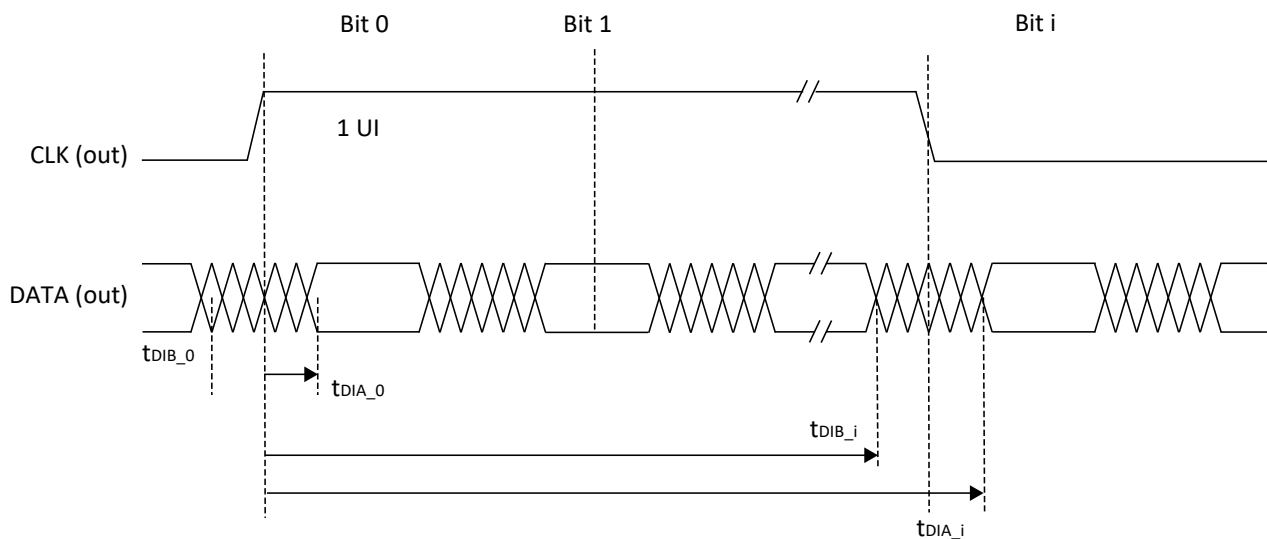


Figure 3.13. Transmitter DDRX71\_TX Waveforms

### 3.18. sysCLOCK PLL Timing ( $V_{CC} = 1.0\text{ V}$ ) – Commercial/Industrial

Table 3.34. sysCLOCK PLL Timing ( $V_{CC} = 1.0\text{ V}$ ) – Commercial/Industrial

| Parameter                    | Descriptions                        | Conditions                   | Min  | Typ. | Max  | Units |
|------------------------------|-------------------------------------|------------------------------|------|------|------|-------|
| f <sub>IN</sub>              | Input Clock Frequency (CLKI, CLKFB) | —                            | 18   | —    | 500  | MHz   |
| f <sub>OUT</sub>             | Output Clock Frequency              | —                            | 6.25 | —    | 800  | MHz   |
| f <sub>VCO</sub>             | PLL VCO Frequency                   | —                            | 800  | —    | 1600 | MHz   |
| f <sub>PFD</sub>             | Phase Detector Input Frequency      | Without Fractional-N Enabled | 18   | —    | 500  | MHz   |
|                              |                                     | With Fractional-N Enabled    | 18   | —    | 100  | MHz   |
| AC Characteristics           |                                     |                              |      |      |      |       |
| t <sub>DT</sub>              | Output Clock Duty Cycle             | —                            | 45   | —    | 55   | %     |
| t <sub>PH</sub> <sup>4</sup> | Output Phase Accuracy               | —                            | –5   | —    | 5    | %     |

| Parameter           | Descriptions                                         | Conditions                                      | Min  | Typ. | Max  | Units  |
|---------------------|------------------------------------------------------|-------------------------------------------------|------|------|------|--------|
| $t_{OPJIT}^1$       | Output Clock Period Jitter                           | $f_{OUT} \geq 200$ MHz                          | —    | —    | 250  | ps p-p |
|                     |                                                      | $f_{OUT} < 200$ MHz                             | —    | —    | 0.05 | UIPP   |
|                     | Output Clock Cycle-to-Cycle Jitter                   | $f_{OUT} \geq 200$ MHz                          | —    | —    | 250  | ps p-p |
|                     |                                                      | $f_{OUT} < 200$ MHz                             | —    | —    | 0.05 | UIPP   |
|                     | Output Clock Phase Jitter                            | $f_{PFD} \geq 200$ MHz                          | —    | —    | 250  | ps p-p |
|                     |                                                      | $60 \text{ MHz} \leq f_{PFD} < 200 \text{ MHz}$ | —    | —    | 350  | ps p-p |
|                     |                                                      | $30 \text{ MHz} \leq f_{PFD} < 60 \text{ MHz}$  | —    | —    | 450  | ps p-p |
|                     |                                                      | $18 \text{ MHz} \leq f_{PFD} < 30 \text{ MHz}$  | —    | —    | 650  | ps p-p |
|                     | Output Clock Period Jitter (Fractional-N)            | $f_{OUT} \geq 200$ MHz                          | —    | —    | 350  | ps p-p |
|                     |                                                      | $f_{OUT} < 200$ MHz                             | —    | —    | 0.07 | UIPP   |
|                     | Output Clock Cycle-to-Cycle Jitter (Fractional-N)    | $f_{OUT} \geq 200$ MHz                          | —    | —    | 400  | ps p-p |
|                     |                                                      | $f_{OUT} < 200$ MHz                             | —    | —    | 0.08 | UIPP   |
| $f_{BW}^3$          | PLL Loop Bandwidth                                   | —                                               | 0.45 | —    | 13   | MHz    |
| $t_{LOCK}^2$        | PLL Lock-in Time                                     | —                                               | —    | —    | 10   | ms     |
| $t_{UNLOCK}$        | PLL Unlock Time (from RESET goes HIGH)               | —                                               | —    | —    | 50   | ns     |
| $t_{IPJIT}$         | Input Clock Period Jitter                            | $f_{PFD} \geq 20$ MHz                           | —    | —    | 0.01 | UIPP   |
|                     |                                                      | $f_{PFD} < 20$ MHz                              | —    | —    | 500  | ps p-p |
| $t_{HI}$            | Input Clock High Time                                | 90% to 90%                                      | 0.5  | —    | —    | ns     |
| $t_{LO}$            | Input Clock Low Time                                 | 10% to 10%                                      | 0.5  | —    | —    | ns     |
| $t_{RST}$           | RST/ Pulse Width                                     | —                                               | 1    | —    | —    | ms     |
| $f_{SS\_MOD}$       | Spread Spectrum Clock Modulation                     | —                                               | 20   | —    | 200  | kHz    |
| $f_{SS\_MOD\_AMP}$  | Spread Spectrum Clock Modulation Amplitude Range     | —                                               | 0.25 | —    | 2.00 | %      |
| $f_{SS\_MOD\_STEP}$ | Spread Spectrum Clock Modulation Amplitude Step Size | —                                               | —    | 0.25 | —    | %      |

**Notes:**

1. Jitter sample is taken over 10,000 samples for Period jitter, and 1,000 samples for Cycle-to-Cycle jitter of the primary PLL output with clean reference clock with no additional I/O toggling.
2. Output clock is valid after  $t_{LOCK}$  for PLL reset and dynamic delay adjustment.
3. Result from Lattice Radiant software.
4. CLKOS as compared to CLKOP output for one phase step at the maximum VCO frequency.

## 3.19. Internal Oscillators Characteristics

**Table 3.35. Internal Oscillators ( $V_{CC} = 1.0$  V)**

| Symbol        | Parameter Description                | Min   | Typ | Max   | Unit |
|---------------|--------------------------------------|-------|-----|-------|------|
| $f_{CLKHF}$   | HFOSC CLKK Clock Frequency           | 418.5 | 450 | 481.5 | MHz  |
| $f_{CLKLF}$   | LFOSC CLKK Clock Frequency           | 25.6  | 32  | 38.4  | kHz  |
| $DCH_{CLKHF}$ | HFOSC Duty Cycle (Clock High Period) | 45    | 50  | 55    | %    |
| $DCH_{CLKLF}$ | LFOSC Duty Cycle (Clock High Period) | 45    | 50  | 55    | %    |

## 3.20. User I2C Characteristics

**Table 3.36. User I2C Specifications ( $V_{CC} = 1.0\text{ V}$ )**

| Symbol        | Parameter Description              | STD Mode |     |     | FAST Mode |     |     | FAST Mode Plus <sup>2</sup> |     |      | Units |
|---------------|------------------------------------|----------|-----|-----|-----------|-----|-----|-----------------------------|-----|------|-------|
|               |                                    | Min      | Typ | Max | Min       | Typ | Max | Min                         | Typ | Max  |       |
| $f_{SCL}$     | SCL Clock Frequency                | —        | —   | 100 | —         | —   | 400 | —                           | —   | 1000 | kHz   |
| $T_{DELAY}^1$ | Optional delay through delay block | —        | —   | 62  | —         | —   | 62  | —                           | —   | 62   | ns    |

**Notes:**

1. Refer to the I2C Specification for timing requirements. User design should set constraints in Lattice Design software to meet this industrial I2C Specification.
2. Fast Mode Plus maximum speed may be achieved by using external pull up resistor on I2C bus. Internal pull up may not be sufficient to support the maximum speed.

## 3.21. Analog-Digital Converter (ADC) Block Characteristics

**Table 3.37. ADC Specifications<sup>1</sup>**

| Symbol             | Description                                                    | Condition                                     | Min                               | Typ                 | Max                               | Unit                |
|--------------------|----------------------------------------------------------------|-----------------------------------------------|-----------------------------------|---------------------|-----------------------------------|---------------------|
| $V_{REFINT\_ADC}$  | ADC Internal Reference Voltage <sup>4</sup>                    | —                                             | 1.14 <sup>2</sup>                 | 1.2                 | 1.26 <sup>2</sup>                 | V                   |
| $V_{REFEXT\_ADC}$  | ADC External Reference Voltage                                 | —                                             | 1.0                               | —                   | 1.8                               | V                   |
| $N_{RES\_ADC}$     | ADC Resolution                                                 | —                                             | —                                 | 12                  | —                                 | bits                |
| $ENOB_{ADC}$       | Effective Number of Bits                                       | —                                             | 9.9                               | 11                  | —                                 | bits                |
| $V_{SR\_ADC}$      | ADC Input Range                                                | Bipolar Mode, Internal $V_{REF}$              | $V_{CM\_ADC} - V_{REFINT\_ADC}/4$ | $V_{CM\_ADC}$       | $V_{CM\_ADC} + V_{REFINT\_ADC}/4$ | V                   |
|                    |                                                                | Bipolar Mode, External $V_{REF}$              | $V_{CM\_ADC} - V_{REFEXT\_ADC}/4$ | $V_{REFEXT\_ADC}$   | $V_{CM\_ADC} + V_{REFEXT\_ADC}/4$ | V                   |
|                    |                                                                | Uni-polar Mode, Internal $V_{REF}$            | 0                                 | —                   | $V_{REFINT\_ADC}$                 | V                   |
|                    |                                                                | Uni-polar Mode, External $V_{REF}$            | 0                                 | —                   | $V_{REFEXT\_ADC}$                 | V                   |
| $V_{CM\_ADC}$      | ADC Input Common Mode Voltage (for fully differential signals) | Internal $V_{REF}$                            | —                                 | $V_{REFINT\_ADC}/2$ | —                                 | V                   |
|                    |                                                                | External $V_{REF}$                            | —                                 | $V_{REFEXT\_ADC}/2$ | —                                 | V                   |
| $f_{CLK\_ADC}$     | ADC Clock Frequency                                            | —                                             | —                                 | 25                  | 50                                | MHz                 |
| $f_{INPUT\_ADC}$   | ADC Input Frequency                                            | @ Sampling Frequency = 1 Mbps                 | —                                 | —                   | 500                               | kHz                 |
| $FS_{ADC}$         | ADC Sampling Rate                                              | —                                             | —                                 | 1                   | —                                 | MS/s                |
| $N_{TRACK\_ADC}$   | ADC Input Tracking Time                                        | —                                             | 4                                 | —                   | —                                 | cycles <sup>3</sup> |
| $R_{IN\_ADC}$      | ADC Input Equivalent Resistance                                | —                                             | —                                 | 116                 | —                                 | k $\Omega$          |
| $t_{CAL\_ADC}$     | ADC Calibration Time                                           | —                                             | —                                 | —                   | 6500                              | cycles <sup>3</sup> |
| $t_{LOUTput\_ADC}$ | ADC Conversion Time                                            | Includes minimum tracking time of four cycles | 25                                | —                   | —                                 | cycles <sup>3</sup> |
| $DNL_{ADC}$        | ADC Differential Nonlinearity                                  | —                                             | –1                                | —                   | 1                                 | LSB                 |
| $INL_{ADC}$        | ADC Integral Nonlinearity                                      | —                                             | –2 <sup>2</sup>                   | —                   | 2.21                              | LSB                 |
| $SFDR_{ADC}$       | ADC Spurious Free Dynamic Range                                | —                                             | 67.7                              | 77                  | —                                 | dBc                 |
| $THD_{ADC}$        | ADC Total Harmonic Distortion                                  | —                                             | —                                 | –76                 | –66.8                             | dB                  |

| Symbol                    | Description                               | Condition | Min  | Typ | Max | Unit                |
|---------------------------|-------------------------------------------|-----------|------|-----|-----|---------------------|
| SNR <sub>ADC</sub>        | ADC Signal to Noise Ratio                 | —         | 61.9 | 68  | —   | dB                  |
| SNDR <sub>ADC</sub>       | ADC Signal to Noise Plus Distortion Ratio | —         | 61.7 | 67  | —   | dB                  |
| ERR <sub>GAIN_ADC</sub>   | ADC Gain Error                            | —         | –0.5 | —   | 0.5 | % FS <sub>ADC</sub> |
| ERR <sub>OFFSET_ADC</sub> | ADC Offset Error                          | —         | –2   | —   | 2   | LSB                 |
| C <sub>IN_ADC</sub>       | ADC Input Equivalent Capacitance          | —         | —    | 2   | —   | pF                  |

**Notes:**

1. ADC is available in Commercial/Industrial –8 and –9 speed grades.
2. Not tested; guaranteed by design.
3. ADC Sample Clock cycles. See [ADC User Guide for Nexus Platform \(FPGA-TN-02129\)](#) for more details.
4. The internal voltage reference is only for internal testing purposes. It is not recommended for customer design. The user should always use the part with external voltage.

## 3.22. Comparator Block Characteristics

**Table 3.38. Comparator Specifications<sup>1</sup>**

| Symbol                    | Description                 | Min | Typ | Max                  | Unit |
|---------------------------|-----------------------------|-----|-----|----------------------|------|
| f <sub>IN_COMP</sub>      | Comparator Input Frequency  | —   | —   | 10                   | MHz  |
| V <sub>IN_COMP</sub>      | Comparator Input Voltage    | 0   | —   | V <sub>CCADC18</sub> | V    |
| V <sub>OFFSET_COMP</sub>  | Comparator Input Offset     | –23 | —   | 24                   | mV   |
| V <sub>HYST_COMP</sub>    | Comparator Input Hysteresis | 10  | —   | 31                   | mV   |
| V <sub>LATENCY_COMP</sub> | Comparator Latency          | —   | —   | 31                   | ns   |

**Note:**

1. Comparator is available in select speed grades. See [Ordering Information](#).

## 3.23. Digital Temperature Readout Characteristics

Digital temperature Readout (DTR) is implemented in one of the channels of ADC1.

**Table 3.39. DTR Specifications<sup>1, 2</sup>**

| Symbol                    | Description                  | Condition                                                               | Min  | Typ | Max | Unit |
|---------------------------|------------------------------|-------------------------------------------------------------------------|------|-----|-----|------|
| DTR <sub>RANGE</sub>      | DTR Detect Temperature Range | —                                                                       | –40  | —   | 100 | °C   |
| DTR <sub>ACCURACY</sub>   | DTR Accuracy                 | with external voltage <sup>1</sup><br>reference range of 1.0 V to 1.8 V | –13  | ±4  | 13  | °C   |
| DTR <sub>RESOLUTION</sub> | DTR Resolution               | with external voltage<br>reference                                      | –0.3 | —   | 0.3 | °C   |

**Notes:**

1. External voltage reference (VREF) should be 0.1% accurate or better. DTR sensitivity to VREF is –4.1 °C per VREF per-cent (for example, if the VREF is 1 % low, then the DTR will read +4.1 °C high).
2. DTR is available in Commercial/Industrial –8 and –9 speed grades.

## 3.24. Hardened MIPI D-PHY Characteristics

**Table 3.40. Hardened D-PHY Input Timing and Levels**

| Symbol                                                   | Description                                                 | Conditions                                                         | Min | Typ | Max | Unit     |
|----------------------------------------------------------|-------------------------------------------------------------|--------------------------------------------------------------------|-----|-----|-----|----------|
| <b>High Speed (Differential) Input DC Specifications</b> |                                                             |                                                                    |     |     |     |          |
| $V_{CMRX(DC)}$                                           | Common-mode Voltage in High Speed Mode                      | —                                                                  | 70  | —   | 330 | mV       |
| $V_{IDTH}$                                               | Differential Input HIGH Threshold                           | $0.08 \text{ Gbps} \leq V_{IDTH} \leq 1.5 \text{ Gbps}$            | 70  | —   | —   | mV       |
|                                                          |                                                             | $1.5 \text{ Gbps} < V_{IDTH} \leq 2.5 \text{ Gbps}$                | 40  | —   | —   | mV       |
| $V_{IDTL}$                                               | Differential Input LOW Threshold                            | $0.08 \text{ Gbps} \leq V_{IDTL} \leq 1.5 \text{ Gbps}$            | —   | —   | –70 | mV       |
|                                                          |                                                             | $1.5 \text{ Gbps} < V_{IDTL} \leq 2.5 \text{ Gbps}$                | —   | —   | –40 | mV       |
| $V_{IHHS}$                                               | Input HIGH Voltage (for HS mode)                            | —                                                                  | —   | —   | 460 | mV       |
| $V_{ILHS}$                                               | Input LOW Voltage                                           | —                                                                  | –40 | —   | —   | mV       |
| $V_{TERM-EN}$                                            | Single-ended voltage for HS Termination Enable <sup>4</sup> | —                                                                  | —   | —   | 450 | mV       |
| $Z_{ID}$                                                 | Differential Input Impedance                                | —                                                                  | 80  | 100 | 125 | $\Omega$ |
| <b>High Speed (Differential) Input AC Specifications</b> |                                                             |                                                                    |     |     |     |          |
| $\Delta V_{CMRX(HF)}^1$                                  | Common-mode Interference (>450 MHz)                         | $0.08 \text{ Gbps} \leq \Delta V_{CMRX(HF)} \leq 1.5 \text{ Gbps}$ | —   | —   | 100 | mV       |
|                                                          |                                                             | $1.5 \text{ Gbps} < \Delta V_{CMRX(HF)} \leq 2.5 \text{ Gbps}$     | —   | —   | 50  | mV       |
| $\Delta V_{CMRX(LF)}^{2, 3}$                             | Common-mode Interference (50 MHz–450 MHz)                   | $0.08 \text{ Gbps} \leq \Delta V_{CMRX(LF)} \leq 1.5 \text{ Gbps}$ | –50 | —   | 50  | mV       |
|                                                          |                                                             | $1.5 \text{ Gbps} < \Delta V_{CMRX(LF)} \leq 2.5 \text{ Gbps}$     | –25 | —   | 25  | mV       |
| $C_{CM}$                                                 | Common-mode Termination                                     | —                                                                  | —   | —   | 60  | pF       |
| <b>Low Power (Single-Ended) Input DC Specifications</b>  |                                                             |                                                                    |     |     |     |          |
| $V_{IH}$                                                 | Low Power Mode Input HIGH Voltage                           | —                                                                  | 760 | —   | —   | mV       |
| $V_{IL}$                                                 | Low Power Mode Input LOW Voltage                            | —                                                                  | —   | —   | 550 | mV       |
| $V_{IL-ULP}$                                             | Ultra Low Power Input LOW Voltage                           | —                                                                  | —   | —   | 300 | mV       |
| $V_{HYST}$                                               | Low Power Mode Input Hysteresis                             | —                                                                  | 25  | —   | —   | mV       |
| $e_{SPIKE}$                                              | Input Pulse Rejection                                       | —                                                                  | —   | —   | 300 | V·ps     |
| $T_{MIN-RX}$                                             | Minimum Pulse Width Response                                | —                                                                  | 20  | —   | —   | ns       |
| $V_{INT}$                                                | Peak Interference Amplitude                                 | —                                                                  | —   | —   | 200 | mV       |
| $f_{INT}$                                                | Interference Frequency                                      | —                                                                  | 450 | —   | —   | MHz      |
| <b>Contention Detector (LP-CD) DC Specifications</b>     |                                                             |                                                                    |     |     |     |          |
| $V_{IHCD}$                                               | Contention Detect HIGH Voltage                              | —                                                                  | 450 | —   | —   | mV       |
| $V_{ILCD}$                                               | Contention Detect LOW Voltage                               | —                                                                  | —   | —   | 200 | mV       |

**Notes:**

1. This is peak amplitude of sine wave modulated to the receiver inputs.
2. Input common-mode voltage difference compared to average common-mode voltage on the receiver inputs.
3. Exclude any static ground shift of 50 mV.
4. High Speed Differential  $R_{TERM}$  is enabled when both DP and DN are below this voltage.

Table 3.41. Hardened D-PHY Output Timing and Levels

| Symbol                                             | Description                                                  | Conditions                                                                | Min  | Typ | Max  | Unit              |
|----------------------------------------------------|--------------------------------------------------------------|---------------------------------------------------------------------------|------|-----|------|-------------------|
| High Speed (Differential) Output DC Specifications |                                                              |                                                                           |      |     |      |                   |
| V <sub>CMTX</sub>                                  | Common-mode Voltage in High Speed Mode                       | —                                                                         | 150  | 200 | 250  | mV                |
| ΔV <sub>CMTX(1,0)</sub>                            | V <sub>CMTX</sub> Mismatch Between Differential HIGH and LOW | —                                                                         | —    | —   | 5    | mV                |
| V <sub>OD</sub>                                    | Output Differential Voltage                                  | D-PHY-P – D-PHY-N                                                         | 140  | 200 | 270  | mV                |
| ΔV <sub>OD</sub>                                   | V <sub>OD</sub> Mismatch Between Differential HIGH and LOW   | —                                                                         | —    | —   | 14   | mV                |
| V <sub>OHHS</sub>                                  | Single-Ended Output HIGH Voltage                             | —                                                                         | —    | —   | 360  | mV                |
| Z <sub>OS</sub>                                    | Single Ended Output Impedance                                | —                                                                         | 40   | 50  | 68   | Ω                 |
| ΔZ <sub>OS</sub>                                   | Z <sub>OS</sub> mismatch                                     | —                                                                         | —    | —   | 20   | %                 |
| High Speed (Differential) Output AC Specifications |                                                              |                                                                           |      |     |      |                   |
| ΔV <sub>CMTX(LF)</sub>                             | Common-Mode Variation, 50 MHz – 450 MHz                      | —                                                                         | —    | —   | 25   | mV <sub>RMS</sub> |
| ΔV <sub>CMTX(HF)</sub>                             | Common-Mode Variation, above 450 MHz                         | —                                                                         | —    | —   | 15   | mV <sub>RMS</sub> |
| t <sub>R</sub>                                     | Output 20%–80% Rise Time                                     | 0.08 Gbps ≤ t <sub>R</sub> ≤ 1 Gbps                                       | —    | —   | 0.30 | UI                |
|                                                    |                                                              | 1 Gbps < t <sub>R</sub> ≤ 1.5 Gbps                                        | —    | —   | 0.35 | UI                |
|                                                    |                                                              | t <sub>R</sub> ≤ 1.5 Gbps                                                 | 100  | —   | —    | ps                |
|                                                    |                                                              | 1.5 Gbps < t <sub>R</sub> ≤ 2.5 Gbps                                      | —    | —   | 0.40 | UI                |
|                                                    |                                                              | t <sub>R</sub> > 1.5 Gbps                                                 | 50   | —   | —    | ps                |
| t <sub>F</sub>                                     | Output 80%–20% Fall Time                                     | 0.08 Gbps ≤ t <sub>F</sub> ≤ 1 Gbps                                       | —    | —   | 0.30 | UI                |
|                                                    |                                                              | 1 Gbps < t <sub>F</sub> ≤ 1.5 Gbps                                        | —    | —   | 0.35 | UI                |
|                                                    |                                                              | t <sub>F</sub> ≤ 1.5 Gbps                                                 | 100  | —   | —    | ps                |
|                                                    |                                                              | 1.5 Gbps < t <sub>F</sub> ≤ 2.5 Gbps                                      | —    | —   | 0.40 | UI                |
|                                                    |                                                              | t <sub>F</sub> > 1.5 Gbps                                                 | 50   | —   | —    | ps                |
| Low Power (Single-Ended) Output DC Specifications  |                                                              |                                                                           |      |     |      |                   |
| V <sub>OH</sub>                                    | Low Power Mode Output HIGH Voltage                           | 0.08 Gbps ≤ V <sub>OH</sub> ≤ 1.50 Gbps                                   | 1.1  | 1.2 | 1.3  | V                 |
|                                                    |                                                              | V <sub>OH</sub> > 1.50 Gbps                                               | 0.95 | —   | 1.3  | V                 |
| V <sub>OL</sub>                                    | Low Power Mode Input LOW Voltage                             | —                                                                         | –50  | —   | 50   | mV                |
| Z <sub>OLP</sub>                                   | Output Impedance in Low Power Mode                           | —                                                                         | 106  | —   | —    | Ω                 |
| Low Power (Single-Ended) Output AC Specifications  |                                                              |                                                                           |      |     |      |                   |
| t <sub>RLP</sub>                                   | 15%–85% Rise Time                                            | —                                                                         | —    | —   | 25   | ns                |
| t <sub>FLP</sub>                                   | 85%–15% Fall Time                                            | —                                                                         | —    | —   | 25   | ns                |
| t <sub>REOT</sub>                                  | HS – LP Mode Rise and Fall Time, 30%–85%                     | —                                                                         | —    | —   | 35   | ns                |
| T <sub>LP-PULSE-TX</sub>                           | Pulse Width of the LP Exclusive-OR Clock                     | First LP XOR Clock Pulse after STOP State or Last Pulse before STOP State | 40   | —   | —    | ns                |
|                                                    |                                                              | All Other Pulses                                                          | 20   | —   | —    | ns                |
| T <sub>LP-PER-TX</sub>                             | Period of the LP Exclusive-OR Clock                          | —                                                                         | 90   | —   | —    | ns                |
| δV/δt <sub>SR</sub>                                | Slew Rate @ C <sub>LOAD</sub> = 0 pF                         | —                                                                         | —    | —   | 500  | mV/ns             |

| Symbol     | Description                                             | Conditions | Min                                     | Typ | Max | Unit  |
|------------|---------------------------------------------------------|------------|-----------------------------------------|-----|-----|-------|
|            | Slew Rate @ $C_{LOAD} = 5$ pF                           | —          | —                                       | —   | 300 | mV/ns |
|            | Slew Rate @ $C_{LOAD} = 20$ pF                          | —          | —                                       | —   | 250 | mV/ns |
|            | Slew Rate @ $C_{LOAD} = 70$ pF                          | —          | —                                       | —   | 150 | mV/ns |
|            | Slew Rate @ $C_{LOAD} = 0$ to 70 pF (Falling Edge Only) | —          | 30                                      | —   | —   | mV/ns |
|            |                                                         | —          | 25                                      | —   | —   | mV/ns |
|            | Slew Rate @ $C_{LOAD} = 0$ to 70 pF (Rising Edge Only)  | —          | 30                                      | —   | —   | mV/ns |
|            |                                                         | —          | 25                                      | —   | —   | mV/ns |
|            | Slew Rate @ $C_{LOAD} = 0$ to 70 pF (Rising Edge Only)  | —          | $30 - 0.075 \times (V_{O,INST} - 700)$  | —   | —   | mV/ns |
|            |                                                         | —          | $25 - 0.0625 \times (V_{O,INST} - 550)$ | —   | —   | mV/ns |
| $C_{LOAD}$ | Load Capacitance                                        | —          | 0                                       | —   | 70  | pF    |

**Table 3.42. Hardened D-PHY Pin Characteristic Specifications**

| Symbol                                   | Description                                                         | Conditions | Min   | Typ | Max  | Unit |
|------------------------------------------|---------------------------------------------------------------------|------------|-------|-----|------|------|
| <b>Pin Characteristic Specifications</b> |                                                                     |            |       |     |      |      |
| $V_{PIN}$                                | Pin Signal Voltage Range                                            | —          | –50   | —   | 1350 | mV   |
| $V_{PIN\_LVLP}$                          | Pin Signal Voltage Range in LVLP Operation                          | —          | –50   | —   | 1150 | mV   |
| $I_{LEAK}$                               | Pin Leakage Current                                                 | —          | –100  | —   | 100  | μA   |
| $V_{GNDSH}$                              | Ground Shift                                                        | —          | –50   | —   | 50   | mV   |
| $V_{PIN(absmax)}$                        | Transient Pin Voltage Level                                         | —          | –0.15 | —   | 1.45 | V    |
| $T_{VPIN(absmax)}$                       | Maximum Transient Time above $V_{PIN(max)}$ or below $V_{PIN(min)}$ | —          | —     | —   | 20   | ns   |

**Table 3.43. Hardened D-PHY Clock Signal Specification**

| Symbol                            | Description | Conditions | Min  | Typ | Max  | Unit |
|-----------------------------------|-------------|------------|------|-----|------|------|
| <b>Clock Signal Specification</b> |             |            |      |     |      |      |
| UI<br>Instantaneous               | $UI_{INST}$ | —          | —    | —   | 12.5 | ns   |
| UI Variation                      | $\Delta UI$ | —          | –10% | —   | 10%  | UI   |
|                                   |             | —          | –5%  | —   | 5%   | UI   |

**Table 3.44. Hardened D-PHY Data-Clock Timing Specifications**

| Symbol                                  | Description                           | Conditions                                                    | Min   | Typ | Max  | Unit        |
|-----------------------------------------|---------------------------------------|---------------------------------------------------------------|-------|-----|------|-------------|
| <b>Data-Clock Timing Specifications</b> |                                       |                                                               |       |     |      |             |
| $T_{SKEW[TX]}$                          | Data to Clock Skew                    | $0.08 \text{ Gbps} \leq T_{SKEW[TX]} \leq 1.00 \text{ Gbps}$  | –0.15 | —   | 0.15 | $UI_{INST}$ |
|                                         |                                       | $1.00 \text{ Gbps} < T_{SKEW[TX]} \leq 1.50 \text{ Gbps}$     | –0.20 | —   | 0.20 | $UI_{INST}$ |
| $T_{SETUP[RX]}$                         | Input Data Setup Before CLK           | $0.08 \text{ Gbps} \leq T_{SETUP[RX]} \leq 1.00 \text{ Gbps}$ | 0.15  | —   | —    | UI          |
|                                         |                                       | $1.00 \text{ Gbps} < T_{SETUP[RX]} \leq 1.50 \text{ Gbps}$    | 0.20  | —   | —    | UI          |
| $T_{HOLD[RX]}$                          | Input Data Hold After CLK             | $0.08 \text{ Gbps} \leq T_{HOLD[RX]} \leq 1.00 \text{ Gbps}$  | 0.15  | —   | —    | UI          |
|                                         |                                       | $1.00 \text{ Gbps} < T_{HOLD[RX]} \leq 1.50 \text{ Gbps}$     | 0.20  | —   | —    | UI          |
| $F_{IN\_DPHY}$                          | Input frequency to Hardened D-PHY PLL | —                                                             | 24    |     | 200  | MHz         |



| Symbol                                                  | Description                                    | Conditions | Min   | Typ | Max  | Unit               |
|---------------------------------------------------------|------------------------------------------------|------------|-------|-----|------|--------------------|
| $T_{\text{SKEW[TX]}}$<br>Dynamic                        | Dynamic Data to Clock Skew (Tx)                | > 1.5 Gbps | −0.15 | —   | 0.15 | UI <sub>INST</sub> |
| ISI                                                     | Channel ISI                                    | > 1.5 Gbps | —     | —   | 0.20 | UI <sub>INST</sub> |
| $T_{\text{SETUP[RX]}} + T_{\text{HOLD[RX]}}$<br>Dynamic | Dynamic Data to Clock Skew Window Rx Tolerance | > 1.5 Gbps | 0.50  | —   | —    | UI <sub>INST</sub> |

## 3.25. Hardened PCIe Characteristics

### 3.25.1. PCIe (2.5 Gbps)

Table 3.45. PCIe (2.5 Gbps)

| Symbol                                   | Description                                                       | Condition               | Min.   | Typ. | Max.          | Unit    |
|------------------------------------------|-------------------------------------------------------------------|-------------------------|--------|------|---------------|---------|
| <b>Transmitter<sup>1</sup></b>           |                                                                   |                         |        |      |               |         |
| UI                                       | Unit Interval                                                     | —                       | 399.88 | 400  | 400.12        | ps      |
| BW <sub>TX</sub>                         | Tx PLL bandwidth                                                  | —                       | 1.5    | —    | 22            | MHz     |
| V <sub>TX-DIFF-PP</sub>                  | Differential p-p Tx voltage swing                                 | —                       | 0.8    | —    | 1.2           | Vp-p    |
| V <sub>TX-DIFF-PP-LOW</sub>              | Low power differential p-p Tx voltage swing                       | —                       | 0.4    | —    | 1.2           | Vp-p    |
| V <sub>TX-DE-RATIO-3.5dB</sub>           | Tx de-emphasis level ratio at 3.5 dB                              | —                       | 3      | —    | 4             | dB      |
| T <sub>TX-RISE-FALL</sub>                | Transmitter rise and fall time                                    | —                       | 0.125  | —    | —             | UI      |
| T <sub>TX-EYE</sub>                      | Transmitter Eye, including all jitter sources                     | —                       | 0.75   | —    | —             | UI      |
| T <sub>TX-EYE-MEDIAN-to-MAX-JITTER</sub> | Max. time between jitter median and max deviation from the median | —                       | —      | —    | 0.125         | UI      |
| RL <sub>TX-DIFF</sub>                    | Tx Differential Return Loss, including pkg and silicon            | —                       | 10     | —    | —             | dB      |
| RL <sub>TX-CM</sub>                      | Tx Common Mode Return Loss, including pkg and silicon             | 50 MHz < freq < 2.5 GHz | 6      | —    | —             | dB      |
| Z <sub>TX-DIFF-DC</sub>                  | DC differential Impedance                                         | —                       | 80     | —    | 120           | Ω       |
| V <sub>TX-CM-AC-P</sub>                  | Tx AC peak common mode voltage, RMS                               | —                       | —      | —    | 20            | mV, RMS |
| I <sub>TX-SHORT</sub>                    | Transmitter short-circuit current                                 | —                       | —      | —    | 90            | mA      |
| V <sub>TX-DC-CM</sub>                    | Transmitter DC common-mode voltage                                | —                       | 0      | —    | 1.2           | V       |
| V <sub>TX-IDLE-DIFF-AC-p</sub>           | Electrical Idle Output peak voltage                               | —                       | —      | —    | 20            | mV      |
| V <sub>TX-RCV-DETECT</sub>               | Voltage change allowed during Receiver Detect                     | —                       | —      | —    | 600           | mV      |
| T <sub>TX-IDLE-MIN</sub>                 | Min. time in Electrical Idle                                      | —                       | 20     | —    | —             | ns      |
| T <sub>TX-IDLE-SET-TO-IDLE</sub>         | Max. time from EI Order Set to valid Electrical Idle              | —                       | —      | —    | 8             | ns      |
| T <sub>TX-IDLE-TO-DIFF-DATA</sub>        | Max. time from Electrical Idle to valid differential output       | —                       | —      | —    | 8             | ns      |
| L <sub>TX-SKEW</sub>                     | Lane-to-Lane output skew                                          | —                       | —      | —    | 500 ps + 2 UI | ps      |

| Symbol                                                | Description                                             | Condition | Min.   | Typ. | Max.   | Unit     |
|-------------------------------------------------------|---------------------------------------------------------|-----------|--------|------|--------|----------|
| <b>Receiver<sup>2</sup></b>                           |                                                         |           |        |      |        |          |
| UI                                                    | Unit Interval                                           | —         | 399.88 | 400  | 400.12 | ps       |
| V <sub>RX-DIFF-PP</sub>                               | Differential Rx peak-peak voltage                       | —         | 0.175  | —    | 1.2    | Vp-p     |
| T <sub>RX-EYE</sub> <sup>3</sup>                      | Receiver eye opening time                               | —         | 0.4    | —    | —      | UI       |
| T <sub>RX-EYE-MEDIAN-TO-MAX-JITTER</sub> <sup>3</sup> | Max time delta between median and deviation from median | —         | —      | —    | 0.3    | UI       |
| RL <sub>RX-DIFF</sub>                                 | Receiver differential Return Loss, package plus silicon | —         | 10     | —    | —      | dB       |
| RL <sub>RX-CM</sub>                                   | Receiver common mode Return Loss, package plus silicon  | —         | 6      | —    | —      | dB       |
| Z <sub>RX-DC</sub>                                    | Receiver DC single ended impedance                      | —         | 40     | —    | 60     | Ω        |
| Z <sub>RX-DIFF-DC</sub>                               | Receiver DC differential impedance                      | —         | 80     | —    | 120    | Ω        |
| Z <sub>RX-HIGH-IMP-DC</sub>                           | Receiver DC single ended impedance when powered down    | —         | 200k   | —    | —      | Ω        |
| V <sub>RX-CM-AC-P</sub> <sup>3</sup>                  | Rx AC peak common mode voltage                          | —         | —      | —    | 150    | mV, peak |
| V <sub>RX-IDLE-DET-DIFF-PP</sub>                      | Electrical Idle Detect Threshold                        | —         | 65     | —    | 175    | mVp-p    |
| L <sub>RX-SKEW</sub>                                  | Receiver –lane-lane skew                                | —         | —      | —    | 20     | ps       |

**Notes:**

1. Refer to PCI Express Base Specification Revision 3.0 Table 4.18 test condition and requirement for respective parameters.
2. Refer to PCI Express Base Specification Revision 3.0 Table 4.24 test condition and requirement for respective parameters.
3. Spec compliant requirement

### 3.25.2. PCIe (5 Gbps)

**Table 3.46. PCIe (5 Gbps)**

| Symbol                         | Description                                              | Test Conditions | Min    | Typ | Max    | Unit   |
|--------------------------------|----------------------------------------------------------|-----------------|--------|-----|--------|--------|
| <b>Transmit<sup>1</sup></b>    |                                                          |                 |        |     |        |        |
| UI                             | Unit Interval                                            | —               | 199.94 | 200 | 200.06 | ps     |
| B <sub>WTX-PKG-PLL1</sub>      | Tx PLL bandwidth corresponding to PKG <sub>TX-PLL1</sub> | —               | 8      | —   | 16     | MHz    |
| B <sub>WTX-PKG-PLL2</sub>      | Tx PLL bandwidth corresponding to PKG <sub>TX-PLL2</sub> | —               | 5      | —   | 16     | MHz    |
| P <sub>KGTX-PLL1</sub>         | Tx PLL Peaking corresponding to PKG <sub>TX-PLL1</sub>   | —               | —      | —   | 3      | dB     |
| P <sub>KGTX-PLL2</sub>         | Tx PLL Peaking corresponding to PKG <sub>TX-PLL2</sub>   | —               | —      | —   | 1      | dB     |
| V <sub>TX-DIFF-PP</sub>        | Differential p-p Tx voltage swing                        | —               | 0.8    | —   | 1.2    | V, p-p |
| V <sub>TX-DIFF-PP-LOW</sub>    | Low power differential p-p Tx voltage swing              | —               | 0.4    | —   | 1.2    | V, p-p |
| V <sub>TX-DE-RATIO-3.5dB</sub> | Tx de-emphasis level ratio at 3.5 dB                     | —               | 3      | —   | 4      | dB     |
| V <sub>TX-DE-RATIO-6dB</sub>   | Tx de-emphasis level ratio at 6 dB                       | —               | 5.5    | —   | 6.5    | dB     |
| T <sub>MIN-PULSE</sub>         | Instantaneous lone pulse width                           | —               | 0.9    | —   | —      | UI     |
| T <sub>TX-RISE-FALL</sub>      | Transmitter rise and fall time                           | —               | 0.15   | —   | —      | UI     |

| Symbol                              | Description                                                 | Test Conditions                   | Min               | Typ | Max              | Unit     |
|-------------------------------------|-------------------------------------------------------------|-----------------------------------|-------------------|-----|------------------|----------|
| T <sub>TX-EYE</sub>                 | Transmitter Eye, including all jitter sources               | —                                 | 0.75              | —   | —                | UI       |
| T <sub>TX-DJ</sub>                  | Tx deterministic jitter > 1.5 MHz                           | —                                 | —                 | —   | 0.15             | UI       |
| T <sub>TX-RJ</sub>                  | Tx RMS jitter < 1.5 MHz                                     | —                                 | —                 | —   | 3                | ps, RMS  |
| T <sub>RF-MISMATCH</sub>            | Tx rise/fall time mismatch                                  | —                                 | —                 | —   | 0.1              | UI       |
| R <sub>LTX-DIFF</sub>               | Tx Differential Return Loss, including package and silicon  | 50 MHz < freq < 1.25 GHz          | 10                | —   | —                | dB       |
|                                     |                                                             | 1.25 GHz < freq < 2.5 GHz         | 8                 | —   | —                | dB       |
| R <sub>LTX-CM</sub>                 | Tx Common Mode Return Loss, including package and silicon   | 50 MHz < freq < 2.5 GHz           | 6                 | —   | —                | dB       |
| Z <sub>TX-DIFF-DC</sub>             | DC differential Impedance                                   | —                                 | —                 | —   | 120              | Ω        |
| V <sub>TX-CM-AC-PP</sub>            | Tx AC peak common mode voltage, peak-peak                   | —                                 | —                 | —   | 150              | mV, p-p  |
| I <sub>TX-SHORT</sub>               | Transmitter short-circuit current                           | —                                 | —                 | —   | 90               | mA       |
| V <sub>TX-DC-CM</sub>               | Transmitter DC common-mode voltage                          | —                                 | 0                 | —   | 1.2              | V        |
| V <sub>TX-IDLE-DIFF-DC</sub>        | Electrical Idle Output DC voltage                           | —                                 | 0                 | —   | 5                | mV       |
| V <sub>TX-IDLE-DIFF-AC-p</sub>      | Electrical Idle Differential Output peak voltage            | —                                 | —                 | —   | 20               | mV       |
| V <sub>TX-RCV-DETECT</sub>          | Voltage change allowed during Receiver Detect               | —                                 | —                 | —   | 600              | mV       |
| T <sub>TX-IDLE-MIN</sub>            | Min. time in Electrical Idle                                | —                                 | 20                | —   | —                | ns       |
| T <sub>TX-IDLE-SET-TO-IDLE</sub>    | Max. time from EI Order Set to valid Electrical Idle        | —                                 | —                 | —   | 8                | ns       |
| T <sub>TX-IDLE-TO-DIFF-DATA</sub>   | Max. time from Electrical Idle to valid differential output | —                                 | —                 | —   | 8                | ns       |
| <b>Receive<sup>2</sup></b>          |                                                             |                                   |                   |     |                  |          |
| L <sub>TX-SKEW</sub>                | Lane-to-Lane output skew                                    | —                                 | —                 | —   | 500 + 4 UI       | ps       |
| UI                                  | Unit Interval                                               | —                                 | 199.94            | 200 | 200.06           | ps       |
| V <sub>RX-DIFF-PP</sub>             | Differential Rx peak-peak voltage                           | —                                 | 0.34 <sup>3</sup> | —   | 1.2              | V, p-p   |
| T <sub>RX-RJ-RMS</sub>              | Receiver random jitter tolerance (RMS)                      | 1.5 MHz – 100 MHz<br>Random noise | —                 | —   | 4.2              | ps, RMS  |
| T <sub>RX-DJ</sub>                  | Receiver deterministic jitter tolerance                     | —                                 | —                 | —   | 88               | ps       |
| R <sub>LRX-DIFF</sub>               | Receiver differential Return Loss, package plus silicon     | 50 MHz < freq < 1.25 GHz          | 10                | —   | —                | dB       |
|                                     |                                                             | 1.25 GHz < freq < 2.5 GHz         | 8                 | —   | —                | dB       |
| R <sub>LRX-CM</sub>                 | Receiver common mode Return Loss, package plus silicon      | —                                 | 6                 | —   | —                | dB       |
| Z <sub>RX-DC</sub>                  | Receiver DC single ended impedance                          | —                                 | 40                | —   | 60               | Ω        |
| Z <sub>RX-HIGH-IMP-DC</sub>         | Receiver DC single ended impedance when powered down        | —                                 | 200K              | —   | —                | Ω        |
| V <sub>RX-CM-AC-P<sup>3</sup></sub> | Rx AC peak common mode voltage                              | —                                 | —                 | —   | 150              | mV, peak |
| V <sub>RX-IDLE-DET-DIFF-PP</sub>    | Electrical Idle Detect Threshold                            | —                                 | 65                | —   | 175 <sup>3</sup> | mv, pp   |

| Symbol               | Description              | Test Conditions | Min | Typ | Max | Unit |
|----------------------|--------------------------|-----------------|-----|-----|-----|------|
| L <sub>RX-SKEW</sub> | Receiver –lane-lane skew | —               | —   | —   | 8   | ns   |

**Notes:**

1. Refer to PCI Express Base Specification Revision 3.0 Table 4.18 test condition and requirement for respective parameters.
2. Refer to PCI Express Base Specification Revision 3.0 Table 4.24 test condition and requirement for respective parameters.
3. Spec compliant requirement

## 3.26. SGMII Characteristics

### 3.26.1. SGMII Specifications

**Table 3.47. SGMII**

| Symbol              | Description                                      | Test Conditions              | Min  | Typ  | Max              | Unit |
|---------------------|--------------------------------------------------|------------------------------|------|------|------------------|------|
| f <sub>DATA</sub>   | SGMII Data Rate                                  | —                            | —    | 1250 | —                | MHz  |
| f <sub>REFCLK</sub> | SGMII Reference Clock Frequency (Data Rate / 10) | —                            | —    | 125  | —                | MHz  |
| J <sub>TOL_DJ</sub> | Jitter Tolerance, Deterministic                  | Periodic jitter<br>< 300 kHz | —    | —    | 0.1 <sup>1</sup> | UI   |
| J <sub>TOL_TJ</sub> | Jitter Tolerance, Total                          | Periodic jitter<br>< 300 kHz | —    | —    | 0.3 <sup>1</sup> | UI   |
| Δf/f                | Data Rate and Reference Clock Accuracy           | —                            | –300 | —    | 300              | ppm  |

**Notes:**

1. J<sub>TOT</sub> can meet the following jitter mask specification: 0 to 3.5 kHz: 10 UI; 3.5 to 700 kHz: log-log slope 10 UI to 0.05 UI; above 700 kHz: 0.05 UI.
2. SGMII is not supported on 72-pin packages (QFN and WLCSP).

## 3.27. sysCONFIG Port Timing Specifications

**Table 3.48. sysCONFIG Port Timing Specifications**

| Symbol                                   | Parameter                                                                                                                                                                                               | Device | Min | Typ. | Max | Unit |
|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-----|------|-----|------|
| <b>Controller SPI POR/REFRESH Timing</b> |                                                                                                                                                                                                         |        |     |      |     |      |
| t <sub>ICFG</sub>                        | REFRESH command executed, to the rising edge of INITN (bulk-erase off)                                                                                                                                  | —      | —   | —    | 30  | μs   |
| t <sub>VMC</sub>                         | Time from rising edge of INITN to the valid Controller MCLK                                                                                                                                             | —      | —   | —    | 5   | μs   |
| f <sub>MCLK_DEF</sub>                    | Default MCLK frequency (Before MCLK frequency selection in bitstream)                                                                                                                                   | —      | —   | 3.5  | —   | MHz  |
| t <sub>ICFG_POR</sub>                    | Time during POR, from VCC, VCCAUX, VCCIO0, or VCCIO1 (whichever is the last) pass POR trip voltage, to the rising edge if INITN                                                                         | —      | —   | —    | 5   | ms   |
| <b>Target SPI/I2C/I3C POR</b>            |                                                                                                                                                                                                         |        |     |      |     |      |
| t <sub>MSPI_INH</sub>                    | Time during POR, from V <sub>CC</sub> , V <sub>CCAUX</sub> , V <sub>CCIO0</sub> or V <sub>CCIO1</sub> (whichever is the last) pass POR trip voltage, to pull PROGRAMN LOW to prevent entering MSPI mode | —      | —   | —    | 1   | μs   |
| t <sub>ACT_PROGRAMN_H</sub>              | Minimum time driving PROGRAMN HIGH after last activation clock                                                                                                                                          | —      | 50  | —    | —   | ns   |
| t <sub>CONFIG_CCLK</sub>                 | Minimum time to start driving CCLK (SSPI) after PROGRAMN HIGH                                                                                                                                           | —      | 50  | —    | —   | ns   |

| Symbol                               | Parameter                                                       | Device | Min              | Typ. | Max             | Unit |
|--------------------------------------|-----------------------------------------------------------------|--------|------------------|------|-----------------|------|
| t <sub>CONFIG_SCL</sub>              | Minimum time to start driving SCL (I2C/I3C) after PROGRAMN HIGH | —      | 50               | —    | —               | ns   |
| <b>PROGRAMN Configuration Timing</b> |                                                                 |        |                  |      |                 |      |
| t <sub>PROGRAMN_L</sub>              | PROGRAMN LOW pulse accepted                                     | —      | 50               | —    | —               | ns   |
| t <sub>PROGRAMN_H</sub>              | PROGRAMN HIGH pulse accepted                                    | —      | 60               | —    | —               | ns   |
| t <sub>PROGRAMN_RJ</sub>             | PROGRAMN LOW pulse rejected                                     | —      | —                | —    | 25              | ns   |
| t <sub>INIT_LOW</sub>                | PROGRAMN LOW to INITN LOW                                       | —      | —                | —    | 100             | ns   |
| t <sub>INIT_HIGH</sub>               | PROGRAMN LOW to INITN HIGH (bulk-erase off)                     | —      | —                | —    | 40              | μs   |
| t <sub>DONE_LOW</sub>                | PROGRAMN LOW to DONE LOW                                        | —      | —                | —    | 55              | μs   |
| t <sub>DONE_HIGH</sub> <sup>2</sup>  | PROGRAMN HIGH to DONE HIGH                                      | —      | —                | —    | 2               | s    |
| t <sub>IODISS</sub>                  | PROGRAMN LOW to I/O Disabled                                    | —      | —                | —    | 125             | ns   |
| <b>Controller SPI</b>                |                                                                 |        |                  |      |                 |      |
| f <sub>MCLK</sub> <sup>1</sup>       | Max selected MCLK output frequency                              | —      | —                | 150  | 165             | MHz  |
| f <sub>MCLK_DC</sub>                 | MCLK output clock duty cycle                                    | —      | 40               | —    | 60              | %    |
| t <sub>MCLKH</sub>                   | MCLK output clock pulse width HIGH                              | —      | 3                | —    | —               | ns   |
| t <sub>MCLKL</sub>                   | MCLK output clock pulse width LOW                               | —      | 3                | —    | —               | ns   |
| t <sub>SU_MSI</sub>                  | MSI to MCLK setup time                                          | —      | 3                | —    | —               | ns   |
| t <sub>HD_MSI</sub>                  | MSI to MCLK hold time                                           | —      | 0.5              | —    | —               | ns   |
| t <sub>CO_MSO</sub> <sup>2</sup>     | MCLK to MSO delay                                               | —      | —                | —    | 12              | ns   |
| <b>Target SPI</b>                    |                                                                 |        |                  |      |                 |      |
| f <sub>CCLK_W</sub>                  | CCLK input clock frequency (For write transaction) <sup>4</sup> | —      | —                | —    | 135             | MHz  |
| f <sub>CCLK_R</sub>                  | CCLK input clock frequency (For read transaction) <sup>5</sup>  | —      | —                | —    | — <sup>6</sup>  | MHz  |
| t <sub>CCLKH</sub>                   | CCLK input clock pulse width HIGH                               | —      | 3.5              | —    | —               | ns   |
| t <sub>CCLKL</sub>                   | CCLK input clock pulse width LOW                                | —      | 3.5              | —    | —               | ns   |
| t <sub>VMC_SLAVE</sub>               | Time from rising edge of INITN to Target CCLK driven            | —      | 50               | —    | —               | ns   |
| t <sub>VMC_MASTER</sub>              | CCLK input clock duty cycle                                     | —      | 40               | —    | 60              | %    |
| t <sub>SU_SSI</sub>                  | SSI to CCLK setup time                                          | —      | 3.2              | —    | —               | ns   |
| t <sub>HD_SSI</sub>                  | SSI to CCLK hold time                                           | —      | 1.9              | —    | —               | ns   |
| t <sub>CO_SSO</sub>                  | CCLK falling edge to valid SSO output                           | —      | 3.0 <sup>7</sup> | —    | 16 <sup>7</sup> | ns   |
| t <sub>EN_SSO</sub>                  | CCLK falling edge to SSO output enabled                         | —      | 3.0 <sup>7</sup> | —    | 16 <sup>7</sup> | ns   |
| t <sub>DIS_SSO</sub>                 | CCLK falling edge to SSO output disabled                        | —      | 3.0 <sup>7</sup> | —    | 16 <sup>7</sup> | ns   |
| t <sub>HIGH_SCSN</sub>               | SCSN HIGH time                                                  | —      | 74               | —    | —               | ns   |
| t <sub>SU_SCSN</sub>                 | SCSN to CCLK setup time                                         | —      | 3.5              | —    | —               | ns   |
| t <sub>HD_SCSN</sub>                 | SCSN to CCLK hold time                                          | —      | 1.6              | —    | —               | ns   |
| <b>I2C/I3C</b>                       |                                                                 |        |                  |      |                 |      |
| f <sub>SCL_I2C</sub>                 | SCL input clock frequency for I2C                               | —      | —                | —    | 1               | MHz  |
| f <sub>SCL_I3C</sub>                 | SCL input clock frequency for I3C                               | —      | —                | —    | 12              | MHz  |
| t <sub>SCLH_I2C</sub>                | SCL input clock pulse width HIGH for I2C                        | —      | 400              | —    | —               | ns   |
| t <sub>SCLL_I2C</sub>                | SCL input clock pulse width LOW for I2C                         | —      | 400              | —    | —               | ns   |
| t <sub>SU_SDA_I2C</sub>              | SDA to SCL setup time for I2C                                   | —      | 250              | —    | —               | ns   |
| t <sub>HD_SDA_I2C</sub>              | SDA to SCL hold time for I2C                                    | —      | 50               | —    | —               | ns   |
| t <sub>SU_SDA_I3C</sub>              | SDA to SCL setup time for I3C                                   | —      | 30               | —    | —               | ns   |
| t <sub>HD_SDA_I3C</sub>              | SDA to SCL hold time for I3C                                    | —      | 30               | —    | —               | ns   |

| Symbol                                     | Parameter                                         | Device   | Min | Typ. | Max   | Unit   |
|--------------------------------------------|---------------------------------------------------|----------|-----|------|-------|--------|
| t <sub>CO_SDA</sub>                        | SCL falling edge to valid SDA output              | —        | —   | —    | 200   | ns     |
| t <sub>EN_SDA</sub>                        | SCL falling edge to SDA output enabled            | —        | —   | —    | 200   | ns     |
| t <sub>DIS_SDA</sub>                       | SCL falling edge to SDA output disabled           | —        | —   | —    | 200   | ns     |
| <b>Wake-Up Timing</b>                      |                                                   |          |     |      |       |        |
| t <sub>WAKEUP_DONE_HIGH</sub> <sup>2</sup> | Last configuration clock cycle to DONE going HIGH | —        | —   | —    | 60    | μs     |
| t <sub>FIO_EN</sub> <sup>2</sup>           | User I/O enabled in Early I/O Mode                | LIFCL-40 | —   | —    | 31184 | cycles |
|                                            |                                                   | LIFCL-17 | —   | —    | 20688 | cycles |
| t <sub>IOEN</sub> <sup>2</sup>             | Config clock to user I/O enabled                  | —        | 130 | —    | —     | ns     |
| t <sub>MCLKZ</sub> <sup>2,3</sup>          | Controller MCLK to Hi-Z                           | —        | —   | —    | 2.5   | μs     |

**Notes:**

1. f<sub>MCLK</sub> has a dependency on HFOSC and is 1/3 of f<sub>CLKHF</sub>.
2. Based on 30k uncompressed/unauthenticated/default MCLK timing (3.5 MHz)/x1. Other permutations result in different values.
3. Measure using LVCMOS18, default MCLK frequency, slow slew rate.
4. Supported input clock frequency for bursting in configuration bitstream to the device.
5. Supported input clock frequency for reading out data transactions from the device.
6. Refer to the following equations to determine the supported input clock frequency for read transaction. Assumption: The skew between CCLK and SSO on board is zero.

$$\frac{1}{2} CCLK - tCO(max) - Tsu > 0$$

$$CCLK > 2(tCO(max) + Tsu)$$

CCLK – Input clock period. fCCLK\_R = 1/CCLK.

tCO(max) – Equivalent to tCO\_SSO or tEN\_SSO max value.

Tsu – Setup time requirement for host controller I/O.

For customer that can only use single clock for read/write operation, the Fmax will be limited by the Fmax for read operation.  
For example: tCO(max)=30ns and Tsu=2ns.

$$CCLK > 2(tCO(max) + Tsu)$$



$$CCLK > 2(30ns + 2ns)$$

$$CCLK > 64ns$$

$$fCCLK\_R = 1/64ns = 15.62MHz$$

For customer that want to do the programming at 135Mhz or faster than Fmax for read operation:

- Have a mechanism in the host controller to switch between read clock and write clock for read/write transaction. For example refer to SPI specification to switch between read and write clock by changing the SPI Baud Rate Register (SPIBR) if standard SPI controller is used as the host.
  - or implementing a mechanism to adjust/calibrate the sampling clock edge when the valid data becomes available.
7. Based on SLOW(default) slew rate control on Config output pins.

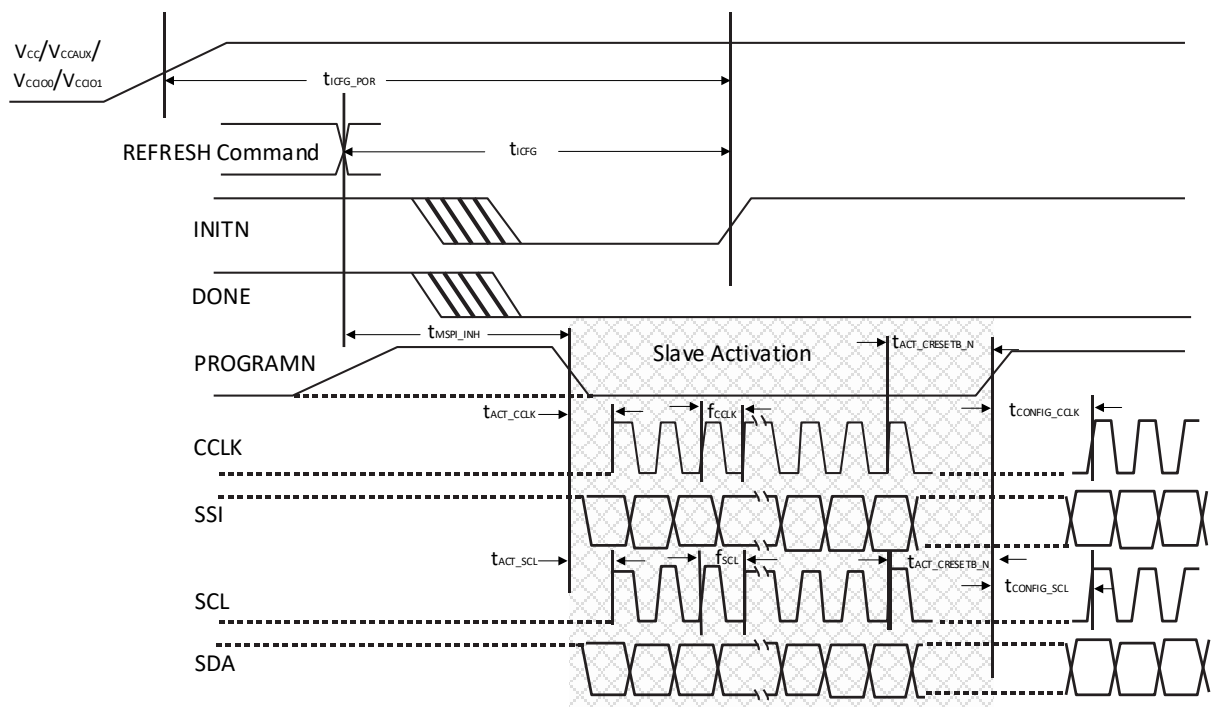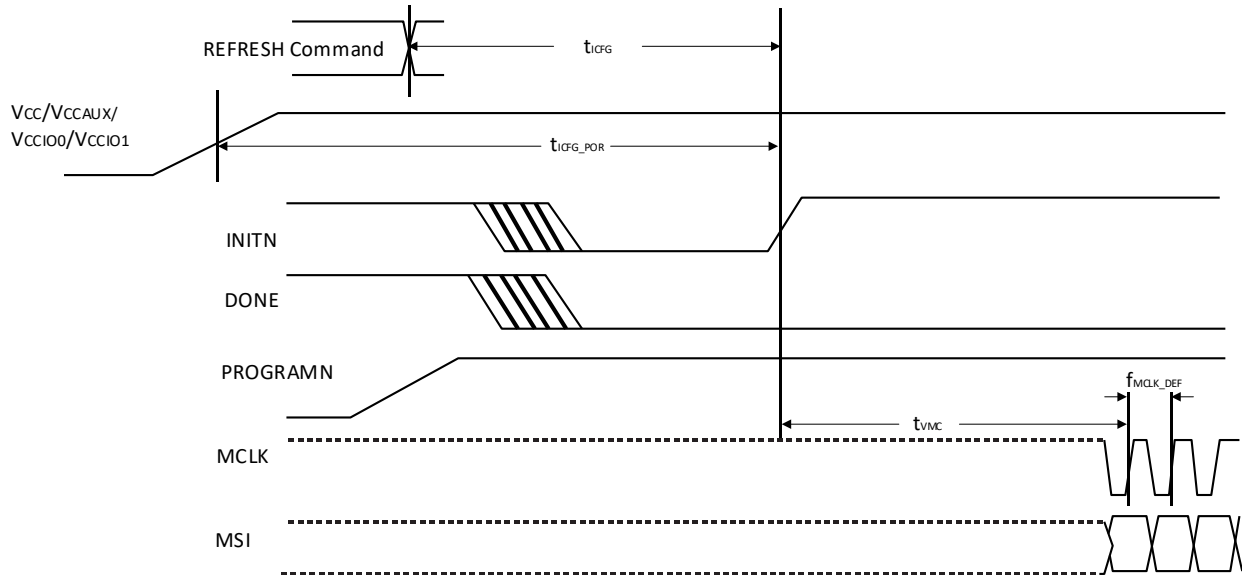

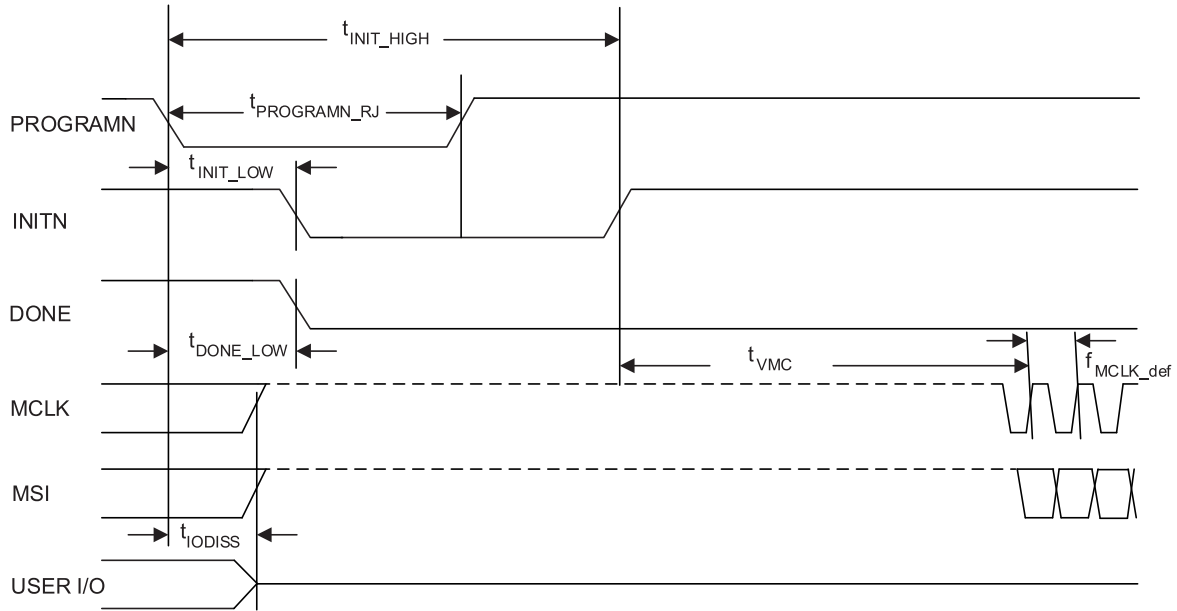


Figure 3.16. Controller SPI PROGRAMN Timing



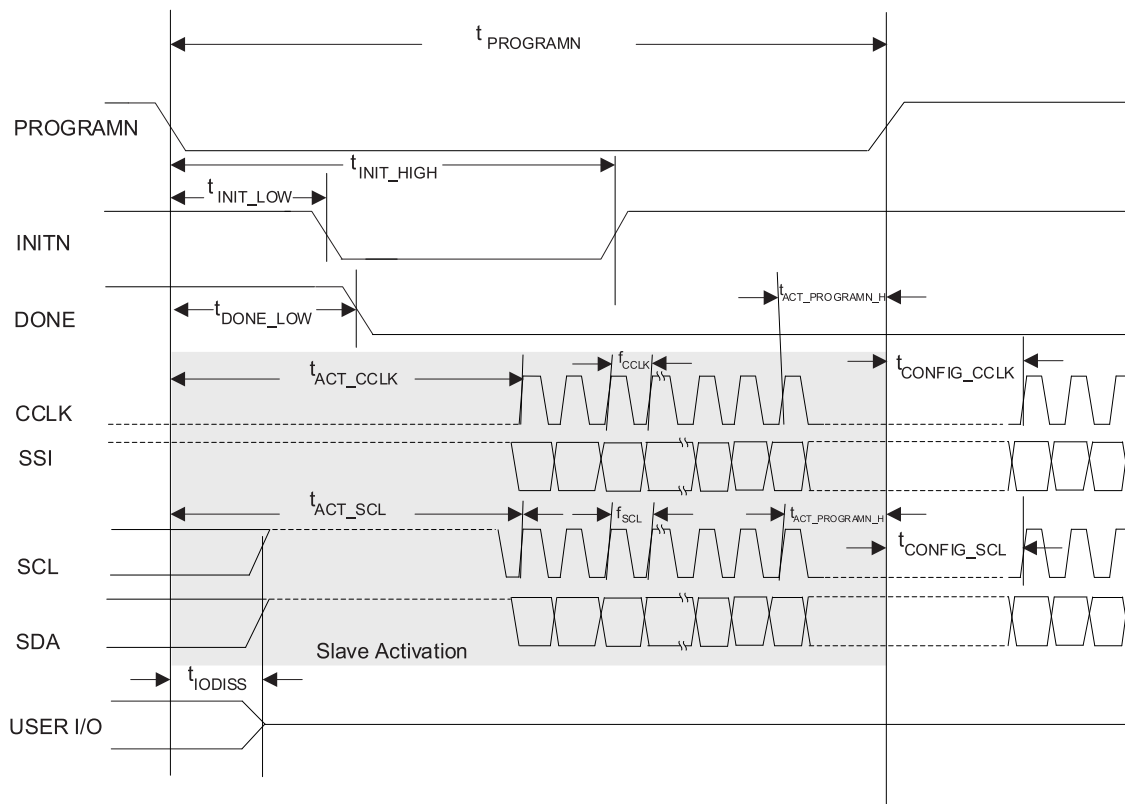


Figure 3.17. Target SPI/I2C/I3C PROGRAMN Timing




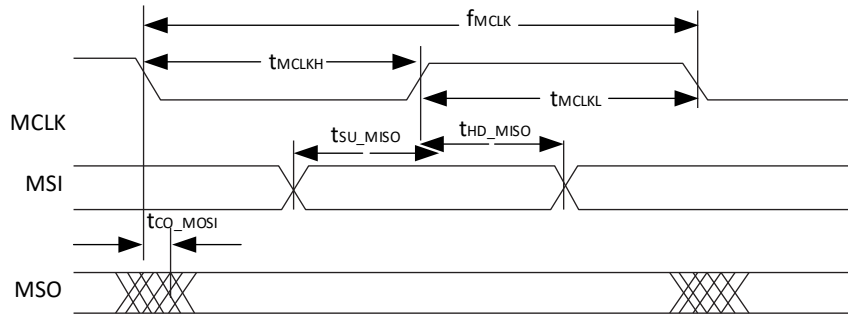


**Figure 3.18. Controller SPI Configuration Timing**

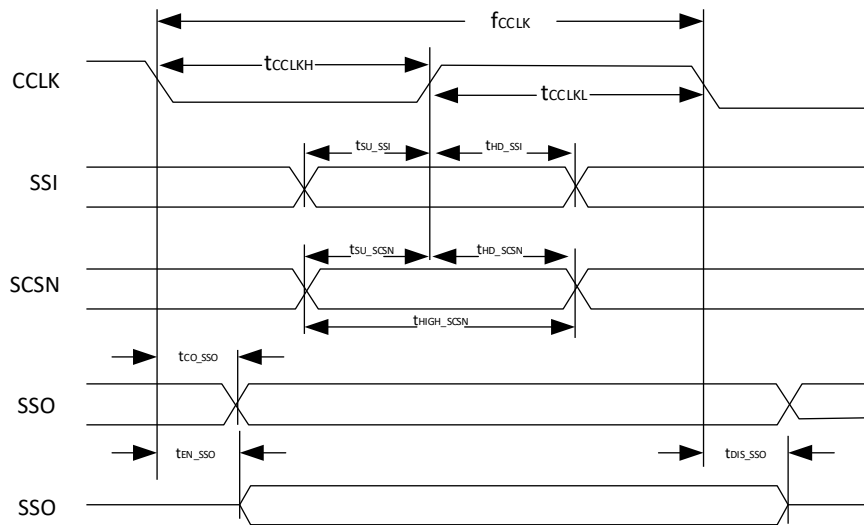


**Figure 3.19. Target SPI Configuration Timing**

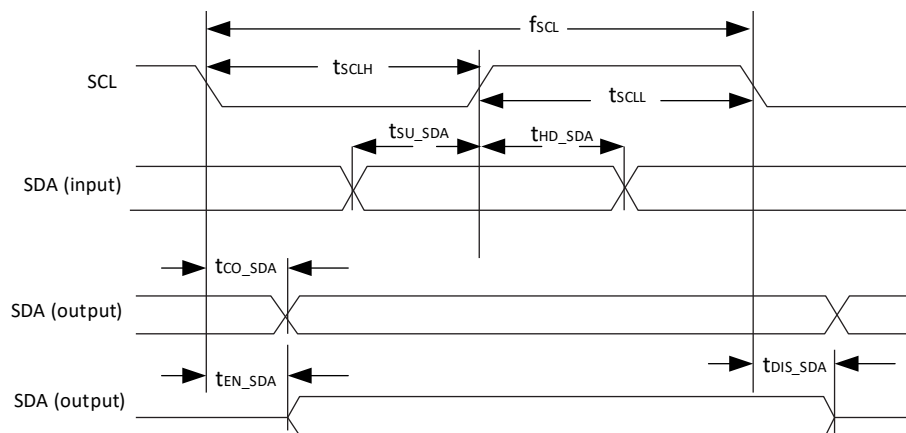


**Figure 3.20. I2C /I3C Configuration Timing**

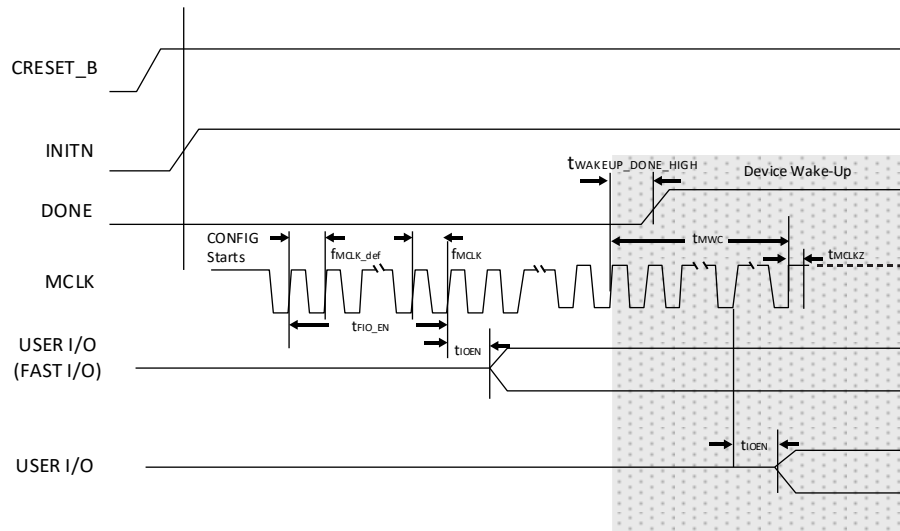

**Figure 3.21. Controller SPI Wake-Up Timing**

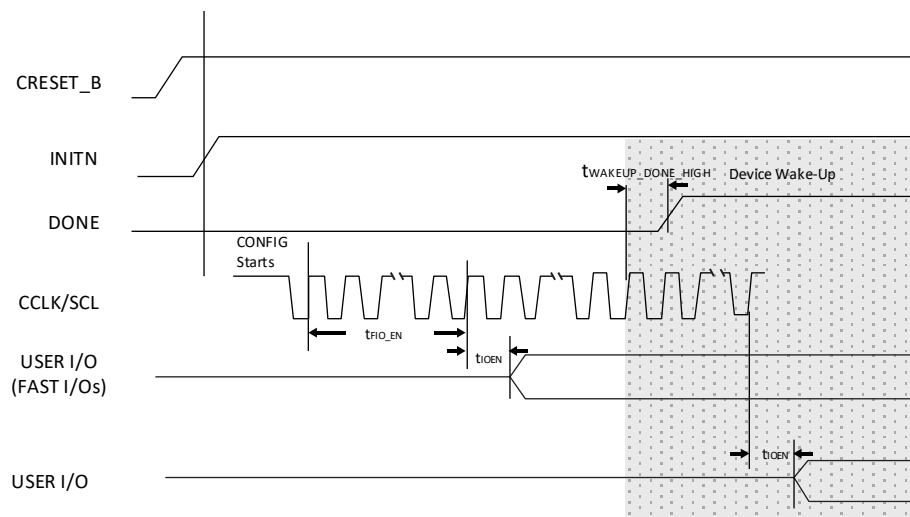

**Figure 3.22. Target SPI/I2C/I3C Wake-Up Timing**

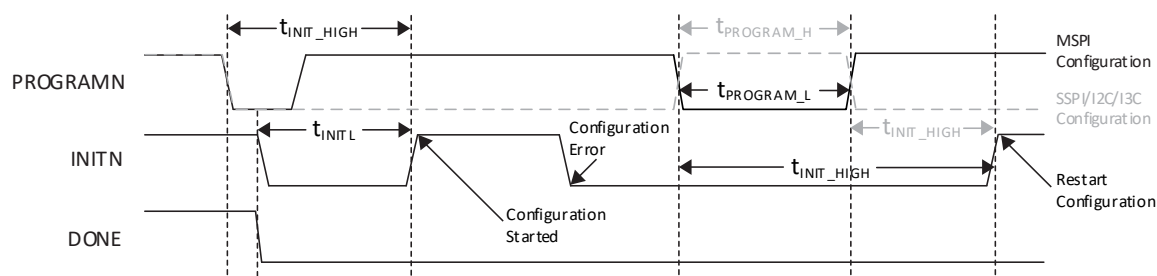

**Figure 3.23. Configuration Error Notification**


## 3.28. JTAG Port Timing Specifications

**Table 3.49. JTAG Port Timing Specifications**

| Symbol        | Parameter                                                          | Min | Typ. | Max | Units |
|---------------|--------------------------------------------------------------------|-----|------|-----|-------|
| $f_{MAX}$     | TCK clock frequency                                                | —   | —    | 25  | MHz   |
| $t_{BTCPH}$   | TCK clock pulse width high                                         | 20  | —    | —   | ns    |
| $t_{BTCPL}$   | TCK clock pulse width low                                          | 20  | —    | —   | ns    |
| $t_{BTS}$     | TCK TAP setup time                                                 | 5   | —    | —   | ns    |
| $t_{BTH}$     | TCK TAP hold time                                                  | 5   | —    | —   | ns    |
| $t_{BTRF}$    | TAP controller TDO rise/fall time <sup>1</sup>                     | 100 | —    | —   | mV/ns |
| $t_{BTCO}$    | TAP controller falling edge of clock to valid output               | —   | —    | 14  | ns    |
| $t_{BTCODIS}$ | TAP controller falling edge of clock to valid disable              | —   | —    | 14  | ns    |
| $t_{BTCOEN}$  | TAP controller falling edge of clock to valid enable               | —   | —    | 14  | ns    |
| $t_{BTCRS}$   | BSCAN test capture register setup time                             | 8   | —    | —   | ns    |
| $t_{BTCRH}$   | BSCAN test capture register hold time                              | 25  | —    | —   | ns    |
| $t_{BUTCO}$   | BSCAN test update register, falling edge of clock to valid output  | —   | —    | 25  | ns    |
| $t_{BTUODIS}$ | BSCAN test update register, falling edge of clock to valid disable | —   | —    | 25  | ns    |
| $t_{BTUPOEN}$ | BSCAN test update register, falling edge of clock to valid enable  | —   | —    | 25  | ns    |

**Note:**


1. Based on default I/O setting of slow slew rate.

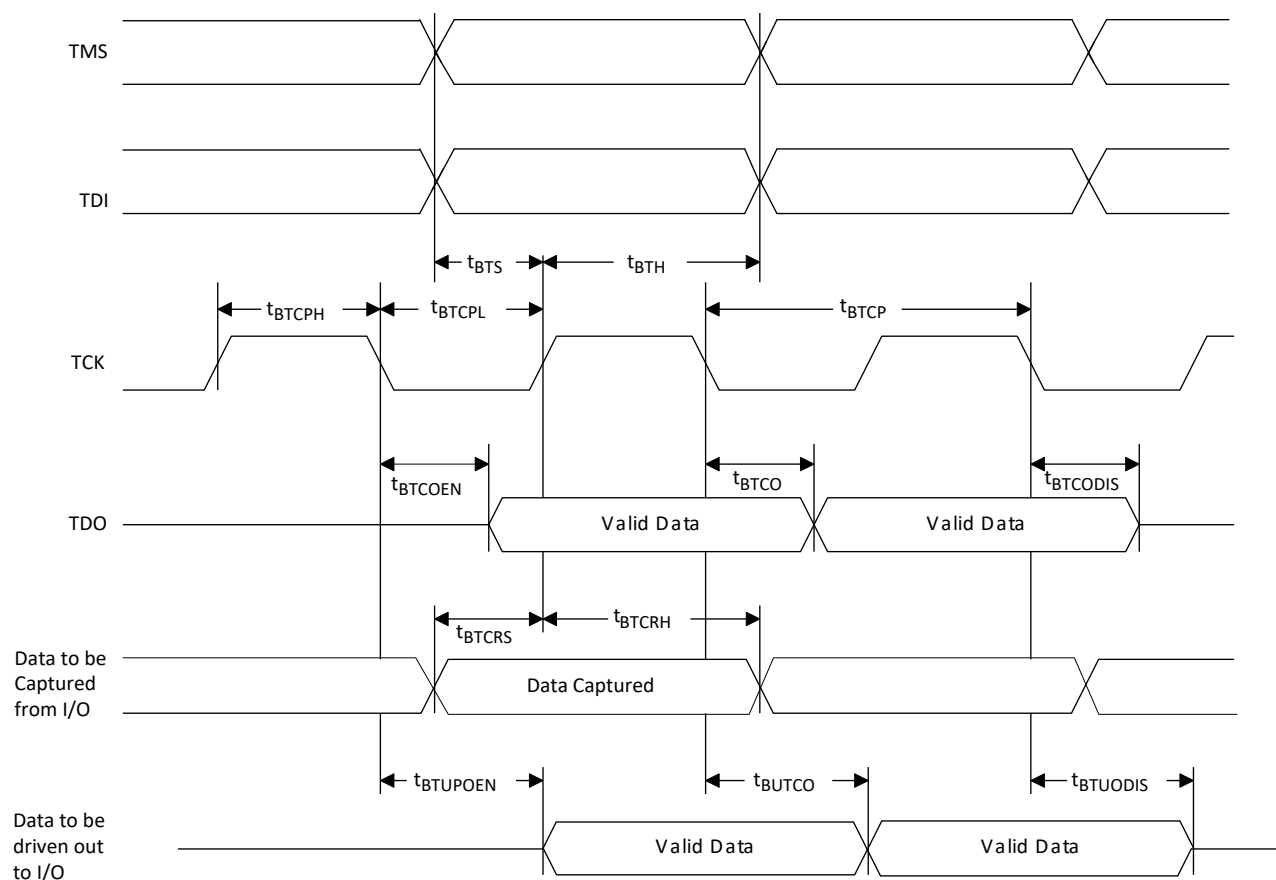

**Figure 3.24. JTAG Port Timing Waveforms**

### 3.29. Switching Test Conditions

Figure 3.25 shows the output test load that is used for AC testing. The specific values for resistance, capacitance, voltage, and other test conditions are listed in Table 3.50.

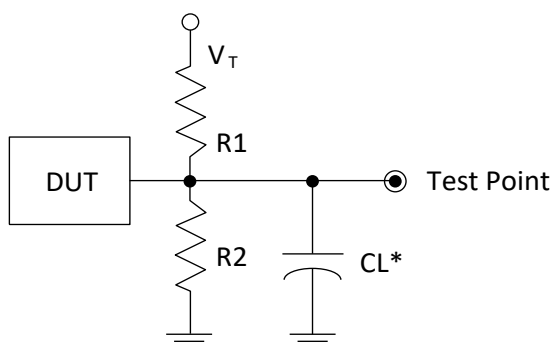

\*CL Includes Test Fixture and Probe Capacitance

**Figure 3.25. Output Test Load, LVTTTL and LVC MOS Standards**

**Table 3.50. Test Fixture Required Components, Non-Terminated Interfaces**

| Test Condition                                                | $R_1$        | $R_2$        | $C_L$ | Timing Ref.                | $V_T$      |
|---------------------------------------------------------------|--------------|--------------|-------|----------------------------|------------|
| LVTTTL and other LVC MOS settings ( $L \geq H$ , $H \geq L$ ) | $\infty$     | $\infty$     | 0 pF  | LVC MOS 3.3 = 1.5 V        | —          |
|                                                               |              |              |       | LVC MOS 2.5 = $V_{CCIO}/2$ | —          |
|                                                               |              |              |       | LVC MOS 1.8 = $V_{CCIO}/2$ | —          |
|                                                               |              |              |       | LVC MOS 1.5 = $V_{CCIO}/2$ | —          |
|                                                               |              |              |       | LVC MOS 1.2 = $V_{CCIO}/2$ | —          |
| LVC MOS 2.5 I/O ( $Z \geq H$ )                                | $\infty$     | 1 M $\Omega$ | 0 pF  | $V_{CCIO}/2$               | —          |
| LVC MOS 2.5 I/O ( $Z \geq L$ )                                | 1 M $\Omega$ | $\infty$     | 0 pF  | $V_{CCIO}/2$               | $V_{CCIO}$ |
| LVC MOS 2.5 I/O ( $H \geq Z$ )                                | $\infty$     | 100          | 0 pF  | $V_{OH} - 0.10$            | —          |
| LVC MOS 2.5 I/O ( $L \geq Z$ )                                | 100          | $\infty$     | 0 pF  | $V_{OL} + 0.10$            | $V_{CCIO}$ |

**Note:**

- Output test conditions for all other interfaces are determined by the respective standards.

## 4. DC and Switching Characteristics for Automotive

All specifications in this Chapter are characterized within recommended operating conditions unless otherwise specified.

### 4.1. Absolute Maximum Ratings

**Table 4.1. Absolute Maximum Ratings**

| Symbol                                                         | Parameter                                                            | Min  | Max  | Unit |
|----------------------------------------------------------------|----------------------------------------------------------------------|------|------|------|
| $V_{CC}, V_{CCECLK}$                                           | Supply Voltage                                                       | -0.5 | 1.10 | V    |
| $V_{CCAUX}, V_{CCAUXA}, V_{CCAUXH3}, V_{CCAUXH4}, V_{CCAUXH5}$ | Supply Voltage                                                       | -0.5 | 1.98 | V    |
| $V_{CCIO0, 1, 2, 6, 7}$                                        | I/O Supply Voltage                                                   | -0.5 | 3.63 | V    |
| $V_{CCIO3, 4, 5}$                                              | I/O Supply Voltage                                                   | -0.5 | 1.98 | V    |
| $V_{CCPLL\_DPHY0, 1}$                                          | Hardened D-PHY PLL Supply Voltage                                    | -0.5 | 1.10 | V    |
| $V_{CCPLLSD0}$                                                 | SerDes Block PLL Supply Voltage                                      | -0.5 | 1.98 | V    |
| $V_{CCA\_DPHY0, 1}$                                            | Analog Supply Voltage for Hardened D-PHY                             | -0.5 | 1.98 | V    |
| $V_{CC\_DPHY0, 1}$                                             | Digital Supply Voltage for Hardened D-PHY                            | -0.5 | 1.10 | V    |
| $V_{CCSD0}$                                                    | SerDes Supply Voltage                                                | -0.5 | 1.10 | V    |
| $V_{CCADC18}$                                                  | ADC Block 1.8 V Supply Voltage                                       | -0.5 | 1.98 | V    |
| $V_{CCAUXSD}$                                                  | SerDes and AUX Supply Voltage                                        | -0.5 | 1.98 | V    |
| —                                                              | Input or I/O Voltage Applied, Bank 0, Bank 1, Bank 2, Bank 6, Bank 7 | -0.5 | 3.63 | V    |
| —                                                              | Input or I/O Voltage Applied, Bank 3, Bank 4, Bank 5                 | -0.5 | 1.98 | V    |
| —                                                              | Voltage Applied on SerDes Pins                                       | -0.5 | 1.98 | V    |
| $T_A$                                                          | Storage Temperature (Ambient)                                        | -65  | +150 | °C   |
| $T_J$                                                          | Junction Temperature                                                 | —    | +125 | °C   |

**Notes:**

1. Stress above those listed under the *Absolute Maximum Ratings* may cause permanent damage to the device. Functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.
2. Compliance with the Lattice [Thermal Management](#) document is required.
3. All voltages referenced to GND.
4. All  $V_{CCAUX}$  should be connected on PCB.

## 4.2. Recommended Operating Conditions<sup>1, 2, 3</sup>

**Table 4.2. Recommended Operating Conditions**

| Symbol                                 | Parameter                                      | Conditions                                                        | Min    | Typ. | Max    | Unit |
|----------------------------------------|------------------------------------------------|-------------------------------------------------------------------|--------|------|--------|------|
| V <sub>CC</sub> , V <sub>CCCECLK</sub> | Core Supply Voltage                            | V <sub>CC</sub> = 1.0                                             | 0.95   | 1.00 | 1.05   | V    |
| V <sub>CCAUX</sub>                     | Auxiliary Supply Voltage                       | Bank 0, Bank 1, Bank 2, Bank 6, Bank 7                            | 1.746  | 1.80 | 1.89   | V    |
| V <sub>CCAUXH3/4/5</sub>               | Auxiliary Supply Voltage                       | Bank 3, Bank 4, Bank 5                                            | 1.746  | 1.80 | 1.89   | V    |
| V <sub>CCAUXA</sub>                    | Auxiliary Supply Voltage for core logic        | —                                                                 | 1.746  | 1.80 | 1.89   | V    |
| V <sub>CCIO</sub>                      | I/O Driver Supply Voltage                      | V <sub>CCIO</sub> = 3.3 V, Bank 0, Bank 1, Bank 2, Bank 6, Bank 7 | 3.135  | 3.30 | 3.465  | V    |
|                                        |                                                | V <sub>CCIO</sub> = 2.5 V, Bank 0, Bank 1, Bank 2, Bank 6, Bank 7 | 2.375  | 2.50 | 2.625  | V    |
|                                        |                                                | V <sub>CCIO</sub> = 1.8 V, All Banks                              | 1.71   | 1.80 | 1.89   | V    |
|                                        |                                                | V <sub>CCIO</sub> = 1.5 V, All Banks <sup>4</sup>                 | 1.425  | 1.50 | 1.575  | V    |
|                                        |                                                | V <sub>CCIO</sub> = 1.35 V, All Banks (For DDR3L Only)            | 1.2825 | 1.35 | 1.4175 | V    |
|                                        |                                                | V <sub>CCIO</sub> = 1.2 V, All Banks <sup>4</sup>                 | 1.14   | 1.20 | 1.26   | V    |
|                                        |                                                | V <sub>CCIO</sub> = 1.0 V, Bank 3, Bank 4, Bank 5                 | 0.95   | 1.00 | 1.05   | V    |
| D-PHY External Power Supplies          |                                                |                                                                   |        |      |        |      |
| V <sub>CCA_D-PHY</sub>                 | D-PHY Analog Power Supply                      | —                                                                 | 1.71   | 1.80 | 1.89   | V    |
| V <sub>CC_D-PHY</sub>                  | D-PHY Digital Power Supply                     | —                                                                 | 0.95   | 1.00 | 1.05   | V    |
| V <sub>CCPLL_D-PHY</sub>               | D-PHY PLL Power Supply                         | —                                                                 | 0.95   | 1.00 | 1.05   | V    |
| ADC External Power Supplies            |                                                |                                                                   |        |      |        |      |
| V <sub>CCADC18</sub>                   | ADC 1.8 V Power Supply                         | —                                                                 | 1.71   | 1.80 | 1.89   | V    |
| SerDes Block External Power Supplies   |                                                |                                                                   |        |      |        |      |
| V <sub>CCSD0</sub>                     | Supply Voltage for SerDes Block and SerDes I/O | —                                                                 | 0.95   | 1.00 | 1.05   | V    |
| V <sub>CCPLLS0</sub>                   | SerDes Block PLL Supply Voltage                | —                                                                 | 1.71   | 1.80 | 1.89   | V    |
| V <sub>CCAUXSD</sub>                   | SerDes Block Auxiliary Supply Voltage          | —                                                                 | 1.71   | 1.80 | 1.89   | V    |
| Operating Temperature                  |                                                |                                                                   |        |      |        |      |
| t <sub>JAUTO</sub>                     | Junction Temperature, Automotive Operation     | —                                                                 | –40    | —    | 125    | °C   |

**Notes:**

- For correct operation, all supplies must be held in their valid operation voltage range.
- All supplies with same voltage should be from the same voltage source. Proper isolation filters are needed to properly isolate noise from each other.
- Common supply rails must be tied together except SerDes.
- MSPI (Bank 0) and JTAG, SSPI, I2C, and I3C (Bank 1) ports are supported for  $V_{CCIO} = 1.8$  V to 3.3 V.

## 4.3. Power Supply Ramp Rates

**Table 4.3. Power Supply Ramp Rates**

| Symbol     | Parameter                                             | Min | Typ | Max | Unit |
|------------|-------------------------------------------------------|-----|-----|-----|------|
| $t_{RAMP}$ | Power Supply ramp rates for all supplies <sup>1</sup> | 0.1 | —   | 50  | V/ms |

**Notes:**

1. Assumes monotonic ramp rates.
2. All supplies need to be in the operating range as defined in [Recommended Operating Conditions1](#), when the device has completed configuration and entering into User Mode. Supplies that are not in the operating range needs to be adjusted to faster ramp rate, or users have to delay configuration or wake up.

## 4.4. Power up Sequence

Power-On-Reset (POR) puts the CrossLink-NX device into a reset state. There is no power up sequence required for the CrossLink-NX device.


**Table 4.4. Power-On Reset**

| Symbol             | Parameter                                                                                                                          |                                         | Min  | Typ | Max  | Unit |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|------|-----|------|------|
| V <sub>PORUP</sub> | Power-On-Reset ramp-up trip point (Monitoring V <sub>CC</sub> , V <sub>CCAUX</sub> , V <sub>CCIO0</sub> , and V <sub>CCIO1</sub> ) | V <sub>CC</sub>                         | 0.72 | —   | 0.84 | V    |
|                    |                                                                                                                                    | V <sub>CCAUX</sub>                      | 1.30 | —   | 1.71 | V    |
|                    |                                                                                                                                    | V <sub>CCIO0</sub> , V <sub>CCIO1</sub> | 0.87 | —   | 1.07 | V    |
| V <sub>PORDN</sub> | Power-On-Reset ramp-up trip point (Monitoring V <sub>CC</sub> and V <sub>CCAUX</sub> )                                             | V <sub>CC</sub>                         | 0.48 | —   | 0.85 | V    |
|                    |                                                                                                                                    | V <sub>CCAUX</sub>                      | 1.36 | —   | 1.57 | V    |

## 4.5. On-Chip Programmable Termination

The CrossLink-NX devices support a variety of programmable on-chip terminations options, including:

- Dynamically switchable Single-Ended Termination with programmable resistor values of 40  $\Omega$ , 50  $\Omega$ , 60  $\Omega$ , or 75  $\Omega$ .
- Common mode termination of 100  $\Omega$  for differential inputs.

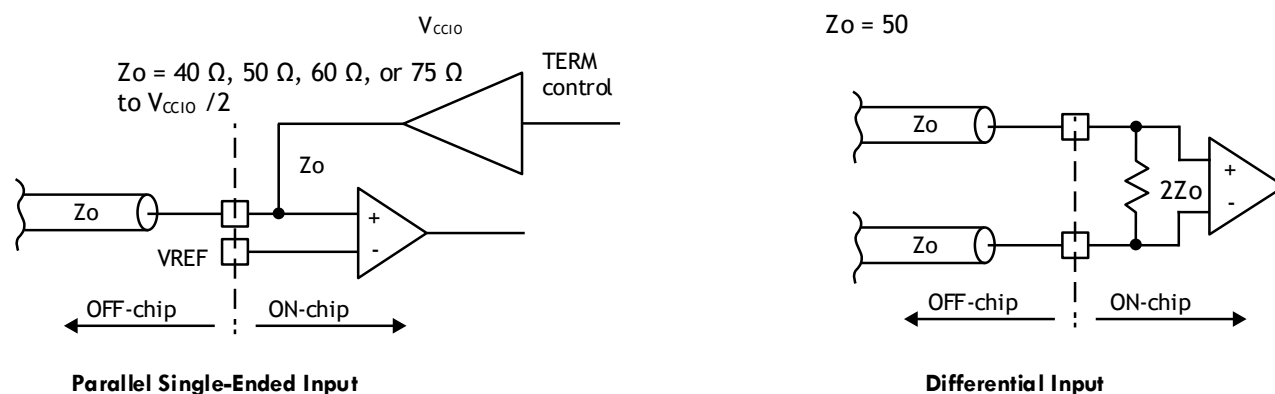

**Figure 4.1. On-Chip Termination**

See [Table 4.5](#) for termination options for input modes.

**Table 4.5. On-Chip Termination Options for Input Modes**

| IO_TYPE    | Differential Termination Resistor <sup>1, 2</sup> | Terminate to $V_{CCIO}/2$ <sup>1, 2</sup> |
|------------|---------------------------------------------------|-------------------------------------------|
| subLVDS    | 100, OFF                                          | OFF                                       |
| SLVS       | 100, OFF                                          | OFF                                       |
| MIPI_DPHY  | 100                                               | OFF                                       |
| HSTL15D_I  | 100, OFF                                          | OFF                                       |
| SSTL15D_I  | 100, OFF                                          | OFF                                       |
| SSTL135D_I | 100, OFF                                          | OFF                                       |
| HSUL12D    | 100, OFF                                          | OFF                                       |
| LVC MOS15H | OFF                                               | OFF                                       |
| LVC MOS12H | OFF                                               | OFF                                       |
| LVC MOS10H | OFF                                               | OFF                                       |
| LVC MOS12H | OFF                                               | OFF                                       |
| LVC MOS10H | OFF                                               | OFF                                       |
| LVC MOS18H | OFF                                               | OFF, 40, 50, 60, 75                       |
| HSTL15_I   | OFF                                               | 50                                        |
| SSTL15_I   | OFF                                               | OFF, 40, 50, 60, 75                       |
| SSTL135_I  | OFF                                               | OFF, 40, 50, 60, 75                       |
| HSUL12     | OFF                                               | OFF, 40, 50, 60, 75                       |

**Notes:**

1. TERMINATE to  $V_{CCIO}/2$  (Single-Ended) and DIFFERENTIAL TERMINATION RESISTOR when turned on can only have one setting per bank. Only left and right banks have this feature.
2. Use of TERMINATE to  $V_{CCIO}/2$  and DIFFERENTIAL TERMINATION RESISTOR are mutually exclusive in an I/O bank. On-chip termination tolerance  $-10\%/+60\%$ .

Refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for on-chip termination usage and value ranges.

## 4.6. Hot Socketing Specifications

**Table 4.6. Hot Socketing Specifications for GPIO**

| Symbol   | Parameter                                                                             | Condition                                                                                                                                                  | Min  | Typ | Max | Unit |
|----------|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----|-----|------|
| $I_{DK}$ | Input or I/O Leakage Current for Wide Range I/O (excluding MCLK/MCSN/MOSI/INITN/DONE) | $0 < V_{IN} < V_{IH}(\text{max})$<br>$0 < V_{CC} < V_{CC}(\text{max})$<br>$0 < V_{CCIO} < V_{CCIO}(\text{max})$<br>$0 < V_{CCAUX} < V_{CCAUX}(\text{max})$ | -1.5 | —   | 1.5 | mA   |

**Notes:**

- $I_{DK}$  is additive to  $I_{PU}$ ,  $I_{PD}$ , or  $I_{BH}$ .
- Hot socketing specs are defined at a device junction temperature of 85 °C or below. When the device temperature is above 85 °C, the  $I_{DK}$  current can exceed the above spec.
- Going beyond the hot socketing ranges specified here will cause exponentially higher Leakage currents and potential reliability issues. A total of 64 mA per 8 I/O should not be exceeded.

## 4.7. ESD Performance

Refer to the [CrossLink-NX Product Family Qualification Summary](#) for complete Automotive grade qualification data, including ESD performance.



## 4.8. DC Electrical Characteristics

**Table 4.7. DC Electrical Characteristics – Wide Range**

| Symbol             | Parameter                                            | Condition                                | Min            | Typ | Max            | Unit    |
|--------------------|------------------------------------------------------|------------------------------------------|----------------|-----|----------------|---------|
| $I_{IL}, I_{IH}^1$ | Input or I/O Leakage current (Commercial/Industrial) | $0 \leq V_{IN} \leq V_{CCIO}$            | —              | —   | 10             | $\mu A$ |
| $I_{IH}^2$         | Input or I/O Leakage current                         | $V_{CCIO} \leq V_{IN} \leq V_{IH} (max)$ | —              | —   | 100            | $\mu A$ |
| $I_{PU}$           | I/O Weak Pull-up Resistor Current                    | $0 \leq V_{IN} \leq 0.7 \times V_{CCIO}$ | –30            | —   | –150           | $\mu A$ |
| $I_{PD}$           | I/O Weak Pull-down Resistor Current                  | $V_{IL} (max) \leq V_{IN} \leq V_{CCIO}$ | 30             | —   | 150            | $\mu A$ |
| $I_{BHLS}$         | Bus Hold Low Sustaining Current                      | $V_{IN} = V_{IL} (max)$                  | 30             | —   | —              | $\mu A$ |
| $I_{BHHS}$         | Bus Hold High Sustaining Current                     | $V_{IN} = 0.7 \times V_{CCIO}$           | –30            | —   | —              | $\mu A$ |
| $I_{BHLO}$         | Bus Hold Low Overdrive Current                       | $0 \leq V_{IN} \leq V_{CCIO}$            | —              | —   | 150            | $\mu A$ |
| $I_{BHHO}$         | Bus Hold High Overdrive Current                      | $0 \leq V_{IN} \leq V_{CCIO}$            | —              | —   | –150           | $\mu A$ |
| $V_{BHT}$          | Bus Hold Trip Points                                 | —                                        | $V_{IL} (max)$ | —   | $V_{IH} (min)$ | V       |

**Notes:**

- Input or I/O leakage current is measured with the pin configured as an input or as an I/O with the output tri-stated. Bus Maintenance circuits are disabled.
- The input leakage current  $I_{IH}$  is the worst case input leakage per GPIO when the pad signal is high and also higher than the bank  $V_{CCIO}$ . This is considered a mixed mode input.

**Table 4.8. DC Electrical Characteristics – High Speed**

| Symbol             | Parameter                           | Condition                                | Min            | Typ | Max            | Unit    |
|--------------------|-------------------------------------|------------------------------------------|----------------|-----|----------------|---------|
| $I_{IL}, I_{IH}^1$ | Input or I/O Leakage                | $0 \leq V_{IN} \leq V_{CCIO}$            | —              | —   | 10             | $\mu A$ |
| $I_{PU}$           | I/O Weak Pull-up Resistor Current   | $0 \leq V_{IN} \leq 0.7 \times V_{CCIO}$ | –30            | —   | –150           | $\mu A$ |
| $I_{PD}$           | I/O Weak Pull-down Resistor Current | $V_{IL} (max) \leq V_{IN} \leq V_{CCIO}$ | 30             | —   | 150            | $\mu A$ |
| $I_{BHLS}$         | Bus Hold Low Sustaining Current     | $V_{IN} = V_{IL} (max)$                  | 30             | —   | —              | $\mu A$ |
| $I_{BHHS}$         | Bus Hold High Sustaining Current    | $V_{IN} = 0.7 \times V_{CCIO}$           | –30            | —   | —              | $\mu A$ |
| $I_{BHLO}$         | Bus Hold low Overdrive Current      | $0 \leq V_{IN} \leq V_{CCIO}$            | —              | —   | 150            | $\mu A$ |
| $I_{BHHO}$         | Bus Hold high Overdrive Current     | $0 \leq V_{IN} \leq V_{CCIO}$            | —              | —   | –150           | $\mu A$ |
| $V_{BHT}$          | Bus Hold Trip Points                | —                                        | $V_{IL} (max)$ | —   | $V_{IH} (min)$ | V       |

**Note:**

- Input or I/O leakage current is measured with the pin configured as an input or as an I/O with the output tri-stated. Bus Maintenance circuits are disabled.

**Table 4.9. Capacitors – Wide Range**

| Symbol  | Parameter                                | Condition                                                                                             | Min | Typ | Max | Unit |
|---------|------------------------------------------|-------------------------------------------------------------------------------------------------------|-----|-----|-----|------|
| $C_1^1$ | I/O Capacitance <sup>1</sup>             | $V_{CCIO} = 3.3 V, 2.5 V, 1.8 V, 1.5 V, 1.2 V, V_{CC} = typ., V_{IO} = 0 \text{ to } V_{CCIO} + 0.2V$ | —   | 6   | —   | pF   |
| $C_2^1$ | Dedicated Input Capacitance <sup>1</sup> | $V_{CCIO} = 3.3 V, 2.5 V, 1.8 V, 1.5 V, 1.2 V, V_{CC} = typ., V_{IO} = 0 \text{ to } V_{CCIO} + 0.2V$ | —   | 6   | —   | pF   |

**Note:**

- $T_A = 25^\circ C, f = 1.0 \text{ MHz}$ .

**Table 4.10. Capacitors – High Performance**

| Symbol                      | Parameter                                | Condition                                                                                                        | Min | Typ | Max | Unit |
|-----------------------------|------------------------------------------|------------------------------------------------------------------------------------------------------------------|-----|-----|-----|------|
| C <sub>1</sub> <sup>1</sup> | I/O Capacitance <sup>1</sup>             | V <sub>CCIO</sub> = 1.8 V, 1.5 V, 1.2 V, V <sub>CC</sub> = typ., V <sub>IO</sub> = 0 to V <sub>CCIO</sub> + 0.2V | —   | 6   | —   | pF   |
| C <sub>2</sub> <sup>1</sup> | Dedicated Input Capacitance <sup>1</sup> | V <sub>CCIO</sub> = 1.8 V, 1.5 V, 1.2 V, V <sub>CC</sub> = typ., V <sub>IO</sub> = 0 to V <sub>CCIO</sub> + 0.2V | —   | 6   | —   | pF   |
| C <sub>3</sub> <sup>1</sup> | D-PHY I/O Capacitance                    | V <sub>CCA_D-PHY</sub> = 1.8 V, V <sub>CC</sub> = typ., V <sub>IO</sub> = 0 to V <sub>CCA_D-PHY</sub> + 0.2V     | —   | 5   | —   | pF   |
| C <sub>4</sub> <sup>1</sup> | SerDes I/O Capacitance                   | V <sub>CCSD0</sub> = 1.0 V, V <sub>CC</sub> = typ., V <sub>IO</sub> = 0 to V <sub>CCSD0</sub> + 0.2 V            | —   | 5   | —   | pF   |

**Note:**1. T<sub>A</sub> 25 °C, f = 1.0 MHz.**Table 4.11. Single Ended Input Hysteresis – Wide Range**

| IO_TYPE | VCCIO | TYP Hysteresis |
|---------|-------|----------------|
| LVCMS33 | 3.3 V | 250 mV         |
| LVCMS25 | 3.3 V | 200 mV         |
|         | 2.5 V | 250 mV         |
| LVCMS18 | 1.8 V | 180 mV         |
| LVCMS15 | 1.5 V | 50 mV          |
| LVCMS12 | 1.2 V | 0              |
| LVCMS10 | 1.2 V | 0              |

**Table 4.12. Single Ended Input Hysteresis – High Performance**

| IO_TYPE    | VCCIO | TYP Hysteresis |
|------------|-------|----------------|
| LVCMS18H   | 1.8 V | 180 mV         |
| LVCMS15H   | 1.8 V | 50 mV          |
|            | 1.5 V | 150 mV         |
| LVCMS12H   | 1.2 V | 0              |
| LVCMS10H   | 1.0 V | 0              |
| MIPI-LP-RX | 1.2 V | >25 mV         |

## 4.9. Supply Currents

For estimating and calculating current, use Power Calculator in Lattice Design software.

This operating and peak current is design dependent, and can be calculated in Lattice Design software. Some blocks can be placed into low current standby modes. Refer to [Power Management and Calculation for CrossLink-NX Devices \(FPGA-TN-02075\)](#).

## 4.10. sysI/O Recommended Operating Conditions

Table 4.13. sysI/O Recommended Operating Conditions

| Standard                             | Support Banks | V <sub>CCIO</sub> (Input)                           | V <sub>CCIO</sub> (Output)                     |
|--------------------------------------|---------------|-----------------------------------------------------|------------------------------------------------|
|                                      |               | Typ.                                                | Typ.                                           |
| Single-Ended                         |               |                                                     |                                                |
| LVC MOS33                            | 0, 1, 2, 6, 7 | 3.3                                                 | 3.3                                            |
| LVTTL33                              | 0, 1, 2, 6, 7 | 3.3                                                 | 3.3                                            |
| LVC MOS25 <sup>1, 2</sup>            | 0, 1, 2, 6, 7 | 2.5, 3.3                                            | 2.5                                            |
| LVC MOS18 <sup>1, 2</sup>            | 0, 1, 2, 6, 7 | 1.2, 1.5, 1.8, 2.5, 3.3                             | 1.8                                            |
| LVC MOS18H                           | 3, 4, 5       | 1.8                                                 | 1.8                                            |
| LVC MOS15 <sup>1, 2</sup>            | 0, 1, 2, 6, 7 | 1.2, 1.5, 1.8, 2.5, 3.3                             | 1.5                                            |
| LVC MOS15H <sup>1</sup>              | 3, 4, 5       | 1.5, 1.8                                            | 1.5                                            |
| LVC MOS12 <sup>1, 2</sup>            | 0, 1, 2, 6, 7 | 1.2, 1.5, 1.8, 2.5, 3.3                             | 1.2                                            |
| LVC MOS12H <sup>1</sup>              | 3, 4, 5       | 1.2, 1.35 <sup>7</sup> , 1.5, 1.8                   | 1.2                                            |
| LVC MOS10 <sup>1</sup>               | 0, 1, 2, 6, 7 | 1.2, 1.5, 1.8, 2.5, 3.3                             | —                                              |
| LVC MOS10H <sup>1</sup>              | 3, 4, 5       | 1.0, 1.2, 1.35 <sup>7</sup> , 1.5, 1.8              | 1.0                                            |
| LVC MOS10R <sup>1</sup>              | 3, 4, 5       | 1.0, 1.2, 1.35 <sup>7</sup> , 1.5, 1.8              | —                                              |
| SSTL135_I, SSTL135_II <sup>3</sup>   | 3, 4, 5       | 1.35 <sup>7</sup>                                   | 1.35                                           |
| SSTL15_I, SSTL15_II <sup>3</sup>     | 3, 4, 5       | 1.5 <sup>8</sup>                                    | 1.5 <sup>8</sup>                               |
| HSTL15_I <sup>3</sup>                | 3, 4, 5       | 1.5 <sup>8</sup>                                    | 1.5 <sup>8</sup>                               |
| HSUL12 <sup>3</sup>                  | 3, 4, 5       | 1.2                                                 | 1.2                                            |
| MIPI D-PHY LP Input <sup>6</sup>     | 3, 4, 5       | 1.2                                                 | 1.2                                            |
| Differential <sup>6</sup>            |               |                                                     |                                                |
| LVDS                                 | 3, 4, 5       | 1.2, 1.35, 1.5, 1.8                                 | 1.8                                            |
| LVDSE <sup>5</sup>                   | 0, 1, 2, 6, 7 | —                                                   | 2.5                                            |
| subLVDS                              | 3, 4, 5       | 1.2, 1.35, 1.5, 1.8                                 | —                                              |
| subLVDSE <sup>5</sup>                | 0, 1, 2, 6, 7 | —                                                   | 1.8                                            |
| subLVDSEH <sup>5</sup>               | 3, 4, 5       | —                                                   | 1.8                                            |
| SLVS <sup>6</sup>                    | 3, 4, 5       | 1.0, 1.2, 1.35 <sup>7</sup> , 1.5, 1.8 <sup>4</sup> | 1.2, 1.35 <sup>7</sup> , 1.5, 1.8 <sup>4</sup> |
| MIPI D-PHY <sup>6</sup>              | 3, 4, 5       | 1.2                                                 | 1.2                                            |
| LVC MOS33D <sup>5</sup>              | 0, 1, 2, 6, 7 | —                                                   | 3.3                                            |
| LVTTL33D <sup>5</sup>                | 0, 1, 2, 6, 7 | —                                                   | 3.3                                            |
| LVC MOS25D <sup>5</sup>              | 0, 1, 2, 6, 7 | —                                                   | 2.5                                            |
| SSTL135D_I, SSTL135D_II <sup>5</sup> | 3, 4, 5       | —                                                   | 1.35 <sup>7</sup>                              |
| SSTL15D_I, SSTL15D_II <sup>5</sup>   | 3, 4, 5       | —                                                   | 1.5                                            |
| HSTL15D_I <sup>5</sup>               | 3, 4, 5       | —                                                   | 1.5                                            |
| HSUL12D <sup>5</sup>                 | 3, 4, 5       | —                                                   | 1.2                                            |

**Notes:**

- Single-ended input can mix into I/O Banks with V<sub>CCIO</sub> different from the standard requires due to some of these input standards use internal supply voltage source (V<sub>CC</sub>, V<sub>CCAUX</sub>) to power the input buffer, which makes them to be independent of V<sub>CCIO</sub> voltage. For more details, please refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#). The following is a brief guideline to follow:
  - Weak pull-up on the I/O must be set to OFF.
  - Bank 3, Bank 4, and Bank 5 I/O can only mix into banks with V<sub>CCIO</sub> higher than the pin standard, due to clamping diode on the pin in these banks. Bank 0, Bank 1, Bank 2, Bank 6, and Bank 7 does not have this restriction.
  - LVC MOS25 uses V<sub>CCIO</sub> supply on input buffer in Bank 0, Bank 1, Bank 2, Bank 6, and Bank 7. It can be supported with V<sub>CCIO</sub> = 3.3 V to meet the V<sub>IH</sub> and V<sub>IL</sub> requirements, but there is additional current drawn on V<sub>CCIO</sub>. Hysteresis has to be disabled when using 3.3 V supply voltage.
  - LVC MOS15 uses V<sub>CCIO</sub> supply on input buffer in Bank 3, Bank 4, and Bank 5. It can be supported with V<sub>CCIO</sub> = 1.8 V to meet the V<sub>IH</sub> and V<sub>IL</sub> requirements, but there is additional current drawn on V<sub>CCIO</sub>.

- Single-ended LVCMOS inputs can mixed into I/O Banks with different  $V_{CCIO}$ , providing weak pull-up is not used. For additional information on Mixed I/O in Bank  $V_{CCIO}$ , refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#).
- These inputs use differential input comparator in Bank 3, Bank 4, and Bank 5. The differential input comparator uses  $V_{CCAUXH}$  power supply. These inputs require the  $V_{REF}$  pin to provide the reference voltage in the Bank. Refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for details.
- All differential inputs use differential input comparator in Bank 3, Bank 4, and Bank 5. The differential input comparator uses  $V_{CCAUXH}$  power supply. There is no differential input signaling supported in Bank 0, Bank 1, Bank 2, Bank 6, and Bank 7.
- These outputs are emulating differential output pair with single-ended output drivers with true and complement outputs driving on each of the corresponding true and complement output pair pins. The common mode voltage,  $V_{CM}$ , is  $\frac{1}{2} \times V_{CCIO}$ . Refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for details.
- Soft MIPI D-PHY HS using sysI/O is supported with SLVS input and output that can be placed in banks with  $V_{CCIO}$  voltage shown in SLVS. D-PHY with HS and LP modes supported needs to be placed in banks with  $V_{CCIO}$  voltage = 1.2 V. Soft MIPI D-PHY LP input and output using sysI/O are supported with LVCMOS12.
- $V_{CCIO} = 1.35$  V is only supported in Bank 3, Bank 4, and Bank 5, for use with DDR3L interface in the bank. These Input and Output standards can fit into the same bank with the  $V_{CCIO} = 1.35$  V.
- LVCMOS15 input uses  $V_{CCIO}$  supply voltage. If  $V_{CCIO}$  is 1.8 V, the DC levels for LVCMOS15 are still met, but there could be increase in input buffer current.

## 4.11. sysI/O Single-Ended DC Electrical Characteristics<sup>3</sup>

**Table 4.14. sysI/O DC Electrical Characteristics – Wide Range I/O**

| Input/Output Standard <sup>2</sup> | $V_{IL}$ |                        | $V_{IH}$               |                    | $V_{OL}$ Max (V) | $V_{OH}$ Min (V)  | $I_{OL}$ (mA)                        | $I_{OH}$ (mA)                             |
|------------------------------------|----------|------------------------|------------------------|--------------------|------------------|-------------------|--------------------------------------|-------------------------------------------|
|                                    | Min (V)  | Max (V)                | Min (V)                | Max (V)            |                  |                   |                                      |                                           |
| LVTTL33<br>LVCMOS33                | —        | 0.8                    | 2.0                    | 3.465 <sup>4</sup> | 0.4              | $V_{CCIO} - 0.4$  | 2, 4, 8, 12, 16, "50RS" <sup>3</sup> | -2, -4, -8, -12, -16, "50RS" <sup>3</sup> |
| LVCMOS25                           | —        | 0.7                    | 1.7                    | 3.465 <sup>4</sup> | 0.4              | $V_{CCIO} - 0.45$ | 2, 4, 8, 10, "50RS" <sup>3</sup>     | -2, -4, -8, -10, "50RS" <sup>3</sup>      |
| LVCMOS18                           | —        | $0.35 \times V_{CCIO}$ | $0.65 \times V_{CCIO}$ | 3.465 <sup>4</sup> | 0.4              | $V_{CCIO} - 0.45$ | 2, 4, 8, "50RS" <sup>3</sup>         | -2, -4, -8, "50RS" <sup>3</sup>           |
| LVCMOS15                           | —        | $0.35 \times V_{CCIO}$ | $0.65 \times V_{CCIO}$ | 3.465 <sup>4</sup> | 0.4              | $V_{CCIO} - 0.4$  | 2, 4                                 | -2, -4                                    |
| LVCMOS12                           | —        | $0.35 \times V_{CCIO}$ | $0.65 \times V_{CCIO}$ | 3.465 <sup>4</sup> | 0.4              | $V_{CCIO} - 0.4$  | 2, 4                                 | -2, -4                                    |
| LVCMOS10                           | —        | $0.35 \times V_{CCIO}$ | $0.65 \times V_{CCIO}$ | 3.465 <sup>4</sup> | No O/P Support   |                   |                                      |                                           |

**Notes:**

- For electro-migration, the average DC current drawn by the I/O pads within a bank of I/O shall not exceed 10 mA per I/O average.
- For the types of I/O standard supported in which bank, refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for details.
- Select "50RS" in driver strength is selecting 50  $\Omega$  series impedance driver.
- $V_{IH}$  (MAX) for inputs on these standards (in Bank 0, Bank 1, Bank 2, Bank 6, and Bank 7) can go up to 3.465 V if the input clamp is OFF. Otherwise, the input cannot be higher than  $V_{CCIO} + 0.3$  V.

Table 4.15. sysI/O DC Electrical Characteristics – High Performance I/O<sup>3</sup>

| Input/Output Standard <sup>2</sup> | V <sub>IL</sub> |                          | V <sub>IH</sub>          |                         | V <sub>OL</sub> Max (V)  | V <sub>OH</sub> Min (V)  | I <sub>OL</sub> (mA)             | I <sub>OH</sub> (mA)                 |
|------------------------------------|-----------------|--------------------------|--------------------------|-------------------------|--------------------------|--------------------------|----------------------------------|--------------------------------------|
|                                    | Min (V)         | Max (V)                  | Min (V)                  | Max (V)                 |                          |                          |                                  |                                      |
| LVC MOS18H                         | —               | 0.35 × V <sub>CCIO</sub> | 0.65 × V <sub>CCIO</sub> | V <sub>CCIO</sub> + 0.3 | 0.4                      | V <sub>CCIO</sub> – 0.45 | 2, 4, 8, 12, “50RS” <sup>3</sup> | -2, -4, -8, -12, “50RS” <sup>3</sup> |
| LVC MOS15H                         | —               | 0.35 × V <sub>CCIO</sub> | 0.65 × V <sub>CCIO</sub> | V <sub>CCIO</sub> + 0.3 | 0.4                      | V <sub>CCIO</sub> – 0.4  | 2, 4, 8, “50RS” <sup>3</sup>     | -2, -4, -8, “50RS” <sup>3</sup>      |
| LVC MOS12H                         | —               | 0.35 × V <sub>CCIO</sub> | 0.65 × V <sub>CCIO</sub> | V <sub>CCIO</sub> + 0.3 | 0.4                      | V <sub>CCIO</sub> – 0.4  | 2, 4, 8, “50RS” <sup>3</sup>     | -2, -4, -8, “50RS” <sup>3</sup>      |
| LVC MOS10H                         | —               | 0.35 × V <sub>CCIO</sub> | 0.65 × V <sub>CCIO</sub> | V <sub>CCIO</sub> + 0.3 | 0.27 × V <sub>CCIO</sub> | 0.75 × V <sub>CCIO</sub> | 2, 4                             | -2, -4                               |
| SSTL15_I                           | —               | V <sub>REF</sub> – 0.10  | V <sub>REF</sub> + 0.1   | V <sub>CCIO</sub> + 0.3 | 0.30                     | V <sub>CCIO</sub> – 0.30 | 7.5                              | –7.5                                 |
| SSTL15_II                          | —               | V <sub>REF</sub> – 0.10  | V <sub>REF</sub> + 0.1   | V <sub>CCIO</sub> + 0.3 | 0.30                     | V <sub>CCIO</sub> – 0.30 | 8.8                              | –8.8                                 |
| HSTL15_I                           | —               | V <sub>REF</sub> – 0.10  | V <sub>REF</sub> + 0.1   | V <sub>CCIO</sub> + 0.3 | 0.40                     | V <sub>CCIO</sub> – 0.40 | 8                                | –8                                   |
| SSTL135_I                          | —               | V <sub>REF</sub> – 0.09  | V <sub>REF</sub> + 0.09  | V <sub>CCIO</sub> + 0.3 | 0.27                     | V <sub>CCIO</sub> – 0.27 | 6.75                             | –6.75                                |
| SSTL135_II                         | —               | V <sub>REF</sub> – 0.09  | V <sub>REF</sub> + 0.09  | V <sub>CCIO</sub> + 0.3 | 0.27                     | V <sub>CCIO</sub> – 0.27 | 8                                | –8                                   |
| LVC MOS10R                         | —               | V <sub>REF</sub> – 0.10  | V <sub>REF</sub> + 0.10  | V <sub>CCIO</sub> + 0.3 | —                        | —                        | —                                | —                                    |
| HSUL12                             | —               | V <sub>REF</sub> – 0.10  | V <sub>REF</sub> + 0.10  | V <sub>CCIO</sub> + 0.3 | 0.3                      | V <sub>CCIO</sub> – 0.3  | 8.0, 7.5, 6.25, 5                | –8.0, –7.5, –6.25, –5                |

**Notes:**

For electro-migration, the average DC current drawn by the I/O pads within a bank of I/O shall not exceed 10 mA per I/O average.

- For the types of I/O standard supported in which bank, refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for details.
- Select “50RS” in driver strength is selecting 50 Ω series impedance driver.

Table 4.16. I/O Resistance Characteristics

| Parameter            | Description                                               | Test Conditions                                                | Min | Typ | Max | Unit |
|----------------------|-----------------------------------------------------------|----------------------------------------------------------------|-----|-----|-----|------|
| 50RS                 | Output Drive Resistance when 50RS Drive Strength Selected | V <sub>CCIO</sub> = 1.8 V, 2.5 V, or 3.3 V                     | —   | 50  | —   | Ω    |
| R <sub>DIFF</sub>    | Input Differential Termination Resistance                 | Bank 3, Bank 4, and Bank 5 for I/O selected to be differential | —   | 100 | —   | Ω    |
| SE Input Termination | Input Single Ended Termination Resistance                 | Bank 3, Bank 4, and Bank 5 for I/O selected to be Single Ended | 36  | 40  | 64  | Ω    |
|                      |                                                           |                                                                | 46  | 50  | 80  |      |
|                      |                                                           |                                                                | 56  | 60  | 96  |      |
|                      |                                                           |                                                                | 71  | 75  | 120 |      |

**Table 4.17. V<sub>IN</sub> Maximum Overshoot/Undershoot Allowance – Wide Range<sup>1, 2</sup>**

| AC Voltage Overshoot    | % of UI at –40 °C to 125 °C | AC Voltage Undershoot | % of UI at –40 °C to 125 °C |
|-------------------------|-----------------------------|-----------------------|-----------------------------|
| V <sub>CCIO</sub> + 0.4 | 100.0%                      | –0.4                  | 100.0%                      |
| V <sub>CCIO</sub> + 0.5 | 100.0%                      | –0.5                  | 44.2%                       |
| V <sub>CCIO</sub> + 0.6 | 94.0%                       | –0.6                  | 10.1%                       |
| V <sub>CCIO</sub> + 0.7 | 21.0%                       | –0.7                  | 1.3%                        |
| V <sub>CCIO</sub> + 0.8 | 10.2%                       | –0.8                  | 0.3%                        |
| V <sub>CCIO</sub> + 0.9 | 2.5%                        | –0.9                  | 0.1%                        |

**Notes:**

1. The peak overshoot or undershoot voltage and the duration above V<sub>CCIO</sub> + 0.2 V or below GND – 0.2 V must not exceed the values in this table.
2. For UI less than 20 μs.

**Table 4.18. V<sub>IN</sub> Maximum Overshoot/Undershoot Allowance – High Performance<sup>1, 2</sup>**

| AC Voltage Overshoot    | % of UI at –40 °C to 125 °C | AC Voltage Undershoot | % of UI at –40 °C to 125 °C |
|-------------------------|-----------------------------|-----------------------|-----------------------------|
| V <sub>CCIO</sub> + 0.5 | 100.0%                      | –0.5                  | 100.0%                      |
| V <sub>CCIO</sub> + 0.6 | 47.3%                       | –0.6                  | 47.3%                       |
| V <sub>CCIO</sub> + 0.7 | 10.9%                       | –0.7                  | 10.9%                       |
| V <sub>CCIO</sub> + 0.8 | 2.7%                        | –0.8                  | 2.7%                        |
| V <sub>CCIO</sub> + 0.9 | 0.7%                        | –0.9                  | 0.7%                        |

**Notes:**

1. The peak overshoot or undershoot voltage and the duration above V<sub>CCIO</sub> + 0.2 V or below GND – 0.2 V must not exceed the values in this table.
2. For UI less than 20 μs.

## 4.12. sysI/O Differential DC Electrical Characteristics

### 4.12.1. LVDS

LVDS input buffer on CrossLink-NX is operating with V<sub>CCAUX</sub> = 1.8 V and independent of Bank V<sub>CCIO</sub> voltage. LVDS output buffer is powered by the Bank V<sub>CCIO</sub> at 1.8 V.

LVDS can only be supported in Bank 3, Bank 4, and Bank 5. LVDS25 output can be emulated with LVDS25E in Bank 0, Bank 1, Bank 2, Bank 6, and Bank 7. This is described in [LVDS25E \(Output Only\)](#) section.

**Table 4.19. LVDS DC Electrical Characteristics<sup>1</sup>**

| Parameter                           | Description                                                                  | Test Conditions                                                | Min   | Typ   | Max               | Unit |
|-------------------------------------|------------------------------------------------------------------------------|----------------------------------------------------------------|-------|-------|-------------------|------|
| V <sub>INP</sub> , V <sub>INM</sub> | Input Voltage                                                                | —                                                              | 0     | —     | 1.60              | V    |
| V <sub>ICM</sub>                    | Input Common Mode Voltage                                                    | Half the sum of the two Inputs                                 | 0.05  | —     | 1.55 <sup>2</sup> | V    |
| V <sub>THD</sub>                    | Differential Input Threshold                                                 | Difference between the two Inputs                              | ±100  | —     | —                 | mV   |
| I <sub>IN</sub>                     | Input Current                                                                | Power On or Power Off                                          | —     | —     | ±10               | μA   |
| V <sub>OH</sub>                     | Output High Voltage for V <sub>OP</sub> or V <sub>OM</sub>                   | R <sub>T</sub> = 100 Ω                                         | —     | 1.425 | 1.60              | V    |
| V <sub>OL</sub>                     | Output Low Voltage for V <sub>OP</sub> or V <sub>OM</sub>                    | R <sub>T</sub> = 100 Ω                                         | 0.9   | 1.075 | —                 | V    |
| V <sub>OD</sub>                     | Output Voltage Differential                                                  | (V <sub>OP</sub> - V <sub>OM</sub> ), R <sub>T</sub> = 100 Ω   | 250   | 350   | 450               | mV   |
| ΔV <sub>OD</sub>                    | Change in V <sub>OD</sub> Between High and Low                               | —                                                              | —     | —     | 50                | mV   |
| V <sub>OCM</sub>                    | Output Common Mode Voltage                                                   | (V <sub>OP</sub> + V <sub>OM</sub> )/2, R <sub>T</sub> = 100 Ω | 1.125 | 1.25  | 1.375             | V    |
| ΔV <sub>OCM</sub>                   | Change in V <sub>OCM</sub> , V <sub>OCM</sub> (MAX) - V <sub>OCM</sub> (MIN) | —                                                              | —     | —     | 50                | mV   |
| I <sub>SAB</sub>                    | Output Short Circuit Current                                                 | V <sub>OD</sub> = 0 V Driver outputs shorted to each other     | —     | —     | 12                | mA   |
| ΔV <sub>OS</sub>                    | Change in V <sub>OS</sub> between H and L                                    | —                                                              | —     | —     | 50                | mV   |

**Notes:**


1. LVDS input or output are supported in Bank 3, Bank 4, and Bank 5. LVDS input uses  $V_{CCAUX}$  on the differential input comparator, and can be located in any  $V_{CCIO}$  voltage bank. LVDS output uses  $V_{CCIO}$  on the differential output driver, and can only be located in bank with  $V_{CCIO} = 1.8$  V.
2.  $V_{ICM}$  is depending on  $V_{ID}$ , input differential voltage, so the voltage on pin cannot exceed  $V_{INP/INN(min/max)}$  requirements.  $V_{ICM(min)} = V_{INP/INN(min)} + \frac{1}{2} V_{ID}$ ,  $V_{ICM(max)} = V_{INP/INN(max)} - \frac{1}{2} V_{ID}$ . Values in the table is based on minimum  $V_{ID}$  of +/- 100 mV.

#### 4.12.2. LVDS25E (Output Only)

Three sides of the CrossLink-NX devices, Top, Left and Right, support LVDS25 outputs with emulated complementary LVCMOS outputs in conjunction with a parallel resistor across the driver outputs. The scheme shown in Figure 4.2 is one possible solution for point-to-point signals.

**Table 4.20. LVDS25E DC Conditions**

| Parameter  | Description                            | Typical | Unit     |
|------------|----------------------------------------|---------|----------|
| $V_{CCIO}$ | Output Driver Supply ( $\pm 5\%$ )     | 2.50    | V        |
| $Z_{OUT}$  | Driver Impedance                       | 20      | $\Omega$ |
| $R_S$      | Driver Series Resistor ( $\pm 1\%$ )   | 158     | $\Omega$ |
| $R_P$      | Driver Parallel Resistor ( $\pm 1\%$ ) | 140     | $\Omega$ |
| $R_T$      | Receiver Termination ( $\pm 1\%$ )     | 100     | $\Omega$ |
| $V_{OH}$   | Output High Voltage                    | 1.43    | V        |
| $V_{OL}$   | Output Low Voltage                     | 1.07    | V        |
| $V_{OD}$   | Output Differential Voltage            | 0.35    | V        |
| $V_{CM}$   | Output Common Mode Voltage             | 1.25    | V        |
| $Z_{BACK}$ | Back Impedance                         | 100.5   | $\Omega$ |
| $I_{DC}$   | DC Output Current                      | 6.03    | mA       |

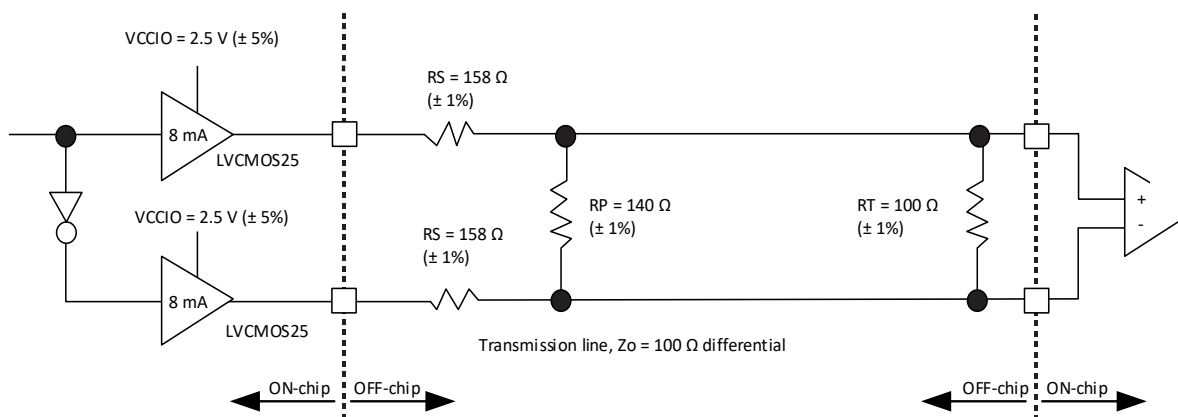


**Figure 4.2. LVDS25E Output Termination Example**

#### 4.12.3. SubLVDS (Input Only)

SubLVDS is a reduced-voltage form of LVDS signaling, very similar to LVDS. It is a standard used in many camera types of applications. Being similar to LVDS, the CrossLink-NX devices can support the subLVDS input signaling with the same LVDS input buffer. The output for subLVDS is implemented in subLVDSSE/subLVDSSEH with a pair of LVCMOS18 output drivers (see SubLVDSSE/SubLVDSSEH (Output Only) section).

**Table 4.21. SubLVDS Input DC Electrical Characteristics**

| Parameter | Description                          | Test Conditions                | Min | Typ | Max | Unit |
|-----------|--------------------------------------|--------------------------------|-----|-----|-----|------|
| $V_{ID}$  | Input Differential Threshold Voltage | Over $V_{ICM}$ range           | 70  | 150 | 200 | mV   |
| $V_{ICM}$ | Input Common Mode Voltage            | Half the sum of the two Inputs | 0.4 | 0.9 | 1.4 | V    |

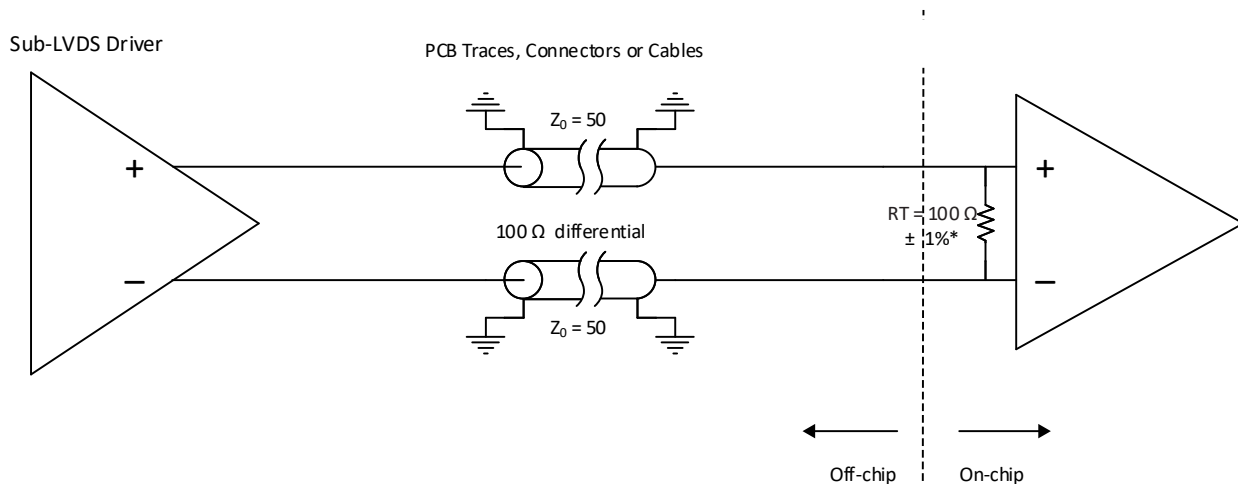

**Figure 4.3. SubLVDS Input Interface**

#### 4.12.4. SubLVDS Output DC Electrical Characteristics (Output Only)


SubLVDS output uses a pair of LVCMOS18 drivers with True and Complement outputs. The VCCIO of the bank used for subLVDS or subLVDSSEH needs to be powered by 1.8 V. SubLVDS is for Bank 0, Bank 1, Bank 2, Bank 5, and Bank 6; and subLVDSSEH is for Bank 3, Bank 4, and Bank 5.

Performance of the subLVDS/subLVDSSEH driver is limited to the performance of LVCMOS18.

**Table 4.22. SubLVDS Output DC Electrical Characteristics**

| Parameter | Description                       | Test Conditions                 | Min | Typ | Max | Unit |
|-----------|-----------------------------------|---------------------------------|-----|-----|-----|------|
| $V_{OD}$  | Output Differential Voltage Swing | —                               | —   | 150 | —   | mV   |
| $V_{OCM}$ | Output Common Mode Voltage        | Half the sum of the two Outputs | —   | 0.9 | —   | V    |



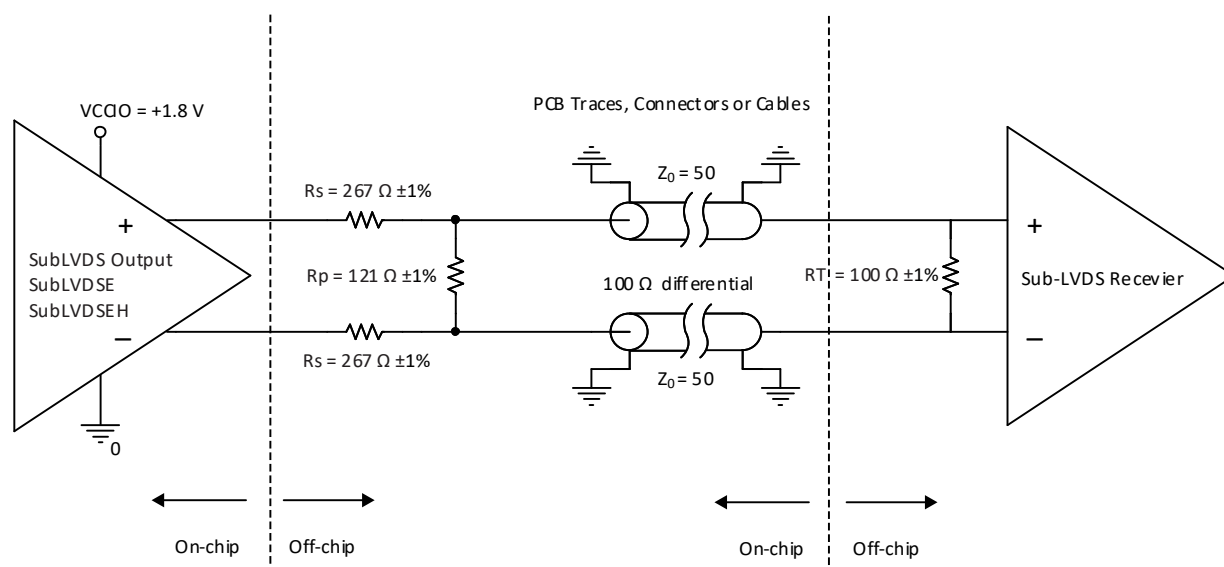

**Figure 4.4. SubLVDS Output Interface**

#### 4.12.5. SLVS

Scalable Low-Voltage Signaling (SLVS) is based on a point-to-point signaling method defined in the JEDEC JESD8-13 (SLVS-400) standard. This standard evolved from the traditional LVDS standard with smaller voltage swings and a lower common-mode voltage. The 200 mV (400 mV p-p) SLVS swing contributes to a reduction in power.

The CrossLink-NX devices receive SLVS differential input with the LVDS input buffer. This LVDS input buffer is design to cover wide input common mode range that can meet the SLVS input standard specified by the JEDEC standard.

**Table 4.23. SLVS Input DC Characteristics**

| Parameter | Description                          | Test Conditions                | Min | Typ | Max | Unit |
|-----------|--------------------------------------|--------------------------------|-----|-----|-----|------|
| $V_{ID}$  | Input Differential Threshold Voltage | Over $V_{ICM}$ range           | 70  | —   | —   | mV   |
| $V_{ICM}$ | Input Common Mode Voltage            | Half the sum of the two Inputs | 70  | 200 | 330 | mV   |

The SLVS output on CrossLink-NX is supported with the LVDS drivers found in Bank 3, Bank 4, and Bank 5. The LVDS driver on CrossLink-NX is a current controlled driver. It can be configured as LVDS driver, or configured with the 100  $\Omega$  differential termination with center-tap set to  $V_{OCM}$  at 200 mV. This means the differential output driver can be placed into bank with  $V_{CCIO} = 1.2$  V, 1.5 V, or 1.8 V, even if it is powered by  $V_{CCIO}$ .

**Table 4.24. SLVS Output DC Characteristics**

| Parameter  | Description                       | Test Conditions                 | Min  | Typ                 | Max  | Unit     |
|------------|-----------------------------------|---------------------------------|------|---------------------|------|----------|
| $V_{CCIO}$ | Bank $V_{CCIO}$                   | —                               | –5%  | 1.2,<br>1.5,<br>1.8 | + 5% | V        |
| $V_{OD}$   | Output Differential Voltage Swing | —                               | 140  | 200                 | 270  | mV       |
| $V_{OCM}$  | Output Common Mode Voltage        | Half the sum of the two Outputs | 150  | 200                 | 250  | mV       |
| $Z_{OS}$   | Single-Ended Output Impedance     | —                               | 37.5 | 50                  | 80   | $\Omega$ |

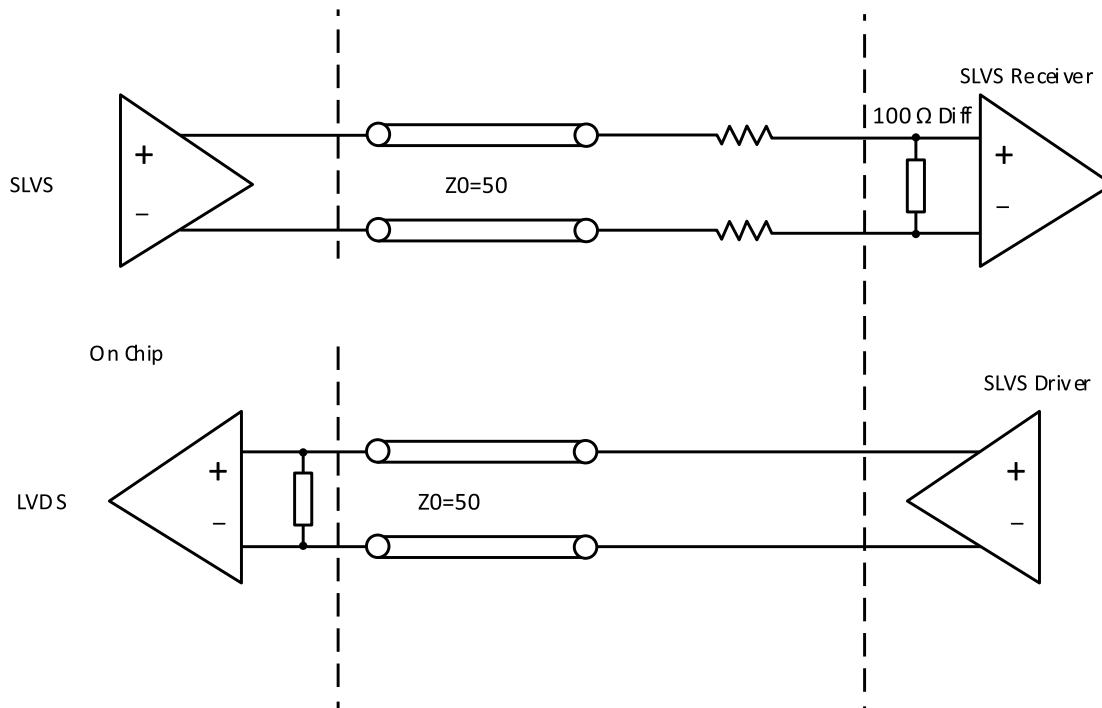


Figure 4.5. SLVS Interface

#### 4.12.6. Soft MIPI D-PHY

When Soft D-PHY is implemented inside the FPGA logic, the I/O interface needs to use sysI/O buffers to connect to external D-PHY pins.

The CrossLink-NX sysI/O provides support for SLVS, as described in [SLVS](#) section, plus the LVCMOS12 input / output buffers together to support the High Speed (HS) and Low Power (LP) mode as defined in MIPI Alliance Specification for D-PHY.

To support MIPI D-PHY with SLVS (LVDS) and LVCMOS12, the bank  $V_{CCIO}$  cannot be set to 1.5 V or 1.8 V. It must connect to 1.2 V or 1.1 V.

All other DC parameters are the same as listed in [SLVS](#) section. DC parameters for the LP driver and receiver are the same as listed in LVCMOS12.

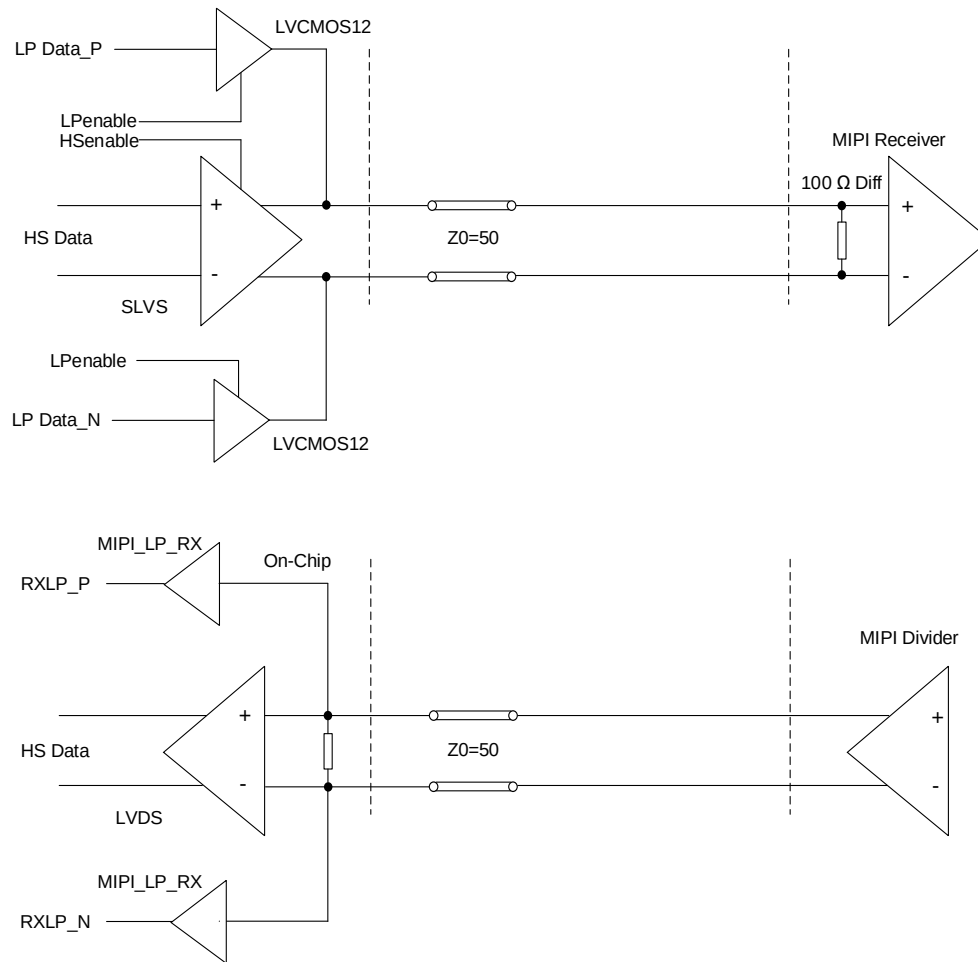


Figure 4.6. MIPI Interface

Table 4.25. Soft D-PHY Input Timing and Levels

| Symbol                                                   | Description                                                 | Conditions | Min | Typ | Max | Unit |
|----------------------------------------------------------|-------------------------------------------------------------|------------|-----|-----|-----|------|
| <b>High Speed (Differential) Input DC Specifications</b> |                                                             |            |     |     |     |      |
| $V_{CMRX(DC)}$                                           | Common-mode Voltage in High Speed Mode                      | —          | 70  | —   | 330 | mV   |
| $V_{IDTH}$                                               | Differential Input HIGH Threshold                           | —          | 70  | —   | —   | mV   |
| $V_{IDTL}$                                               | Differential Input LOW Threshold                            | —          | —   | —   | -70 | mV   |
| $V_{IHHS}$                                               | Input HIGH Voltage (for HS mode)                            | —          | —   | —   | 460 | mV   |
| $V_{ILHS}$                                               | Input LOW Voltage                                           | —          | -40 | —   | —   | mV   |
| $V_{TERM-EN}$                                            | Single-ended voltage for HS Termination Enable <sup>4</sup> | —          | —   | —   | 450 | mV   |
| $Z_D$                                                    | Differential Input Impedance                                | —          | 80  | 100 | 125 | Ω    |
| <b>High Speed (Differential) Input AC Specifications</b> |                                                             |            |     |     |     |      |
| $\Delta V_{CMRX(HF)}^1$                                  | Common-mode Interference (>450 MHz)                         | —          | —   | —   | 100 | mV   |
| $\Delta V_{CMRX(LF)}^{2,3}$                              | Common-mode Interference (50 MHz - 450 MHz)                 | —          | -50 | —   | 50  | mV   |
| $C_{CM}$                                                 | Common-mode Termination                                     | —          | —   | —   | 60  | pF   |
| <b>Low Power (Single-Ended) Input DC Specifications</b>  |                                                             |            |     |     |     |      |
| $V_{IH}$                                                 | Low Power Mode Input HIGH Voltage                           | —          | 820 | —   | —   | mV   |
| $V_{IL}$                                                 | Low Power Mode Input LOW Voltage                            | —          | —   | —   | 480 | mV   |
| $V_{IL-ULP}$                                             | Ultra Low Power Input LOW Voltage                           | —          | —   | —   | 300 | mV   |
| $V_{HYST}$                                               | Low Power Mode Input Hysteresis                             | —          | 25  | —   | —   | mV   |
| $e_{SPIKE}$                                              | Input Pulse Rejection                                       | —          | —   | —   | 300 | V-ps |

| Symbol              | Description                  | Conditions | Min | Typ | Max | Unit |
|---------------------|------------------------------|------------|-----|-----|-----|------|
| $T_{\text{MIN-RX}}$ | Minimum Pulse Width Response | —          | 20  | —   | —   | ns   |
| $V_{\text{INT}}$    | Peak Interference Amplitude  | —          | —   | —   | 200 | mV   |
| $f_{\text{INT}}$    | Interference Frequency       | —          | 450 | —   | —   | MHz  |

**Notes:**

1. This is peak amplitude of sine wave modulated to the receiver inputs.
2. Input common-mode voltage difference compared to average common-mode voltage on the receiver inputs.
3. Exclude any static ground shift of 50 mV.
4. High Speed Differential  $R_{\text{TERM}}$  is enabled when both  $D_P$  and  $D_N$  are below this voltage.

**Table 4.26. Soft D-PHY Output Timing and Levels**

| Symbol                                                    | Description                                                  | Conditions                                                   | Min  | Typ | Max  | Unit              |
|-----------------------------------------------------------|--------------------------------------------------------------|--------------------------------------------------------------|------|-----|------|-------------------|
| <b>High Speed (Differential) Output DC Specifications</b> |                                                              |                                                              |      |     |      |                   |
| $V_{\text{CMTX}}$                                         | Common-mode Voltage in High Speed Mode                       | —                                                            | 135  | 200 | 250  | mV                |
| $ \Delta V_{\text{CMTX}(1,0)} $                           | $V_{\text{CMTX}}$ Mismatch Between Differential HIGH and LOW | —                                                            | —    | —   | 15   | mV                |
| $ V_{\text{OD}} $                                         | Output Differential Voltage                                  | $ D\text{-PHY-P} - D\text{-PHY-N} $                          | 100  | 200 | 270  | mV                |
| $ \Delta V_{\text{OD}} $                                  | $V_{\text{OD}}$ Mismatch Between Differential HIGH and LOW   | —                                                            | —    | —   | 50   | mV                |
| $V_{\text{OHHS}}$                                         | Single-Ended Output HIGH Voltage                             | —                                                            | —    | —   | 385  | mV                |
| $Z_{\text{OS}}$                                           | Single Ended Output Impedance                                | —                                                            | 37.5 | 50  | 80   | $\Omega$          |
| $\Delta Z_{\text{OS}}$                                    | $Z_{\text{OS}}$ mismatch                                     | —                                                            | —    | —   | 20   | %                 |
| <b>High Speed (Differential) Output AC Specifications</b> |                                                              |                                                              |      |     |      |                   |
| $\Delta V_{\text{CMTX}(\text{LF})}$                       | Common-Mode Variation, 50 MHz–450 MHz                        | —                                                            | —    | —   | 30   | mV <sub>RMS</sub> |
| $\Delta V_{\text{CMTX}(\text{HF})}$                       | Common-Mode Variation, above 450 MHz                         | —                                                            | —    | —   | 17   | mV <sub>RMS</sub> |
| $t_{\text{R}}$                                            | Output 20%–80% Rise Time<br>Output 80%–20% Fall Time         | $0.08 \text{ Gbps} \leq t_{\text{R}} \leq 1.00 \text{ Gbps}$ | —    | —   | 0.35 | UI                |
| $t_{\text{F}}$                                            | Output Data Valid After CLK Output                           | $0.08 \text{ Gbps} \leq t_{\text{F}} \leq 1.00 \text{ Gbps}$ | —    | —   | 0.27 | UI                |
| <b>Low Power (Single-Ended) Output DC Specifications</b>  |                                                              |                                                              |      |     |      |                   |
| $V_{\text{OH}}$                                           | Low Power Mode Output HIGH Voltage                           | $0.08 \text{ Gbps} - 1.5 \text{ Gbps}$                       | 1.07 | 1.2 | 1.3  | V                 |
| $V_{\text{OL}}$                                           | Low Power Mode Input LOW Voltage                             | —                                                            | –50  | —   | 50   | mV                |
| $Z_{\text{OLP}}$                                          | Output Impedance in Low Power Mode                           | —                                                            | 110  | —   | —    | $\Omega$          |
| <b>Low Power (Single-Ended) Output AC Specifications</b>  |                                                              |                                                              |      |     |      |                   |
| $t_{\text{RLP}}$                                          | 15%–85% Rise Time                                            | —                                                            | —    | —   | 25   | ns                |
| $t_{\text{FLP}}$                                          | 85%–15% Fall Time                                            | —                                                            | —    | —   | 25   | ns                |
| $t_{\text{REOT}}$                                         | HS – LP Mode Rise and Fall Time, 30%–85%                     | —                                                            | —    | —   | 35   | ns                |

| Symbol                   | Description                              | Conditions                                                                | Min | Typ | Max | Unit |
|--------------------------|------------------------------------------|---------------------------------------------------------------------------|-----|-----|-----|------|
| T <sub>LP-PULSE-TX</sub> | Pulse Width of the LP Exclusive-OR Clock | First LP XOR Clock Pulse after STOP State or Last Pulse before STOP State | 40  | —   | —   | ns   |
|                          |                                          | All Other Pulses                                                          | 20  | —   | —   | ns   |
| T <sub>LP-PER-TX</sub>   | Period of the LP Exclusive-OR Clock      | —                                                                         | 90  | —   | —   | ns   |
| C <sub>LOAD</sub>        | Load Capacitance                         | —                                                                         | 0   | —   | 70  | pF   |

**Table 4.27. Soft D-PHY Clock Signal Specification**

| Symbol                            | Description        | Conditions | Min  | Typ | Max  | Unit |
|-----------------------------------|--------------------|------------|------|-----|------|------|
| <b>Clock Signal Specification</b> |                    |            |      |     |      |      |
| UI<br>Instantaneous               | U <sub>IINST</sub> | —          | —    | —   | 12.5 | ns   |
| UI Variation                      | ΔUI                | —          | –10% | —   | 10%  | UI   |
|                                   |                    | —          | –5%  | —   | 5%   | UI   |

**Table 4.28. Soft D-PHY Data-Clock Timing Specifications**

| Symbol                                  | Description                 | Conditions                                         | Min   | Typ | Max   | Unit               |
|-----------------------------------------|-----------------------------|----------------------------------------------------|-------|-----|-------|--------------------|
| <b>Data-Clock Timing Specifications</b> |                             |                                                    |       |     |       |                    |
| T <sub>SKEW[TX]</sub>                   | Data to Clock Skew          | 0.08 Gbps ≤ T <sub>SKEW[TX]</sub><br>≤ 1.00 Gbps   | –0.15 | —   | 0.158 | U <sub>IINST</sub> |
| T <sub>SKEW[TLIS]</sub>                 | Data to Clock Skew          | 0.08 Gbps ≤ T <sub>SKEW[TLIS]</sub><br>≤ 1.00 Gbps | –0.20 | —   | 0.20  | U <sub>IINST</sub> |
| T <sub>SETUP[RX]</sub>                  | Input Data Setup Before CLK | 0.08 Gbps ≤ T <sub>SETUP[RX]</sub><br>≤ 1.00 Gbps  | 0.173 | —   | —     | UI                 |
| T <sub>HOLD[RX]</sub>                   | Input Data Hold After CLK   | 0.08 Gbps ≤ T <sub>HOLD[RX]</sub><br>≤ 1.00 Gbps   | 0.195 | —   | —     | UI                 |

#### 4.12.7. Differential HSTL15D (Output Only)

Differential HSTL outputs are implemented as a pair of complementary single-ended HSTL outputs.

#### 4.12.8. Differential SSTL135D, SSTL15D (Output Only)

Differential SSTL is used for differential clock in DDR3/DDR3L memory interface. All differential SSTL outputs are implemented as a pair of complementary single-ended SSTL outputs. All allowable single-ended output classes (class I and class II) are supported.

#### 4.12.9. Differential HSUL12D (Output Only)

Differential HSUL is used for differential clock in LPDDR2 memory interface. All differential HSUL outputs are implemented as a pair of complementary single-ended HSUL12 outputs. All allowable single-ended drive strengths are supported.

#### 4.12.10. Differential LVCMOS25D, LVCMOS33D, LVTTTL33D (Output Only)

Differential LVCMOS and LVTTTL outputs are implemented as a pair of complementary single-ended outputs. All allowable single-ended output drive strengths are supported.

## 4.13. Maximum sysI/O Buffer Speed

**Table 4.29. Maximum I/O Buffer Speed<sup>1, 2, 3, 4, 7</sup>**

| Buffer                                | Description                                                                              | Banks         | Max  | Unit |
|---------------------------------------|------------------------------------------------------------------------------------------|---------------|------|------|
| <b>Maximum sysI/O Input Frequency</b> |                                                                                          |               |      |      |
| <b>Single-Ended</b>                   |                                                                                          |               |      |      |
| LVCNOS33                              | LVCNOS33, $V_{CCIO} = 3.3\text{ V}$                                                      | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVTTL33                               | LVTTL33, $V_{CCIO} = 3.3\text{ V}$                                                       | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVCNOS25                              | LVCNOS25, $V_{CCIO} = 2.5\text{ V}$                                                      | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVCNOS18 <sup>5</sup>                 | LVCNOS18, $V_{CCIO} = 1.8\text{ V}$                                                      | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVCNOS18H                             | LVCNOS18, $V_{CCIO} = 1.8\text{ V}$                                                      | 3, 4, 5       | 200  | MHz  |
| LVCNOS15 <sup>5</sup>                 | LVCNOS15, $V_{CCIO} = 1.5\text{ V}$                                                      | 0, 1, 2, 6, 7 | 100  | MHz  |
| LVCNOS15H <sup>5</sup>                | LVCNOS15, $V_{CCIO} = 1.5\text{ V}$                                                      | 3, 4, 5       | 150  | MHz  |
| LVCNOS12 <sup>5</sup>                 | LVCNOS12, $V_{CCIO} = 1.2\text{ V}$                                                      | 0, 1, 2, 6, 7 | 50   | MHz  |
| LVCNOS12H <sup>5</sup>                | LVCNOS12, $V_{CCIO} = 1.2\text{ V}$                                                      | 3, 4, 5       | 100  | MHz  |
| LVCNOS10 <sup>5</sup>                 | LVCNOS 1.0, $V_{CCIO} = 1.2\text{ V}$                                                    | 0, 1, 2, 6, 7 | 50   | MHz  |
| LVCNOS10H <sup>5</sup>                | LVCNOS 1.0, $V_{CCIO} = 1.0\text{ V}$                                                    | 3, 4, 5       | 50   | MHz  |
| LVCNOS10R                             | LVCNOS 1.0, $V_{CCIO}$ independent                                                       | 3, 4, 5       | 50   | MHz  |
| SSTL15_I, SSTL15_II                   | SSTL_15, $V_{CCIO} = 1.5\text{ V}$                                                       | 3, 4, 5       | 1066 | Mbps |
| SSTL135_I, SSTL135_II                 | SSTL_135, $V_{CCIO} = 1.35\text{ V}$                                                     | 3, 4, 5       | 1066 | Mbps |
| HSUL12                                | HSUL_12, $V_{CCIO} = 1.2\text{ V}$                                                       | 3, 4, 5       | 1066 | Mbps |
| HSTL15                                | HSTL15, $V_{CCIO} = 1.5\text{ V}$                                                        | 3, 4, 5       | 250  | Mbps |
| MIPI D-PHY (LP Mode)                  | MIPI, Low Power Mode, $V_{CCIO} = 1.2\text{ V}$                                          | 3, 4, 5       | 10   | Mbps |
| <b>Differential<sup>8</sup></b>       |                                                                                          |               |      |      |
| LVDS                                  | LVDS, $V_{CCIO}$ independent QFN72, caBGA256, csBGA289, and caBGA400                     | 3, 4, 5       | 1250 | Mbps |
|                                       | LVDS, $V_{CCIO}$ independent csfBGA121                                                   | 3, 4, 5       | 1500 | Mbps |
| subLVDS                               | subLVDS, $V_{CCIO}$ independent QFN72, caBGA256, csBGA289, and caBGA400                  | 3, 4, 5       | 1250 | Mbps |
|                                       | subLVDS, $V_{CCIO}$ independent csfBGA121                                                | 3, 4, 5       | 1500 | Mbps |
| SLVS                                  | SLVS similar to MIPI HS, $V_{CCIO}$ independent QFN72, caBGA256, csBGA289, caBGA400      | 3, 4, 5       | 1250 | Mbps |
|                                       | SLVS similar to MIPI HS, $V_{CCIO}$ independent csfBGA121                                | 3, 4, 5       | 1500 | Mbps |
| MIPI D-PHY (HS Mode)                  | MIPI, High Speed Mode, $V_{CCIO} = 1.2\text{ V}$ QFN72                                   | 3, 4, 5       | 1250 | Mbps |
|                                       | MIPI, High Speed Mode, $V_{CCIO} = 1.2\text{ V}$ csfBGA121, caBGA256, csBGA289, caBGA400 | 3, 4, 5       | 1500 | Mbps |
| SSTL15D                               | Differential SSTL15, $V_{CCIO}$ independent                                              | 3, 4, 5       | 1066 | Mbps |
| SSTL135D                              | Differential SSTL135, $V_{CCIO}$ independent                                             | 3, 4, 5       | 1066 | Mbps |
| HUSL12D                               | Differential HSUL12, $V_{CCIO}$ independent                                              | 3, 4, 5       | 1066 | Mbps |
| HSTL15D                               | Differential HSTL15, $V_{CCIO}$ independent                                              | 3, 4, 5       | 250  | Mbps |

| Buffer                                 | Description                                                                              | Banks         | Max  | Unit |
|----------------------------------------|------------------------------------------------------------------------------------------|---------------|------|------|
| <b>Maximum sysI/O Output Frequency</b> |                                                                                          |               |      |      |
| <b>Single-Ended</b>                    |                                                                                          |               |      |      |
| LVC MOS33 (all drive strengths)        | LVC MOS33, $V_{CCIO} = 3.3\text{ V}$                                                     | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVC MOS33 (RS50)                       | LVC MOS33, $V_{CCIO} = 3.3\text{ V}$ , $R_{SERIES} = 50\ \Omega$                         | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVTTL33 (all drive strengths)          | LVTTL33, $V_{CCIO} = 3.3\text{ V}$                                                       | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVTTL33 (RS50)                         | LVTTL33, $V_{CCIO} = 3.3\text{ V}$ , $R_{SERIES} = 50\ \Omega$                           | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVC MOS25 (all drive strengths)        | LVC MOS25, $V_{CCIO} = 2.5\text{ V}$                                                     | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVC MOS25 (RS50)                       | LVC MOS25, $V_{CCIO} = 2.5\text{ V}$ , $R_{SERIES} = 50\ \Omega$                         | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVC MOS18 (all drive strengths)        | LVC MOS18, $V_{CCIO} = 1.8\text{ V}$                                                     | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVC MOS18 (RS50)                       | LVC MOS18, $V_{CCIO} = 1.8\text{ V}$ , $R_{SERIES} = 50\ \Omega$                         | 0, 1, 2, 6, 7 | 200  | MHz  |
| LVC MOS18H (all drive strengths)       | LVC MOS18, $V_{CCIO} = 1.8\text{ V}$                                                     | 3, 4, 5       | 200  | MHz  |
| LVC MOS18H (RS50)                      | LVC MOS18, $V_{CCIO} = 1.8\text{ V}$ , $R_{SERIES} = 50\ \Omega$                         | 3, 4, 5       | 200  | MHz  |
| LVC MOS15 (all drive strengths)        | LVC MOS15, $V_{CCIO} = 1.5\text{ V}$                                                     | 0, 1, 2, 6, 7 | 100  | MHz  |
| LVC MOS15H (all drive strengths)       | LVC MOS15, $V_{CCIO} = 1.5\text{ V}$                                                     | 3, 4, 5       | 150  | MHz  |
| LVC MOS12 (all drive strengths)        | LVC MOS12, $V_{CCIO} = 1.2\text{ V}$                                                     | 0, 1, 2, 6, 7 | 50   | MHz  |
| LVC MOS12H (all drive strengths)       | LVC MOS12, $V_{CCIO} = 1.2\text{ V}$                                                     | 3, 4, 5       | 100  | MHz  |
| LVC MOS10H (all drive strengths)       | LVC MOS12, $V_{CCIO} = 1.2\text{ V}$                                                     | 3, 4, 5       | 50   | MHz  |
| SSTL15_I, SSTL15_II                    | SSTL_15, $V_{CCIO} = 1.5\text{ V}$                                                       | 3, 4, 5       | 1066 | Mbps |
| SSTL135_I, SSTL135_II                  | SSTL_135, $V_{CCIO} = 1.35\text{ V}$                                                     | 3, 4, 5       | 1066 | Mbps |
| HSUL12 (all drive strengths)           | HSUL_12, $V_{CCIO} = 1.2\text{ V}$                                                       | 3, 4, 5       | 1066 | Mbps |
| HSTL15                                 | HSTL15, $V_{CCIO} = 1.5\text{ V}$                                                        | 3, 4, 5       | 250  | Mbps |
| MIPI D-PHY (LP Mode)                   | MIPI, Low Power Mode, $V_{CCIO} = 1.2\text{ V}$                                          | 3, 4, 5       | 10   | Mbps |
| <b>Differential<sup>8</sup></b>        |                                                                                          |               |      |      |
| LVDS                                   | LVDS, $V_{CCIO} = 1.8\text{ V}$ QFN72, caBGA256, csBGA289, and caBGA400                  | 3, 4, 5       | 1250 | Mbps |
|                                        | LVDS, $V_{CCIO} = 1.8\text{ V}$ csfBGA121                                                | 3, 4, 5       | 1500 | Mbps |
| LVDS25E <sup>6</sup>                   | LVDS25, Emulated, $V_{CCIO} = 2.5\text{ V}$                                              | 0, 1, 2, 6, 7 | 400  | Mbps |
| SubLVDS <sup>6</sup>                   | subLVDS, Emulated, $V_{CCIO} = 1.8\text{ V}$                                             | 0, 1, 2, 6, 7 | 400  | Mbps |
| SubLVDS <sup>6</sup> EH <sup>6</sup>   | subLVDS, Emulated, $V_{CCIO} = 1.8\text{ V}$                                             | 3, 4, 5       | 800  | Mbps |
| SLVS                                   | SLVS similar to MIPI, $V_{CCIO} = 1.2\text{ V}$ QFN72, caBGA256, csBGA289, caBGA400      | 3, 4, 5       | 1250 | Mbps |
|                                        | SLVS similar to MIPI, $V_{CCIO} = 1.2\text{ V}$ csfBGA121                                | 3, 4, 5       | 1500 | Mbps |
| MIPI D-PHY (HS Mode)                   | MIPI, High Speed Mode, $V_{CCIO} = 1.2\text{ V}$ QFN72                                   | 3, 4, 5       | 1250 | Mbps |
|                                        | MIPI, High Speed Mode, $V_{CCIO} = 1.2\text{ V}$ csfBGA121, caBGA256, csBGA289, caBGA400 | 3, 4, 5       | 1500 | Mbps |
| SSTL15D                                | Differential SSTL15, $V_{CCIO} = 1.5\text{ V}$                                           | 3, 4, 5       | 1066 | Mbps |
| SSTL135D                               | Differential SSTL135, $V_{CCIO} = 1.35\text{ V}$                                         | 3, 4, 5       | 1066 | Mbps |
| HUSL12D                                | Differential HSUL12, $V_{CCIO} = 1.2\text{ V}$                                           | 3, 4, 5       | 1066 | Mbps |
| HSTL15D                                | Differential HSTL15, $V_{CCIO} = 1.5\text{ V}$                                           | 3, 4, 5       | 250  | Mbps |

**Notes:**

- Maximum I/O speed is the maximum switching rate of the I/O operating within the guidelines of the defining standard. The actual interface speed performance using the I/O also depends on other factors, such as internal and external timing.
- These numbers are characterized but not test on every device.

3. Performance is specified in MHz, as defined in clock rate when the sysI/O is used as pin. For data rate performance, this can be converted to Mbps, which equals to 2 times the clock rate.
4. LVCMOS and LVTTTL are measured with load specified in [Table 4.50](#).
5. These LVCMOS inputs can be placed in different V<sub>CCIO</sub> voltage. Performance may vary. Please refer to Lattice Design Software
6. These emulated outputs performance is based on externally properly terminated as described in [LVDS25E \(Output Only\)](#) and [SubLVDS/SubLVDSSEH \(Output Only\)](#).
7. All speeds are measured with fast slew.
8. For maximum differential I/O performance only Differential I/O should be placed in the bottom I/O banks. If this is not possible, the following will impact on maximum performance:
  - a. If Fast Slew Rate LVCMOS I/O are used, they should be limited to no more than nine I/O (adjacent), four I/O (same bank), 55 I/O (left/right banks) to keep degradation below 50%.
  - b. If non-Differential I/O (SLOW SLEW) are placed on the bottom but not within the same bank as differential I/O, then the maximum Differential performance is degraded to 70% of original when 21 aggressors are toggling.
  - c. If non-Differential I/O (SLOW SLEW) are placed within the same bank as Differential I/O then the maximum performance is degraded to 50% of original when 16 aggressors are toggling.
  - d. No performance impact if MIPI LP and MIPI HS are in the same bank.
  - e. If Differential RX/TX I/O are both placed within the same bank then the maximum performance is degraded to 90%.
  - f. For DDR3/3L, LPDDR2/3 separate DQ/DQS groups from Address/Commands/CLK groups into separate banks.

## 4.14. Typical Building Block Function Performance

These building block functions can be generated using Lattice Design Software Tool. Exact performance may vary with the device and the design software tool version. The design software tool uses internal parameters that have been characterized but are not tested on every device.

**Table 4.30. Pin-to-Pin Performance**

| Function                                                            | Typ. @ VCC = 1.0 V | Unit |
|---------------------------------------------------------------------|--------------------|------|
| 16-bit Decoder (I/O configured with LVCMOS18, Left and Right Banks) | 5.5                | ns   |
| 16-bit Decoder (I/O configured with HSTL15_I, Bottom Banks)         | 5.1                | ns   |
| 16:1 Mux (I/O configured with LVCMOS18, Left and Right Banks)       | 6                  | ns   |
| 16:1 Mux (I/O configured with HSTL15_I, Bottom Banks)               | 6.1                | ns   |

**Note:** These functions are generated using Lattice Radiant Design Software tool. Exact performance may vary with the device and the design software tool version. The design software tool uses internal parameters that have been characterized but are not tested on every device.

**Table 4.31. Register-to-Register Performance**

| Function                                                                          | Typ. @ VCC = 1.0 V | Unit |
|-----------------------------------------------------------------------------------|--------------------|------|
| <b>Basic Functions</b>                                                            |                    |      |
| 16-bit Adder                                                                      | 500 <sup>2</sup>   | MHz  |
| 32-bit Adder                                                                      | 496                | MHz  |
| 16-bit Counter                                                                    | 402                | MHz  |
| 32-bit Counter                                                                    | 371                | MHz  |
| <b>Embedded Memory Functions</b>                                                  |                    |      |
| 512 × 36 Single Port RAM, with Output Register                                    | 500 <sup>2</sup>   | MHz  |
| 1024 × 18 True-Dual Port RAM using same clock, with EBR Output Registers          | 500 <sup>2</sup>   | MHz  |
| 1024 × 18 True-Dual Port RAM using asynchronous clocks, with EBR Output Registers | 500 <sup>2</sup>   | MHz  |
| <b>Large Memory Functions</b>                                                     |                    |      |
| 32k × 32 Single Port RAM, with Output Register                                    | 165 <sup>2</sup>   | MHz  |
| 32k × 32 Single Port RAM with ECC, with Output Register                           | 130 <sup>2</sup>   | MHz  |
| 32k × 32 True-Dual Port RAM using same clock, with Output Registers               | 154.883            | MHz  |



| Function                                          | Typ. @ VCC = 1.0 V | Unit |
|---------------------------------------------------|--------------------|------|
| <b>Distributed Memory Functions</b>               |                    |      |
| 16 × 4 Single Port RAM (One PFU)                  | 500 <sup>2</sup>   | MHz  |
| 16 × 2 Pseudo-Dual Port RAM (One PFU)             | 500 <sup>2</sup>   | MHz  |
| 16 × 4 Pseudo-Dual Port (Two PFUs)                | 500 <sup>2</sup>   | MHz  |
| <b>DSP Functions</b>                              |                    |      |
| 9 × 9 Multiplier with Input Output Registers      | 340                | MHz  |
| 18 × 18 Multiplier with Input/Output Registers    | 260                | MHz  |
| 36 × 36 Multiplier with Input/Output Registers    | 184                | MHz  |
| MAC 18 × 18 with Input/Output Registers           | 189                | MHz  |
| MAC 18 × 18 with Input/Pipelined/Output Registers | 260                | MHz  |
| MAC 36 × 36 with Input/Output Registers           | 111                | MHz  |
| MAC 36 × 36 with Input/Pipelined/Output Registers | 145                | MHz  |

**Notes:**

1. The Clock port is configured with LVDS I/O type. Performance Grade: 9\_High-Performance\_1.0V.
2. Limited by the Minimum Pulse Width of the component
3. These functions are generated using Lattice Radiant Design software tool. Exact performance may vary with the device and the design software tool version. The design software tool uses internal parameters that have been characterized but are not tested on every device.
4. For the Pipelined designs, the number of pipeline stages used are 2.

## 4.15. LMMI

Table 4.32 summarizes the performance of the LMMI interface with supported IPs. Additional timing requirement and constraint can be identified through the Lattice Radiance design tools.

**Table 4.32. LMMI F<sub>MAX</sub> Summary**

| IP      | F <sub>MAX</sub> (MHz) |
|---------|------------------------|
| CDR0    | 73                     |
| CDR1    | 70                     |
| DPHY0   | 67                     |
| DPHY1   | 55                     |
| CRE     | 54                     |
| I2C     | 38                     |
| PCIe    | 57                     |
| PLL_ULC | 59                     |
| PLL_LLC | 55                     |
| PLL_LRC | 37                     |

## 4.16. Derating Timing Tables

Logic timing provided in the following sections of this data sheet and the Lattice Radiant design tools are worst case numbers in the operating range. Actual delays at nominal temperature and voltage for best case process, can be much better than the values given in the tables. The Lattice Radiant design tool can provide logic timing numbers at a particular temperature and voltage.

## 4.17. External Switching Characteristics

Over recommended commercial operating conditions.

**Table 4.33. External Switching Characteristics (V<sub>CC</sub> = 1.0 V)**

| Parameter                                                                                                                                                                                                                    | Description                                                    | –7 Auto |        | Unit        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|---------|--------|-------------|
|                                                                                                                                                                                                                              |                                                                | Min     | Max    |             |
| Clocks                                                                                                                                                                                                                       |                                                                |         |        |             |
| Primary Clock                                                                                                                                                                                                                |                                                                |         |        |             |
| f <sub>MAX_PRI</sub>                                                                                                                                                                                                         | Frequency for Primary Clock                                    | —       | 276    | MHz         |
| t <sub>W_PRI</sub>                                                                                                                                                                                                           | Clock Pulse Width for Primary Clock                            | 1.59    | —      | ns          |
| t <sub>SKEW_PRI</sub> <sup>6</sup>                                                                                                                                                                                           | Primary Clock Skew Within a Device                             | —       | 653    | ps          |
| Edge Clock                                                                                                                                                                                                                   |                                                                |         |        |             |
| f <sub>MAX_EDGE</sub>                                                                                                                                                                                                        | Frequency for Edge Clock Tree                                  | —       | 551.7  | MHz         |
| t <sub>W_EDGE</sub>                                                                                                                                                                                                          | Clock Pulse Width for Edge Clock                               | 0.761   | —      | ns          |
| t <sub>SKEW_EDGE</sub> <sup>6</sup>                                                                                                                                                                                          | Edge Clock Skew Within a Device                                | —       | 174    | ps          |
| Generic SDR Input                                                                                                                                                                                                            |                                                                |         |        |             |
| General I/O Pin Parameters Using Dedicated Primary Clock Input without PLL                                                                                                                                                   |                                                                |         |        |             |
| t <sub>CO</sub>                                                                                                                                                                                                              | Clock to Output – PIO Output Register                          | —       | 7.91   | ns          |
| t <sub>SU</sub>                                                                                                                                                                                                              | Clock to Data Setup – PIO Input Register                       | 0       | —      | ns          |
| t <sub>H</sub>                                                                                                                                                                                                               | Clock to Data Hold – PIO Input Register                        | 3.95    | —      | ns          |
| t <sub>SU_DEL</sub>                                                                                                                                                                                                          | Clock to Data Setup – PIO Input Register with Data Input Delay | 1.86    | —      | ns          |
| t <sub>H_DEL</sub>                                                                                                                                                                                                           | Clock to Data Hold – PIO Input Register with Data Input Delay  | 0.26    | —      | ns          |
| General I/O Pin Parameters Using Dedicated Primary Clock Input with PLL                                                                                                                                                      |                                                                |         |        |             |
| t <sub>COPLL</sub>                                                                                                                                                                                                           | Clock to Output – PIO Output Register                          | —       | 5.57   | ns          |
| t <sub>SUPLL</sub>                                                                                                                                                                                                           | Clock to Data Setup – PIO Input Register                       | 1.31    | —      | ns          |
| t <sub>HPLL</sub>                                                                                                                                                                                                            | Clock to Data Hold - PIO Input Register                        | 1.44    | —      | ns          |
| t <sub>SU_DELP</sub>                                                                                                                                                                                                         | Clock to Data Setup - PIO Input Register with Data Input Delay | 4.99    | —      | ns          |
| t <sub>H_DELP</sub>                                                                                                                                                                                                          | Clock to Data Hold - PIO Input Register with Data Input Delay  | 0       | —      | ns          |
| Generic DDR Input/Output                                                                                                                                                                                                     |                                                                |         |        |             |
| Generic DDRX1 Inputs/Outputs with Clock and Data Centered at Pin (GDDR1_RX/TX.SCLK.Centered) using PCLK Clock Input – Bank 0, Bank 1, Bank 2, Bank 6, and Bank 7 – <a href="#">Figure 4.7</a> and <a href="#">Figure 4.9</a> |                                                                |         |        |             |
| t <sub>SU_GDDR1</sub>                                                                                                                                                                                                        | Input Data Setup Before CLK                                    | 0.917   | —      | ns          |
|                                                                                                                                                                                                                              |                                                                | 0.275   | —      | UI          |
| t <sub>HO_GDDR1</sub>                                                                                                                                                                                                        | Input Data Hold After CLK                                      | 0.917   | —      | ns          |
|                                                                                                                                                                                                                              |                                                                | 0.275   | —      | UI          |
| t <sub>DVB_GDDR1</sub>                                                                                                                                                                                                       | Output Data Valid After CLK Output                             | 1.008   | —      | ns          |
|                                                                                                                                                                                                                              |                                                                | –0.659  | —      | ns + 1/2 UI |
| t <sub>DQVA_GDDR1</sub>                                                                                                                                                                                                      | Output Data Valid After CLK Output                             | 1.008   | —      | ns          |
|                                                                                                                                                                                                                              |                                                                | –0.659  | —      | ns + 1/2 UI |
| f <sub>DATA_GDDR1</sub>                                                                                                                                                                                                      | Input/Output Data Rate                                         | —       | 300    | Mbps        |
| f <sub>MAX_GDDR1</sub>                                                                                                                                                                                                       | Frequency of PCLK                                              | —       | 150    | MHz         |
| ½ UI                                                                                                                                                                                                                         | Half of Data Bit Time, or 90 degree                            | 1.667   | —      | ns          |
| Output TX to Input RX Margin per Edge                                                                                                                                                                                        |                                                                | 0.091   | —      | ns          |
| Generic DDRX1 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR1_RX/TX.SCLK.Aligned) using PCLK Clock Input – Bank 0, Bank 1, Bank 2, Bank 6, and Bank 7 – <a href="#">Figure 4.8</a> and <a href="#">Figure 4.10</a>  |                                                                |         |        |             |
| t <sub>DVA_GDDR1</sub>                                                                                                                                                                                                       | Input Data Valid After CLK                                     | —       | –0.917 | ns + 1/2 UI |
|                                                                                                                                                                                                                              |                                                                | —       | 0.75   | ns          |
|                                                                                                                                                                                                                              |                                                                | —       | 0.225  | UI          |

| Parameter                                                                                                                                                                           | Description                           | –7 Auto |         | Unit        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------|---------|-------------|
|                                                                                                                                                                                     |                                       | Min     | Max     |             |
| t <sub>DVE_GDDR1</sub>                                                                                                                                                              | Input Data Hold After CLK             | 0.917   | —       | ns + 1/2 UI |
|                                                                                                                                                                                     |                                       | 2.583   | —       | ns          |
|                                                                                                                                                                                     |                                       | 0.775   | —       | UI          |
| t <sub>DIA_GDDR1</sub>                                                                                                                                                              | Output Data Invalid After CLK Output  | —       | 0.659   | ns          |
| t <sub>DIB_GDDR1</sub>                                                                                                                                                              | Output Data Invalid Before CLK Output | —       | 0.659   | ns          |
| f <sub>DATA_GDDR1</sub>                                                                                                                                                             | Input/Output Data Rate                | —       | 300     | Mbps        |
| f <sub>MAX_GDDR1</sub>                                                                                                                                                              | Frequency for PCLK                    | —       | 150     | MHz         |
| ½ UI                                                                                                                                                                                | Half of Data Bit Time, or 90 degree   | 1.667   | —       | ns          |
| Output TX to Input RX Margin per Edge                                                                                                                                               |                                       | 0.091   | —       | ns          |
| <b>Generic DDRX1 Inputs/Outputs with Clock and Data Centered at Pin (GDDR1_RX/TX.SCLK.Centered) using PCLK Clock Input – Bank 3, Bank 4, and Bank 5 – Figure 4.7 and Figure 4.9</b> |                                       |         |         |             |
| t <sub>SU_GDDR1</sub>                                                                                                                                                               | Input Data Setup Before CLK           | 0.917   | —       | ns          |
|                                                                                                                                                                                     |                                       | 0.275   | —       | UI          |
| t <sub>HO_GDDR1</sub>                                                                                                                                                               | Input Data Hold After CLK             | 0.917   | —       | ns          |
| t <sub>DVB_GDDR1</sub>                                                                                                                                                              | Output Data Valid After CLK Output    | 1.227   | —       | ns          |
|                                                                                                                                                                                     |                                       | –0.439  | —       | ns + 1/2 UI |
| t <sub>DQVA_GDDR1</sub>                                                                                                                                                             | Output Data Valid After CLK Output    | 1.227   | —       | ns          |
|                                                                                                                                                                                     |                                       | –0.439  | —       | ns + 1/2 UI |
| f <sub>DATA_GDDR1</sub>                                                                                                                                                             | Input/Output Data Rate                | —       | 300     | Mbps        |
| f <sub>MAX_GDDR1</sub>                                                                                                                                                              | Frequency of PCLK                     | —       | 150     | MHz         |
| ½ UI                                                                                                                                                                                | Half of Data Bit Time, or 90 degree   | 1.667   | —       | ns          |
| Output TX to Input RX Margin per Edge                                                                                                                                               |                                       | 0.311   | —       | ns          |
| <b>Generic DDRX1 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR1_RX/TX.SCLK.Aligned) using PCLK Clock Input – Bank 3, Bank 4, and Bank 5 – Figure 4.8 and Figure 4.10</b>  |                                       |         |         |             |
| t <sub>DVA_GDDR1</sub>                                                                                                                                                              | Input Data Valid After CLK            | —       | –0.9167 | ns + 1/2 UI |
|                                                                                                                                                                                     |                                       | —       | 0.75    | ns          |
|                                                                                                                                                                                     |                                       | —       | 0.225   | UI          |
| t <sub>DVE_GDDR1</sub>                                                                                                                                                              | Input Data Hold After CLK             | 0.9167  | —       | ns + 1/2 UI |
|                                                                                                                                                                                     |                                       | 2.5833  | —       | ns          |
|                                                                                                                                                                                     |                                       | 0.775   | —       | UI          |
| t <sub>DIA_GDDR1</sub>                                                                                                                                                              | Output Data Invalid After CLK Output  | —       | 0.439   | ns          |
| t <sub>DIB_GDDR1</sub>                                                                                                                                                              | Output Data Invalid Before CLK Output | —       | 0.439   | ns          |
| f <sub>DATA_GDDR1</sub>                                                                                                                                                             | Input/Output Data Rate                | —       | 300     | Mbps        |
| f <sub>MAX_GDDR1</sub>                                                                                                                                                              | Frequency for PCLK                    | —       | 150     | MHz         |
| ½ UI                                                                                                                                                                                | Half of Data Bit Time, or 90 degree   | 1.667   | —       | ns          |
| Output TX to Input RX Margin per Edge                                                                                                                                               |                                       | 0.311   | —       | ns          |

| Parameter                                                                                                                                                                 | Description                           | –7 Auto |        | Unit        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------|--------|-------------|
|                                                                                                                                                                           |                                       | Min     | Max    |             |
| Generic DDRX2 Inputs/Outputs with Clock and Data Centered at Pin (GDDR2_RX/TX.ECLK.Centered) using PCLK Clock Input – Figure 4.7 and Figure 4.9                           |                                       |         |        |             |
| t <sub>SU_GDDR2</sub>                                                                                                                                                     | Data Setup before CLK Input           | 0.270   | —      | ns          |
|                                                                                                                                                                           |                                       | 0.162   | —      | UI          |
| t <sub>HO_GDDR2</sub>                                                                                                                                                     | Data Hold after CLK Input             | 0.270   | —      | ns          |
| t <sub>DVB_GDDR2</sub>                                                                                                                                                    | Output Data Valid Before CLK Output   | 0.658   | —      | ns          |
|                                                                                                                                                                           |                                       | –0.176  | —      | ns + 1/2 UI |
| t <sub>DQVA_GDDR2</sub>                                                                                                                                                   | Output Data Valid After CLK Output    | 0.658   | —      | ns          |
|                                                                                                                                                                           |                                       | –0.176  | —      | ns + 1/2 UI |
| f <sub>DATA_GDDR2</sub>                                                                                                                                                   | Input/Output Data Rate                | —       | 600    | Mbps        |
| f <sub>MAX_GDDR2</sub>                                                                                                                                                    | Frequency for ECLK                    | —       | 300    | MHz         |
| ½ UI                                                                                                                                                                      | Half of Data Bit Time, or 90 degree   | 0.833   | —      | ns          |
| f <sub>PCLK</sub>                                                                                                                                                         | PCLK frequency                        | —       | 209.97 | MHz         |
| Output TX to Input RX Margin per Edge                                                                                                                                     |                                       | 0.408   | —      | ns          |
| Generic DDRX2 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR2_RX/TX.ECLK.Aligned) using PCLK Clock Input – Figure 4.8 and Figure 4.10                            |                                       |         |        |             |
| t <sub>DVA_GDDR2</sub>                                                                                                                                                    | Input Data Valid After CLK            | —       | –0.458 | ns + 1/2 UI |
|                                                                                                                                                                           |                                       | —       | 0.375  | ns          |
|                                                                                                                                                                           |                                       | —       | 0.225  | UI          |
| t <sub>DVE_GDDR2</sub>                                                                                                                                                    | Input Data Hold After CLK             | 0.458   | —      | ns + 1/2 UI |
|                                                                                                                                                                           |                                       | 1.292   | —      | ns          |
|                                                                                                                                                                           |                                       | 0.775   | —      | UI          |
| t <sub>DIA_GDDR2</sub>                                                                                                                                                    | Output Data Invalid After CLK Output  | —       | 0.176  | ns          |
| t <sub>DIB_GDDR2</sub>                                                                                                                                                    | Output Data Invalid Before CLK Output | —       | 0.176  | ns          |
| f <sub>DATA_GDDR2</sub>                                                                                                                                                   | Input/Output Data Rate                | —       | 600    | Mbps        |
| f <sub>MAX_GDDR2</sub>                                                                                                                                                    | Frequency for ECLK                    | —       | 300    | MHz         |
| ½ UI                                                                                                                                                                      | Half of Data Bit Time, or 90 degree   | 0.589   | —      | ns          |
| f <sub>PCLK</sub>                                                                                                                                                         | PCLK frequency                        | —       | 209.97 | MHz         |
| Output TX to Input RX Margin per Edge                                                                                                                                     |                                       | 0.091   | —      | ns          |
| Generic DDRX4 Inputs/Outputs with Clock and Data Centered at Pin (GDDR4_RX/TX.ECLK.Centered) using PCLK Clock Input – Figure 4.7 and Figure 4.9                           |                                       |         |        |             |
| t <sub>SU_GDDR4</sub>                                                                                                                                                     | Input Data Set-Up Before CLK          | 0.220   | —      | ns          |
|                                                                                                                                                                           |                                       | 0.220   | —      | UI          |
| t <sub>HO_GDDR4</sub>                                                                                                                                                     | Input Data Hold After CLK             | 0.220   | —      | ns          |
| t <sub>DVB_GDDR4</sub>                                                                                                                                                    | Output Data Valid Before CLK Output   | 0.324   | —      | ns          |
|                                                                                                                                                                           |                                       | –0.176  | —      | ns + 1/2UI  |
| t <sub>DQVA_GDDR4</sub>                                                                                                                                                   | Output Data Valid After CLK Output    | 0.324   | —      | ns          |
|                                                                                                                                                                           |                                       | –0.176  | —      | ns + 1/2UI  |
| f <sub>DATA_GDDR4</sub>                                                                                                                                                   | Input/Output Data Rate                | —       | 1000   | Mbps        |
| f <sub>MAX_GDDR4</sub>                                                                                                                                                    | Frequency for ECLK                    | —       | 500    | MHz         |
| ½ UI                                                                                                                                                                      | Half of Data Bit Time, or 90 degree   | 0.5     | —      | ns          |
| f <sub>PCLK</sub>                                                                                                                                                         | PCLK frequency                        | —       | 125    | MHz         |
| Output TX to Input RX Margin per Edge                                                                                                                                     |                                       | 0.124   | —      | ns          |
| Generic DDRX4 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR4_RX/TX.ECLK.Aligned) using PCLK Clock Input, Left and Right sides Only – Figure 4.8 and Figure 4.10 |                                       |         |        |             |
| t <sub>DVA_GDDR4</sub>                                                                                                                                                    | Input Data Valid After CLK            | —       | –0.275 | ns + 1/2 UI |
|                                                                                                                                                                           |                                       | —       | 0.225  | ns          |
|                                                                                                                                                                           |                                       | —       | 0.225  | UI          |


| Parameter                                                                                                                                                                        | Description                           | –7 Auto |        | Unit        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------|--------|-------------|
|                                                                                                                                                                                  |                                       | Min     | Max    |             |
| t <sub>DVE_GDDR4</sub>                                                                                                                                                           | Input Data Hold After CLK             | 0.275   | —      | ns + 1/2 UI |
|                                                                                                                                                                                  |                                       | 0.775   | —      | ns          |
|                                                                                                                                                                                  |                                       | 0.775   | —      | UI          |
| t <sub>DIA_GDDR4</sub>                                                                                                                                                           | Output Data Invalid After CLK Output  | —       | 0.176  | ns          |
| t <sub>DIB_GDDR4</sub>                                                                                                                                                           | Output Data Invalid Before CLK Output | —       | 0.176  | ns          |
| f <sub>DATA_GDDR4</sub>                                                                                                                                                          | Input/Output Data Rate                | —       | 1000   | Mbps        |
| f <sub>MAX_GDDR4</sub>                                                                                                                                                           | Frequency for ECLK                    | —       | 500    | MHz         |
| ½ UI                                                                                                                                                                             | Half of Data Bit Time, or 90 degree   | 0.5     | —      | ns          |
| f <sub>PCLK</sub>                                                                                                                                                                | PCLK frequency                        | —       | 125    | MHz         |
| Output TX to Input RX Margin per Edge                                                                                                                                            |                                       | 0.049   | —      | ns          |
| <b>Generic DDRX5 Inputs/Outputs with Clock and Data Centered at Pin (GDDR5_RX/TX.ECLK.Centered) using PCLK Clock Input – Figure 4.7 and Figure 4.9</b>                           |                                       |         |        |             |
| t <sub>SU_GDDR5</sub>                                                                                                                                                            | Input Data Set-Up Before CLK          | 0.22    | —      | ns          |
|                                                                                                                                                                                  |                                       | 0.22    | —      | UI          |
| t <sub>HO_GDDR5</sub>                                                                                                                                                            | Input Data Hold After CLK             | 0.22    | —      | ns          |
| t <sub>WINDOW_GDDR5C</sub>                                                                                                                                                       | Input Data Valid Window               | 0.44    | —      | ns          |
| t <sub>DVB_GDDR5</sub>                                                                                                                                                           | Output Data Valid Before CLK Output   | 0.324   | —      | ns          |
|                                                                                                                                                                                  |                                       | –0.176  | —      | ns+1/2UI    |
| t <sub>DQA_GDDR5</sub>                                                                                                                                                           | Output Data Valid After CLK Output    | 0.324   | —      | ns          |
|                                                                                                                                                                                  |                                       | –0.176  | —      | ns+1/2UI    |
| f <sub>DATA_GDDR5</sub>                                                                                                                                                          | Input/Output Data Rate                | —       | 1000   | Mbps        |
| f <sub>MAX_GDDR5</sub>                                                                                                                                                           | Frequency for ECLK                    | —       | 500    | MHz         |
| ½ UI                                                                                                                                                                             | Half of Data Bit Time, or 90 degree   | 0.5     | —      | ns          |
| f <sub>PCLK</sub>                                                                                                                                                                | PCLK frequency                        | —       | 100    | MHz         |
| Output TX to Input RX Margin per Edge                                                                                                                                            |                                       | 0.124   | —      | ns          |
| <b>Generic DDRX5 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR5_RX/TX.ECLK.Aligned) using PCLK Clock Input, Left and Right sides Only – Figure 4.8 and Figure 4.10</b> |                                       |         |        |             |
| t <sub>DVA_GDDR5</sub>                                                                                                                                                           | Input Data Valid After CLK            | —       | –0.275 | ns + 1/2 UI |
|                                                                                                                                                                                  |                                       | —       | 0.225  | ns          |
|                                                                                                                                                                                  |                                       | —       | 0.225  | UI          |
| t <sub>DVE_GDDR5</sub>                                                                                                                                                           | Input Data Hold After CLK             | 0.275   | —      | ns + 1/2 UI |
|                                                                                                                                                                                  |                                       | 0.775   | —      | ns          |
|                                                                                                                                                                                  |                                       | 0.775   | —      | UI          |
| t <sub>WINDOW_GDDR5A</sub>                                                                                                                                                       | Input Data Valid Window               | 0.55    | —      | ns          |
| t <sub>DIA_GDDR5</sub>                                                                                                                                                           | Output Data Invalid After CLK Output  | —       | 0.176  | ns          |
| t <sub>DIB_GDDR5</sub>                                                                                                                                                           | Output Data Invalid Before CLK Output | —       | 0.176  | ns          |
| f <sub>DATA_GDDR5</sub>                                                                                                                                                          | Input/Output Data Rate                | —       | 1000   | Mbps        |
| f <sub>MAX_GDDR5</sub>                                                                                                                                                           | Frequency for ECLK                    | —       | 500    | MHz         |
| ½ UI                                                                                                                                                                             | Half of Data Bit Time, or 90 degree   | 0.5     | —      | ns          |
| f <sub>PCLK</sub>                                                                                                                                                                | PCLK frequency                        | —       | 100    | MHz         |
| Output TX to Input RX Margin per Edge                                                                                                                                            |                                       | 0.049   | —      | ns          |


| Parameter                                                                                                                           | Description                                                                               |           | –7 Auto |        | Unit          |
|-------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-----------|---------|--------|---------------|
|                                                                                                                                     |                                                                                           |           | Min     | Max    |               |
| Soft D-PHY DDRX4 Inputs/Outputs with Clock and Data Centered at Pin, using PCLK Clock Input                                         |                                                                                           |           |         |        |               |
| t <sub>SU_GDDR4_MP</sub>                                                                                                            | Input Data Set-Up Before CLK                                                              |           | 0.21    | —      | ns            |
|                                                                                                                                     |                                                                                           |           | 0.21    | —      | UI            |
| t <sub>HO_GDDR4_MP</sub>                                                                                                            | Input Data Hold After CLK                                                                 |           | 0.2     | —      | ns            |
|                                                                                                                                     |                                                                                           |           | 0.2     | —      | UI            |
| t <sub>DVB_GDDR4_MP</sub>                                                                                                           | Output Data Valid Before CLK Output                                                       |           | 0.3     | —      | ns            |
|                                                                                                                                     |                                                                                           |           | 0.3     | —      | UI            |
| t <sub>DQVA_GDDR4_MP</sub>                                                                                                          | Output Data Valid After CLK Output                                                        |           | 0.3     | —      | ns            |
|                                                                                                                                     |                                                                                           |           | 0.3     | —      | UI            |
| f <sub>DATA_GDDR4_MP</sub>                                                                                                          | Input Data Bit Rate for MIPI PHY                                                          | csfBGA121 | —       | 1000   | Mbps          |
|                                                                                                                                     |                                                                                           | caBGA256  | —       | 1000   | Mbps          |
| ½ UI                                                                                                                                | Half of Data Bit Time, or 90 degree                                                       |           | 0.5     | —      | ns            |
| f <sub>PCLK</sub>                                                                                                                   | PCLK frequency                                                                            |           | —       | 125    | MHz           |
| Output TX to Input RX Margin per Edge                                                                                               |                                                                                           |           | 0.1     | —      | ns            |
| Video DDRX71 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR71_RX.ECLK) using PLL Clock Input – Figure 4.12 and Figure 4.13 |                                                                                           |           |         |        |               |
| t <sub>RPBi_DVA</sub>                                                                                                               | Input Valid Bit "i" switch from CLK Rising Edge ("i" = 0 to 6, 0 aligns with CLK)         |           | —       | 0.277  | UI            |
|                                                                                                                                     |                                                                                           |           | —       | –0.278 | ns+(1/2+i)×UI |
| t <sub>RPBi_DVE</sub>                                                                                                               | Input Hold Bit "i" switch from CLK Rising Edge ("i" = 0 to 6, 0 aligns with CLK)          |           | 0.711   | —      | UI            |
|                                                                                                                                     |                                                                                           |           | 0.263   | —      | ns+(1/2+i)×UI |
| t <sub>TPBi_DOV</sub>                                                                                                               | Data Output Valid Bit "i" switch from CLK Rising Edge ("i" = 0 to 6, 0 aligns with CLK)   |           | —       | 0.187  | ns+i×UI       |
| t <sub>TPBi_DOI</sub>                                                                                                               | Data Output Invalid Bit "i" switch from CLK Rising Edge ("i" = 0 to 6, 0 aligns with CLK) |           | –0.187  | —      | ns+(i+ 1)×UI  |
| t <sub>TPBi_skew_UI</sub>                                                                                                           | TX skew in UI                                                                             |           | —       | 0.150  | UI            |
| t <sub>B</sub>                                                                                                                      | Serial Data Bit Time, = 1UI                                                               |           | 1.247   | —      | ns            |
| f <sub>DATA_TX71</sub>                                                                                                              | DDR71 Serial Data Rate                                                                    |           | —       | 802    | Mbps          |
| f <sub>MAX_TX71</sub>                                                                                                               | DDR71 ECLK Frequency                                                                      |           | —       | 401    | MHz           |
| f <sub>CLKIN</sub>                                                                                                                  | 7:1 Clock (PCLK) Frequency                                                                |           | —       | 113.4  | MHz           |
| Output TX to Input RX Margin per Edge                                                                                               |                                                                                           |           | 0.187   | —      | ns            |
| Memory Interface                                                                                                                    |                                                                                           |           |         |        |               |
| DDR3/DDR3L/LPDDR2 READ (DQ Input Data are Aligned to DQS) – Figure 4.8                                                              |                                                                                           |           |         |        |               |
| t <sub>DVBDQ_DDR3</sub><br>t <sub>DVBDQ_DDR3L</sub><br>t <sub>DVBDQ_LPDDR2</sub>                                                    | Data Input Valid before DQS Input                                                         |           | —       | –0.277 | ns + 1/2 UI   |
| t <sub>DVADQ_DDR3</sub><br>t <sub>DVADQ_DDR3L</sub><br>t <sub>DVADQ_LPDDR2</sub>                                                    | Data Input Valid after DQS Input                                                          |           | 0.277   | —      | ns + 1/2 UI   |
| f <sub>DATA_DDR3</sub><br>f <sub>DATA_DDR3L</sub><br>f <sub>DATA_LPDDR2</sub>                                                       | DDR Memory Data Rate                                                                      |           | —       | 904    | Mb/s          |
| f <sub>MAX_ECLK_DDR3</sub><br>f <sub>MAX_ECLK_DDR3L</sub><br>f <sub>MAX_ECLK_LPDDR2</sub>                                           | DDR Memory ECLK Frequency                                                                 |           | —       | 452    | MHz           |
| f <sub>MAX_SCLK_DDR3</sub><br>f <sub>MAX_SCLK_DDR3L</sub><br>f <sub>MAX_SCLK_LPDDR2</sub>                                           | DDR Memory SCLK Frequency                                                                 |           | —       | 113    | MHz           |

| Parameter                                                                  | Description                         | –7 Auto |        | Unit        |
|----------------------------------------------------------------------------|-------------------------------------|---------|--------|-------------|
|                                                                            |                                     | Min     | Max    |             |
| DDR3/DDR3L/LPDDR2 WRITE (DQ Output Data are Centered to DQS) – Figure 4.11 |                                     |         |        |             |
| $t_{DQVBS\_DDR3}$<br>$t_{DQVBS\_DDR3L}$<br>$t_{DQVBS\_LPDDR2}$             | Data Output Valid before DQS Output | —       | –0.277 | ns + 1/2 UI |
| $t_{DQVAS\_DDR3}$<br>$t_{DQVAS\_DDR3L}$<br>$t_{DQVAS\_LPDDR2}$             | Data Output Valid after DQS Output  | 0.277   | —      | ns + 1/2 UI |
| $f_{DATA\_DDR3}$<br>$f_{DATA\_DDR3L}$<br>$f_{DATA\_LPDDR2}$                | DDR Memory Data Rate                | —       | 904    | Mb/s        |
| $f_{MAX\_ECLK\_DDR3}$<br>$f_{MAX\_ECLK\_DDR3L}$<br>$f_{MAX\_ECLK\_LPDDR2}$ | DDR Memory ECLK Frequency           | —       | 452    | MHz         |
| $f_{MAX\_SCLK\_DDR3}$<br>$f_{MAX\_SCLK\_DDR3L}$<br>$f_{MAX\_SCLK\_LPDDR2}$ | DDR Memory SCLK Frequency           | —       | 113    | MHz         |


**Notes:**

- Commercial timing numbers are shown. Industrial numbers are typically slower and can be extracted from the Lattice Radiant software.
- General I/O timing numbers are based on LVCMOS 1.8, 8 mA, Fast Slew Rate, 0 pF load.  
Generic DDR timing are numbers based on LVDS I/O.  
DDR3 timing numbers are based on SSTL15.  
LPDDR2 timing numbers are based on HSUL12.
- Uses LVDS I/O standard for measurements.
- Maximum clock frequencies are tested under best case conditions. System performance may vary depending on the user environment.
- All numbers are generated with the Lattice Radiant software.
- This clock skew is not the internal clock network skew. The Nexus family devices have very low internal clock network skew that can be approximated to 0 ps. These  $t_{SKEW}$  values measured externally at system level includes additional skew added by the I/O, wire bonding and package ball.

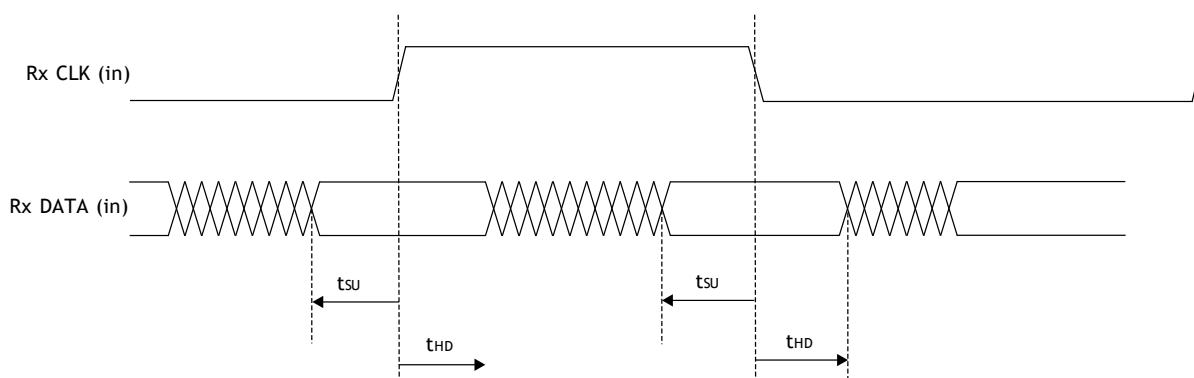

**Figure 4.7. Receiver RX.CLK.Centered Waveforms**

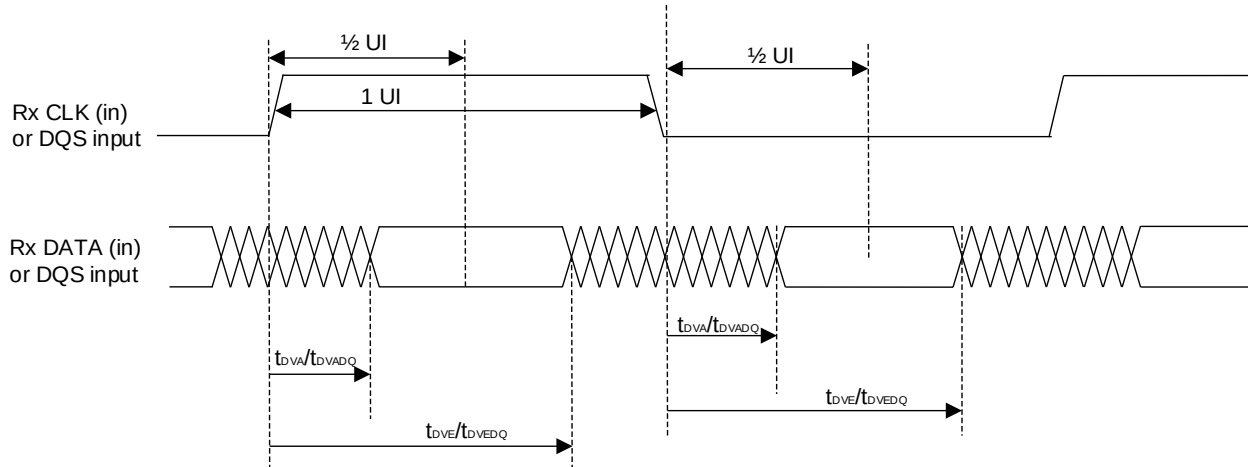

**Figure 4.8. Receiver RX.CLK.Aligned and DDR Memory Input Waveforms**

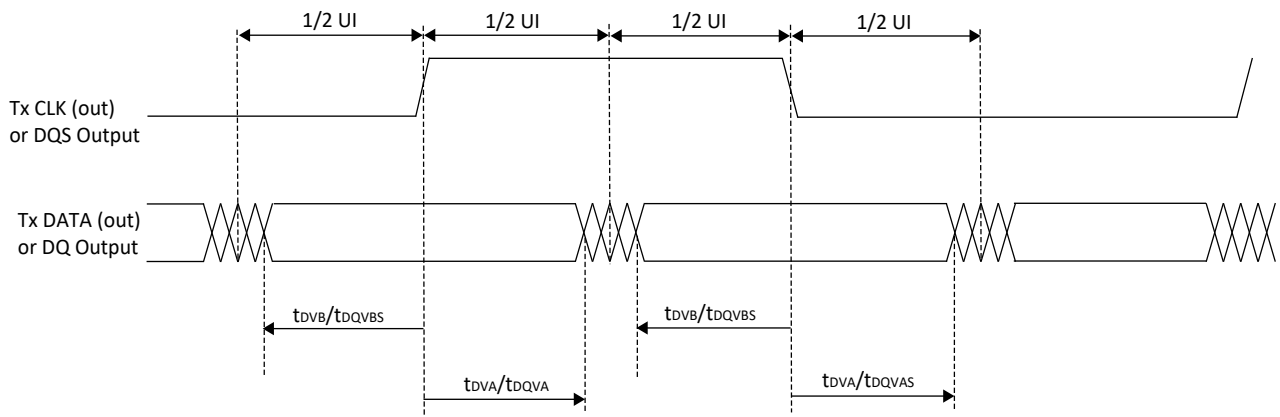


**Figure 4.9. Transmit TX.CLK.Centered and DDR Memory Output Waveforms**

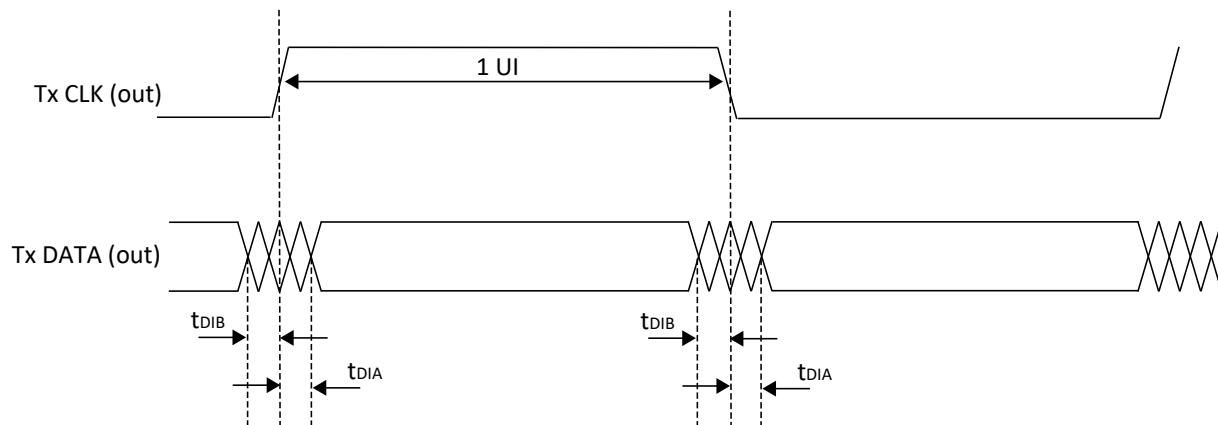

**Figure 4.10. Transmit TX.CLK.Aligned Waveforms**



### Receiver – Shown for one LVDS Channel

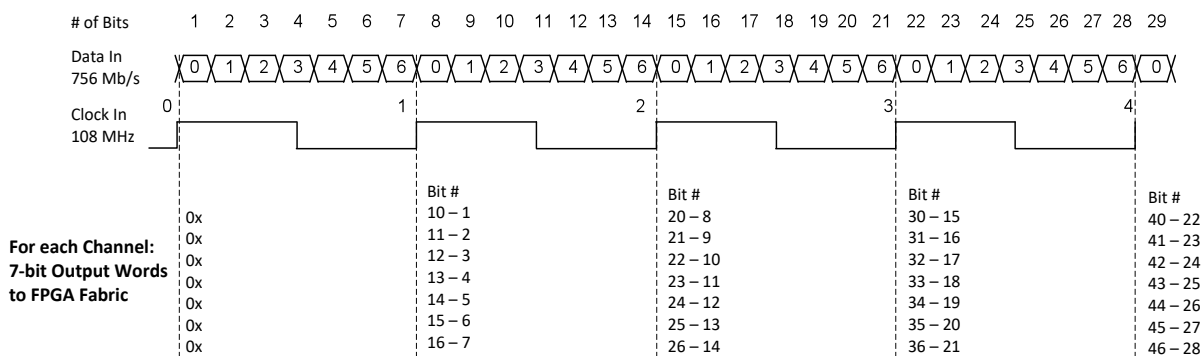

### Transmitter – Shown for one LVDS Channel

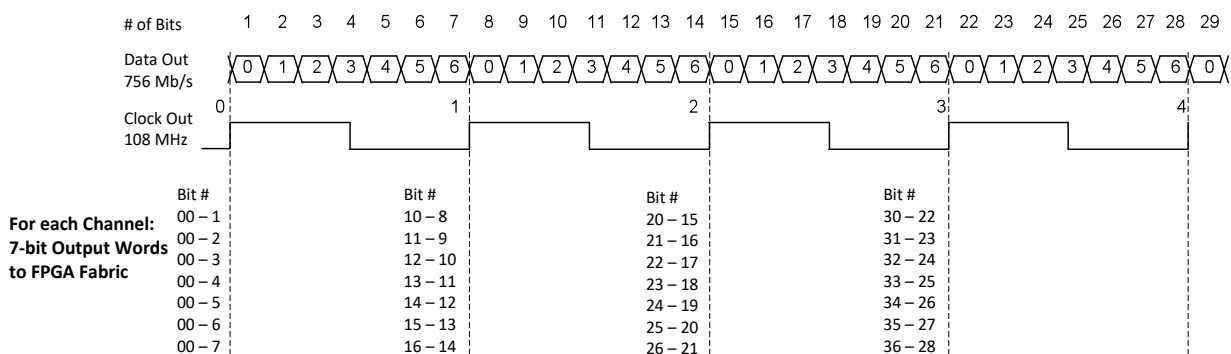


Figure 4.11. DDRX71 Video Timing Waveforms

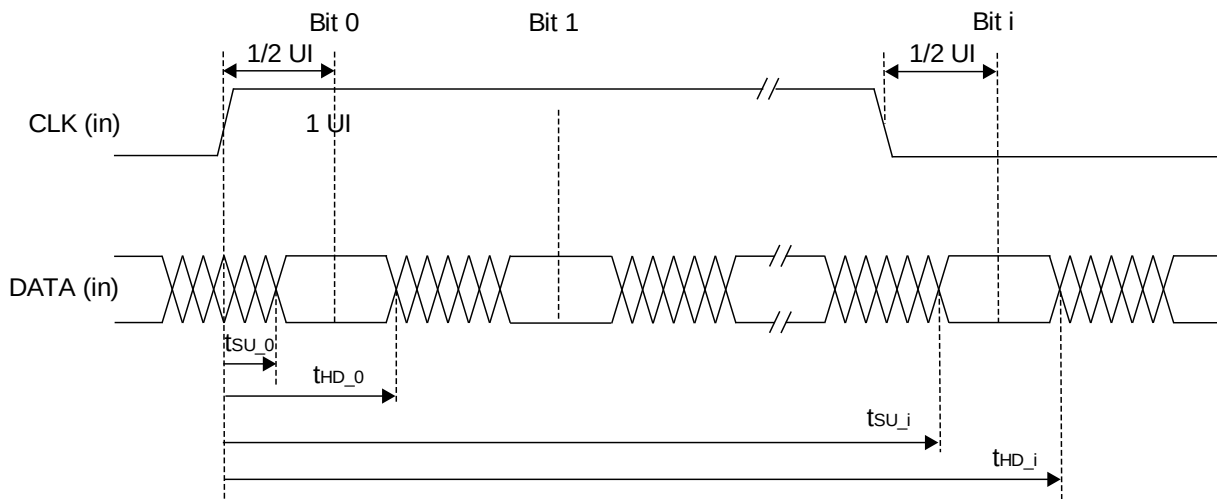


Figure 4.12. Receiver DDRX71\_RX Waveforms

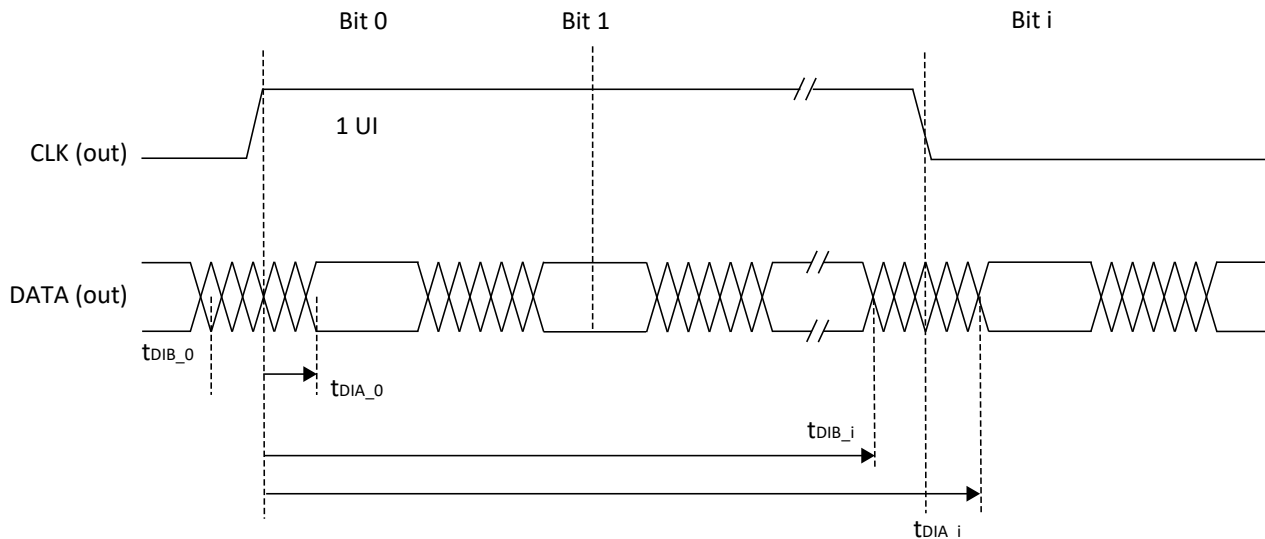


Figure 4.13. Transmitter DDRX71\_TX Waveforms

## 4.18. sysCLOCK PLL Timing ( $V_{CC} = 1.0\text{ V}$ ) – Automotive

Table 4.34. sysCLOCK PLL Timing ( $V_{CC} = 1.0\text{ V}$ ) – Automotive

| Parameter                       | Descriptions                                      | Conditions                          | Min  | Typ. | Max  | Units  |
|---------------------------------|---------------------------------------------------|-------------------------------------|------|------|------|--------|
| f <sub>IN</sub>                 | Input Clock Frequency (CLKI, CLKFB)               | —                                   | 18   | —    | 500  | MHz    |
| f <sub>OUT</sub>                | Output Clock Frequency                            | —                                   | 6.25 | —    | 800  | MHz    |
| f <sub>VCO</sub>                | PLL VCO Frequency                                 | —                                   | 800  | —    | 1600 | MHz    |
| f <sub>PFD</sub>                | Phase Detector Input Frequency                    | Without Fractional-N Enabled        | 18   | —    | 500  | MHz    |
|                                 |                                                   | With Fractional-N Enabled           | 18   | —    | 100  | MHz    |
| AC Characteristics              |                                                   |                                     |      |      |      |        |
| t <sub>DT</sub>                 | Output Clock Duty Cycle                           | —                                   | 45   | —    | 55   | %      |
| t <sub>PH</sub> <sup>4</sup>    | Output Phase Accuracy                             | —                                   | –5   | —    | 5    | %      |
| t <sub>OPJIT</sub> <sup>1</sup> | Output Clock Period Jitter                        | f <sub>OUT</sub> ≥ 200 MHz          | —    | —    | 250  | ps p-p |
|                                 |                                                   | f <sub>OUT</sub> < 200 MHz          | —    | —    | 0.05 | UIPP   |
|                                 | Output Clock Cycle-to-Cycle Jitter                | f <sub>OUT</sub> ≥ 200 MHz          | —    | —    | 250  | ps p-p |
|                                 |                                                   | f <sub>OUT</sub> < 200 MHz          | —    | —    | 0.05 | UIPP   |
|                                 | Output Clock Phase Jitter                         | f <sub>PFD</sub> ≥ 200 MHz          | —    | —    | 250  | ps p-p |
|                                 |                                                   | 60 MHz ≤ f <sub>PFD</sub> < 200 MHz | —    | —    | 400  | ps p-p |
|                                 |                                                   | 30 MHz ≤ f <sub>PFD</sub> < 60 MHz  | —    | —    | 500  | ps p-p |
|                                 |                                                   | 18 MHz ≤ f <sub>PFD</sub> < 30 MHz  | —    | —    | 725  | ps p-p |
|                                 | Output Clock Period Jitter (Fractional-N)         | f <sub>OUT</sub> ≥ 200 MHz          | —    | —    | 350  | ps p-p |
|                                 |                                                   | f <sub>OUT</sub> < 200 MHz          | —    | —    | 0.07 | UIPP   |
|                                 | Output Clock Cycle-to-Cycle Jitter (Fractional-N) | f <sub>OUT</sub> ≥ 200 MHz          | —    | —    | 400  | ps p-p |
|                                 |                                                   | f <sub>OUT</sub> < 200 MHz          | —    | —    | 0.08 | UIPP   |

| Parameter            | Descriptions                                         | Conditions            | Min  | Typ. | Max  | Units  |
|----------------------|------------------------------------------------------|-----------------------|------|------|------|--------|
| $f_{BW}^3$           | PLL Loop Bandwidth                                   | —                     | 0.45 | —    | 13   | MHz    |
| $t_{LOCK}^2$         | PLL Lock-in Time                                     | —                     | —    | —    | 10   | ms     |
| $t_{UNLOCK}$         | PLL Unlock Time (from RESET goes HIGH)               | —                     | —    | —    | 50   | ns     |
| $t_{IPJIT}$          | Input Clock Period Jitter                            | $f_{PFD} \geq 20$ MHz | —    | —    | 0.01 | UIPP   |
|                      |                                                      | $f_{PFD} < 20$ MHz    | —    | —    | 500  | ps p-p |
| $t_{HI}$             | Input Clock High Time                                | 90% to 90%            | 0.5  | —    | —    | ns     |
| $t_{LO}$             | Input Clock Low Time                                 | 10% to 10%            | 0.5  | —    | —    | ns     |
| $t_{RST}$            | RST/ Pulse Width                                     | —                     | 1    | —    | —    | ms     |
| $f_{SSC\_MOD}$       | Spread Spectrum Clock Modulation Frequency           | —                     | 20   | —    | 200  | kHz    |
| $f_{SSC\_MOD\_AMP}$  | Spread Spectrum Clock Modulation Amplitude Range     | —                     | 0.25 | —    | 2.00 | %      |
| $f_{SSC\_MOD\_STEP}$ | Spread Spectrum Clock Modulation Amplitude Step Size | —                     | —    | 0.25 | —    | %      |

**Notes:**

1. Jitter sample is taken over 10,000 samples for Period jitter, and 1,000 samples for Cycle-to-Cycle jitter of the primary PLL output with clean reference clock with no additional I/O toggling.
2. Output clock is valid after  $t_{LOCK}$  for PLL reset and dynamic delay adjustment.
3. Result from Lattice Radiant software.
4. CLKOS as compared to CLKOP output for one phase step at the maximum VCO frequency.

## 4.19. Internal Oscillators Characteristics

**Table 4.35. Internal Oscillators ( $V_{CC} = 1.0$  V)**

| Symbol        | Parameter Description                | Min   | Typ | Max   | Unit |
|---------------|--------------------------------------|-------|-----|-------|------|
| $f_{CLKHF}$   | HFOSC CLKK Clock Frequency           | 418.5 | 450 | 481.5 | MHz  |
| $f_{CLKLF}$   | LFOSC CLKK Clock Frequency           | 18.2  | 32  | 45.8  | kHz  |
| $DCH_{CLKHF}$ | HFOSC Duty Cycle (Clock High Period) | 43    | 50  | 57    | %    |
| $DCH_{CLKLF}$ | LFOSC Duty Cycle (Clock High Period) | 45    | 50  | 55    | %    |

## 4.20. User I2C Characteristics

**Table 4.36. User I2C Specifications ( $V_{CC} = 1.0$  V)**

| Symbol        | Parameter Description              | STD Mode |     |     | FAST Mode |     |     | FAST Mode Plus <sup>2</sup> |     |      | Units |
|---------------|------------------------------------|----------|-----|-----|-----------|-----|-----|-----------------------------|-----|------|-------|
|               |                                    | Min      | Typ | Max | Min       | Typ | Max | Min                         | Typ | Max  |       |
| $f_{SCL}$     | SCL Clock Frequency                | —        | —   | 100 | —         | —   | 400 | —                           | —   | 1000 | kHz   |
| $T_{DELAY}^1$ | Optional delay through delay block | —        | —   | 62  | —         | —   | 62  | —                           | —   | 62   | ns    |

**Notes:**

1. Refer to the I2C Specification for timing requirements. User design should set constraints in Lattice Design Software to meet this industrial I2C Specification.
2. Fast Mode Plus maximum speed may be achieved by using external pull up resistor on I2C bus. Internal pull up may not be sufficient to support the maximum speed.

## 4.21. Analog-Digital Converter (ADC) Block Characteristics

**Table 4.37. ADC Specifications<sup>3</sup>**

| Symbol              | Description                                                    | Condition                                     | Min                               | Typ                 | Max                               | Unit                |
|---------------------|----------------------------------------------------------------|-----------------------------------------------|-----------------------------------|---------------------|-----------------------------------|---------------------|
| $V_{REFINT\_ADC}$   | ADC Internal Reference Voltage <sup>4</sup>                    | —                                             | 1.14 <sup>1</sup>                 | 1.2                 | 1.26 <sup>1</sup>                 | V                   |
| $V_{REFEXT\_ADC}$   | ADC External Reference Voltage                                 | —                                             | 1.0                               | —                   | 1.8                               | V                   |
| $N_{RES\_ADC}$      | ADC Resolution                                                 | —                                             | —                                 | 12                  | —                                 | bits                |
| $ENOB_{ADC}$        | Effective Number of Bits                                       | —                                             | 9.9                               | 11                  | —                                 | bits                |
| $V_{SR\_ADC}$       | ADC Input Range                                                | Bipolar Mode, Internal $V_{REF}$              | $V_{CM\_ADC} - V_{REFINT\_ADC}/4$ | $V_{CM\_ADC}$       | $V_{CM\_ADC} + V_{REFINT\_ADC}/4$ | V                   |
|                     |                                                                | Bipolar Mode, External $V_{REF}$              | $V_{CM\_ADC} - V_{REFEXT\_ADC}/4$ | $V_{REFEXT\_ADC}$   | $V_{CM\_ADC} + V_{REFEXT\_ADC}/4$ | V                   |
|                     |                                                                | Uni-polar Mode, Internal $V_{REF}$            | 0                                 | —                   | $V_{REFINT\_ADC}$                 | V                   |
|                     |                                                                | Uni-polar Mode, External $V_{REF}$            | 0                                 | —                   | $V_{REFEXT\_ADC}$                 | V                   |
| $V_{CM\_ADC}$       | ADC Input Common Mode Voltage (for fully differential signals) | Internal $V_{REF}$                            | —                                 | $V_{REFINT\_ADC}/2$ | —                                 | V                   |
|                     |                                                                | External $V_{REF}$                            | —                                 | $V_{REFEXT\_ADC}/2$ | —                                 | V                   |
| $f_{CLK\_ADC}$      | ADC Clock Frequency                                            | —                                             | —                                 | 25                  | 50                                | MHz                 |
| $f_{INPUT\_ADC}$    | ADC Input Frequency                                            | @ Sampling Frequency 1 Mbps                   | —                                 | —                   | 500                               | kHz                 |
| $FS_{ADC}$          | ADC Sampling Rate                                              | —                                             | —                                 | 1                   | —                                 | MS/s                |
| $N_{TRACK\_ADC}$    | ADC Input Tracking Time                                        | —                                             | 4                                 | —                   | —                                 | cycles <sup>2</sup> |
| $R_{IN\_ADC}$       | ADC Input Equivalent Resistance                                | —                                             | —                                 | 116                 | —                                 | k $\Omega$          |
| $t_{CAL\_ADC}$      | ADC Calibration Time                                           | —                                             | —                                 | —                   | 6500                              | cycles <sup>2</sup> |
| $L_{OUTput\_ADC}$   | ADC Conversion Time                                            | Includes minimum tracking time of four cycles | 25                                | —                   | —                                 | cycles <sup>2</sup> |
| $DNL_{ADC}$         | ADC Differential Nonlinearity                                  | —                                             | –1                                | —                   | 1                                 | LSB                 |
| $INL_{ADC}$         | ADC Integral Nonlinearity                                      | —                                             | –2 <sup>1</sup>                   | —                   | 2.21                              | LSB                 |
| $SFDR_{ADC}$        | ADC Spurious Free Dynamic Range                                | —                                             | 65.8                              | 77                  | —                                 | dBc                 |
| $THD_{ADC}$         | ADC Total Harmonic Distortion                                  | —                                             | —                                 | –76                 | –66.4                             | dB                  |
| $SNR_{ADC}$         | ADC Signal to Noise Ratio                                      | —                                             | 61.6                              | 68                  | —                                 | dB                  |
| $SNDR_{ADC}$        | ADC Signal to Noise Plus Distortion Ratio                      | —                                             | 61.5                              | 67                  | —                                 | dB                  |
| $ERR_{GAIN\_ADC}$   | ADC Gain Error                                                 | —                                             | –0.5                              | —                   | 0.5                               | % $FS_{ADC}$        |
| $ERR_{OFFSET\_ADC}$ | ADC Offset Error                                               | —                                             | –2                                | —                   | 2                                 | LSB                 |
| $C_{IN\_ADC}$       | ADC Input Equivalent Capacitance                               | —                                             | —                                 | 2                   | —                                 | pF                  |

**Notes:**

1. Not tested; guaranteed by design.
2. ADC Sample Clock cycles. See [ADC User Guide for Nexus Platform \(FPGA-TN-02129\)](#) for more details.
3. ADC is available in Automotive –7 speed grade.
4. Internal voltage reference is only for internal testing purpose. It is not recommended for customer design. User should always use the part with external reference voltage.

## 4.22. Comparator Block Characteristics

**Table 4.38. Comparator Specifications**

| Symbol              | Description                 | Min   | Typ | Max             | Unit |
|---------------------|-----------------------------|-------|-----|-----------------|------|
| $f_{IN\_COMP}$      | Comparator Input Frequency  | —     | —   | 10              | MHz  |
| $V_{IN\_COMP}$      | Comparator Input Voltage    | 0     | —   | $V_{CC\_ADC18}$ | V    |
| $V_{OFFSET\_COMP}$  | Comparator Input Offset     | –34.3 | —   | 36.44           | mV   |
| $V_{HYST\_COMP}$    | Comparator Input Hysteresis | 10    | —   | 31.62           | mV   |
| $V_{LATENCY\_COMP}$ | Comparator Latency          | —     | —   | 31.24           | ns   |

## 4.23. Digital Temperature Readout Characteristics

Digital temperature Readout (DTR) is implemented in one of the channels of ADC1.

**Table 4.39. DTR Specifications<sup>1, 2</sup>**

| Symbol             | Description                  | Condition                                               | Min  | Typ | Max | Unit |
|--------------------|------------------------------|---------------------------------------------------------|------|-----|-----|------|
| $DTR_{RANGE}$      | DTR Detect Temperature Range | —                                                       | –40  | —   | 125 | °C   |
| $DTR_{ACCURACY}$   | DTR Accuracy                 | with external voltage reference range of 1.0 V to 1.8 V | –16  | ±6  | 16  | °C   |
| $DTR_{RESOLUTION}$ | DTR Resolution               | with external voltage reference                         | –0.3 | —   | 0.3 | °C   |

**Notes:**

- External voltage reference (VREF) should be 0.1% accurate or better. DTR sensitivity to VREF is –4.1 °C per VREF per-cent (for example, if the VREF is 1 % low, then the DTR will read +4.1 °C high).
- DTR is available in Automotive –7 speed grade.

## 4.24. Hardened MIPI D-PHY Characteristics

**Table 4.40. Hardened D-PHY Input Timing and Levels**

| Symbol                                                   | Description                                                 | Conditions                                                         | Min | Typ | Max | Unit |
|----------------------------------------------------------|-------------------------------------------------------------|--------------------------------------------------------------------|-----|-----|-----|------|
| <b>High Speed (Differential) Input DC Specifications</b> |                                                             |                                                                    |     |     |     |      |
| $V_{CMRX(DC)}$                                           | Common-mode Voltage in High Speed Mode                      | —                                                                  | 70  | —   | 330 | mV   |
| $V_{IDTH}$                                               | Differential Input HIGH Threshold                           | $0.08 \text{ Gbps} \leq V_{IDTH} \leq 1.5 \text{ Gbps}$            | 70  | —   | —   | mV   |
|                                                          |                                                             | $1.5 \text{ Gbps} < V_{IDTH} \leq 2.5 \text{ Gbps}$                | 40  | —   | —   | mV   |
| $V_{IDTL}$                                               | Differential Input LOW Threshold                            | $0.08 \text{ Gbps} \leq V_{IDTL} \leq 1.5 \text{ Gbps}$            | —   | —   | –70 | mV   |
|                                                          |                                                             | $1.5 \text{ Gbps} < V_{IDTL} \leq 2.5 \text{ Gbps}$                | —   | —   | –40 | mV   |
| $V_{IHHS}$                                               | Input HIGH Voltage (for HS mode)                            | —                                                                  | —   | —   | 460 | mV   |
| $V_{ILHS}$                                               | Input LOW Voltage                                           | —                                                                  | –40 | —   | —   | mV   |
| $V_{TERM-EN}$                                            | Single-ended voltage for HS Termination Enable <sup>4</sup> | —                                                                  | —   | —   | 450 | mV   |
| $Z_{ID}$                                                 | Differential Input Impedance                                | —                                                                  | 80  | 100 | 125 | Ω    |
| <b>High Speed (Differential) Input AC Specifications</b> |                                                             |                                                                    |     |     |     |      |
| $\Delta V_{CMRX(HF)}^1$                                  | Common-mode Interference (>450 MHz)                         | $0.08 \text{ Gbps} \leq \Delta V_{CMRX(HF)} \leq 1.5 \text{ Gbps}$ | —   | —   | 100 | mV   |
|                                                          |                                                             | $1.5 \text{ Gbps} < \Delta V_{CMRX(HF)} \leq 2.5 \text{ Gbps}$     | —   | —   | 50  | mV   |

| Symbol                                                  | Description                               | Conditions                                                                | Min | Typ | Max | Unit |
|---------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------|-----|-----|-----|------|
| $\Delta V_{\text{CMRX(LF)}}$ <sup>2, 3</sup>            | Common-mode Interference (50 MHz–450 MHz) | $0.08 \text{ Gbps} \leq \Delta V_{\text{CMRX(LF)}} \leq 1.5 \text{ Gbps}$ | –50 | —   | 50  | mV   |
|                                                         |                                           | $1.5 \text{ Gbps} < \Delta V_{\text{CMRX(LF)}} \leq 2.5 \text{ Gbps}$     | –25 | —   | 25  | mV   |
| $C_{\text{CM}}$                                         | Common-mode Termination                   | —                                                                         | —   | —   | 60  | pF   |
| <b>Low Power (Single-Ended) Input DC Specifications</b> |                                           |                                                                           |     |     |     |      |
| $V_{\text{IH}}$                                         | Low Power Mode Input HIGH Voltage         | —                                                                         | 780 | —   | —   | mV   |
| $V_{\text{IL}}$                                         | Low Power Mode Input LOW Voltage          | —                                                                         | —   | —   | 540 | mV   |
| $V_{\text{IL-ULP}}$                                     | Ultra Low Power Input LOW Voltage         | —                                                                         | —   | —   | 300 | mV   |
| $V_{\text{HYST}}$                                       | Low Power Mode Input Hysteresis           | —                                                                         | 21  | —   | —   | mV   |
| $e_{\text{SPIKE}}$                                      | Input Pulse Rejection                     | —                                                                         | —   | —   | 300 | V·ps |
| $T_{\text{MIN-RX}}$                                     | Minimum Pulse Width Response              | —                                                                         | 20  | —   | —   | ns   |
| $V_{\text{INT}}$                                        | Peak Interference Amplitude               | —                                                                         | —   | —   | 200 | mV   |
| $f_{\text{INT}}$                                        | Interference Frequency                    | —                                                                         | 450 | —   | —   | MHz  |
| <b>Contention Detector (LP-CD) DC Specifications</b>    |                                           |                                                                           |     |     |     |      |
| $V_{\text{IHCD}}$                                       | Contention Detect HIGH Voltage            | —                                                                         | 450 | —   | —   | mV   |
| $V_{\text{ILCD}}$                                       | Contention Detect LOW Voltage             | —                                                                         | —   | —   | 200 | mV   |

**Notes:**

1. This is peak amplitude of sine wave modulated to the receiver inputs.
2. Input common-mode voltage difference compared to average common-mode voltage on the receiver inputs.
3. Exclude any static ground shift of 50 mV.
4. High Speed Differential  $R_{\text{TERM}}$  is enabled when both DP and DN are below this voltage.

**Table 4.41. Hardened D-PHY Output Timing and Levels**

| Symbol                                                    | Description                                                  | Conditions                                                | Min | Typ | Max   | Unit              |
|-----------------------------------------------------------|--------------------------------------------------------------|-----------------------------------------------------------|-----|-----|-------|-------------------|
| <b>High Speed (Differential) Output DC Specifications</b> |                                                              |                                                           |     |     |       |                   |
| $V_{\text{CMTX}}$                                         | Common-mode Voltage in High Speed Mode                       | —                                                         | 130 | 200 | 250   | mV                |
| $ \Delta V_{\text{CMTX(1,0)}} $                           | $V_{\text{CMTX}}$ Mismatch Between Differential HIGH and LOW | —                                                         | —   | —   | 7     | mV                |
| $ V_{\text{OD}} $                                         | Output Differential Voltage                                  | $ D\text{-PHY-P} - D\text{-PHY-N} $                       | 120 | 200 | 270   | mV                |
| $ \Delta V_{\text{OD}} $                                  | $V_{\text{OD}}$ Mismatch Between Differential HIGH and LOW   | —                                                         | —   | —   | 14    | mV                |
| $V_{\text{OHHS}}$                                         | Single-Ended Output HIGH Voltage                             | —                                                         | —   | —   | 375   | mV                |
| $Z_{\text{OS}}$                                           | Single Ended Output Impedance                                | —                                                         | 35  | 50  | 75    | $\Omega$          |
| $\Delta Z_{\text{OS}}$                                    | $Z_{\text{OS}}$ mismatch                                     | —                                                         | —   | —   | 20    | %                 |
| <b>High Speed (Differential) Output AC Specifications</b> |                                                              |                                                           |     |     |       |                   |
| $\Delta V_{\text{CMTX(LF)}}$                              | Common-Mode Variation, 50 MHz – 450 MHz                      | —                                                         | —   | —   | 25    | mV <sub>RMS</sub> |
| $\Delta V_{\text{CMTX(HF)}}$                              | Common-Mode Variation, above 450 MHz                         | —                                                         | —   | —   | 15    | mV <sub>RMS</sub> |
| $t_{\text{R}}$                                            | Output 20%–80% Rise Time                                     | $0.08 \text{ Gbps} \leq t_{\text{R}} \leq 1 \text{ Gbps}$ | —   | —   | 0.35  | UI                |
|                                                           |                                                              | $1 \text{ Gbps} < t_{\text{R}} \leq 1.5 \text{ Gbps}$     | —   | —   | 0.525 | UI                |
|                                                           |                                                              | $t_{\text{R}} \leq 1.5 \text{ Gbps}$                      | 65  | —   | —     | ps                |
|                                                           |                                                              | $1.5 \text{ Gbps} < t_{\text{R}} \leq 2.5 \text{ Gbps}$   | —   | —   | 0.875 | UI                |
|                                                           |                                                              | $t_{\text{R}} > 1.5 \text{ Gbps}$                         | 50  | —   | —     | ps                |

| Symbol                                            | Description                                                    | Conditions                                                                             | Min                                     | Typ | Max   | Unit  |
|---------------------------------------------------|----------------------------------------------------------------|----------------------------------------------------------------------------------------|-----------------------------------------|-----|-------|-------|
| t <sub>F</sub>                                    | Output 80%–20% Fall Time                                       | 0.08 Gbps ≤ t <sub>F</sub> ≤ 1 Gbps                                                    | —                                       | —   | 0.33  | UI    |
|                                                   |                                                                | 1 Gbps < t <sub>F</sub> ≤ 1.5 Gbps                                                     | —                                       | —   | 0.495 | UI    |
|                                                   |                                                                | t <sub>F</sub> ≤ 1.5 Gbps                                                              | 80                                      | —   | —     | ps    |
|                                                   |                                                                | 1.5 Gbps < t <sub>F</sub> ≤ 2.5 Gbps                                                   | —                                       | —   | 0.825 | UI    |
|                                                   |                                                                | t <sub>F</sub> > 1.5 Gbps                                                              | 50                                      | —   | —     | ps    |
| Low Power (Single-Ended) Output DC Specifications |                                                                |                                                                                        |                                         |     |       |       |
| V <sub>OH</sub>                                   | Low Power Mode Output HIGH Voltage                             | 0.08 Gbps ≤ V <sub>OH</sub> ≤ 1.50 Gbps                                                | 0.75                                    | —   | 1.5   | V     |
|                                                   |                                                                | V <sub>OH</sub> > 1.50 Gbps                                                            | 0.75                                    | —   | 1.5   | V     |
| V <sub>OL</sub>                                   | Low Power Mode Input LOW Voltage                               | —                                                                                      | –50                                     | —   | 50    | mV    |
| Z <sub>OLP</sub>                                  | Output Impedance in Low Power Mode                             | —                                                                                      | 106                                     | —   | —     | Ω     |
| Low Power (Single-Ended) Output AC Specifications |                                                                |                                                                                        |                                         |     |       |       |
| t <sub>RLP</sub>                                  | 15%–85% Rise Time                                              | —                                                                                      | —                                       | —   | 25    | ns    |
| t <sub>FLP</sub>                                  | 85%–15% Fall Time                                              | —                                                                                      | —                                       | —   | 25    | ns    |
| t <sub>REOT</sub>                                 | HS – LP Mode Rise and Fall Time, 30%–85%                       | —                                                                                      | —                                       | —   | 35    | ns    |
| T <sub>LP-PULSE-TX</sub>                          | Pulse Width of the LP Exclusive-OR Clock                       | First <sup>t</sup> LP XOR Clock Pulse after STOP State or Last Pulse before STOP State | 40                                      | —   | —     | ns    |
|                                                   |                                                                | All Other Pulses                                                                       | 20                                      | —   | —     | ns    |
| T <sub>LP-PER-TX</sub>                            | Period of the LP Exclusive-OR Clock                            | —                                                                                      | 90                                      | —   | —     | ns    |
| δV/δt <sub>SR</sub>                               | Slew Rate @ C <sub>LOAD</sub> = 0 pF                           | —                                                                                      | —                                       | —   | 500   | mV/ns |
|                                                   | Slew Rate @ C <sub>LOAD</sub> = 5 pF                           | —                                                                                      | —                                       | —   | 300   | mV/ns |
|                                                   | Slew Rate @ C <sub>LOAD</sub> = 20 pF                          | —                                                                                      | —                                       | —   | 250   | mV/ns |
|                                                   | Slew Rate @ C <sub>LOAD</sub> = 70 pF                          | —                                                                                      | —                                       | —   | 250   | mV/ns |
|                                                   | Slew Rate @ C <sub>LOAD</sub> = 0 to 70 pF (Falling Edge Only) | —                                                                                      | 7                                       | —   | —     | mV/ns |
|                                                   |                                                                | —                                                                                      | 7                                       | —   | —     | mV/ns |
|                                                   | Slew Rate @ C <sub>LOAD</sub> = 0 to 70 pF (Rising Edge Only)  | —                                                                                      | 7                                       | —   | —     | mV/ns |
|                                                   |                                                                | —                                                                                      | 7                                       | —   | —     | mV/ns |
|                                                   | Slew Rate @ C <sub>LOAD</sub> = 0 to 70 pF (Rising Edge Only)  | —                                                                                      | 7 - 0.075 × (V <sub>O,INST</sub> - 700) | —   | —     | mV/ns |
| —                                                 |                                                                | 7 - 0.0625 × (V <sub>O,INST</sub> - 550)                                               | —                                       | —   | mV/ns |       |
| C <sub>LOAD</sub>                                 | Load Capacitance                                               | —                                                                                      | 0                                       | —   | 70    | pF    |

**Table 4.42. Hardened D-PHY Pin Characteristic Specifications**

| Symbol                                   | Description                                                         | Conditions | Min   | Typ | Max  | Unit    |
|------------------------------------------|---------------------------------------------------------------------|------------|-------|-----|------|---------|
| <b>Pin Characteristic Specifications</b> |                                                                     |            |       |     |      |         |
| $V_{PIN}$                                | Pin Signal Voltage Range                                            | —          | –50   | —   | 1350 | mV      |
| $V_{PIN\_LVLP}$                          | Pin Signal Voltage Range in LVLP Operation                          | —          | –50   | —   | 1150 | mV      |
| $I_{LEAK}$                               | Pin Leakage Current                                                 | —          | –100  | —   | 100  | $\mu$ A |
| $V_{GNDSh}$                              | Ground Shift                                                        | —          | –50   | —   | 50   | mV      |
| $V_{PIN(absmax)}$                        | Transient Pin Voltage Level                                         | —          | –0.15 | —   | 1.45 | V       |
| $T_{VPIN(absmax)}$                       | Maximum Transient Time above $V_{PIN(max)}$ or below $V_{PIN(min)}$ | —          | —     | —   | 20   | ns      |

**Table 4.43. Hardened D-PHY Clock Signal Specification**

| Symbol                            | Description | Conditions | Min  | Typ | Max  | Unit |
|-----------------------------------|-------------|------------|------|-----|------|------|
| <b>Clock Signal Specification</b> |             |            |      |     |      |      |
| UI<br>Instantaneous               | $UI_{INST}$ | —          | —    | —   | 12.5 | ns   |
| UI Variation                      | $\Delta UI$ | —          | –10% | —   | 10%  | UI   |
|                                   |             | —          | –5%  | —   | 5%   | UI   |

**Table 4.44. Hardened D-PHY Data-Clock Timing Specifications**

| Symbol                                    | Description                                    | Conditions                                                    | Min   | Typ | Max  | Unit        |
|-------------------------------------------|------------------------------------------------|---------------------------------------------------------------|-------|-----|------|-------------|
| <b>Data-Clock Timing Specifications</b>   |                                                |                                                               |       |     |      |             |
| $T_{SKEW[TX]}$                            | Data to Clock Skew                             | $0.08 \text{ Gbps} \leq T_{SKEW[TX]} \leq 1.00 \text{ Gbps}$  | –0.15 | —   | 0.15 | $UI_{INST}$ |
|                                           |                                                | $1.00 \text{ Gbps} < T_{SKEW[TX]} \leq 1.50 \text{ Gbps}$     | –0.20 | —   | 0.20 | $UI_{INST}$ |
| $T_{SETUP[RX]}$                           | Input Data Setup Before CLK                    | $0.08 \text{ Gbps} \leq T_{SETUP[RX]} \leq 1.00 \text{ Gbps}$ | 0.247 | —   | —    | UI          |
|                                           |                                                | $1.00 \text{ Gbps} < T_{SETUP[RX]} \leq 1.50 \text{ Gbps}$    | 0.37  | —   | —    | UI          |
| $T_{HOLD[RX]}$                            | Input Data Hold After CLK                      | $0.08 \text{ Gbps} \leq T_{HOLD[RX]} \leq 1.00 \text{ Gbps}$  | 0.2   | —   | —    | UI          |
|                                           |                                                | $1.00 \text{ Gbps} < T_{HOLD[RX]} \leq 1.50 \text{ Gbps}$     | 0.3   | —   | —    | UI          |
| $F_{IN\_DPHY}$                            | Input frequency to Hardened D-PHY PLL          | —                                                             | 24    | —   | 200  | MHz         |
| $T_{SKEW[TX]}$<br>Dynamic                 | Dynamic Data to Clock Skew (Tx)                | $> 1.5 \text{ Gbps}$                                          | –0.15 | —   | 0.15 | $UI_{INST}$ |
| ISI                                       | Channel ISI                                    | $> 1.5 \text{ Gbps}$                                          | —     | —   | 0.20 | $UI_{INST}$ |
| $T_{SETUP[RX]} + T_{HOLD[RX]}$<br>Dynamic | Dynamic Data to Clock Skew Window Rx Tolerance | $> 1.5 \text{ Gbps}$                                          | 0.57  | —   | —    | $UI_{INST}$ |



## 4.25. Hardened PCIe Characteristics

### 4.25.1. PCIe (2.5 Gbps)

Table 4.45. PCIe (2.5 Gbps)

| Symbol                                               | Description                                                       | Condition               | Min.   | Typ. | Max.          | Unit    |
|------------------------------------------------------|-------------------------------------------------------------------|-------------------------|--------|------|---------------|---------|
| <b>Transmitter<sup>1</sup></b>                       |                                                                   |                         |        |      |               |         |
| UI                                                   | Unit Interval                                                     | —                       | 399.88 | 400  | 400.12        | ps      |
| BW <sub>TX</sub>                                     | Tx PLL bandwidth                                                  | —                       | 1.5    | —    | 22            | MHz     |
| V <sub>TX-DIFF-PP</sub>                              | Differential p-p Tx voltage swing                                 | —                       | 0.8    | —    | 1.2           | Vp-p    |
| V <sub>TX-DIFF-PP-LOW</sub>                          | Low power differential p-p Tx voltage swing                       | —                       | 0.4    | —    | 1.2           | Vp-p    |
| V <sub>TX-DE-RATIO-3.5dB</sub>                       | Tx de-emphasis level ratio at 3.5 dB                              | —                       | 3      | —    | 4             | dB      |
| T <sub>TX-RISE-FALL</sub>                            | Transmitter rise and fall time                                    | —                       | 0.125  | —    | —             | UI      |
| T <sub>TX-EYE</sub>                                  | Transmitter Eye, including all jitter sources                     | —                       | 0.75   | —    | —             | UI      |
| T <sub>TX-EYE-MEDIAN-to-MAX-JITTER</sub>             | Max. time between jitter median and max deviation from the median | —                       | —      | —    | 0.125         | UI      |
| RL <sub>TX-DIFF</sub>                                | Tx Differential Return Loss, including pkg and silicon            | —                       | 10     | —    | —             | dB      |
| RL <sub>TX-CM</sub>                                  | Tx Common Mode Return Loss, including pkg and silicon             | 50 MHz < freq < 2.5 GHz | 6      | —    | —             | dB      |
| Z <sub>TX-DIFF-DC</sub>                              | DC differential Impedance                                         | —                       | 80     | —    | 120           | Ω       |
| V <sub>TX-CM-AC-P</sub>                              | Tx AC peak common mode voltage, RMS                               | —                       | —      | —    | 20            | mV, RMS |
| I <sub>TX-SHORT</sub>                                | Transmitter short-circuit current                                 | —                       | —      | —    | 90            | mA      |
| V <sub>TX-DC-CM</sub>                                | Transmitter DC common-mode voltage                                | —                       | 0      | —    | 1.2           | V       |
| V <sub>TX-IDLE-DIFF-AC-p</sub>                       | Electrical Idle Output peak voltage                               | —                       | —      | —    | 20            | mV      |
| V <sub>TX-RCV-DETECT</sub>                           | Voltage change allowed during Receiver Detect                     | —                       | —      | —    | 600           | mV      |
| T <sub>TX-IDLE-MIN</sub>                             | Min. time in Electrical Idle                                      | —                       | 20     | —    | —             | ns      |
| T <sub>TX-IDLE-SET-TO-IDLE</sub>                     | Max. time from EI Order Set to valid Electrical Idle              | —                       | —      | —    | 8             | ns      |
| T <sub>TX-IDLE-TO-DIFF-DATA</sub>                    | Max. time from Electrical Idle to valid differential output       | —                       | —      | —    | 8             | ns      |
| L <sub>TX-SKEW</sub>                                 | Lane-to-Lane output skew                                          | —                       | —      | —    | 500 ps + 2 UI | ps      |
| <b>Receiver<sup>2</sup></b>                          |                                                                   |                         |        |      |               |         |
| UI                                                   | Unit Interval                                                     | —                       | 399.9  | 400  | 400.12        | ps      |
| V <sub>RX-DIFF-PP</sub>                              | Differential Rx peak-peak voltage                                 | —                       | 0.175  | —    | 1.2           | Vp-p    |
| T <sub>RX-EYE<sup>3</sup></sub>                      | Receiver eye opening time                                         | —                       | 0.4    | —    | —             | UI      |
| T <sub>RX-EYE-MEDIAN-to-MAX-JITTER<sup>3</sup></sub> | Max time delta between median and deviation from median           | —                       | —      | —    | 0.3           | UI      |
| RL <sub>RX-DIFF</sub>                                | Receiver differential Return Loss, package plus silicon           | —                       | 10     | —    | —             | dB      |

| Symbol                               | Description                                            | Condition | Min. | Typ. | Max. | Unit     |
|--------------------------------------|--------------------------------------------------------|-----------|------|------|------|----------|
| RL <sub>RX-CM</sub>                  | Receiver common mode Return Loss, package plus silicon | —         | 6    | —    | —    | dB       |
| Z <sub>RX-DC</sub>                   | Receiver DC single ended impedance                     | —         | 40   | —    | 60   | Ω        |
| Z <sub>RX-DIFF-DC</sub>              | Receiver DC differential impedance                     | —         | 80   | —    | 120  | Ω        |
| Z <sub>RX-HIGH-IMP-DC</sub>          | Receiver DC single ended impedance when powered down   | —         | 200  | —    | —    | kΩ       |
| V <sub>RX-CM-AC-P</sub> <sup>3</sup> | Rx AC peak common mode voltage                         | —         | —    | —    | 150  | mV, peak |
| V <sub>RX-IDLE-DET-DIFF-PP</sub>     | Electrical Idle Detect Threshold                       | —         | 65   | —    | 175  | mVp-p    |
| L <sub>RX-SKEW</sub>                 | Receiver –lane-lane skew                               | —         | —    | —    | 20   | ps       |

**Notes:**

1. Refer to PCI Express Base Specification Revision 3.0 Table 4.18 test condition and requirement for respective parameters.
2. Refer to PCI Express Base Specification Revision 3.0 Table 4.24 test condition and requirement for respective parameters.
3. Spec compliant requirement

## 4.25.2. PCIe (5 Gbps)

**Table 4.46. PCIe (5 Gbps)**

| Symbol                         | Description                                                | Test Conditions           | Min    | Typ | Max    | Unit    |
|--------------------------------|------------------------------------------------------------|---------------------------|--------|-----|--------|---------|
| <b>Transmit<sup>1</sup></b>    |                                                            |                           |        |     |        |         |
| UI                             | Unit Interval                                              | —                         | 199.94 | 200 | 200.06 | ps      |
| B <sub>WTX-PKG-PLL1</sub>      | Tx PLL bandwidth corresponding to PKG <sub>TX-PLL1</sub>   | —                         | 8      | —   | 16     | MHz     |
| B <sub>WTX-PKG-PLL2</sub>      | Tx PLL bandwidth corresponding to PKG <sub>TX-PLL2</sub>   | —                         | 5      | —   | 16     | MHz     |
| P <sub>KGTX-PLL1</sub>         | Tx PLL Peaking corresponding to PKG <sub>TX-PLL1</sub>     | —                         | —      | —   | 3      | dB      |
| P <sub>KGTX-PLL2</sub>         | Tx PLL Peaking corresponding to PKG <sub>TX-PLL2</sub>     | —                         | —      | —   | 1      | dB      |
| V <sub>TX-DIFF-PP</sub>        | Differential p-p Tx voltage swing                          | —                         | 0.8    | —   | 1.2    | V, p-p  |
| V <sub>TX-DIFF-PP-LOW</sub>    | Low power differential p-p Tx voltage swing                | —                         | 0.4    | —   | 1.2    | V, p-p  |
| V <sub>TX-DE-RATIO-3.5dB</sub> | Tx de-emphasis level ratio at 3.5 dB                       | —                         | 3      | —   | 4      | dB      |
| V <sub>TX-DE-RATIO-6dB</sub>   | Tx de-emphasis level ratio at 6 dB                         | —                         | 5.5    | —   | 6.5    | dB      |
| T <sub>MIN-PULSE</sub>         | Instantaneous lone pulse width                             | —                         | 0.9    | —   | —      | UI      |
| T <sub>TX-RISE-FALL</sub>      | Transmitter rise and fall time                             | —                         | 0.15   | —   | —      | UI      |
| T <sub>TX-EYE</sub>            | Transmitter Eye, including all jitter sources              | —                         | 0.75   | —   | —      | UI      |
| T <sub>TX-DJ</sub>             | Tx deterministic jitter > 1.5 MHz                          | —                         | —      | —   | 0.15   | UI      |
| T <sub>TX-RJ</sub>             | Tx RMS jitter < 1.5 MHz                                    | —                         | —      | —   | 3      | ps, RMS |
| T <sub>RF-MISMATCH</sub>       | Tx rise/fall time mismatch                                 | —                         | —      | —   | 0.1    | UI      |
| R <sub>LTX-DIFF</sub>          | Tx Differential Return Loss, including package and silicon | 50 MHz < freq < 1.25 GHz  | 10     | —   | —      | dB      |
|                                |                                                            | 1.25 GHz < freq < 2.5 GHz | 8      | —   | —      | dB      |

| Symbol                     | Description                                                 | Test Conditions                   | Min    | Typ | Max              | Unit       |
|----------------------------|-------------------------------------------------------------|-----------------------------------|--------|-----|------------------|------------|
| $R_{LTX-CM}$               | Tx Common Mode Return Loss, including package and silicon   | 50 MHz < freq < 2.5 GHz           | 6      | —   | —                | dB         |
| $Z_{TX-DIFF-DC}$           | DC differential Impedance                                   | —                                 | —      | —   | 120              | $\Omega$   |
| $V_{TX-CM-AC-PP}$          | Tx AC peak common mode voltage, peak-peak                   | —                                 | —      | —   | 150              | mV, p-p    |
| $I_{TX-SHORT}$             | Transmitter short-circuit current                           | —                                 | —      | —   | 90               | mA         |
| $V_{TX-DC-CM}$             | Transmitter DC common-mode voltage                          | —                                 | 0      | —   | 1.2              | V          |
| $V_{TX-IDLE-DIFF-DC}$      | Electrical Idle Output DC voltage                           | —                                 | 0      | —   | 5                | mV         |
| $V_{TX-IDLE-DIFF-AC-p}$    | Electrical Idle Differential Output peak voltage            | —                                 | —      | —   | 20               | mV         |
| $V_{TX-RCV-DETECT}$        | Voltage change allowed during Receiver Detect               | —                                 | —      | —   | 600              | mV         |
| $T_{TX-IDLE-MIN}$          | Min. time in Electrical Idle                                | —                                 | 20     | —   | —                | ns         |
| $T_{TX-IDLE-SET-TO-IDLE}$  | Max. time from EI Order Set to valid Electrical Idle        | —                                 | —      | —   | 8                | ns         |
| $T_{TX-IDLE-TO-DIFF-DATA}$ | Max. time from Electrical Idle to valid differential output | —                                 | —      | —   | 8                | ns         |
| $L_{TX-SKEW}$              | Lane-to-Lane output skew                                    | —                                 | —      | —   | 500 + 4 UI       | ps         |
| <b>Receive<sup>2</sup></b> |                                                             |                                   |        |     |                  |            |
| UI                         | Unit Interval                                               | —                                 | 199.94 | 200 | 200.06           | ps         |
| $V_{RX-DIFF-PP}$           | Differential Rx peak-peak voltage                           | —                                 | 0.343  | —   | 1.2              | V, p-p     |
| $T_{RX-RJ-RMS}$            | Receiver random jitter tolerance (RMS)                      | 1.5 MHz – 100 MHz<br>Random noise | —      | —   | 4.2              | ps, RMS    |
| $T_{RX-DJ}$                | Receiver deterministic jitter tolerance                     | —                                 | —      | —   | 88               | ps         |
| $R_{LRX-DIFF}$             | Receiver differential Return Loss, package plus silicon     | 50 MHz < freq < 1.25 GHz          | 10     | —   | —                | dB         |
|                            |                                                             | 1.25 GHz < freq < 2.5 GHz         | 8      | —   | —                | dB         |
| $R_{LRX-CM}$               | Receiver common mode Return Loss, package plus silicon      | —                                 | 6      | —   | —                | dB         |
| $Z_{RX-DC}$                | Receiver DC single ended impedance                          | —                                 | 40     | —   | 60               | $\Omega$   |
| $Z_{RX-HIGH-IMP-DC}$       | Receiver DC single ended impedance when powered down        | —                                 | 200    | —   | —                | k $\Omega$ |
| $V_{RX-CM-AC-P}^3$         | Rx AC peak common mode voltage                              | —                                 | —      | —   | 150              | mV, peak   |
| $V_{RX-IDLE-DET-DIFF-PP}$  | Electrical Idle Detect Threshold                            | —                                 | 65     | —   | 175 <sup>3</sup> | mv, pp     |
| $L_{RX-SKEW}$              | Receiver –lane-lane skew                                    | —                                 | —      | —   | 8                | ns         |

**Notes:**

1. Refer to PCI Express Base Specification Revision 3.0 Table 4.18 test condition and requirement for respective parameters.
2. Refer to PCI Express Base Specification Revision 3.0 Table 4.24 test condition and requirement for respective parameters.
3. Spec compliant requirement

## 4.26. Hardened SGMII Characteristics

### 4.26.1. SGMII Specifications

**Table 4.47. SGMII**

| Symbol        | Description                                      | Test Conditions              | Min  | Typ  | Max              | Unit |
|---------------|--------------------------------------------------|------------------------------|------|------|------------------|------|
| $f_{DATA}$    | SGMII Data Rate                                  | —                            | —    | 1250 | —                | MHz  |
| $f_{REFCLK}$  | SGMII Reference Clock Frequency (Data Rate / 10) | —                            | —    | 125  | —                | MHz  |
| $J_{TOL\_DJ}$ | Jitter Tolerance, Deterministic                  | Periodic jitter<br>< 300 kHz | —    | —    | 0.1 <sup>1</sup> | UI   |
| $J_{TOL\_TJ}$ | Jitter Tolerance, Total                          | Periodic jitter<br>< 300 kHz | —    | —    | 0.3 <sup>1</sup> | UI   |
| $\Delta f/f$  | Data Rate and Reference Clock Accuracy           | —                            | –300 | —    | 300              | ppm  |

**Notes:**

- $J_{TOT}$  can meet the following jitter mask specification: 0 to 3.5 kHz: 10 UI; 3.5 to 700 kHz: log-log slope 10 UI to 0.05 UI; above 700 kHz: 0.05 UI.
- SGMII is not supported on 72-pin packages (QFN and WLCSP).

## 4.27. sysCONFIG Port Timing Specifications

**Table 4.48. sysCONFIG Port Timing Specifications**

| Symbol                                   | Parameter                                                                                                                                             | Device | Min | Typ. | Max | Unit    |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-----|------|-----|---------|
| <b>Controller SPI POR/REFRESH Timing</b> |                                                                                                                                                       |        |     |      |     |         |
| $t_{ICFG}$                               | REFRESH command executed, to the last rising edge of INITN (bulk-erase off)                                                                           | —      | —   | —    | 30  | $\mu$ s |
| $t_{VMC}$                                | Time from last rising edge of INITN to the valid Controller MCLK                                                                                      | —      | —   | —    | 5   | $\mu$ s |
| $f_{MCLK\_DEF}$                          | Default MCLK frequency (Before MCLK frequency selection in bitstream)                                                                                 | —      | —   | 3.5  | —   | MHz     |
| $t_{ICFG\_POR}$                          | Time during POR, from VCC, VCCAUX, VCCIO0, or VCCIO1 (whichever is the last) pass POR trip                                                            | —      | —   | —    | 5   | ms      |
| <b>Target SPI/I2C/I3C POR</b>            |                                                                                                                                                       |        |     |      |     |         |
| $t_{MSPI\_INH}$                          | Time during POR, from VCC, VCCAUX, VCCIO0 or VCCIO1 (whichever is the last) pass POR trip voltage, to pull PROGRAMN LOW to prevent entering MSPI mode | —      | —   | —    | 1   | $\mu$ s |
| $t_{ACT\_PROGRAMN\_H}$                   | Minimum time driving PROGRAMN HIGH after last activation clock                                                                                        | —      | 50  | —    | —   | ns      |
| $t_{CONFIG\_CCLK}$                       | Minimum time to start driving CCLK (SSPI) after PROGRAMN HIGH                                                                                         | —      | 50  | —    | —   | ns      |
| $t_{CONFIG\_SCL}$                        | Minimum time to start driving SCL (I2C/I3C) after PROGRAMN HIGH                                                                                       | —      | 50  | —    | —   | ns      |
| <b>PROGRAMN Configuration Timing</b>     |                                                                                                                                                       |        |     |      |     |         |
| $t_{PROGRAMN\_L}$                        | PROGRAMN LOW pulse accepted                                                                                                                           | —      | 50  | —    | —   | ns      |
| $t_{PROGRAMN\_H}$                        | PROGRAMN HIGH pulse accepted                                                                                                                          | —      | 60  | —    | —   | ns      |
| $t_{PROGRAMN\_RJ}$                       | PROGRAMN LOW pulse rejected                                                                                                                           | —      | —   | —    | 25  | ns      |
| $t_{INIT\_LOW}$                          | PROGRAMN LOW to INITN LOW                                                                                                                             | —      | —   | —    | 100 | ns      |
| $t_{INIT\_HIGH}$                         | PROGRAMN LOW to INITN HIGH (bulk-erase off)                                                                                                           | —      | —   | —    | 50  | $\mu$ s |

| Symbol                                     | Parameter                                                       | Device   | Min              | Typ.  | Max             | Unit   |
|--------------------------------------------|-----------------------------------------------------------------|----------|------------------|-------|-----------------|--------|
| t <sub>DONE_LOW</sub>                      | PROGRAMN LOW to DONE LOW                                        | —        | —                | —     | 55              | μs     |
| t <sub>DONE_HIGH</sub> <sup>2</sup>        | PROGRAMN HIGH to DONE HIGH                                      | —        | —                | —     | 2               | s      |
| t <sub>IODISS</sub>                        | PROGRAMN LOW to I/O Disabled                                    | —        | —                | —     | 125             | ns     |
| <b>Controller SPI</b>                      |                                                                 |          |                  |       |                 |        |
| f <sub>MCLK</sub> <sup>1</sup>             | Max selected MCLK output frequency                              | —        | —                | 112.5 | 124             | MHz    |
| f <sub>MCLK_DC</sub>                       | MCLK output clock duty cycle                                    | —        | 40               | —     | 60              | %      |
| t <sub>MCLKH</sub>                         | MCLK output clock pulse width HIGH                              | —        | 3.5              | —     | —               | ns     |
| t <sub>MCLKL</sub>                         | MCLK output clock pulse width LOW                               | —        | 3.5              | —     | —               | ns     |
| t <sub>SU_MSI</sub>                        | MSI to MCLK setup time                                          | —        | 3                | —     | —               | ns     |
| t <sub>HD_MSI</sub>                        | MSI to MCLK hold time                                           | —        | 0.5              | —     | —               | ns     |
| t <sub>CO_MSO</sub> <sup>2</sup>           | MCLK to MSO delay                                               | —        | —                | —     | 12              | ns     |
| <b>Target SPI</b>                          |                                                                 |          |                  |       |                 |        |
| f <sub>CCLK_W</sub>                        | CCLK input clock frequency (For write transaction) <sup>4</sup> | —        | —                | —     | 120             | MHz    |
| f <sub>CCLK_R</sub>                        | CCLK input clock frequency (For write transaction) <sup>5</sup> | —        | —                | —     | — <sup>6</sup>  | MHz    |
| t <sub>CCLKH</sub>                         | CCLK input clock pulse width HIGH                               | —        | 3.5              | —     | —               | ns     |
| t <sub>CCLKL</sub>                         | CCLK input clock pulse width LOW                                | —        | 3.5              | —     | —               | ns     |
| t <sub>VMC_SLAVE</sub>                     | Time from rising edge of INITN to Target CCLK driven            | —        | 50               | —     | —               | ns     |
| t <sub>VMC_MASTER</sub>                    | CCLK input clock duty cycle                                     | —        | 40               | —     | 60              | %      |
| t <sub>SU_SSI</sub>                        | SSI to CCLK setup time                                          | —        | 3.2              | —     | —               | ns     |
| t <sub>HD_SSI</sub>                        | SSI to CCLK hold time                                           | —        | 1.9              | —     | —               | ns     |
| t <sub>CO_SSO</sub>                        | CCLK falling edge to valid SSO output                           | —        | 3.0 <sup>7</sup> | —     | 30 <sup>7</sup> | ns     |
| t <sub>EN_SSO</sub>                        | CCLK falling edge to SSO output enabled                         | —        | 3.0 <sup>7</sup> | —     | 30 <sup>7</sup> | ns     |
| t <sub>DIS_SSO</sub>                       | CCLK falling edge to SSO output disabled                        | —        | 3.0 <sup>7</sup> | —     | 30 <sup>7</sup> | ns     |
| t <sub>HIGH_SCSN</sub>                     | SCSN HIGH time                                                  | —        | 74               | —     | —               | ns     |
| t <sub>SU_SCSN</sub>                       | SCSN to CCLK setup time                                         | —        | 3.5              | —     | —               | ns     |
| t <sub>HD_SCSN</sub>                       | SCSN to CCLK hold time                                          | —        | 1.6              | —     | —               | ns     |
| <b>I2C/I3C</b>                             |                                                                 |          |                  |       |                 |        |
| f <sub>SCL_I2C</sub>                       | SCL input clock frequency for I2C                               | —        | —                | —     | 1               | MHz    |
| f <sub>SCL_I3C</sub>                       | SCL input clock frequency for I3C                               | —        | —                | —     | 12              | MHz    |
| t <sub>SCLH_I2C</sub>                      | SCL input clock pulse width HIGH for I2C                        | —        | 400              | —     | —               | ns     |
| t <sub>SCLL_I2C</sub>                      | SCL input clock pulse width LOW for I2C                         | —        | 400              | —     | —               | ns     |
| t <sub>SU_SDA_I2C</sub>                    | SDA to SCL setup time for I2C                                   | —        | 250              | —     | —               | ns     |
| t <sub>HD_SDA_I2C</sub>                    | SDA to SCL hold time for I2C                                    | —        | 50               | —     | —               | ns     |
| t <sub>SU_SDA_I3C</sub>                    | SDA to SCL setup time for I3C                                   | —        | 30               | —     | —               | ns     |
| t <sub>HD_SDA_I3C</sub>                    | SDA to SCL hold time for I3C                                    | —        | 30               | —     | —               | ns     |
| t <sub>CO_SDA</sub>                        | SCL falling edge to valid SDA output                            | —        | —                | —     | 200             | ns     |
| t <sub>EN_SDA</sub>                        | SCL falling edge to SDA output enabled                          | —        | —                | —     | 200             | ns     |
| t <sub>DIS_SDA</sub>                       | SCL falling edge to SDA output disabled                         | —        | —                | —     | 200             | ns     |
| <b>Wake-Up Timing</b>                      |                                                                 |          |                  |       |                 |        |
| t <sub>WAKEUP_DONE_HIGH</sub> <sup>2</sup> | Last configuration clock cycle to DONE going HIGH               | —        | —                | —     | 60              | μs     |
| t <sub>FIO_EN</sub> <sup>2</sup>           | User I/O enabled in Early I/O Mode                              | LIFCL-40 | —                | —     | 31184           | cycles |

| Symbol            | Parameter                        | Device   | Min | Typ. | Max   | Unit    |
|-------------------|----------------------------------|----------|-----|------|-------|---------|
|                   |                                  | LIFCL-17 | —   | —    | 20688 | cycles  |
| $t_{IOEN}^2$      | Config clock to user I/O enabled | —        | 150 | —    | —     | ns      |
| $t_{MCLKZ}^{2,3}$ | Controller MCLK to Hi-Z          | —        | —   | —    | 2.5   | $\mu$ s |

**Notes:**

1.  $f_{MCLK}$  has a dependency on HFOSC and is 1/3 of  $f_{CLKHF}$ .
2. Based on 30k uncompressed/unauthenticated/default MCLK timing (3.5 MHz)/x1. Other permutations result in different values.
3. Measured using LVCMOS18, default MCLK frequency, slow slew rate.
4. Supported input clock frequency for bursting in configuration bitstream to the device.
5. Supported input clock frequency for reading out data transactions from the device.
6. Refer to the following equations to determine the supported input clock frequency for read transaction. Assumption: The skew between CCLK and SSO on board is zero.

$$\frac{1}{2} CCLK - tCO(max) - Tsu > 0$$

$$CCLK > 2(tCO(max) + Tsu)$$

CCLK – Input clock period.  $fCCLK\_R = 1/CCLK$ .

$tCO(max)$  – Equivalent to  $tCO\_SSO$  or  $tEN\_SSO$  max value.

$Tsu$  – Setup time requirement for host controller I/O.

For customer that can only use single clock for read/write operation, the Fmax will be limited by the Fmax for read operation.  
For example:  $tCO(max)=30ns$  and  $Tsu=2ns$ .

$$CCLK > 2(tCO(max) + Tsu)$$


$$CCLK > 2(30ns + 2ns)$$

$$CCLK > 64ns$$

$$fCCLK\_R = 1/64ns = 15.62MHz$$

For customer that want to do the programming at 135Mhz or faster than Fmax for read operation:

- Have a mechanism in the host controller to switch between read clock and write clock for read/write transaction. For example refer to SPI specification to switch between read and write clock by changing the SPI Baud Rate Register (SPIBR) if standard SPI controller is used as the host.
  - or implementing a mechanism to adjust/calibrate the sampling clock edge when the valid data becomes available.
7. Based on SLOW(default) slew rate control on Config output pins.

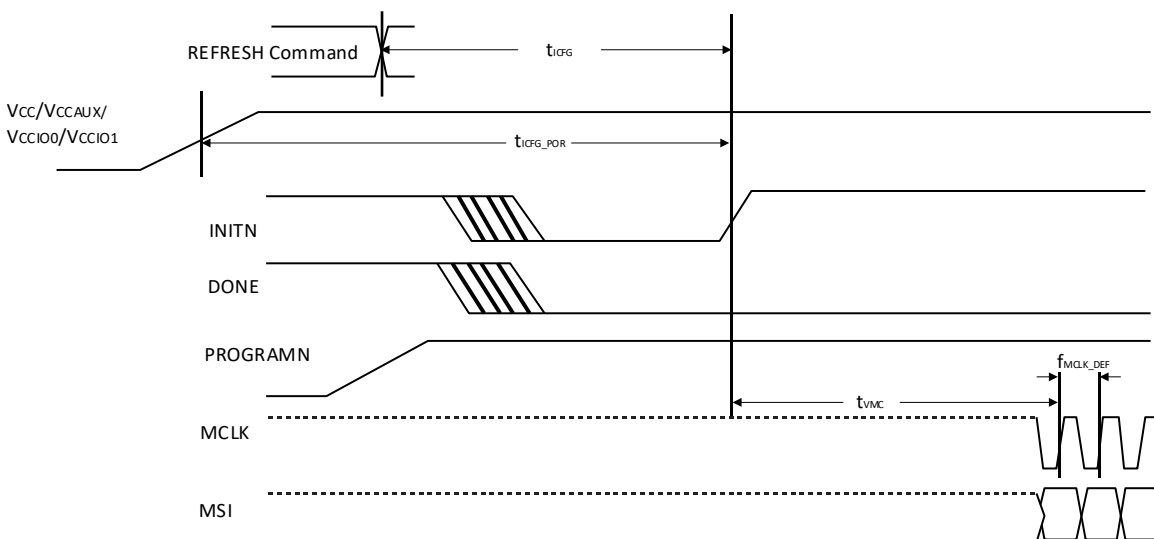

**Figure 4.14. Controller SPI POR/REFRESH Timing**

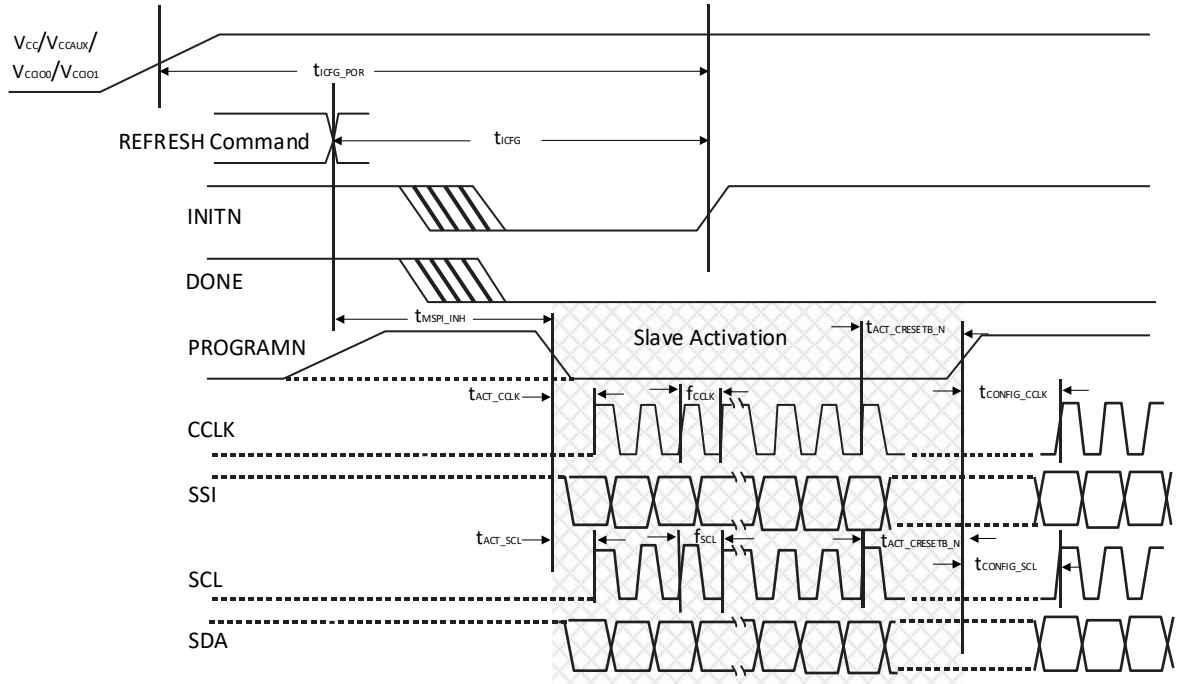


Figure 4.15. Target SPI/I2C/I3C POR/REFRESH Timing

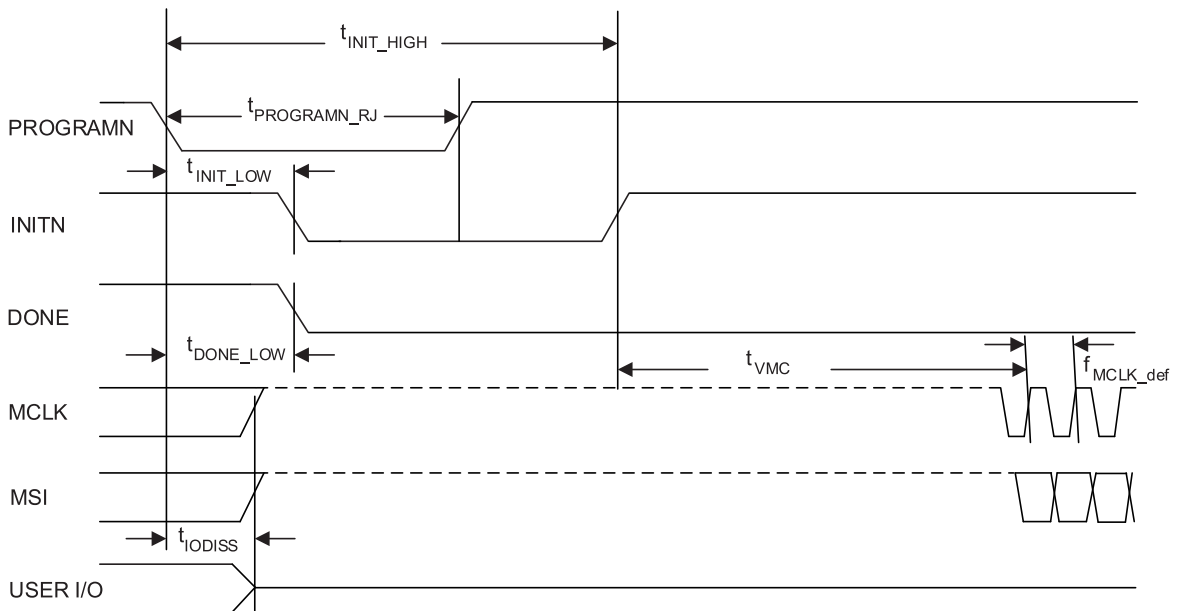


Figure 4.16. Controller SPI PROGRAMN Timing

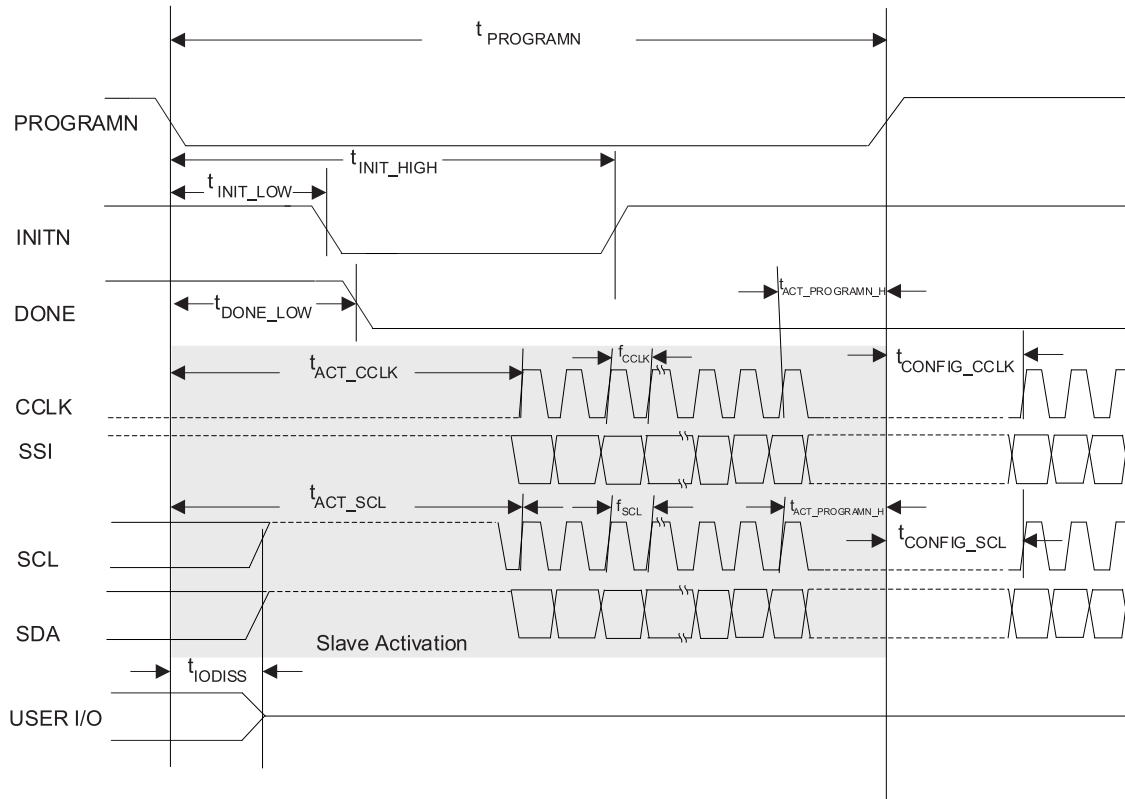


Figure 4.17. Target SPI/I2C/I3C PROGRAMN Timing



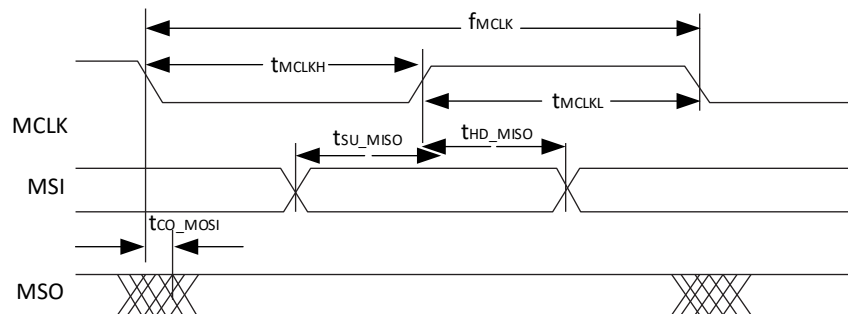


Figure 4.18. Controller SPI Configuration Timing




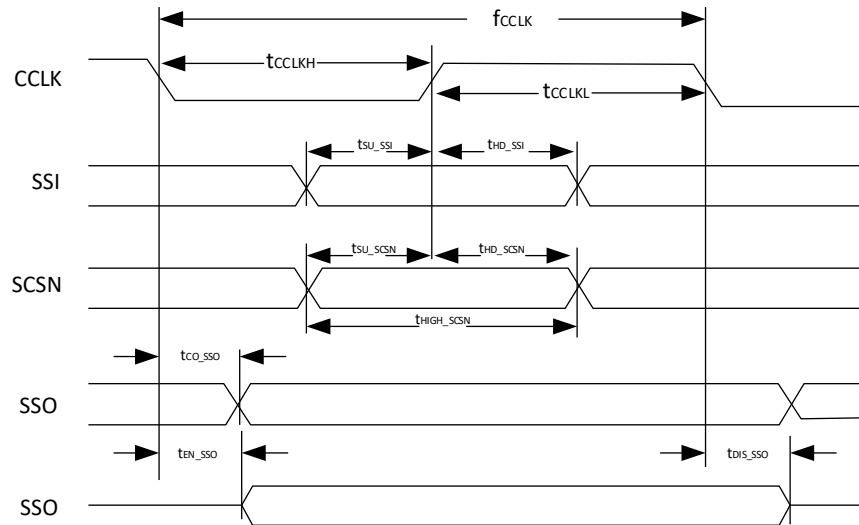


**Figure 4.19. Target SPI Configuration Timing**

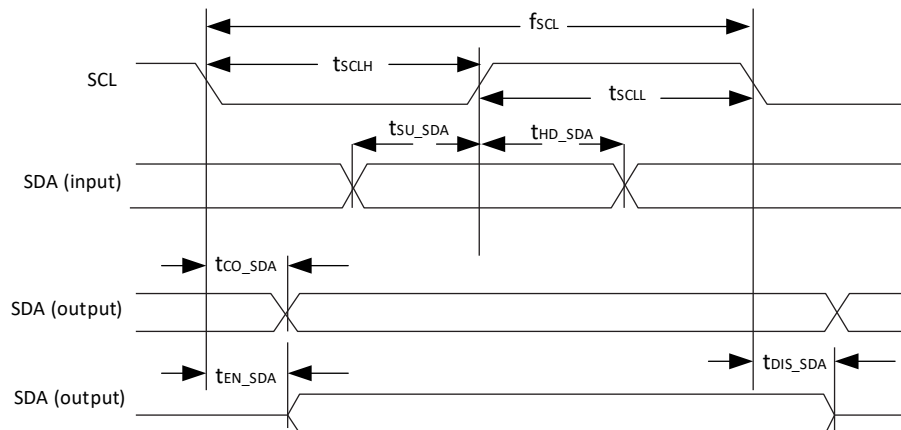


**Figure 4.20. I2C /I3C Configuration Timing**

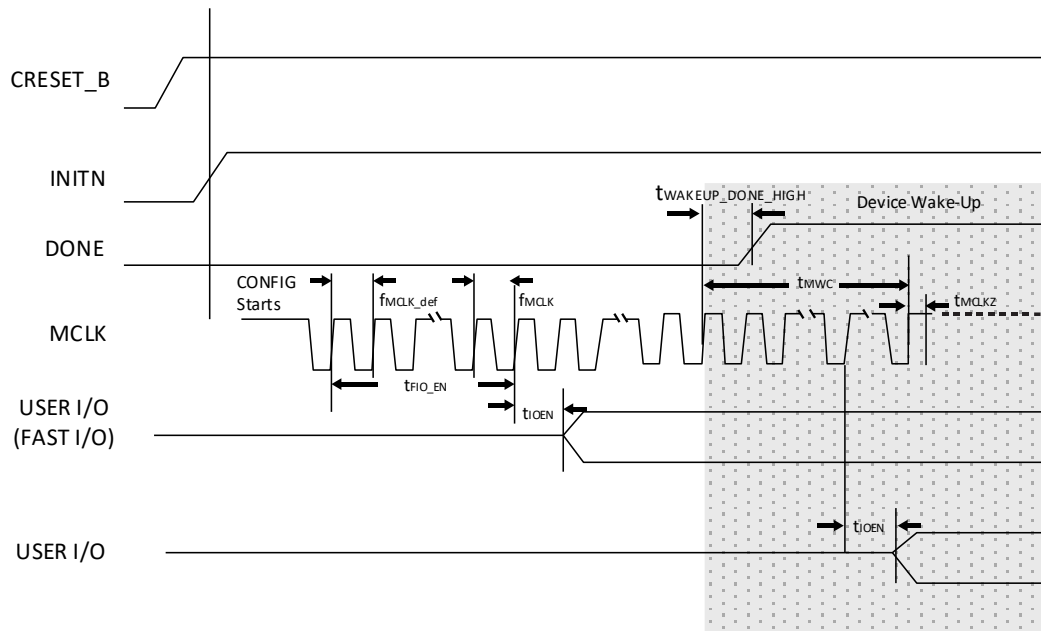

### Figure 4.21. Controller SPI Wake-Up Timing

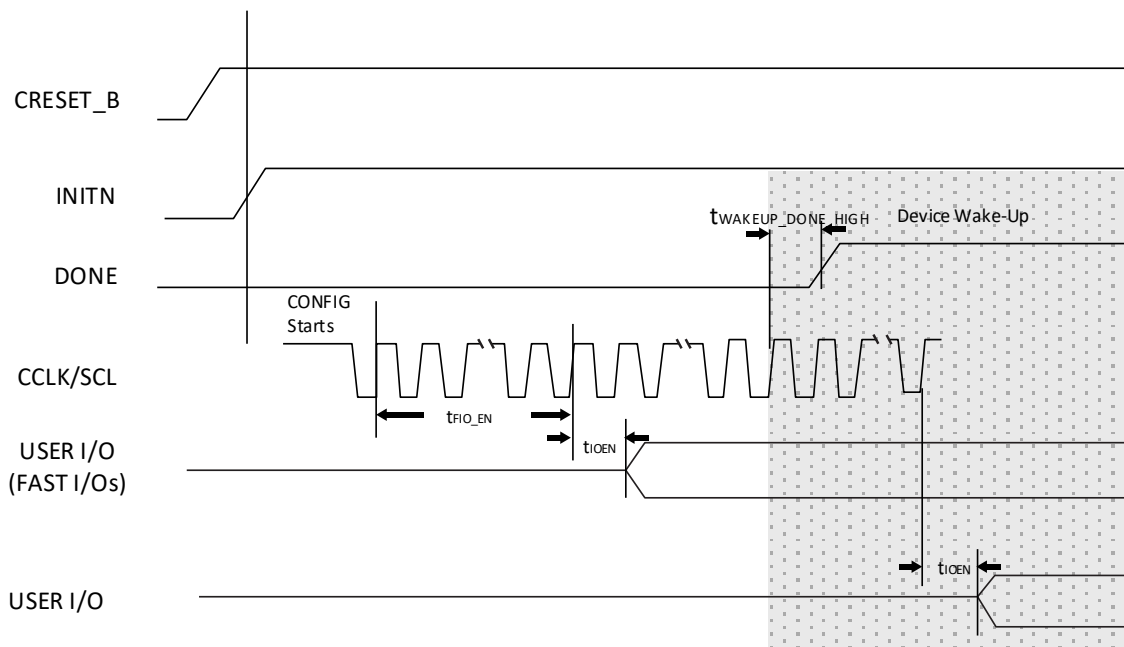

### Figure 4.22. Target SPI/I2C/I3C Wake-Up Timing

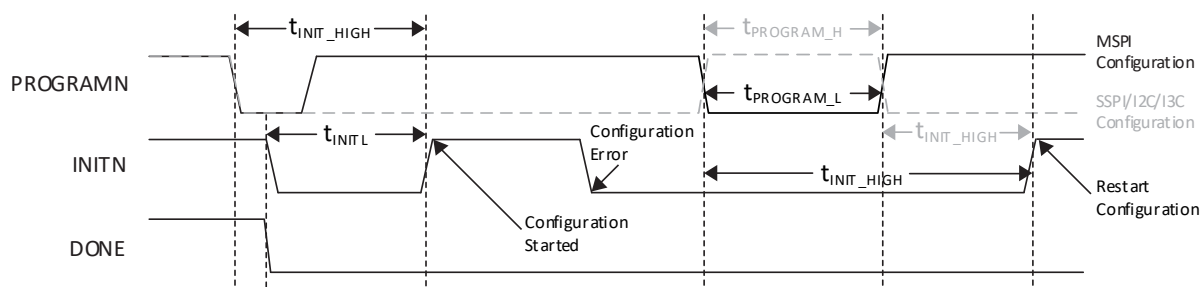

### Figure 4.23. Configuration Error Notification


## 4.28. JTAG Port Timing Specifications

**Table 4.49. JTAG Port Timing Specifications**

| Symbol        | Parameter                                                          | Min | Typ. | Max | Units |
|---------------|--------------------------------------------------------------------|-----|------|-----|-------|
| $f_{MAX}$     | TCK clock frequency                                                | —   | —    | 25  | MHz   |
| $t_{BTCPH}$   | TCK clock pulse width high                                         | 20  | —    | —   | ns    |
| $t_{BTCPL}$   | TCK clock pulse width low                                          | 20  | —    | —   | ns    |
| $t_{BTS}$     | TCK TAP setup time                                                 | 5   | —    | —   | ns    |
| $t_{BTH}$     | TCK TAP hold time                                                  | 5   | —    | —   | ns    |
| $t_{BTRF}$    | TAP controller TDO rise/fall time <sup>1</sup>                     | 100 | —    | —   | mV/ns |
| $t_{BTCO}$    | TAP controller falling edge of clock to valid output               | —   | —    | 14  | ns    |
| $t_{BTCODIS}$ | TAP controller falling edge of clock to valid disable              | —   | —    | 14  | ns    |
| $t_{BTCOEN}$  | TAP controller falling edge of clock to valid enable               | —   | —    | 14  | ns    |
| $t_{BTCRS}$   | BSCAN test capture register setup time                             | 8   | —    | —   | ns    |
| $t_{BTCRH}$   | BSCAN test capture register hold time                              | 25  | —    | —   | ns    |
| $t_{BUTCO}$   | BSCAN test update register, falling edge of clock to valid output  | —   | —    | 25  | ns    |
| $t_{BTUODIS}$ | BSCAN test update register, falling edge of clock to valid disable | —   | —    | 25  | ns    |
| $t_{BTUPOEN}$ | BSCAN test update register, falling edge of clock to valid enable  | —   | —    | 25  | ns    |

**Note:**


1. Based on default I/O setting of slow slew rate.

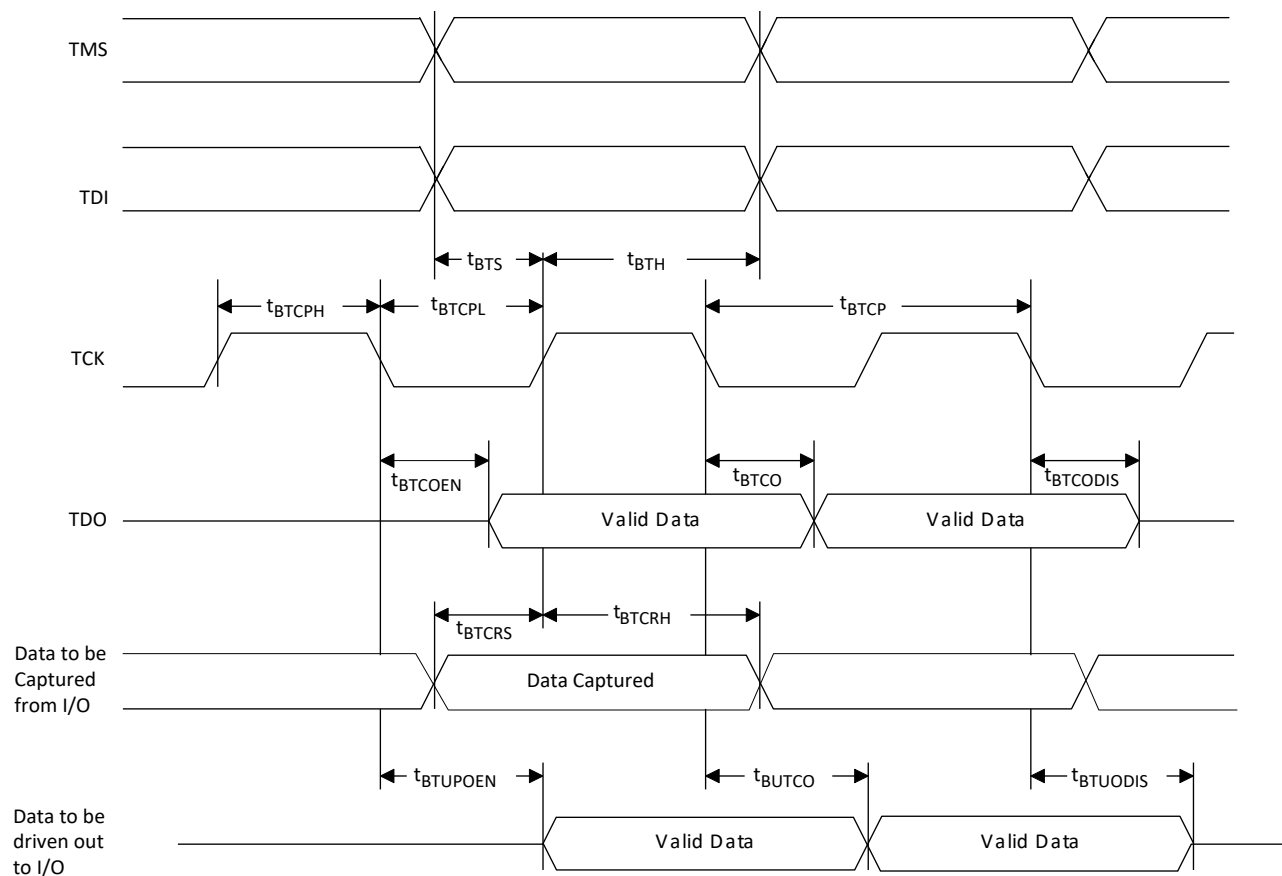

**Figure 4.24. JTAG Port Timing Waveforms**

## 4.29. Switching Test Conditions

Figure 3.25 shows the output test load that is used for AC testing. The specific values for resistance, capacitance, voltage, and other test conditions are listed in Table 4.50.

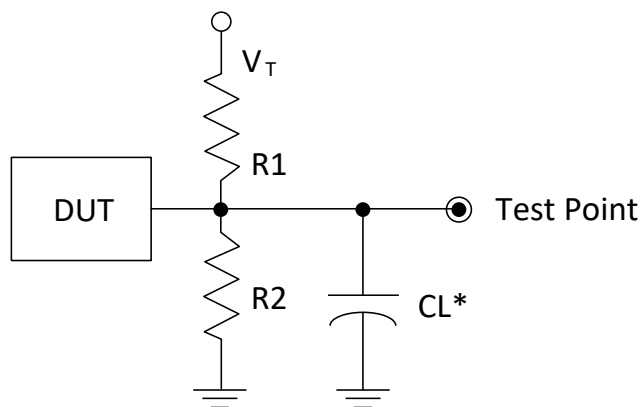

\*CL Includes Test Fixture and Probe Capacitance

Figure 4.25. Output Test Load, LVTTL and LVCMOS Standards

Table 4.50. Test Fixture Required Components, Non-Terminated Interfaces

| Test Condition                                              | $R_1$        | $R_2$        | $C_L$ | Timing Ref.               | $V_T$      |
|-------------------------------------------------------------|--------------|--------------|-------|---------------------------|------------|
| LVTTL and other LVCMOS settings ( $L \geq H$ , $H \geq L$ ) | $\infty$     | $\infty$     | 0 pF  | LVCMOS 3.3 = 1.5 V        | —          |
|                                                             |              |              |       | LVCMOS 2.5 = $V_{CCIO}/2$ | —          |
|                                                             |              |              |       | LVCMOS 1.8 = $V_{CCIO}/2$ | —          |
|                                                             |              |              |       | LVCMOS 1.5 = $V_{CCIO}/2$ | —          |
|                                                             |              |              |       | LVCMOS 1.2 = $V_{CCIO}/2$ | —          |
| LVCMOS 2.5 I/O ( $Z \geq H$ )                               | $\infty$     | 1 M $\Omega$ | 0 pF  | $V_{CCIO}/2$              | —          |
| LVCMOS 2.5 I/O ( $Z \geq L$ )                               | 1 M $\Omega$ | $\infty$     | 0 pF  | $V_{CCIO}/2$              | $V_{CCIO}$ |
| LVCMOS 2.5 I/O ( $H \geq Z$ )                               | $\infty$     | 100          | 0 pF  | $V_{OH} - 0.10$           | —          |
| LVCMOS 2.5 I/O ( $L \geq Z$ )                               | 100          | $\infty$     | 0 pF  | $V_{OL} + 0.10$           | $V_{CCIO}$ |

**Note:** Output test conditions for all other interfaces are determined by the respective standards.

## 5. Pinout Information

### 5.1. Signal Descriptions

| Signal Name                               | Bank | Type  | Description                                                                                                                                                                                                                                                                                                                                             |
|-------------------------------------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Power and GND</b>                      |      |       |                                                                                                                                                                                                                                                                                                                                                         |
| VSS                                       | —    | GND   | Ground for internal FPGA logic and I/O                                                                                                                                                                                                                                                                                                                  |
| VSSA_D-PHY                                | —    | GND   | Analog Ground for D-PHY blocks                                                                                                                                                                                                                                                                                                                          |
| VSSSD                                     | —    | GND   | Ground for SerDes blocks                                                                                                                                                                                                                                                                                                                                |
| V <sub>CC</sub>                           | —    | Power | Power supply pins for core logic. V <sub>CC</sub> is connected to 1.0 V (nom.) supply voltage. Power On Reset (POR) monitors this supply voltage.                                                                                                                                                                                                       |
| VCCAUXA                                   | —    | Power | Auxiliary power supply pin for internal analog circuitry. This supply is connected to 1.8 V (nom.) supply voltage. POR monitors this supply voltage.                                                                                                                                                                                                    |
| VCCAUX                                    | —    | Power | Auxiliary power supply pin for I/O Bank 0, Bank 1, Bank 2, Bank 6, and Bank 7. This supply is connected to 1.8 V (nom.) supply voltage, and is used for generating stable drive current for the I/O.                                                                                                                                                    |
| VCCAUXHx                                  | —    | Power | Auxiliary power supply pin for I/O Bank 3, Bank 4, and Bank 5. This supply is connected to 1.8 V (nom.) supply voltage, and is used for generating stable current for the differential input comparators.                                                                                                                                               |
| VCCIOx                                    | 0-7  | Power | Power supply pins for I/O bank x.<br>For x = 0, 1, 2, 6, and 7, VCCIO can be connected to (nom.) 1.2 V, 1.5 V, 1.8 V, 2.5 V, or 3.3 V.<br>For x = 3, 4, and 5, VCCIO can be connected to (nom.) 1.0 V, 1.2 V, 1.35 V, 1.5 V, or 1.8 V.<br>There are dedicated and shared configuration pins in banks 0 and 1. POR monitors these banks supply voltages. |
| VCC_D-PHYx                                | —    | Power | 1.0 V (nom.) digital power supply for the hardened D-PHY blocks.<br>X = 0, 1                                                                                                                                                                                                                                                                            |
| VCCA_D-PHYx                               | —    | Power | 1.8 V (nom.) analog power supply for the hardened D-PHY blocks.<br>X = 0, 1                                                                                                                                                                                                                                                                             |
| VCCPLL_D-PHYx                             | —    | Power | 1.0 V (nom.) power supply for the hardened D-PHY blocks.<br>X = 0, 1                                                                                                                                                                                                                                                                                    |
| VCCADC18 <sup>2,3</sup>                   | —    | Power | 1.8 V (nom.) power supply for the ADC block.                                                                                                                                                                                                                                                                                                            |
| VCCSD0                                    | —    | Power | 1.0 V (nom.) power supply for the SerDes block.                                                                                                                                                                                                                                                                                                         |
| VCCPLLS0                                  | —    | Power | 1.8 V (nom.) power supply for the PLL in the SerDes block.                                                                                                                                                                                                                                                                                              |
| VCCAUXSD                                  | —    | Power | 1.8 V (nom.) auxiliary power supply for the SerDes block.                                                                                                                                                                                                                                                                                               |
| <b>Dedicated Pins</b>                     |      |       |                                                                                                                                                                                                                                                                                                                                                         |
| <b>Dedicated Configuration I/O Pin</b>    |      |       |                                                                                                                                                                                                                                                                                                                                                         |
| JTAG_EN                                   | 1    | Input | LVC MOS input pin. This input selects the JTAG shared GPIO to be used for JTAG<br>0 = GPIO<br>1 = JTAG ✓                                                                                                                                                                                                                                                |
| <b>Dedicated ADC I/O Pins<sup>2</sup></b> |      |       |                                                                                                                                                                                                                                                                                                                                                         |
| ADC_REF[0, 1]                             | —    | Input | ADC reference voltage, for each of the two ADC converters. If not used, tie to ground.                                                                                                                                                                                                                                                                  |
| ADC_DP/N[0, 1]                            | —    | Input | Dedicated ADC input pairs, for each of the two ADC converters. If not used, tie to ground.                                                                                                                                                                                                                                                              |

| Signal Name                          | Bank                                         | Type                  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------------------|----------------------------------------------|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Dedicated High Speed I/O Pins</b> |                                              |                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| SDO_RXDP/N                           | —                                            | Input                 | High Speed Data Differential Input Pairs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| SDO_TXDP/N                           | —                                            | Output                | High Speed Data Differential Output Pairs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| SDO_REFCLKP/N                        | —                                            | Input                 | High Speed Reference Clock Differential Input Pairs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| SDO_REXT                             | —                                            | Input                 | High Speed External Reference Resistor Input. Resistor connects between to this pin and SDO_REFRET pin. This is used to adjust the on-chip differential termination impedance, based on the external resistance value:<br>$R_{EXT} = 909 \Omega$ , $R_{DIFF} = 80 \Omega$<br>$R_{EXT} = 976 \Omega$ , $R_{DIFF} = 85 \Omega$<br>$R_{EXT} = 1.02 \text{ k}\Omega$ , $R_{DIFF} = 90 \Omega$<br>$R_{EXT} = 1.15 \text{ k}\Omega$ , $R_{DIFF} = 100 \Omega$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| SDO_REFRET                           | —                                            | Input                 | High Speed Reference Return Input. These pins should be AC coupled to the VCCPLSD0 supply                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Dedicated D-PHY I/O Pins</b>      |                                              |                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| D-PHY[0-1]_DP/N[0-3]                 | —                                            | Input, Output         | Hardened D-PHY Data Input/Output Pairs, for each of the 4 High Speed lanes in the 2 Hardened D-PHY Blocks                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| D-PHY[0-1]_CKP/N                     | —                                            | Input, Output         | Hardened D-PHY Clock Input/Output Pairs, for each of the 2 Hardened D-PHY Blocks                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Misc Pins</b>                     |                                              |                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| NC                                   | —                                            | —                     | No connect.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| RESERVED                             | —                                            | —                     | This pin is reserved and should not be connected to anything on the                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>General Purpose I/O Pins</b>      |                                              |                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| P[T/B/L/R] [Number]_[A/B]            | T = 0<br>R = 1, 2<br>B = 3, 4, 5<br>L = 6, 7 | Input, Output, Bi-Dir | <p>Programmable User I/O:</p> <p>[T/B/L/R] indicates the package pin/ball is in T (Top), B (Bottom), L (Left), or R (Right) edge of the device.</p> <p>[Number] identifies the PIO [A/B] pair.</p> <p>[A/B] shows the package pin/ball is A or B signal in the pair. PIO A and PIO B are grouped as a pair.</p> <p>Each A/B pair in the bottom banks supports true differential input and output buffers. When configured as differential input, differential termination of <math>100 \Omega</math> can be selected.</p> <p>Each A/B pair in the top, left and right banks does not support true differential input or output buffer. It supports all single-ended inputs and outputs, and can be used for emulated differential output buffer.</p> <p>Some of these user-programmable I/O are used during configuration, depending on the configuration mode. You need to make appropriate connection on the board to isolate the two different functions before/after configuration.</p> <p>Some of these user-programmable I/O are shared with special function pins. These pins, when not used as special purpose pins, can be programmed as I/O for user logic.</p> <p>During configuration the user-programmable I/O are tri-stated with an internal weak pull-down resistor enabled. If any pin is not used (or not bonded to a package pin), it is tri-stated and default to have weak pull-down enabled after configuration.</p> |

| Signal Name                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Bank | Type                        | Description                                                                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Shared Configuration Pins</b><br>1. These pins can be used for configuration during configuration mode. When configuration is completed, these pins can be used as GPIO, or shared function in GPIO. When these pins are used in dual function, users need to isolate the signal paths for the dual functions on the board.<br>2. The pins used are defined by the configuration modes detected. Target SPI or I2C/I3C modes are detected during Target activation. Pins that are not used in the configuration mode selected are tri-stated during configuration, and can connect directly as GPIO in user's function. |      |                             |                                                                                                                                                   |
| PRxxx /SDA/USER_SDA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1    | Input,<br>Output,<br>Bi-Dir | Configuration:<br>I2C/I3C Mode: SDA signal<br>User Mode:<br>PRxxx: GPIO<br>User_SDA: SDA signal for I2C/I3C interface                             |
| PRxxx /SCL/USER_SCL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1    | Input,<br>Output,<br>Bi-Dir | Configuration:<br>I2C/I3C Mode: SCL signal<br>User Mode:<br>PRxxx: GPIO<br>User_SDA: SCL signal for I2C/I3C interface                             |
| PRxxx/ <u>TDO/SSO</u>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 1    | Input,<br>Output,<br>Bi-Dir | Configuration:<br>Target SPI Mode: Target Serial Output<br>User Mode:<br>PRxxx: GPIO<br><u>TDO: When JTAG_EN = 1, used as TDO signal for JTAG</u> |
| PRxxx/ <u>TDI/SSI</u>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 1    | Input,<br>Output,<br>Bi-Dir | Configuration:<br>Target SPI Mode: Target Serial Input<br>User Mode:<br>PRxxx: GPIO<br><u>TDI: When JTAG_EN = 1, used as TDI signal for JTAG</u>  |
| PRxxx/ <u>TMS/SCSN</u>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 1    | Input,<br>Output,<br>Bi-Dir | Configuration:<br>Target SPI Mode: Target Chip Select<br>User Mode:<br>PRxxx: GPIO<br><u>TMS: When JTAG_EN = 1, used as TMS signal for JTAG</u>   |
| PRxxx/ <u>TCK/SCLK</u>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 1    | Input,<br>Output,<br>Bi-Dir | Configuration:<br>Target SPI Mode: Target Clock Input<br>User Mode:<br>PRxxx: GPIO<br><u>TCK: When JTAG_EN = 1, used as TCK signal for JTAG</u>   |
| PTxxx/MCSNO                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 0    | Input,<br>Output,<br>Bi-Dir | Configuration:<br>Flow-through Daisy Chain Mode: Chip Select Output<br>User Mode:<br>PTxxx: GPIO                                                  |
| PTxxx/MD3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0    | Input,<br>Output,<br>Bi-Dir | Configuration:<br>Controller Quad SPI Mode: I/O3<br>User Mode:<br>PTxxx: GPIO                                                                     |
| PTxxx/MD2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0    | Input,<br>Output,<br>Bi-Dir | Configuration:<br>Controller Quad SPI Mode: I/O2<br>User Mode:<br>PTxxx: GPIO                                                                     |

| Signal Name                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Bank | Type                        | Description                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PTxxx/MSI/MD1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 0    | Input,<br>Output,<br>Bi-Dir | Configuration:<br>Controller SPI Mode: Controller Serial Input<br>Controller Quad SPI Mode: I/O1<br>User Mode:<br>PTxxx: GPIO                                                                                                                                                                                                                                                       |
| PTxxx/MSO/MD0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 0    | Input,<br>Output,<br>Bi-Dir | Configuration:<br>Controller SPI Mode: Controller Serial Output<br>Controller Quad SPI Mode: I/O0<br>User Mode:<br>PTxxx: GPIO                                                                                                                                                                                                                                                      |
| PTxxx/MCSN/PCLKT0_1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 0    | Input,<br>Output,<br>Bi-Dir | Configuration:<br>Controller SPI Mode: Controller Chip Select Output<br>User Mode:<br>PTxxx: GPIO<br>PCLKT0_0: Top PCLK Input                                                                                                                                                                                                                                                       |
| PTxxx/MCLK/PCLKT0_0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 0    | Input,<br>Output,<br>Bi-Dir | Configuration:<br>Controller SPI Mode: Controller Clock Output<br>User Mode:<br>PTxxx: GPIO<br>PCLKT0_1: Top PCLK Input                                                                                                                                                                                                                                                             |
| PTxxx/PROGRAMN                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 0    | Input,<br>Output,<br>Bi-Dir | Configuration:<br>PROGRAMN: Initiate configuration sequence when asserted LOW.<br>User Mode:<br>PTxxx: GPIO                                                                                                                                                                                                                                                                         |
| PTxxx/INITN                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 0    | Input,<br>Output,<br>Bi-Dir | Configuration:<br>INITN: Open Drain I/O pin. This signal is driven to LOW when configuration sequence is started, to indicate the device is in initialization state. This signal is released after initialization is completed, and the configuration download can start. You can keep drive this signal LOW to delay configuration download to start.<br>User Mode:<br>PTxxx: GPIO |
| PTxxx/DONE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 0    | Input,<br>Output,<br>Bi-Dir | Configuration:<br>DONE: Open Drain I/O pin. This signal is driven to LOW during configuration time. It is released to indicate the device has completed configuration. You can keep drive this signal LOW to delay the device to wake up from configuration.<br>User Mode:<br>PTxxx: GPIO                                                                                           |
| <b>Shared User GPIO Pins</b><br><b>1. Shared User GPIO pins are pins that can be used as GPIO, or functional pins that connect directly to specific functional blocks, when device enters into User Mode.</b><br><b>2. Declaring on assigning the pin as GPIO or specific functional pin is done by configuration bitstream, except JTAG pins.</b><br><b>3. JTAG pins are controlled by JTAG_EN signal. When JTAG_EN = 1, the pins are used for JTAG interface. When JTAG = 0, the pins are used as GPIO or specific functional pin defined by configuration bitstream.</b><br><b>4. Refer to package pin file.</b> |      |                             |                                                                                                                                                                                                                                                                                                                                                                                     |



| Signal Name                                                                                                                                                                  | Bank    | Type                        | Description                                                                                                                                                                                                                                              |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Shared JTAG Pins</b>                                                                                                                                                      |         |                             |                                                                                                                                                                                                                                                          |
| PRxxx/EIO                                                                                                                                                                    | 1,2,6,7 | Input,<br>Output,<br>Bi-Dir | User Mode:<br>PRxxx: GPIO<br>EIO: Early I/O Release, for more information refer to <a href="#">sysCONFIG User Guide for Nexus Platform (FPGA-TN-02099)</a> Section 5.5.                                                                                  |
| PLxxx/EIO                                                                                                                                                                    | 1,2,6,7 | Input,<br>Output,<br>Bi-Dir | User Mode:<br>PLxxx: GPIO<br>EIO: Early I/O Release, for more information refer to <a href="#">sysCONFIG User Guide for Nexus Platform (FPGA-TN-02099)</a> Section 5.5.                                                                                  |
| PRxxx/TDO/ yyyy                                                                                                                                                              | 1       | Input,<br>Output,<br>Bi-Dir | User Mode:<br>PRxxx: GPIO<br>TDO: When JTAG_EN = 1, used as TDO signal for JTAG<br>yyyy: Other possible selectable specific functional                                                                                                                   |
| PRxxx/TDI/yyyy                                                                                                                                                               | 1       | Input,<br>Output,<br>Bi-Dir | User Mode:<br>PRxxx: GPIO<br>TDI: When JTAG_EN = 1, used as TDI signal for JTAG<br>yyyy: Other possible selectable specific functional                                                                                                                   |
| PRxxx/TMS/ yyyy                                                                                                                                                              | 1       | Input,<br>Output,<br>Bi-Dir | User Mode:<br>PRxxx: GPIO<br>TMS: When JTAG_EN = 1, used as TMS signal for JTAG<br>yyyy: Other possible selectable specific functional                                                                                                                   |
| PRxxx/TCK/ yyyy                                                                                                                                                              | 1       | Input,<br>Output,<br>Bi-Dir | User Mode:<br>PRxxx: GPIO<br>TCK: When JTAG_EN = 1, used as TCK signal for JTAG<br>Yyyy: Other possible selectable specific functional                                                                                                                   |
| <b>Shared CLOCK Pins</b>                                                                                                                                                     |         |                             |                                                                                                                                                                                                                                                          |
| 1. <u>Some PCLK pins can also be used as GPLL reference clock input pin. Refer to <a href="#">sysCLOCK PLL Design and User Guide for Nexus Platform (FPGA-TN-02095)</a>.</u> |         |                             |                                                                                                                                                                                                                                                          |
| PBxxx/ <u>PCLK[T,C][3,4,5]_[0-3]/yyyy</u>                                                                                                                                    | 3, 4, 5 | Input,<br>Output,<br>Bi-Dir | User Mode:<br>PBxxx: GPIO<br><u>PCLK: Primary Clock or GPLL Refclk signal</u><br>[T,C] = True/Complement when using differential signaling<br>[3,4,5] = Bank<br>[0-3] Up to 4 signals in the bank<br>yyyy: Other possible selectable specific functional |
| PTxxx/ <u>PCLKT0_[0-1]/yyyy</u>                                                                                                                                              | 0       | Input,<br>Output,<br>Bi-Dir | User Mode:<br>PTxxx: GPIO<br>PCLKT: Primary Clock or GPLL Refclk signal (Only Single Ended)<br>[0-1] Up to 2 signals in the bank<br>yyyy: Other possible selectable specific functional                                                                  |
| PRxxx/ <u>PCLKT[1,2]_[0-2]/yyyy</u>                                                                                                                                          | 1, 2    | Input,<br>Output,<br>Bi-Dir | User Mode:<br>PRxxx: GPIO<br>PCLKT: Primary Clock or GPLL Refclk signal (Only Single Ended)<br><u>[0-2] Up to 3 signals in the bank</u><br>yyyy: Other possible selectable specific functional                                                           |

| Signal Name                                                                                                                 | Bank    | Type                        | Description                                                                                                                                                                                              |
|-----------------------------------------------------------------------------------------------------------------------------|---------|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PLxxx/PCLKT[6,7]_[0-2]/yyyy                                                                                                 | 6, 7    | Input,<br>Output,<br>Bi-Dir | User Mode:<br>PLxxx: GPIO<br>PCLKT: <u>Primary Clock or GPLL Refclk signal (Only Single Ended)</u><br>[0-2] Up to 3 signals in the bank<br>yyyy: Other possible selectable specific functional           |
| PBxxx/ <u>LRC_GPLL</u> [T,C]_IN/yyyy                                                                                        | 3       | Input,<br>Output,<br>Bi-Dir | User Mode:<br>PBxxx: GPIO<br>LRC_GPLL: <u>Lower Right GPLL Refclk signal (PLLCK)</u><br>[T,C] = True/Complement when using differential signaling<br>yyyy: Other possible selectable specific functional |
| PBxxx/ <u>LLC_GPLL</u> [T,C]_IN/yyyy                                                                                        | 5       | Input,<br>Output,<br>Bi-Dir | User Mode:<br>PBxxx: GPIO<br>LLC_GPLL: <u>Lower Left GPLL Refclk signal (PLLCK)</u><br>[T,C] = True/Complement when using differential signaling<br>yyyy: Other possible selectable specific functional  |
| PLxxx/ <u>ULC_GPLL</u> T_IN/yyyy                                                                                            | 7       | Input,<br>Output,<br>Bi-Dir | User Mode:<br>PLxxx: GPIO<br>ULC_GPLL: <u>Upper Left GPLL Refclk signal (Only Single Ended) (PLLCK)</u><br>yyyy: Other possible selectable specific functional                                           |
| <b>Shared VREF Pins</b>                                                                                                     |         |                             |                                                                                                                                                                                                          |
| PBxxx/ <u>VREF</u> [3,4,5]_[1-2]/yyyy<br> | 3, 4, 5 | Input,<br>Output,<br>Bi-Dir | User Mode:<br>PBxxx: GPIO<br><u>VREF: Reference Voltage for DDR memory function</u><br>[3,4,5] = Bank<br>[1-2] Up to VREFs for each bank<br>yyyy: Other possible selectable specific functional          |
| <b>Shared ADC Pins</b>                                                                                                      |         |                             |                                                                                                                                                                                                          |
| PBxxx/ <u>ADC_C</u> [P,N]nn/yyyy                                                                                            | 3, 4, 5 | Input,<br>Output,<br>Bi-Dir | User Mode:<br>PBxxx: GPIO<br><u>ADC_C: ADC Channel Inputs</u><br>[P,N] = <u>Positive or Negative Input</u><br>nn = ADC Channel number (0 – 15)<br>yyyy: Other possible selectable specific functional    |
| <b>Shared Comparator Pins</b>                                                                                               |         |                             |                                                                                                                                                                                                          |
| PBxxx/COMP[1-3][P,N]/yyyy                                                                                                   | 3, 5    | Input,<br>Output,<br>Bi-Dir | User Mode:<br>PBxxx: GPIO<br>COMP: <u>Differential Comparator Input</u><br>[P,N] = Positive or Negative Input<br>[1-3] = Input to Comparators 1-3<br>yyyy: Other possible selectable specific functional |
| <b>Shared SGMII Pins</b>                                                                                                    |         |                             |                                                                                                                                                                                                          |
| PBxxx/SGMII_RX[P,N][0-1]/yyyy                                                                                               | 3, 5    | Input,<br>Output,<br>Bi-Dir | User Mode:<br>PBxxx: GPIO<br>SGMII_RX: Differential SGMII RX Inputs<br>[P,N] = Positive or Negative Input<br>[0-1] = Input to SGMII RX0 or RX1<br>yyyy: Other possible selectable specific functional    |

**Notes:**

- Not all signals are available as external pins in all packages. Refer to the Pinout List file for various package details.
- ADC is available in Commercial/Industrial –8 and –9 speed grades and Automotive –7 speed grade.
- On devices that do not support the ADC, this pin may be powered or left floating.

## 5.2. Pin Information Summary

### 5.2.1. CrossLink-NX Family

| Pin Information Summary                 |        | LIFCL-17 |                |                |          | LIFCL-40 |                |          |          |          |
|-----------------------------------------|--------|----------|----------------|----------------|----------|----------|----------------|----------|----------|----------|
|                                         |        | 72 QFN   | 72WLCSP        | 121csfBGA      | 256caBGA | 72 QFN   | 121csfBGA      | 256caBGA | 289csBGA | 400caBGA |
| User I/O Pins                           |        |          |                |                |          |          |                |          |          |          |
| General Purpose Inputs/Outputs per Bank | Bank 0 | 10       | 8              | 12             | 12       | 10       | 12             | 12       | 12       | 12       |
|                                         | Bank 1 | 7        | 7              | 11             | 11       | 7        | 11             | 20       | 19       | 21       |
|                                         | Bank 2 | 0        | 0              | 0              | 0        | 0        | 0              | 13       | 24       | 28       |
|                                         | Bank 3 | 12       | 12             | 16             | 16       | 12       | 16             | 32       | 32       | 32       |
|                                         | Bank 4 | 0        | 0              | 16             | 16       | 0        | 22             | 32       | 32       | 32       |
|                                         | Bank 5 | 10       | 12             | 16             | 16       | 10       | 10             | 10       | 10       | 10       |
|                                         | Bank 6 | 0        | 0              | 0              | 0        | 0        | 0              | 26       | 28       | 28       |
|                                         | Bank 7 | 0        | 0              | 0              | 0        | 0        | 0              | 11       | 16       | 22       |
| Total Single-Ended User I/O             |        | 39       | 39             | 71             | 71       | 39       | 71             | 156      | 173      | 185      |
| Differential Input / Output Pairs       | Bank 0 | 0        | 0              | 0              | 0        | 0        | 0              | 0        | 0        | 0        |
|                                         | Bank 1 | 0        | 0              | 0              | 0        | 0        | 0              | 0        | 0        | 0        |
|                                         | Bank 2 | 0        | 0              | 0              | 0        | 0        | 0              | 0        | 0        | 0        |
|                                         | Bank 3 | 12       | 12             | 16             | 16       | 12       | 16             | 32       | 32       | 32       |
|                                         | Bank 4 | 0        | 0              | 16             | 16       | 0        | 22             | 32       | 32       | 32       |
|                                         | Bank 5 | 10       | 12             | 16             | 16       | 10       | 10             | 10       | 10       | 10       |
|                                         | Bank 6 | 0        | 0              | 0              | 0        | 0        | 0              | 0        | 0        | 0        |
|                                         | Bank 7 | 0        | 0              | 0              | 0        | 0        | 0              | 0        | 0        | 0        |
| Total Differential I/O                  |        | 22       | 24             | 48             | 48       | 22       | 48             | 74       | 74       | 74       |
| Power Pins                              |        |          |                |                |          |          |                |          |          |          |
| V <sub>CC</sub> , V <sub>CCECLK</sub>   |        | 8        | 3              | 3              | 5        | 8        | 3              | 5        | 6        | 8        |
| V <sub>CCAUXA</sub>                     |        | 0        | 0              | 0              | 0        | 0        | 0              | 1        | 1        | 1        |
| V <sub>CCAUX</sub>                      |        | 2        | 2              | 1              | 3        | 2        | 1              | 2        | 2        | 3        |
| V <sub>CCAUXHx</sub>                    |        | 2        | 2              | 3              | 3        | 2        | 3              | 3        | 3        | 3        |
| V <sub>CCAUXSD</sub>                    |        | 0        | 0              | 0              | 0        | 0        | 0              | 1        | 1        | 1        |
| V <sub>CCIO</sub>                       | Bank 0 | 1        | 1              | 1              | 1        | 1        | 1              | 1        | 1        | 1        |
|                                         | Bank 1 | 1        | 1              | 1              | 1        | 1        | 1              | 1        | 2        | 2        |
|                                         | Bank 2 | 0        | 0              | 0              | 0        | 0        | 0              | 1        | 2        | 2        |
|                                         | Bank 3 | 2        | 1              | 1              | 1        | 2        | 1              | 1        | 2        | 2        |
|                                         | Bank 4 | 0        | 0              | 1              | 1        | 0        | 1              | 1        | 2        | 2        |
|                                         | Bank 5 | 1        | 1              | 1              | 1        | 1        | 1              | 1        | 1        | 1        |
|                                         | Bank 6 | 0        | 0              | 0              | 0        | 0        | 0              | 1        | 2        | 2        |
|                                         | Bank 7 | 0        | 0              | 0              | 0        | 0        | 0              | 1        | 2        | 2        |
| V <sub>CC_D-PHYx</sub>                  |        | 2        | 1              | 2              | 2        | 2        | 2              | 2        | 2        | 2        |
| V <sub>CCA_D-PHYx</sub>                 |        | 1        | 1              | 2              | 2        | 1        | 2              | 2        | 2        | 2        |
| V <sub>CCPLL_D-PHYx</sub>               |        | 1        | 1              | 2              | 2        | 1        | 2              | 2        | 2        | 2        |
| V <sub>CCSD0</sub>                      |        | 0        | 0              | 0              | 0        | 0        | 0              | 1        | 2        | 2        |
| V <sub>CCPLLS0</sub>                    |        | 0        | 0              | 0              | 0        | 0        | 0              | 1        | 1        | 1        |
| V <sub>CCADC18</sub> <sup>1</sup>       |        | 1        | 0 <sup>3</sup> | 0 <sup>3</sup> | 1        | 1        | 0 <sup>3</sup> | 1        | 1        | 1        |
| Total Power Pins                        |        | 22       | 14             | 18             | 23       | 22       | 18             | 29       | 37       | 40       |

| Pin Information Summary                           |        | LIFCL-17 |         |           |          | LIFCL-40 |           |          |          |          |
|---------------------------------------------------|--------|----------|---------|-----------|----------|----------|-----------|----------|----------|----------|
|                                                   |        | 72 QFN   | 72WLCSP | 121csfBGA | 256caBGA | 72 QFN   | 121csfBGA | 256caBGA | 289csBGA | 400caBGA |
| GND Pins                                          |        |          |         |           |          |          |           |          |          |          |
| Vss                                               |        | 0        | 5       | 6         | 20       | 0        | 6         | 22       | 26       | 37       |
| VSSADC                                            |        | 0        | 0       | 0         | 1        | 0        | 0         | 1        | 1        | 1        |
| VSSSD                                             |        | 0        | 0       | 0         | 0        | 0        | 0         | 5        | 8        | 12       |
| VSSA_D-PHY                                        |        | 0        | 3       | 5         | 8        | 0        | 5         | 8        | 9        | 7        |
| Total GND Pins                                    |        | 0        | 8       | 11        | 29       | 0        | 11        | 36       | 44       | 57       |
| Dedicated Pins                                    |        |          |         |           |          |          |           |          |          |          |
| Dedicated ADC Channels (pairs) <sup>1</sup>       |        | 0        | 0       | 0         | 2        | 0        | 0         | 2        | 2        | 2        |
| Dedicated ADC Reference Voltage Pins <sup>1</sup> |        | 0        | 0       | 0         | 2        | 0        | 0         | 2        | 2        | 2        |
| Dedicated D-PHY Data Channels (pairs)             |        | 4        | 4       | 8         | 8        | 4        | 8         | 8        | 8        | 8        |
| Dedicated D-PHY Clock (pairs)                     |        | 1        | 1       | 2         | 2        | 1        | 2         | 2        | 2        | 2        |
| Dedicated Misc Pins                               |        |          |         |           |          |          |           |          |          |          |
| JTAGEN                                            |        | 1        | 1       | 1         | 1        | 1        | 1         | 1        | 1        | 1        |
| NC                                                |        | 0        | 0       | 0         | 106      | 0        | 0         | 0        | 0        | 83       |
| RESERVED                                          |        | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
| Total Dedicated Pins                              |        | 11       | 11      | 21        | 133      | 6        | 11        | 17       | 17       | 17       |
| Shared Pins                                       |        |          |         |           |          |          |           |          |          |          |
| Shared Configuration Pins                         | Bank 0 | 10       | 8       | 10        | 10       | 10       | 10        | 10       | 10       | 10       |
|                                                   | Bank 1 | 0        | 0       | 0         | 0        | 6        | 6         | 6        | 6        | 6        |
|                                                   | Bank 2 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                   | Bank 3 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                   | Bank 4 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                   | Bank 5 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                   | Bank 6 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                   | Bank 7 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
| Shared JTAG Pins                                  | Bank 0 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                   | Bank 1 | 4        | 4       | 4         | 4        | 4        | 4         | 4        | 4        | 4        |
|                                                   | Bank 2 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                   | Bank 3 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                   | Bank 4 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                   | Bank 5 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                   | Bank 6 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                   | Bank 7 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
| Shared PCLK Pins                                  | Bank 0 | 0        | 0       | 2         | 2        | 2        | 2         | 2        | 2        | 2        |
|                                                   | Bank 1 | 0        | 0       | 3         | 3        | 0        | 3         | 3        | 3        | 3        |
|                                                   | Bank 2 | 0        | 0       | 0         | 0        | 0        | 0         | 3        | 3        | 3        |
|                                                   | Bank 3 | 8        | 8       | 8         | 8        | 8        | 8         | 8        | 8        | 8        |
|                                                   | Bank 4 | 0        | 0       | 8         | 8        | 0        | 8         | 8        | 8        | 8        |
|                                                   | Bank 5 | 8        | 8       | 8         | 8        | 8        | 8         | 8        | 8        | 8        |
|                                                   | Bank 6 | 0        | 0       | 0         | 0        | 0        | 0         | 3        | 3        | 3        |
|                                                   | Bank 7 | 0        | 0       | 0         | 0        | 0        | 0         | 3        | 3        | 3        |

| Pin Information Summary                            |        | LIFCL-17 |         |           |          | LIFCL-40 |           |          |          |          |
|----------------------------------------------------|--------|----------|---------|-----------|----------|----------|-----------|----------|----------|----------|
|                                                    |        | 72 QFN   | 72WLCSP | 121csfBGA | 256caBGA | 72 QFN   | 121csfBGA | 256caBGA | 289csBGA | 400caBGA |
| Shared GPLL Pins                                   | Bank 0 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 1 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 2 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 3 | 2        | 2       | 2         | 2        | 2        | 2         | 2        | 2        | 2        |
|                                                    | Bank 4 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 5 | 2        | 2       | 2         | 2        | 2        | 2         | 2        | 2        | 2        |
|                                                    | Bank 6 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 7 | 0        | 0       | 0         | 0        | 0        | 0         | 2        | 2        | 2        |
| Shared VREF Pins                                   | Bank 0 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 1 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 2 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 3 | 2        | 2       | 2         | 2        | 2        | 2         | 2        | 2        | 2        |
|                                                    | Bank 4 | 0        | 0       | 2         | 2        | 0        | 1         | 2        | 2        | 2        |
|                                                    | Bank 5 | 2        | 2       | 2         | 2        | 2        | 2         | 2        | 2        | 2        |
|                                                    | Bank 6 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 7 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
| Shared ADC Channels (pairs) <sup>1</sup>           | Bank 0 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 1 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 2 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 3 | 5        | 5       | 7         | 7        | 5        | 7         | 12       | 12       | 12       |
|                                                    | Bank 4 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 5 | 4        | 4       | 4         | 4        | 4        | 4         | 4        | 4        | 4        |
|                                                    | Bank 6 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 7 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
| Shared Comparator Channels (pairs) <sup>1, 2</sup> | Bank 0 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 1 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 2 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 3 | 0        | 0       | 0         | 0        | 0        | 0         | 3        | 3        | 3        |
|                                                    | Bank 4 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 5 | 0        | 0       | 0         | 0        | 0        | 0         | 3        | 3        | 3        |
|                                                    | Bank 6 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 7 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
| Shared SGMII Channels (pairs)                      | Bank 0 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 1 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 2 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 3 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 4 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 5 | 2        | 2       | 2         | 2        | 2        | 2         | 2        | 2        | 2        |
|                                                    | Bank 6 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |
|                                                    | Bank 7 | 0        | 0       | 0         | 0        | 0        | 0         | 0        | 0        | 0        |


**Notes:**

1. ADC is available in Commercial/Industrial –8 and –9 speed grades and Automotive –7 speed grade.
2. Comparator inputs are selected in the software to be separate (Bank 3) or combined with ADC Channels (Bank 5).
3. ADC is powered by V<sub>CCAUX</sub>.

## 6. Ordering Information

Lattice provides a wide variety of services for its products including custom marking, factory programming, known good die, and application specific testing. Contact the local sales representatives for more details.

### 6.1. Part Number Description

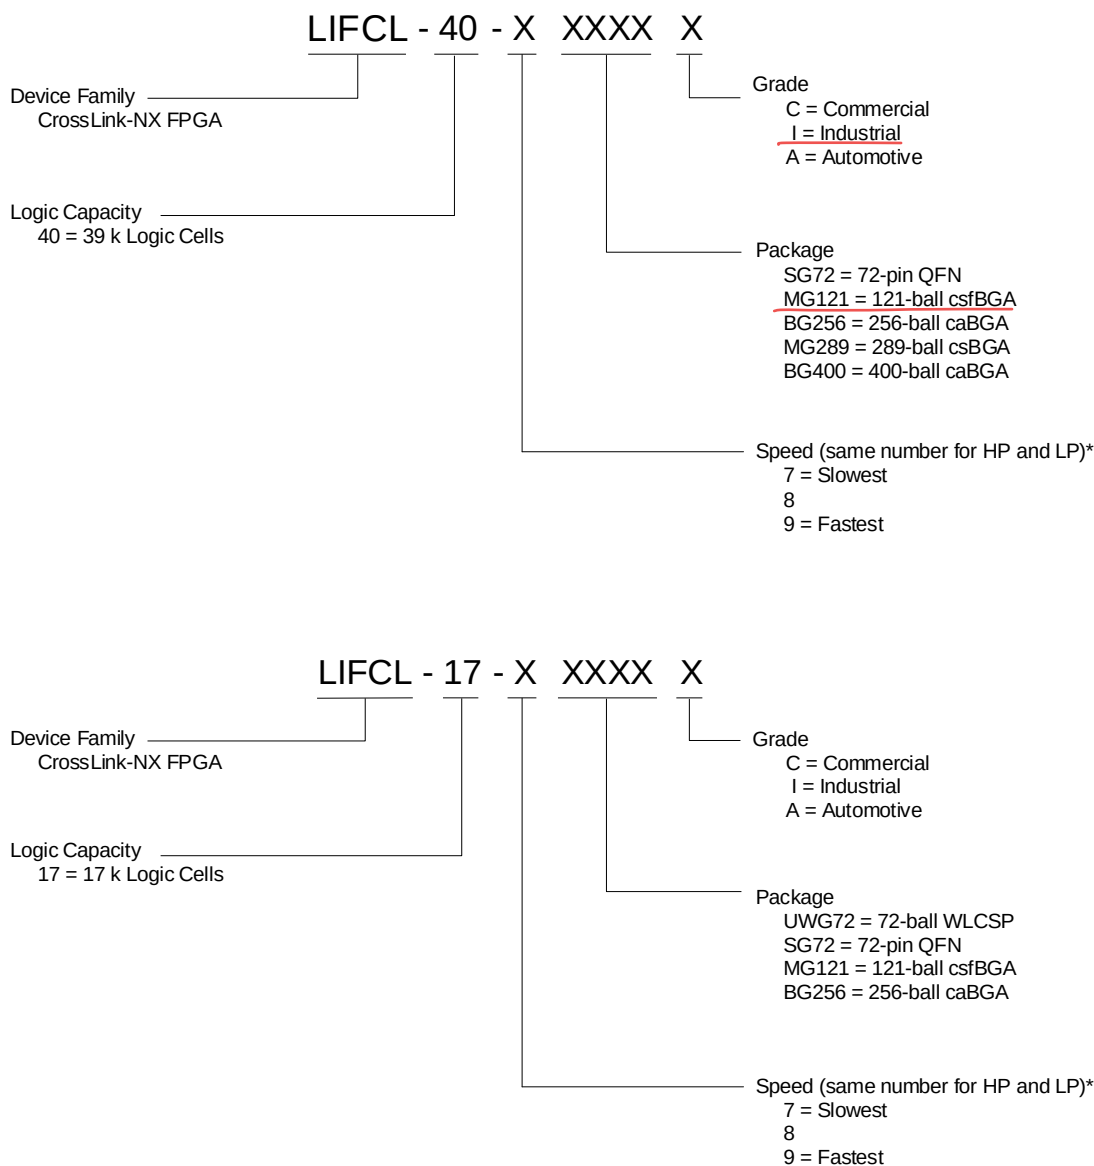

**\*Note:** Input Comparator, ADC, EBR ECC, and DTR are only available in -7 (-A), -8 (-C/I), and -9 (-C/I) speed and grade.

## 6.2. Ordering Part Numbers

### 6.2.1. Commercial

| Part Number      | Speed | Package          | Pins | Temp.      | Logic Cells (k) |
|------------------|-------|------------------|------|------------|-----------------|
| LIFCL-17-7UWG72C | -7    | Lead free WLCSP  | 72   | Commercial | 17              |
| LIFCL-17-8UWG72C | -8    | Lead free WLCSP  | 72   | Commercial | 17              |
| LIFCL-17-7SG72C  | -7    | Lead free QFN    | 72   | Commercial | 17              |
| LIFCL-17-8SG72C  | -8    | Lead free QFN    | 72   | Commercial | 17              |
| LIFCL-17-9SG72C  | -9    | Lead free QFN    | 72   | Commercial | 17              |
| LIFCL-17-7MG121C | -7    | Lead free csfBGA | 121  | Commercial | 17              |
| LIFCL-17-8MG121C | -8    | Lead free csfBGA | 121  | Commercial | 17              |
| LIFCL-17-9MG121C | -9    | Lead free csfBGA | 121  | Commercial | 17              |
| LIFCL-17-7BG256C | -7    | Lead free caBGA  | 256  | Commercial | 17              |
| LIFCL-17-8BG256C | -8    | Lead free caBGA  | 256  | Commercial | 17              |
| LIFCL-17-9BG256C | -9    | Lead free caBGA  | 256  | Commercial | 17              |
| LIFCL-40-7SG72C  | -7    | Lead free QFN    | 72   | Commercial | 39              |
| LIFCL-40-8SG72C  | -8    | Lead free QFN    | 72   | Commercial | 39              |
| LIFCL-40-9SG72C  | -9    | Lead free QFN    | 72   | Commercial | 39              |
| LIFCL-40-7MG121C | -7    | Lead free csfBGA | 121  | Commercial | 39              |
| LIFCL-40-8MG121C | -8    | Lead free csfBGA | 121  | Commercial | 39              |
| LIFCL-40-9MG121C | -9    | Lead free csfBGA | 121  | Commercial | 39              |
| LIFCL-40-7MG289C | -7    | Lead free csBGA  | 289  | Commercial | 39              |
| LIFCL-40-8MG289C | -8    | Lead free csBGA  | 289  | Commercial | 39              |
| LIFCL-40-9MG289C | -9    | Lead free csBGA  | 289  | Commercial | 39              |
| LIFCL-40-7BG256C | -7    | Lead free caBGA  | 256  | Commercial | 39              |
| LIFCL-40-8BG256C | -8    | Lead free caBGA  | 256  | Commercial | 39              |
| LIFCL-40-9BG256C | -9    | Lead free caBGA  | 256  | Commercial | 39              |
| LIFCL-40-7BG400C | -7    | Lead free caBGA  | 400  | Commercial | 39              |
| LIFCL-40-8BG400C | -8    | Lead free caBGA  | 400  | Commercial | 39              |
| LIFCL-40-9BG400C | -9    | Lead free caBGA  | 400  | Commercial | 39              |

### 6.2.2. Industrial

| Part Number      | Speed | Package          | Pins | Temp.      | Logic Cells (k) |
|------------------|-------|------------------|------|------------|-----------------|
| LIFCL-17-8UWG72I | -8    | Lead free WLCSP  | 72   | Industrial | 17              |
| LIFCL-17-7SG72I  | -7    | Lead free QFN    | 72   | Industrial | 17              |
| LIFCL-17-8SG72I  | -8    | Lead free QFN    | 72   | Industrial | 17              |
| LIFCL-17-9SG72I  | -9    | Lead free QFN    | 72   | Industrial | 17              |
| LIFCL-17-7MG121I | -7    | Lead free csfBGA | 121  | Industrial | 17              |
| LIFCL-17-8MG121I | -8    | Lead free csfBGA | 121  | Industrial | 17              |
| LIFCL-17-9MG121I | -9    | Lead free csfBGA | 121  | Industrial | 17              |
| LIFCL-17-7BG256I | -7    | Lead free caBGA  | 256  | Industrial | 17              |
| LIFCL-17-8BG256I | -8    | Lead free caBGA  | 256  | Industrial | 17              |
| LIFCL-17-9BG256I | -9    | Lead free caBGA  | 256  | Industrial | 17              |
| LIFCL-40-7SG72I  | -7    | Lead free QFN    | 72   | Industrial | 39              |
| LIFCL-40-8SG72I  | -8    | Lead free QFN    | 72   | Industrial | 39              |
| LIFCL-40-9SG72I  | -9    | Lead free QFN    | 72   | Industrial | 39              |
| LIFCL-40-7MG121I | -7    | Lead free csfBGA | 121  | Industrial | 39              |
| LIFCL-40-8MG121I | -8    | Lead free csfBGA | 121  | Industrial | 39              |

| Part Number      | Speed | Package          | Pins | Temp.      | Logic Cells (k) |
|------------------|-------|------------------|------|------------|-----------------|
| LIFCL-40-9MG121I | –9    | Lead free csfBGA | 121  | Industrial | 39              |
| LIFCL-40-7MG289I | –7    | Lead free csBGA  | 289  | Industrial | 39              |
| LIFCL-40-8MG289I | –8    | Lead free csBGA  | 289  | Industrial | 39              |
| LIFCL-40-9MG289I | –9    | Lead free csBGA  | 289  | Industrial | 39              |
| LIFCL-40-7BG256I | –7    | Lead free caBGA  | 256  | Industrial | 39              |
| LIFCL-40-8BG256I | –8    | Lead free caBGA  | 256  | Industrial | 39              |
| LIFCL-40-9BG256I | –9    | Lead free caBGA  | 256  | Industrial | 39              |
| LIFCL-40-7BG400I | –7    | Lead free caBGA  | 400  | Industrial | 39              |
| LIFCL-40-8BG400I | –8    | Lead free caBGA  | 400  | Industrial | 39              |
| LIFCL-40-9BG400I | –9    | Lead free caBGA  | 400  | Industrial | 39              |

### 6.2.3. Automotive

| Part Number      | Speed | Package          | Pins | Temp.      | Logic Cells (k) |
|------------------|-------|------------------|------|------------|-----------------|
| LIFCL-17-7MG121A | –7    | Lead free csfBGA | 121  | Automotive | 17              |
| LIFCL-17-7BG256A | –7    | Lead free caBGA  | 256  | Automotive | 17              |
| LIFCL-40-7MG121A | –7    | Lead free csfBGA | 121  | Automotive | 39              |
| LIFCL-40-7BG256A | –7    | Lead free caBGA  | 256  | Automotive | 39              |



## References

A variety of technical notes for the [CrossLink-NX family](#) are available.

- [sub-LVDS Signaling Using Lattice Devices \(FPGA-TN-02028\)](#)
- [Thermal Management \(FPGA-TN-02044\)](#)
- [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#)
- [Power Management and Calculation for CrossLink-NX Devices \(FPGA-TN-02075\)](#)
- [Soft Error Detection \(SED\)/Correction \(SEC\) User Guide for Nexus Platform \(FPGA-TN-02076\)](#)
- [CrossLink-NX Hardened D-PHY User Guide \(FPGA-TN-02081\)](#)
- [Using TraceID \(FPGA-TN-02084\)](#)
- [Memory User Guide for Nexus Platform \(FPGA-TN-02094\)](#)
- [sysCLOCK PLL Design and User Guide for Nexus Platform \(FPGA-TN-02095\)](#)
- [sysDSP User Guide for Nexus Platform \(FPGA-TN-02096\)](#)
- [CrossLink-NX High-Speed I/O Interface \(FPGA-TN-02097\)](#)
- [sysCONFIG User Guide for Nexus Platform \(FPGA-TN-02099\)](#)
- [ADC User Guide for Nexus Platform \(FPGA-TN-02129\)](#)
- [I2C Hardened IP User Guide for Nexus Platform \(FPGA-TN-02142\)](#)
- [Multi-Boot User Guide for Nexus Platform \(FPGA-TN-02145\)](#)
- [High-Speed PCB Design Considerations \(FPGA-TN-02178\)](#)
- [CrossLink-NX Hardware Checklist \(FPGA-TN-02149\)](#)
- [CrossLink-NX Single Event Upset \(SEU\) Report \(FPGA-TN-02174\)](#)
- [Lattice Memory Mapped Interface and Lattice Interrupt Interface User Guide \(FPGA-UG-02039\)](#)

**For further information on interface standards refer to the following websites:**

- JEDEC Standards (LVTTTL, LVCMOS, SSTL) – [www.jedec.org](http://www.jedec.org)
- PCI – [www.pcisig.com](http://www.pcisig.com)

**For more info on this FPGA device, refer to the following:**

- [CrossLink-NX FPGA web page](#)
- [Lattice Radiant Software FPGA web page](#)
- [Lattice Insights](#) for Lattice Semiconductor training courses and learning plans

## Technical Support Assistance

Submit a technical support case through [www.latticesemi.com/techsupport](http://www.latticesemi.com/techsupport).

For frequently asked questions, refer to the Lattice Answer Database at [www.latticesemi.com/Support/AnswerDatabase](http://www.latticesemi.com/Support/AnswerDatabase).

# Revision History

## Revision 2.1, September 2024

| Section                                                        | Change Summary                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| All                                                            | <ul style="list-style-type: none"> <li>Removed <i>The Root Complex</i> reference.</li> <li>Renamed <i>Supplemental Information</i> section to <i>References</i> section.</li> <li>Changed <i>Master</i> to <i>Controller</i>.</li> <li>Changed <i>Slave</i> to <i>Target</i>.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Abbreviations in This document                                 | <ul style="list-style-type: none"> <li>Added the definition of SHA: <i>Secure Hashing Algorithm</i>.</li> <li>Changed <i>Acronyms</i> to <i>Abbreviations</i>.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| General Description                                            | <p>Added the following in the Feature section:</p> <ul style="list-style-type: none"> <li><i>Available in Commercial, Industrial and Automotive temperature grades.</i></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| DC and Switching Characteristics for Commercial and Industrial | <ul style="list-style-type: none"> <li>Removed the statement, <i>and follow the SMIA 1.0, Part 2: CCP2 Specification</i> in <a href="#">Section 3.12.3 SubLVDS (Input Only)</a>.</li> <li>Updated the following descriptions in <a href="#">Table 3.33. External Switching Characteristics (VCC = 1.0 V)</a> under Generic DDRX4 Inputs/Outputs with Clock and Data Centered at Pin (GDDR4_RX/TX.ECLK.Centered) using PCLK Clock Input: <ul style="list-style-type: none"> <li><math>t_{DQVA\_GDDR4}</math>: <i>Output Data Valid After CLK Output</i></li> <li><math>f_{DATA\_GDDR4}</math>: <i>Input/Output Data Rate</i></li> <li><math>F_{MAX\_GDDR4}</math>: <i>Frequency for ECLK</i></li> <li><math>f_{PCLK}</math>: <i>PCLK frequency</i></li> </ul> </li> <li>Added the following units in <a href="#">Table 3.33. External Switching Characteristics (VCC = 1.0 V)</a> under Generic DDRX4 Inputs/Outputs with Clock and Data Centered at Pin (GDDR4_RX/TX.ECLK.Centered) using PCLK Clock Input: <ul style="list-style-type: none"> <li><math>t_{DVB\_GDDR4}</math>: <i>ns, and ns + 1/2UI</i></li> <li><math>t_{DQVA\_GDDR4}</math>: <i>ns, and ns + 1/2UI</i></li> </ul> </li> <li>Updated the tIPJIT specification in <a href="#">Table 3.34. sysCLOCK PLL Timing (VCC = 1.0 V) – Commercial/Industrial</a> to: <ul style="list-style-type: none"> <li><math>f_{PFD} \geq 20\text{MHz}</math> : <i>0.01 UIPP</i></li> <li><math>f_{PFD} &lt; 20\text{MHz}</math> : <i>500 ps p-p</i></li> </ul> </li> <li>Added table note 4 to <a href="#">Table 3.37. ADC Specifications1</a>.</li> <li>Updated the following values in <a href="#">Table 3.37. ADC Specifications1</a>: <ul style="list-style-type: none"> <li>ADC Clock Frequency: Max <math>\rightarrow</math> <i>50 MHz</i></li> <li>ADC Input Frequency: Condition <math>\rightarrow</math> <i>@Sampling frequency = 1 Mbps</i></li> <li>ADC Input Equivalent Resistance: Condition <math>\rightarrow</math> <i>----</i> (removed value)</li> <li>Removed <i>ADC Clock Duty Cycle</i> from the table</li> </ul> </li> <li>Updated the following in <a href="#">Table 3.48. sysCONFIG Port Timing Specifications</a>: <ul style="list-style-type: none"> <li>Updated tPROGRAMN specification</li> <li>Renamed tPROGRAMN to tPROGRAMN_L and tPROGRAMN_H</li> <li>Updated Target SPI Specification</li> <li>Added table notes 4-7</li> <li>Removed the LIFCL-40 and LIFCL-17 devices in the tINIT_HIGH specification. One tINIT_HIGH specification is applicable to all CrossLink-NX devices</li> <li>Updated the tINIT_HIGH specification to <i>40μs (Max)</i></li> <li>Updated the following Max values: <ul style="list-style-type: none"> <li>tCO_SSO: <i>16 ns</i></li> <li>tEN_SSO: <i>16 ns</i></li> <li>tDIS_SSO: <i>16 ns</i></li> </ul> </li> </ul> </li> <li>Updated the following symbols in <a href="#">Figure 3.19. Target SPI Configuration Timing</a>: <ul style="list-style-type: none"> <li>tCO_MISO to tCO_SSO</li> <li>tEN_MISO to tEN_SSO</li> <li>tDIS_MISO to tDIS_SSO</li> <li>tSU_MOSI to tSU_SSI</li> </ul> </li> </ul> |

| Section                                         | Change Summary                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                 | <ul style="list-style-type: none"> <li>tHD_MOSI to tHD_SSI</li> <li>Added <a href="#">Figure 3.23. Configuration Error Notification</a>.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| DC and Switching Characteristics for Automotive | <ul style="list-style-type: none"> <li>Removed the statement, <i>and follow the SMIA 1.0, Part 2: CCP2 Specification</i> in <a href="#">Section 4.12.3 SubLVDS (Input Only)</a>.</li> <li>Updated the following descriptions in <a href="#">Table 4.33. External Switching Characteristics (VCC = 1.0 V)</a> under Generic DDRX4 Inputs/Outputs with Clock and Data Centered at Pin (GDDR4_RX/TX.ECLK.Centered) using PCLK Clock Input: <ul style="list-style-type: none"> <li>tDQVA_GDDR4: <i>Output Data Valid After CLK Output</i></li> <li>fDATA_GDDR4: <i>Input/Output Data Rate</i></li> <li>FMAX_GDDR4: <i>Frequency for ECLK</i></li> <li>fPCLK: <i>PCLK frequency</i></li> </ul> </li> <li>Added the following units in <a href="#">Table 4.33. External Switching Characteristics (VCC = 1.0 V)</a> under Generic DDRX4 Inputs/Outputs with Clock and Data Centered at Pin (GDDR4_RX/TX.ECLK.Centered) using PCLK Clock Input. <ul style="list-style-type: none"> <li>tDVB_GDDR4: <i>ns, and ns + 1/2UI</i></li> <li>tDQVA_GDDR4: <i>ns, and ns + 1/2UI</i></li> </ul> </li> <li>Updated the tPIJT specification in <a href="#">Table 4.34. sysCLOCK PLL Timing (VCC = 1.0 V) – Automotive</a> to: <ul style="list-style-type: none"> <li>fPFD ≥ 20MHz : <i>0.01 UIPP</i></li> <li>fPFD &lt; 20MHz : <i>500 ps p-p</i></li> </ul> </li> <li>Added table note 4 in <a href="#">Table 4.37. ADC Specifications3</a>.</li> <li>Updated the following values in <a href="#">Table 4.37. ADC Specifications3</a>: <ul style="list-style-type: none"> <li>ADC Clock Frequency: Max → <i>50 MHz</i></li> <li>ADC Input Frequency: Condition → <i>@Sampling frequency = 1 Mbps</i></li> <li>ADC Input Equivalent Resistance: Condition → <i>----</i> (removed value)</li> <li>Removed <i>ADC Clock Duty Cycle</i> from the table</li> </ul> </li> <li>Updated the following in <a href="#">Table 4.48. sysCONFIG Port Timing Specifications</a>: <ul style="list-style-type: none"> <li>Updated tPROGRAMN specification</li> <li>Renamed tPROGRAMN to tPROGRAMN_L and tPROGRAMN_H</li> <li>Updated Target SPI Specification</li> <li>Added table notes 4-7</li> <li>Removed the LIFCL-40 and LIFCL-17 devices in the tINIT_HIGH specification. One tINIT_HIGH specification is applicable to all CrossLink-NX devices</li> <li>Updated the tINIT_HIGH specification to <i>50μs (Max)</i></li> </ul> </li> <li>Updated the following symbols in <a href="#">Figure 4.19. Target SPI Configuration Timing</a>: <ul style="list-style-type: none"> <li>tCO_MISO to tCO_SSO</li> <li>tEN_MISO to tEN_SSO</li> <li>tDIS_MISO to tDIS_SSO</li> <li>tSU_MOSI to tSU_SSI</li> <li>tHD_MOSI to tHD_SSI</li> </ul> </li> <li>Added <a href="#">Figure 4.23. Configuration Error Notification</a>.</li> </ul> |

## Revision 2.0, October 2023

| Section     | Change Summary                       |
|-------------|--------------------------------------|
| Disclaimers | Updated with the latest disclaimers. |

## Revision 1.9, September 2023

| Section                                                        | Change Summary                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| All                                                            | <p>Deleted all mentions of LPDD3 in below sections:</p> <ul style="list-style-type: none"> <li>General Description</li> <li>Overview</li> <li>DQS Grouping for DDR Memory</li> <li>Differential HSUL12D (Output Only)</li> <li>External Switching Characteristics</li> <li>Differential HSUL12D (Output Only)</li> <li>External Switching Characteristics</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| General Description                                            | <ul style="list-style-type: none"> <li>Updated below information in Table 1.1. CrossLink-NX Commercial/Industrial Family Selection Guide: <ul style="list-style-type: none"> <li>Updated the value of ADC Blocks from 2 to 1.</li> <li>Changed the title of the cell from <i>D-PHY Quads (D-PHY Data Lanes) / Wide Range (WR) GPIO (Top/Left/Right Banks) / High Performance (HP) GPIOs (Bottom Banks) to Total I/O (Wide Range, High Performance, ADC<sup>4</sup>) (D-PHY Quads<sup>5</sup>, PCIe<sup>6</sup> Lane).</i></li> <li>Updated the format of the values from 1(4)/15/24 to 45 (15, 24, 6) (1, 0).</li> <li>Added footnote 4, 5 and 6 for ADC and PCIe clarity as given below: <ul style="list-style-type: none"> <li><i>Each ADC pin count reflects using dedicated complement pair and vRef.</i></li> <li><i>Each D-PHY quad consists of 4 D-PHY data lanes.</i></li> <li><i>Each PCIe lane consists of a Tx and Rx complement pair.</i></li> </ul> </li> </ul> </li> <li>Updated below information in Table 1.2. CrossLink-NX Automotive Family Selection Guide: <ul style="list-style-type: none"> <li>Changed the title of the cell from <i>Wide Range D-PHY Quads (D-PHY Data Lanes) / Wide Range (WR) GPIO (Top/Left/Right Banks) / High Performance (HP) GPIOs (Bottom Banks) to Total I/O (Wide Range, High Performance, ADC<sup>4</sup>) (D-PHY Quads<sup>5</sup>, PCIe<sup>6</sup> Lane).</i></li> <li>Updated the format of the values from 2(8)/23/48 to 77 (23, 48, 6) (2, 0).</li> <li>Added footnote 4, 5 and 6 for ADC and PCIe clarity as given below: <ul style="list-style-type: none"> <li><i>Each ADC pin count reflects using dedicated complement pair and vRef.</i></li> <li><i>Each D-PHY quad consists of 4 D-PHY data lanes.</i></li> <li><i>Each PCIe lane consists of a Tx and Rx complement pair.</i></li> </ul> </li> </ul> </li> </ul> |
| DC and Switching Characteristics for Commercial and Industrial | Updated the value of 32k × 32 True-Dual Port RAM using same clock, with Output Registers from 340 to 157.183 in Table 3.31. Register-to-Register Performance.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| DC and Switching Characteristics for Automotive                | Updated the value of 32k × 32 True-Dual Port RAM using same clock, with Output Registers from 340 to 154.883 in Table 4.31. Register-to-Register Performance.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Pinout Information                                             | <ul style="list-style-type: none"> <li>Updated the value of Bank 0 of LIFCL-17 QFN72 under Pin Information from 11 to 10 in CrossLink-NX Family section.</li> <li>Added signals <i>PRxxx/EIO</i> and <i>PLxxx/EIO</i> in Signal Descriptions section.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Supplemental Information                                       | Added links for CrossLink-NX, Lattice Radiant, and Lattice Insight web pages.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

#### Revision 1.8, March 2023

| Section                                                        | Change Summary                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DC and Switching Characteristics for Commercial and Industrial | Changed the Note 1.b information from <i>Bank 3, Bank 4, and Bank 5 I/O can only mix into banks with VCCIO higher than the pin standard, due to clamping diode on the pin in these banks. Bank 0, Bank 1, Bank 2, Bank 6, and Bank 7 does not have this restriction</i> to <i>Bank 3, Bank 4, and Bank 5 I/O can only mix into banks with VCCIO higher than or equal to the pin standard, due to clamping diode on the pin in these banks. Bank 0, Bank 1, Bank 2, Bank 6, and Bank 7 does not have this restriction</i> in Table 3.13. sysI/O Recommended Operating Conditions. |

#### Revision 1.7, March 2023

| Section                      | Change Summary                                                                                                                 |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Acronyms in This Document    | Deleted Acronym “MLDVS” and its definition “Multipoint Low-Voltage Differential Signaling” in Acronyms in This Document table. |
| Supplemental Information     | Added link for High Speed PCB Design Considerations (FPGA-TN-02178).                                                           |
| Technical Support Assistance | Added Technical Support Assistance section.                                                                                    |

#### Revision 1.6, January 2023

| Section                                                        | Change Summary                                                                                                                                                                                                                                                                                                                               |
|----------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Architecture                                                   | Adjustment in formatting to move Clocking Structure as sub-section under the Architecture section.                                                                                                                                                                                                                                           |
| DC and Switching Characteristics for Commercial and Industrial | Updated the following in Table 3.33. External Switching Characteristics (VCC = 1.0 V):<br><ul style="list-style-type: none"> <li>Added footnote for <math>t_{\text{SKEW\_PRI}}</math> and <math>t_{\text{SKEW\_EDGE}}</math>.</li> </ul> Updated $f_{\text{DATA\_GDDR4\_MP}}$ in Soft D-PHY DDRX4 group to add packages.                     |
| DC and Switching Characteristics for Automotive                | Updated the following in Table 4.33. External Switching Characteristics (VCC = 1.0 V):<br><ul style="list-style-type: none"> <li>Added footnote for <math>t_{\text{SKEW\_PRI}}</math> and <math>t_{\text{SKEW\_EDGE}}</math>.</li> <li>Updated <math>f_{\text{DATA\_GDDR4\_MP}}</math> in Soft D-PHY DDRX4 group to add packages.</li> </ul> |

#### Revision 1.5, September 2022

| Section             | Change Summary                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| All                 | Minor changes in formatting, including removing product name from heading, figure, and table names.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| General Description | <ul style="list-style-type: none"> <li>Updated the following in Table 1.1. CrossLink-NX Commercial/Industrial Family Selection Guide: <ul style="list-style-type: none"> <li>Changed Distributed RAM for LIFCL-17 and LIFCL-40 to 108 kb and 252 kb, respectively.</li> <li>Changed HP GPIO for LIFCL-40 in 256 caBGA, 289 csBGA, and 400 caBGA packages from 74 to 148.</li> <li>Corrected typo from WLSCP to WLCSP.</li> <li>Updated table note 3 to specify available speed grade for Commercial/Industrial.</li> </ul> </li> <li>Updated table note 3 to specify available speed grade for Automotive in Table 1.2. CrossLink-NX Automotive Family Selection Guide.</li> </ul> |
| Architecture        | <ul style="list-style-type: none"> <li>Updated Analog Interface section content to specify the speed grades the feature is available.</li> <li>Updated the following in SGMII Tx/Rx section: <ul style="list-style-type: none"> <li>Changed section name from SGMII Clock Data Recovery to SGMII Tx/Rx.</li> <li>Updated content to specify that the device utilizes different components/resources for the SGMII transmit and receive paths.</li> </ul> </li> <li>Updated sysMEM Memory Block section content to specify the speed grades the ECC engine is available.</li> </ul>                                                                                                 |

| Section                                                        | Change Summary                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DC and Switching Characteristics for Commercial and Industrial | <ul style="list-style-type: none"> <li>Added Table 3.17. VIN Maximum Overshoot/Undershoot Allowance – Wide Range and Table 3.18. VIN Maximum Overshoot/Undershoot Allowance – High Performance.</li> <li>Updated the following in Table 3.29. Maximum I/O Buffer Speed: <ul style="list-style-type: none"> <li>Changed max data rate (for both Maximum sysI/O Input and Output Frequency) of caBGA256, csBGA289, and caBGA400 to 1500.</li> <li>Updated footnote reference in the Differential groups.</li> </ul> </li> <li>Updated DSP functions in Table 3.31. Register-to-Register Performance.</li> <li>Updated the following in Table 3.34. sysCLOCK PLL Timing (VCC = 1.0 V) – Commercial/Industrial: <ul style="list-style-type: none"> <li>Raised minimum input clock frequency from 10 to 18 MHz.</li> <li>Raised minimum phase detector input frequency from 10 to 18 MHz; removed table note and table note reference.</li> <li>Corrected <math>t_{PH}</math> footnote.</li> <li>Removed and Added conditions for the <math>t_{OPJIT}</math> parameter to accurately reflect PLL jitter performance.</li> </ul> </li> <li>Updated table note 1 in Table 3.37. ADC Specifications to specify available speed grade for ADC.</li> <li>Updated table note 2 in Table 3.39. DTR Specifications to specify available speed grade for DTR.</li> <li>Updated the following in SGMII Characteristics section: <ul style="list-style-type: none"> <li>Updated header and sub section names.</li> <li>Updated table name to Table 3.47 SGMII and added table note 2 to specify SGMII is not supported on 72-pin packages.</li> </ul> </li> </ul> |
| DC and Switching Characteristics for Automotive                | <ul style="list-style-type: none"> <li>Added Table 4.17. VIN Maximum Overshoot/Undershoot Allowance – Wide Range and Table 4.18. VIN Maximum Overshoot/Undershoot Allowance – High Performance.</li> <li>Updated Table 4.29. Maximum I/O Buffer Speed: <ul style="list-style-type: none"> <li>Changed max data rate (for both Maximum sysI/O Input and Output Frequency) of caBGA256, csBGA289, and caBGA400 to 1500.</li> <li>Updated footnote reference in the Differential groups.</li> </ul> </li> <li>Updated DSP functions in Table 4.31. Register-to-Register Performance.</li> <li>Updated Table 4.33. External Switching Characteristics (VCC = 1.0 V) to remove -8 Auto speed grade.</li> <li>Updated the following in Table 4.34. sysCLOCK PLL Timing (VCC = 1.0 V) – Automotive: <ul style="list-style-type: none"> <li>Raised minimum input clock frequency from 10 to 18 MHz.</li> <li>Raised minimum phase detector input frequency from 10 to 18 MHz; removed table note and table note reference.</li> <li>Corrected <math>t_{PH}</math> footnote.</li> <li>Removed and Added conditions for the <math>t_{OPJIT}</math> parameter to accurately reflect PLL jitter performance.</li> </ul> </li> <li>Added table note 3 in Table 4.37. ADC Specifications to specify available speed grade for ADC.</li> <li>Updated table note 2 in Table 4.39. DTR Specifications to specify available speed grade for DTR.</li> <li>Added SGMII Characteristics section.</li> </ul>                                                                                                                                                           |
| Pinout Information                                             | <ul style="list-style-type: none"> <li>Updated table note 2 in Signal Descriptions to specify available speed grade for ADC.</li> <li>Updated the following in Pin Information Summary: <ul style="list-style-type: none"> <li>Updated Bank 5 values for 72QFN and 121csfBGA (LIFCL-17 and LIFCL-40), 72WLCSP and 256caBGA (LIFCL-17).</li> <li>Updated table note 1 to specify available speed grade for ADC.</li> </ul> </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

#### Revision 1.4, June 2022

| Section                                                        | Change Summary                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DC and Switching Characteristics for Commercial and Industrial | Updated max value of $Z_{OS}$ in Table 3.22. SLVS Output DC Characteristics.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| DC and Switching Characteristics for Automotive                | <ul style="list-style-type: none"> <li>Updated LVDS and subLVDS <math>V_{CCIO}</math> (Input) value in Table 4.13. sysI/O Recommended Operating Conditions.</li> <li>Updated max value of <math>Z_{OS}</math> in Table 4.22. SLVS Output DC Characteristics.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Pinout Information                                             | <ul style="list-style-type: none"> <li>Added table note 3 and table note reference to <math>V_{CCADC18}</math> in 72WLCSP and 121csfBGA (LIFLCL-17 and LIFCL-40); Added table note and reference to table note for Dedicated ADCI/O Pins; Adjustment in formatting to remove superscripts for Shared Configuration Pins, Shared User GPIO Pins, and Shared CLOCK Pins in Signal Descriptions.</li> <li>Added table note 3 and table note reference to <math>V_{CCADC18}</math>; Updated 256caBGA, 289csBGA, and 400caBGA values for Dedicated ADC channels, Dedicated ADC reference, and Total Dedicated Pins; Updated 256caBGA and 289csBGA values for Bank 3 Shared Comparator Channels and add table note 2 in Pin Information Summary.</li> </ul> |

#### Revision 1.3, March 2022

| Section             | Change Summary                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| All                 | Adjustments in formatting and wording across the document, including changing the reference document names from Usage Guide to User Guide and changing table footnote with asterisk (*) to one ( <sup>1</sup> ).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| General Description | <ul style="list-style-type: none"> <li>Updated content, including rewording some bullet points in the Features section.</li> <li>Added note for ECC in Flexible Memory Resources bullet point and Dual ADC bullet point.</li> <li>Updated Table 1.1. CrossLink-NX Commercial/Industrial Family Selection Guide and Table 1.2. CrossLink-NX Automotive Family Selection Guide to add table note 3 for ADC block.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Architecture        | <ul style="list-style-type: none"> <li>Updated content, including rewording some information in the following sections: <ul style="list-style-type: none"> <li>Overview</li> <li>PFU Blocks</li> <li>Routing</li> <li>Programmable I/O (PIO)</li> <li>Programmable I/O Cell (PIC)</li> <li>Tri-state Register Block</li> <li>DDR Memory Support</li> <li>sysI/O Buffer</li> <li>Analog Interface</li> <li>Device Configuration</li> <li>Single Event Upset (SEU) Handling</li> <li>On-Chip Oscillator</li> <li>User I<sup>2</sup>C IP</li> <li>MIPI D-PHY Blocks</li> <li>Peripheral Component Interconnect Express (PCIe)</li> </ul> </li> <li>Added information on select speed grades in sysMEM Memory Block and Analog Interface.</li> <li>Updated note reference in Table 2.2. Slice Signal Descriptions.</li> <li>Updated TD[1:0] parameter name to T[1:0] in Table 2.8. Tri-state Block Port Description.</li> <li>Updated Figure 2.6. General Purpose PLL Diagram to correct shading in CLKOS4 and CLKOS5.</li> <li>Updated DELAY CODE to DELAYCODE_I and DELAYCODE_O in Figure 2.26. DQS Control and Delay Block (DQSBUF).</li> </ul> |



| Section                                                        | Change Summary                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DC and Switching Characteristics for Commercial and Industrial | <ul style="list-style-type: none"> <li>Removed “Over Recommended Operating Conditions” info across the section.</li> <li>Added this info in the section: All specifications in this Chapter are characterized within recommended operating conditions unless otherwise specified.</li> <li>Added Commercial and Industrial grade information in ESD Performance.</li> <li>Updated <math>T_A</math> max value in Table 3.1. Absolute Maximum Ratings.</li> <li>Updated table note 2 in Table 3.2. Recommended Operating Conditions.</li> <li>Updated table note 2 in Table 3.6. Hot Socketing Specifications for GPIO.</li> <li>Updated unit in Table 3.9. Capacitors – Wide Range, Table 3.10. Capacitors – High Performance, Table 3.30. LMMI FMAX Summary, and Table 3.33. Internal Oscillators (<math>V_{CC} = 1.0\text{ V}</math>).</li> <li>Updated LVDS and subLVDS VCCIO (Input) value in Table 3.13. sysI/O Recommended Operating Conditions.</li> <li>Updated <math>V_{IH}</math>, <math>V_{IL}</math>, <math>I_{OL}</math>, <math>I_{OH}</math> values and table notes in Table 3.14. sysI/O DC Electrical Characteristics – Wide Range I/O and Table 3.15. sysI/O DC Electrical Characteristics – High Performance I/O.</li> <li>Updated information for <math>V_{CCAUX}</math> in LVDS.</li> <li>Changed <math>V_{INN}</math> to <math>V_{INM}</math> in table note 2 and added table note 3 in Table 3.17. LVDS DC Electrical Characteristics1.</li> <li>Added table note for <math>V_{ICM}</math> in SubLVDS (Input Only).</li> <li>Updated min and max value of <math>Z_{OS}</math> in Table 3.24. Soft D-PHY Output Timing and Levels.</li> <li>Updated max value of HSTL15 in Table 3.27. CrossLink-NX Maximum I/O Buffer Speed.</li> <li>Added reference to table note 2 for 32 k x 32 k True-Dual Port RAM in Table 3.29. Register-to-Register Performance.</li> <li>Updated Generic DDRX1 group to add WRIO and HPIO in Table 3.31. CrossLink-NX External Switching Characteristics (<math>V_{CC} = 1.0\text{ V}</math>).</li> <li>Updated Min and Max values, added reference for table note 2 in cycles unit, and added table notes for ADC in Table 3.35. ADC Specifications.</li> <li>Added table note for Comparator in Table 3.36. Comparator Specifications1.</li> <li>Added table note for ADC in Table 3.37. DTR Specifications.</li> <li>Updated <math>V_{TERM-EN}</math> description, min value of VIDTH (1.5 Gbps), and max value of VIDTL (1.5 Gbps) in Table 3.38. Hardened D-PHY Input Timing and Levels.</li> <li>Updated <math>V_{TX-DE-RATIO-3.5dB}</math> description and <math>Z_{RX-HIGH-IMP-DC}</math> min value in Table 3.43. PCIe (2.5 Gbps).</li> <li>Updated <math>V_{TX-DE-RATIO-3.5dB}</math> and <math>V_{TX-DE-RATIO-6dB}</math> description in Table 3.44. PCIe (5 Gbps).</li> <li>Updated row name to Slave SPI/I2C/I3C POR, description of <math>t_{MSPI\_INM}</math> and <math>t_{FIO\_EN}</math>, max value for <math>t_{FIO\_EN}</math>, Changed <math>t_{DONE\_HIGH}</math> to <math>t_{WAKEUP\_DONE\_HIGH}</math> in Wake-Up Timing row, added references table notes, and added table note 2 and 3 in Table 3.46. CrossLink-NX sysCONFIG Port Timing Specifications.</li> <li>Updated Figure 3.2. LVDS25E Output Termination Example, Figure 3.19. Slave SPI Configuration Timing, Figure 3.20. I2C /I3C Configuration Timing, Figure 3.21. Controller SPI Wake-Up Timing, and Figure 3.22. Slave SPI/I2C/I3C Wake-Up Timing.</li> </ul> |

| Section                                         | Change Summary                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DC and Switching Characteristics for Automotive | <ul style="list-style-type: none"> <li>Removed “Over Recommended Operating Conditions” info across the section.</li> <li>Added this info in the section: All specifications in this Chapter are characterized within recommended operating conditions unless otherwise specified.</li> <li>Added Automotive grade information in ESD Performance.</li> <li>Updated <math>T_A</math> max value in Table 4.1. Absolute Maximum Ratings.</li> <li>Updated table note 2 in Table 4.6. Hot Socketing Specifications for GPIO.</li> <li>Updated unit in Table 4.9. Capacitors – Wide Range, Table 4.10. Capacitors – High Performance, Table 4.30. LMMI FMAX Summary, and Table 4.33. Internal Oscillators (<math>V_{CC} = 1.0\text{ V}</math>).</li> <li>Updated <math>V_{IH}</math>, <math>V_{IL}</math>, <math>I_{OL}</math>, <math>I_{OH}</math> values and table notes in Table 4.14. sysI/O DC Electrical Characteristics – Wide Range I/O and Table 4.15. sysI/O DC Electrical Characteristics – High Performance I/O3.</li> <li>Updated min and max value of <math>Z_{OS}</math> and min value of <math>V_{OH}</math> in Table 4.24. Soft D-PHY Output Timing and Levels.</li> <li>Updated Generic DDRX1 group to add WRIO and HPPIO in Table 4.31. CrossLink-NX External Switching Characteristics (<math>V_{CC} = 1.0\text{ V}</math>).</li> <li>Updated Min and Max values, added reference for table note 2 in cycles unit, and added table notes for ADC in Table 4.35. ADC Specifications.</li> <li>Added table notes in Table 4.37. DTR Specifications1.</li> <li>Updated <math>V_{TERM-EN}</math> description, min value of VIDTH (1.5 Gbps), and max value of VIDTL (1.5 Gbps) in Table 4.38. Hardened D-PHY Input Timing and Levels.</li> <li>Updated <math>V_{TX-DE-RATIO-3.5dB}</math> description and <math>Z_{RX-HIGH-IMP-DC}</math> min value in Table 4.43. PCIe (2.5 Gbps).</li> <li>Updated <math>V_{TX-DE-RATIO-3.5dB}</math> and <math>V_{TX-DE-RATIO-6dB}</math> description in Table 4.44. PCIe (5 Gbps).</li> <li>Updated row name to Slave SPI/I2C/I3C POR, description of <math>t_{MSPI\_INM}</math> and <math>t_{FIO\_EN}</math>, max value for <math>t_{FIO\_EN}</math>; Changed <math>t_{DONE\_HIGH}</math> to <math>t_{WAKEUP\_DONE\_HIGH}</math> in Wake-Up Timing row, added references table notes, and added table note 2 and 3 in Table 4.45. CrossLink-NX sysCONFIG Port Timing Specifications.</li> <li>Updated Figure 4.2. LVDS25E Output Termination Example, Figure 4.3. SubLVDS Input Interface, Figure 4.4. SubLVDS Output Interface, Figure 4.5. SLVS Interface, Figure 4.21. Controller SPI Wake-Up Timing, and Figure 4.22. Slave SPI/I2C/I3C Wake-Up Timing.</li> </ul> |
| Pinout Information                              | <ul style="list-style-type: none"> <li>Updated description for ADC_REF and ADC_DP/N in Signal Descriptions.</li> <li>Added table note and reference for Dedicated ADC Channels and Reference in CrossLink-NX Family.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Ordering Information                            | Added footnote for speed in LIFCL-40 and LIFCL-17 diagrams.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

## Revision 1.2, September 2021

| Section                                                        | Change Summary                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| All                                                            | Changed 17 k and 39 k to 17k and 39k across the document.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Architecture                                                   | <ul style="list-style-type: none"> <li>Changed Successive Approximation Resistor/Capacitor reference to Successive Approximation Register in Analog to Digital Converters section.</li> <li>Updated SGMII Clock Data Recovery (CDR) section to add information that SGMII CDR is only available on commercial and industrial grade devices.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                     |
| DC and Switching Characteristics for Commercial and Industrial | <ul style="list-style-type: none"> <li>Updated Figure 3.3 to move resistor to the on-chip side.</li> <li>Updated Figure 3.14 and Figure 3.15 to move location of power rail and <math>t_{ICFG}</math> parameter.</li> <li>Updated SubLVDS/SubLVDSSEH (Output Only) section content to change Bank 5 and Bank 6 to Bank 6 and Bank 7.</li> <li>Removed table note 8 reference in Table 3.27.</li> <li>Updated Min and Max value of <math>f_{CLKHF}</math> in Table 3.33.</li> <li>Updated <math>DTR_{RANGE}</math> max value, change values, and added note for external voltage reference in <math>DTR_{ACCURACY}</math> in Table 3.37.</li> <li>Updated table note and test conditions of <math>J_{TOL\_DJ}</math> and <math>J_{TOL\_TJ}</math> in Table 3.45.</li> </ul> |

| Section                                         | Change Summary                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                 | <ul style="list-style-type: none"> <li>Added new row for <math>t_{ICFG\_POR}</math> and updated max and unit for <math>t_{ICFG}</math>, unit of <math>t_{VMC}</math>, typ of <math>f_{MCLK\_DEF}</math>, max value of <math>t_{DONE\_LOW}</math>, and data in the I<sup>2</sup>C/I3C section in Table 3.46.</li> <li>Updated table note and data for <math>t_{BTRF}</math> in Table 3.47. Table 3.39</li> </ul> |
| DC and Switching Characteristics for Automotive | <ul style="list-style-type: none"> <li>Added Power Supply Ramp Rates (section 4.3) to Switching Test Conditions (section 4.29) to complete the CrossLink-NX Automotive data for production release.</li> <li>Updated Table 4.2 to change <math>t_{AUTO}</math> to <math>t_{JAUTO}</math>.</li> </ul>                                                                                                            |

#### Revision 1.1, July 2021

| Section                                                        | Change Summary                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| All                                                            | <ul style="list-style-type: none"> <li>Corrected units and measurements across the document.</li> <li>Minor formatting across the document.</li> <li>Changed 17K and 39K to 17 k and 39 k across the document.</li> </ul>                                                                                                                                                                                                                                                               |
| Architecture                                                   | <ul style="list-style-type: none"> <li>Updated Programmable I/O (PIO) content to remove reference to CrossLink-NX regarding PIC.</li> <li>Updated Programmable I/O Cell (PIC) to provide additional information on PIC.</li> <li>Updated Figure 2.17 and Figure 2.18.</li> <li>Added Trace ID section.</li> <li>Updated Cryptographic Engine content.</li> </ul>                                                                                                                        |
| Introduction                                                   | Minor formatting in Features section.                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| DC and Switching Characteristics for Commercial and Industrial | <ul style="list-style-type: none"> <li>Updated note in Table 3.6 and Table 3.27.</li> <li>Added note 3 in Table 3.14 and Table 3.15.</li> <li>Added three rows for fSSC in Table 3.32.</li> <li>Changed EBR Output Registers to Output Registers for 32k × 32 True-Dual Large Memory Functions in Table 3.29.</li> <li>Updated max value for tOPJIT Output Clock Phase Jitter and added rows for fSSC_MOD in Table 3.32.</li> <li>Updated Table 3.35 to fill up empty cells.</li> </ul> |
| Pinout Summary                                                 | <ul style="list-style-type: none"> <li>Updated table in Signal Descriptions to add PLLCK in PBxxx/LRC_GPLL, PBxxx/LLC_GPLL, and PBxxx/ULC_GPLL.</li> <li>Updated table in CrossLink-NX Family to re-arrange pinout package from lowest to highest.</li> </ul>                                                                                                                                                                                                                           |
| References                                                     | Added reference documents.                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

#### Revision 1.0, April 2021

| Section | Change Summary     |
|---------|--------------------|
| All     | Production release |



[www.latticesemi.com](http://www.latticesemi.com)