

(a) Pretraining

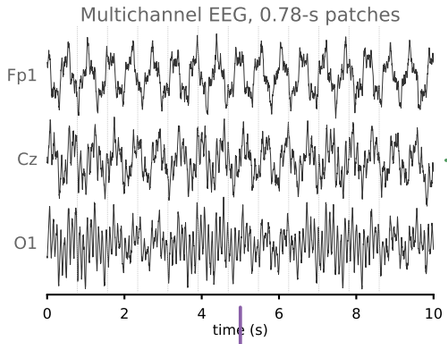

trainable

Patchify + linear embedding

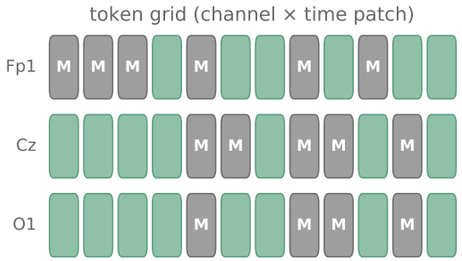

masked tokens (p = 0.3) → learnable [M] token

the raw signal itself is not altered


trainable

Transformer encoder


criss-cross: channel / time attention


trainable

Band-power head

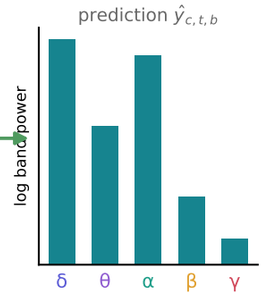

same, uncorrupted signal

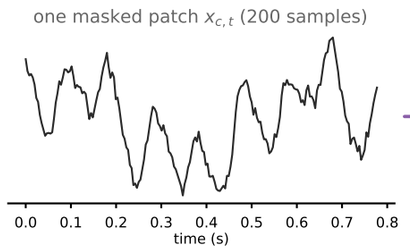


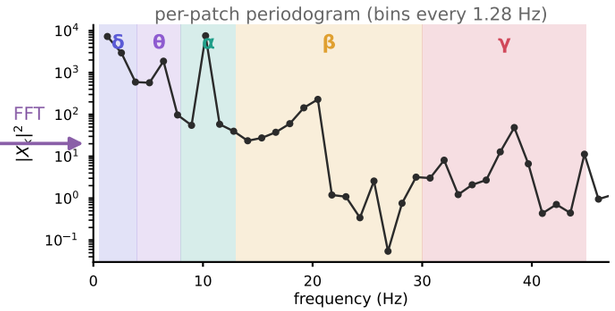

Parameter-free target

1. Periodogram $|X_k|^2,\ X_k = \sum_{\tau} x_{c,t,\tau} e^{-i2\pi k\tau/P}$
2. Band power $P_{c,t,b} = \frac{2}{P^2} \sum_{f_k \in B_b} |X_k|^2$
3. Log $y_{c,t,b} = \log(P_{c,t,b} + \varepsilon)$

δ 0.5–4, θ 4–8, α 8–13, β 13–30, γ 30–45 Hz

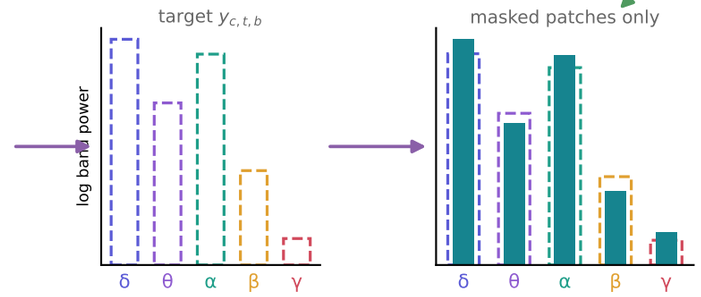


$$\mathcal{L} = \frac{1}{5|\mathcal{M}|} \sum_{(c,t) \in \mathcal{M}} \sum_{b=1}^{5} (\hat{y}_{c,t,b} - y_{c,t,b})^2$$

no reconstruction term, no regularizer


trainable | predicted band power | target band power | masked patch

(b) What the target asks the encoder to learn

ours — Predict band power

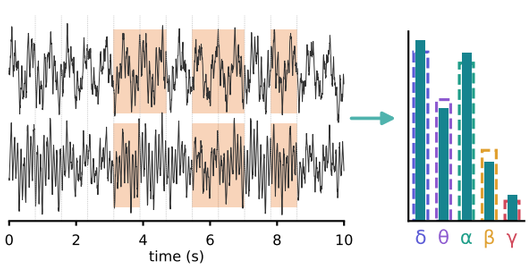


infer the hidden patch's power from its context

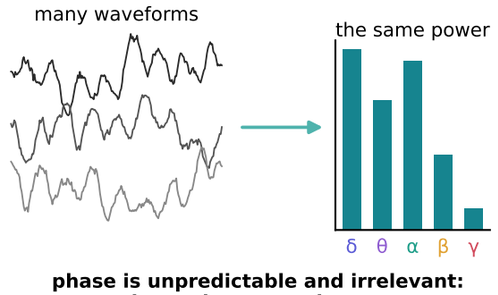


phase is unpredictable and irrelevant: learn the spectral state

alternative — Reconstruct the raw waveform

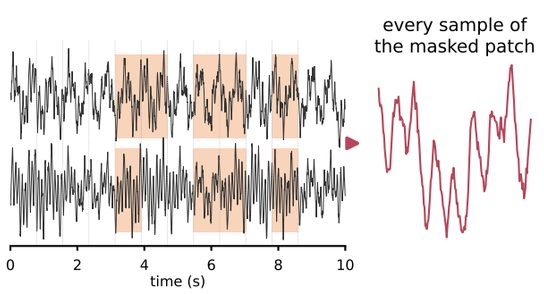

infer the hidden patch's waveform from its context

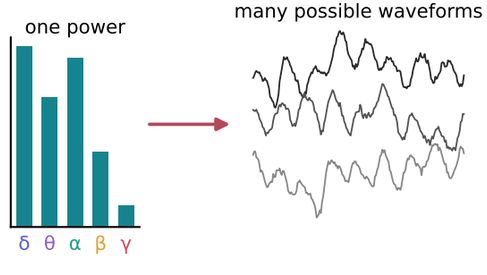

capacity spent on phase and noise