

# DAPNET 2.0 CONCEPT AND INTERFACE DEFINITION

Thomas Gatzweiler, DL2IC
Philipp Thiel, DL6PT
Marvin Menzerath
Ralf Wilke, DH3WR

LAST CHANGE: AUGUST 1, 2018

### Abstract

This is the concept and interface description of the version 2 of the DAPNET. It's purpose in comparison to the first version released is a more robust clustering and network interaction solution to cope with the special requirements of IP connections over HAMNET which means that all network connections have to be considered with a WAN character resulting in unreliable network connectivity. In terms of consistence of the database, "eventually consistence" is considered to be the most reachable. There are "always right" database nodes inside the so called HAMCLOUD. In case of database conflicts, the version inside the HAMCLOUD cluster is always to be considered right.

# Contents

1	Intr	ntroduction				
	1.1	Key F	eatures	4		
	1.2	Histor	ic Background	4		
	1.3	Concept presentation				
	1.4	Transı	mitter Software	5		
		1.4.1	Unipager	5		
		1.4.2	Backward compatibility to XOS slave protocol	5		
		1.4.3	DAPNET-Proxy for AX.25 transmitters	5		
	1.5	DAPN	VET Network	6		
		1.5.1	Overview and Concept	6		
		1.5.2	Used third-party Software	6		
		1.5.3	HAMCLOUD Description	6		
		1.5.4	Transmitter Group Handling Concept	6		
		1.5.5	Rubric Handling Concept	6		
		1.5.6	Queuing Priority Concept	6		
2	DA	PNET	Network Definition	9		
	2.1	Cluste	er Description	9		
		2.1.1	Real-time Message delivery with RabbitMQ	9		
		2.1.2	Distributed Database with CouchDB	9		
		2.1.3	Authentication Concept	9		
		2.1.4	Integration of new Nodes	9		
	2.2	Interfa	ace Overview and Purpose	9		
		2.2.1	RabbitMQ Exchange	9		
		2.2.2	CouchDB Interface	10		
		2.2.3	Core REST API	10		
		2.2.4	Statistic, Status and Telemetry REST API	10		
		2.2.5	Websocket for real-time updates on configuration, Statistics and Telemetry API	10		
		2.2.6	MQTT Fanout for third-party consumers	10		
	2.3	Other	Definitions	11		
		2.3.1	Scheduler	11		
		232	User Roles and Permissions	11		

3	Inte	ernal Programming Workflows	<b>12</b>
	3.1	Sent calls	12
	3.2	Add, edit, delete User	12
	3.3	Add, edit, delete Subscriber	13
	3.4	Add, edit, delete Node (tbd)	13
	3.5	Add, edit, delete Transmitter	13
	3.6	Implementation of Transmitter Groups	13
	3.7	Add, edit, delete Rubrics	13
	3.8	Add, edit, delete Rubrics content	13
	3.9	Add, edit, delete, assign Rubrics to Transmitter/-Groups	13
	3.10	Docker integration	13
	3.11	Microservices	14
		3.11.1 Database Service	14
		3.11.2 Call Service	14
		3.11.3 Rubric Service	14
		3.11.4 Transmitter Service	14
		3.11.5 Cluster Service	15
		3.11.6 Telemetry Service	15
		3.11.7 Database Changes Service	15
		3.11.8 Status Service	15
		3.11.9 RabbitMQ Auth Service	15
		3.11.10 Time and Identification Service	15
	3.12	Ports and Loadbalacing Concept	15
	3.13	Periodic Tasks (Scheduler)	15
	3.14	Plugin Interface	15
	3.15	Transmitter Connection	15
	3.16	Transmitter connections	16
		3.16.1 Authentication of all HTTP-Requests in this context	16
	3.17	DAPNET-Proxy	16
4	Exte	ernal Usage Workflows	17
	4.1	General Concept of REST and Websocket-Updates	17
	4.2	Website and App	17
		4.2.1 Authentication	17
		4.2.2 Calls	17
		4.2.3 Rubrics	17
		4.2.4 Rubrics content	17
		4.2.5 Transmitters and Telemetry	17
		4.2.6 Nodes	17
		4.2.7 Users	17
		4.2.8 MQTT consumers	17
		4.2.9 Scripts and automated Software for DAPNET-Input	17

5	Setu	ıp and Installation	18
	5.1	Unipager	18
	5.2	DAPNET-Proxy	18
	5.3	DAPNET Core	18
	5.4	Special issues for Core running in HAMCLOUD	18
6	Pro	tocol Definitions	19
	6.1	Microservices API	19
		6.1.1 Database Service	19
		6.1.2 Call Service	19
		6.1.3 Rubric Service	19
		6.1.4 Transmitter Service	19
		6.1.5 Cluster Service	21
		6.1.6 Telemetry Service	21
		6.1.7 Database Changes Service	21
		6.1.8 Status Service	21
		6.1.9 Statistics Service	22
		6.1.10 RabbitMQ Service	22
	6.2	RabbitMQ	22
		6.2.1 Transmitters	22
		6.2.2 Telemetry	22
		6.2.3 MQTT API for third-party consumers	23
	6.3	Telemetry from Transmitters	24
	6.4	Telemetry from Nodes	25
	6.5	Statistic, Status and Telemetry REST API	26
		6.5.1 Statistics	26
		6.5.2 Status	27
		6.5.3 Telemetry from Transmitters	27
		6.5.4 Telemetry from Nodes	27
	6.6	Websocket API	28
		6.6.1 Telemetry from Transmitters - Summary of all TX	28
		6.6.2 Telemetry from Transmitters - Details of Transmitter	29
		6.6.3 Telemetry from Nodes - Summary of all Nodes	30
		6.6.4 Telemetry from Transmitters - Details of Node	31
		6.6.5 Database Changes	32
	6.7	CouchDB Documents and Structure	34
		6.7.1 Users	34
		6.7.2 Nodes	35
			35
			36
			36
		•	36
			37
			37

# Introduction

more text

## 1.1 Key Features

The version 2 will please the user/operator with the following key features:


- Reliable clustering of Node instances over unreliable WAN connections like HAMNET
- Transmitter telemetry realtime display on Website and App with Websockets
- Use of microservices instead of one big application. Easier to develop, maintain and update
- Load-Balancing and fail-over for user and transmitter interfaces
- Real-time on-air display of transmitters on map
- Third-Party API for Brandmeister, APRS, etc.
- Priority Queuing for transmitters
- Send calls to individual transmitters and/or transmitter groups
- Inflexible concept of transmitter groups is replaced by group tags on transmitters
- Improved Cluster status monitoring

# 1.2 Historic Background

write some history

# 1.3 Concept presentation

An overview of the DAPNET 2.0 concept is given in Fig. 1.1.

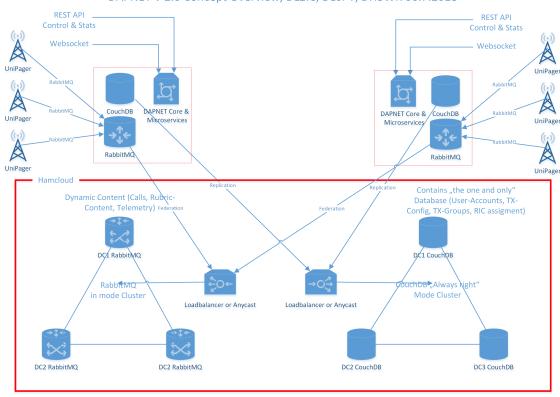

### DAPNET V 2.0 Concept Overview, DL2IC, DL6PT, DH3WR 06.7.2018

Figure 1.1: Overview of DAPNET Clutering and Network Structure

The details of a single node implementation are shown in Fig. 1.2.

### 1.4 Transmitter Software

### 1.4.1 Unipager

The default software for new transmitters is Unipager. It is developed and maintained by Thomas Gatzweiler, DL2IC. There is a debian based repository available. CI technology is used to assure automated compiling of new versions. Transmitters can be updated all at once if they subscribe to the SaltStack remote management program.

### 1.4.2 Backward compatibility to XOS slave protocol

The former amateur radio paging transmitters use the XOS slave protocol. It is defined here. There is a NTP like time sync sequence at the beginning of each connection establishment to assure the synchronicity of the transmitters for TDMA. In times of packet-radio, this approach was necessary. Nowadays NTP is used to sync the transmitter clocks; anyway it's still supported.

As DAPNET V2 introduces RabbitMQ and REST interfaces towards transmitters, there is a need for a backward compatibility module, which is also part of the DAPNET V2 package. We hope that after some month, all IP based transmitters have switched to the new interface implementation.

### 1.4.3 DAPNET-Proxy for AX.25 transmitters

For AX.25 only transmitters like PR430, there is still a demand to support thee XOS slave protocol over plain AX.25. There is a already working solution to pipe the TCP Data through a lot of intermediate programs towards a AX.25 device. The general data flow is shown in the DAPNET DokuWiki. Figure 1.3 in shown for reference only.

### 1.5 DAPNET Network

### 1.5.1 Overview and Concept

### 1.5.2 Used third-party Software

Used third-party Software is:

- RabbitMQ for Message delivery to transmitters and between nodes
- CouchDB as distributed database backend working on unreliable WAN connections
- NGINX as low resource high performance load balancing server for default Interface endpoints
- Docker for easy deployment and update purposes
- SaltStack for easy distributed updates and maintenance

### 1.5.3 HAMCLOUD Description

The HAMCLOUD is a virtual server combination of server central services on the HAMNET and provide short hop connectivity to deployed service on HAMNET towards the Internet. There are three data centers at Essen, Nürnberg and Aachen, which have high bandwidth interlinks over the DFN. There are address spaces for uni- and anycast services. How this concept is deployed is still tbd.

More information is here and here.

### 1.5.4 Transmitter Group Handling Concept

In the first Version of DAPNET, transmitters had to be member of one or more logical transmitter groups. Personal calls and rubric content could only be send to a transmitter group, which afterwards sent the data to be member transmitters. Changes in membership required the assigned owner of the group to do so.

In DAPNET V2, there will by just *virtual* transmitter groups by assigning one of more *tags* to a transmitter by its owner himself. Messages can be sent to either a single or group of individual transmitters and/or a single or group of tags. Each transmitter containing the tag will send out the message.

### 1.5.5 Rubric Handling Concept

### 1.5.6 Queuing Priority Concept

A main drawback of the original DAPNET implementation was the lack of priorities in the message queuing on a transmitter. With increasing popularity the load on the transmitters increased and the FIFO working principle led to personal calls being sent out several 10 minutes later than submitted.

To overcome this, a 5 class priority scheme is implemented in DAPNET. Messages to send out are queued

Define if uni- or anycast entry points will exist

Define
if all 3
hamcloud
sites will
have the
same internet
incoming
ports,
and what
is the
Internet DNS
concept

# DAPNET V 2.0 Node Details, DL2IC, DL6PT, DH3WR 19.7.2018 AX.25 Proxy Microservice AX.25 REST API UniPager NEU UniPage ALT Backw. Compatibility Microservice Scheduler Microservice REST Sign-In Transmitter Microse Call Microservice Cluster Microservice Statistics Microservice REST API XOSProtocol REST API REST API REST API dapnet.calls dapnet.local\_local dapnet.telemetry Auth Microservice REST API CouchDB RabbitMQ Telemetry Microservice **▲** Website 3rd Party Microservice Status Microservice Database Microservice Telemetry Websocket Store REST API REST API REST API eparate topics BM MQTT Broker **Get User Settings** MQTT Broker within RabbitMQ Auth Microservice REST API CouchDB

Figure 1.2: Node Details

RabbitMQ

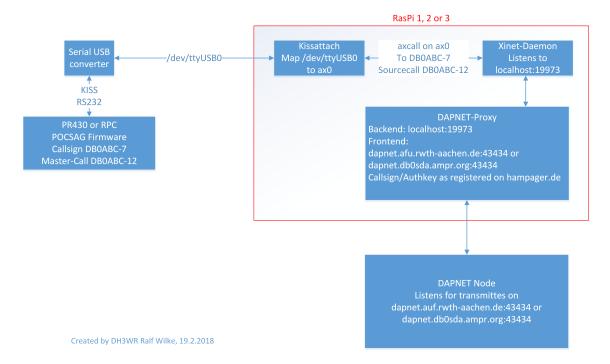


Figure 1.3: Data flow for AX.25 connections from DAPNET

# DAPNET Network Definition

- 2.1 Cluster Description
- 2.1.1 Real-time Message delivery with RabbitMQ
- 2.1.2 Distributed Database with CouchDB
- 2.1.3 Authentication Concept
- 2.1.4 Integration of new Nodes
- 2.2 Interface Overview and Purpose
- 2.2.1 RabbitMQ Exchange

There are 3 exchanges on each RabbitMQ instance available:

dapnet.calls Messages that are distributed to all nodes

dapnet.local calls Messages coming only from the local node instance

dapnet.telemetry Messages containing telemetry from transmitters

Transmitters publish their telemetry data to the **dapnet.telemetry** exchange, while consume the data to be transmitted from a queue that is bound to the **dapnet.calls** and **dapnet.local\_calls** exchanges.

The idea is to distinguish between *local* data coming from the local Core instance and data coming from the DAPNET network. This is necessary, as for example the calls to set the time on the pagers are generated by the local Core and not shall not distributed to other Cores and their connected transmitter to avoid duplicates.

### dapnet.calls

This federated exchange receives calls from all Core instances. Personal calls are always published to this exchange, as they are unique and only published by the Core that receives the call via the Core REST API. Rubric content is also emitted here. The transmitter to receive the call is defined via the routing key.

### dapnet.local calls

The the local Core publishes special calls to this exchange, like the time set calls, the rubric names and repetitions of rubric content for the local connected transmitters.

In short, all calls that are generated by the Scheduler on a Core instance are published to this exchange. As the scheduler runs on every node, otherwise the calls would be transmitted several times by the same transmitter. This exchange is not federated with other RabbitMQ instances on other Cores.

### dapnet.telemetry

On each Core instance, the Statistic, Status and Telemetry microservice described in section 2.2.4 is consuming the telemetry of all transmitters. The received data is stored and delivered via the Core REST API and the Websocket API in section 2.2.5 to connected websites or apps.

#### 2.2.2 CouchDB Interface

The CouchDB interface is a REST interface defined in the CouchDB documentation. All communication with the CouchDB database are done by means of the interface. No user should be able to connect to the CouchDB REST interface, only the Core software components should be able to do so. The local node can access CouchDB with randomly created credentials which are automatically generated on the first startup of the node. For database replication, the other nodes are authenticated by their authentication key in the nodes database.

### 2.2.3 Core REST API

The Core REST API is the main interface for user interactions with the DAPNET network.

### 2.2.4 Statistic, Status and Telemetry REST API

# 2.2.5 Websocket for real-time updates on configuration, Statistics and Telemetry API

### 2.2.6 MQTT Fanout for third-party consumers

In order to allow third-party application to consume the data sent out by DAPNET transmitters in an easy and most generic way, there is an MQTT brocker on each Core. As the RabbitMQ instance already has a plugin to act as an MQTT broker, this solution is chosen.

To dynamically manage the third-party applications attached to DAPNET, there is a CouchDB-Database containing the existing third-party descriptive names, corresponding MQTT topic names and authentication credentials to be allowed to subscribe to the that specific MQTT topic.

It is a intention to not fan out every content on DAPNET to every third-party application but let the user decide if personal calls directed to her/him will be available on other third-party applications or not. The website will display opt-in checkboxes for each subscriber to enable or disable the message delivery for each third-party application. As we have had some issues in this topic in the past, this seems the best but still generic and dynamic solution.

The fan out consists of the source and destination callsign, the destination RIC and SubRIC and an array of callsign and geographic location of the transmitters, where this specific call is supposed to be sent out by DAPNET transmitters. The type of transmitter is also given. The reason to output also the transmitter and their location is to enable third-party applications to estimate the content's distribution geographic area and take adequate action for their own delivery or further processing. (Example: Regional Rubric content to Regional DMR Group SMS.)

The third-party applications can (if access is granted) only read from the topic. All Core instaces have read/write access to publish the data.

The MQTT topics are kept local on the Core instance and are never distributed between DAPNET-Cores.

# 2.3 Other Definitions

### 2.3.1 Scheduler

# 2.3.2 User Roles and Permissions

There are two types of users: Admins and Non-Admins. Admins are allowed to do everything. Non-Admins are just allowed to edit the entities that they own and send calls.

Make overview of data displayed to Non-Admin users from CouchDB in REST-Calls (see 6.1.

# Internal Programming Workflows

- 3.1 Sent calls
- 3.2 Add, edit, delete User

### Show current users

- 1. Get current status via GET /users on Core URL
- 2. Handle updates via Websocket

### Add and Edit User

- 1. If edit: Get current status via GET /users/<username> on Core URL
- 2. Show edit form and place data
- 3. On save button event, send POST /users/<username> on Core URL

The core will update the CouchDB and generate a RabbitMQ administration message to inform all other nodes. This information is transmitted by the Stats and Websocket Micro-Service to all connected websocket clients to get them updated. This will also happen for the website instance emitting the edit request, so its content is also updated.

### Delete User

- 1. Ask "Are you sure?"
- 2. If yes, send DELETE /users/<username> on Core URL

The core will update the CouchDB and generate a RabbitMQ administration message to inform all other nodes. This information is transmitted by the Stats and Websocket Micro-Service to all connected websocket clients to get them updated. This will also happen for the website instance emitting the edit request, so its content is also updated.

- 3.3 Add, edit, delete Subscriber
- 3.4 Add, edit, delete Node (tbd)
- 3.5 Add, edit, delete Transmitter
- 3.6 Implementation of Transmitter Groups
- 3.7 Add, edit, delete Rubrics

### Show current configuration

- 1. Get current status via GET /rubrics on Core URL
- 2. Handle updates via websocket

#### Add and Edit rubrics

- 1. If edit: Get current status via GET /rubrics/<rubricname> on Core URL
- 2. Show edit form and place data
- 3. On save button event, send POST /users/<rubricname> on Core URL

The core will update the CouchDB and generate a RabbitMQ administration message to inform all other nodes. This information is transmitted by the Stats and Websocket Micro-Service to all connected websocket clients to get them updated. This will also happen for the website instance emitting the edit request, so its content is also updated.

### Delete rubric

- 1. Ask "Are you sure?"
- 2. If yes, send DELETE /users/<rubricname> on Core URL

The core will update the CouchDB and generate a RabbitMQ administration message to inform all other nodes. This information is transmitted by the Stats and Websocket Micro-Service to all connected websocket clients to get them updated. This will also happen for the website instance emitting the edit request, so its content is also updated.

- 3.8 Add, edit, delete Rubrics content
- 3.9 Add, edit, delete, assign Rubrics to Transmitter/-Groups
- 3.10 Docker integration

DL2IC:
Docker
Integration
beschreiben

### 3.11 Microservices

A DAPNET node consists of serveral isolated microservices with different responsibilities. Each microservice runs in container and is automatically restarted if it should crash. Some microservices can be started in multiple instances to fully utilize multiple cores. The access to the microservices is proxied by a NGINX webserver which can also provide load balancing and caching.

REST 6	endpoint	Microservice	
*	/users/*	Database Service	
*	/nodes/*		
*	/rubrics/*		
*	/subscribers/*		
*	/subscriber_groups/*		
DELETE	/transmitters/:id		
PUT	/transmitters		
*	/calls/*	Call Service	
*	/rubrics/:id/*	Rubric Service	
GET	/transmitters	Transmitter Service	
GET	/transmitters/:id		
POST	/transmitters/bootstrap		
POST	/transmitters/heartbeat		
POST	/cluster/discovery	Cluster Service	
GET	/telemetry/*	Telemetry Service	
WS	/telemetry/transmitters	Summary data of all TX	
WS	<pre>/telemetry/transmitter/<txname></txname></pre>	Details for TX < TxName>	
WS	/telemetry/nodes	Summary data of all nodes	
WS	<pre>/telemetry/node/<nodename></nodename></pre>	Details for Node < NodeName >	
WS	/changes	Database Changes Service	
GET	/status/*	Status Service	
GET	/statistics	Statistics Service	
GET	/rabbitmq/*	RabbitMQ Auth Service	

### 3.11.1 Database Service

- Proxies calls to the CouchDB database
- Controls access to different database actions
- Removes private/admin only fields from documents

### 3.11.2 Call Service

- Generates and publishes calls to RabbitMQ
- Receives all calls from RabbitMQ
- Maintains a database of all calls

### 3.11.3 Rubric Service

- Publishes rubric content as calls to RabbitMQ
- Periodically publishes rubric names as calls to RabbitMQ

### 3.11.4 Transmitter Service

• Maintains a list of all transmitters and their current status

### 3.11.5 Cluster Service

- Maintains a list of known nodes and their current status
- Manages federation between RabbitMQ queues
- Manages replication between CouchDB databases

### 3.11.6 Telemetry Service

- Maintains the telemetry state of all transmitters
- Forwards telemetry updates via websocket

### 3.11.7 Database Changes Service

• Forwards database changes via websocket

#### 3.11.8 Status Service

• Periodically checks all other services and connections

### 3.11.9 RabbitMQ Auth Service

• Provides authentication for RabbitMQ against the CouchDB users database

### 3.11.10 Time and Identification Service

• Sends periodic time and identification messages to RabbitMQ

## 3.12 Ports and Loadbalacing Concept

## 3.13 Periodic Tasks (Scheduler)

# 3.14 Plugin Interface

### 3.15 Transmitter Connection

Transmitter connections consist of two connections to a Node. A REST connection for initial announcement of a new transmitter, heartbeat messages and transmitter configuration and a RabbitMQ connection to receive the data to be transmitted.

The workflow for a transmitter connection is the following:

- 1. Announce new connecting transmitter via Core REST Interface (6.1.4).
- 2. Get as response the transmitter configuration or an error message (6.1.4).
- 3. Initiate RabbitMQ connection to get the data to be transmitted (6.2.1).

The authentication of the transmitter's REST calls consist of the transmitter name and its AuthKey, which is checked against the value in the CouchDB for this transmitter.

## 3.16 Transmitter connections

If a transmitter wants to connect to DAPNET, the first step is to sign-in and show its presence via the Core REST interface. This interface is also used for transmitter configuration like enabled timeslots and keep-alive polling.

## 3.16.1 Authentication of all HTTP-Requests in this context

All HTTP-requests issued from a transmitter have to send a valid HTTP authentication, which is checked against the CouchDB. It consists of the transmitter name and its AuthKey.

# 3.17 DAPNET-Proxy

Da es sich bei den Anfragen um POST-Requests  $\operatorname{mit}$ **JSON** Body handelt, wäre es einfacher da den AuthKey mit dazu zu packen, so wie es auch schonin der Protokoll-Definition umgesetztist.

# External Usage Workflows

- 4.1 General Concept of REST and Websocket-Updates
- 4.2 Website and App
- 4.2.1 Authentication
- 4.2.2 Calls
- 4.2.3 Rubrics
- 4.2.4 Rubrics content
- 4.2.5 Transmitters and Telemetry
- 4.2.6 Nodes
- 4.2.7 Users
- 4.2.8 MQTT consumers
- 4.2.9 Scripts and automated Software for DAPNET-Input

# Setup and Installation

- 5.1 Unipager
- 5.2 DAPNET-Proxy
- 5.3 DAPNET Core
- 5.4 Special issues for Core running in HAMCLOUD

# **Protocol Definitions**

## 6.1 Microservices API

See Microservices definition.

### 6.1.1 Database Service

- \* /users/\*
- \* /nodes/\*
- \* /rubrics/\*
- \* /subscribers/\*
- \* /subscriber groups/\*

DELETE /transmitters/:id

PUT /transmitters

### 6.1.2 Call Service

- \* /calls/\*
- 6.1.3 Rubric Service
- \* /rubrics/:id/\*

### 6.1.4 Transmitter Service

GET /transmitters

 $\mathbf{GET}\ /\mathbf{transmitters}/\mathbf{:}\mathbf{id}$ 

 $\mathbf{GET}\ /\mathbf{transmitters}/\mathbf{:}\mathbf{id}$ 

 ${\bf POST\ /transmitters/bootstrap}$ 

POST /transmitter/bootstrap

define
all the
REST /
WS Interfaces

```
"callsign": "db0avr",
"auth_key": "<secret>",
"software": {
    "name": "UniPager",
    "version": "1.0.2"
Answers to the bootstrap REST call
  "timeslots": [true, true, false, true, ...],
  "nodes": [
      "host": "node1.ampr.org",
      "port": 4000,
      "reachable": true,
"last_seen": "2018-07-03T07:43:52.783611Z",
      "response_time": 42
 ]
}
423 Locked
  "error": "Transmitter temporarily disabled by config."
423 Locked
  "error": "Transmitter software type not allowed due to serious bug."
{\bf POST\ / transmitters/heartbeat}
POST /transmitter/heartbeat
  "callsign": "db0avr",
  "auth_key": "<secret>",
  "ntp_synced": true
Answers to the heartbeat REST call 200 OK
  "status": "ok"
If network wants to assign new timeslots without disconnecting (for dynamic timeslots)
200 OK
  "status": "ok",
  "timeslots": [true, true, false, ...],
  "valid_from": "2018-07-03T08:00:52.786458Z"
If network wants to initiate handover to other node
503 Service unavailable
  "error": "Node not available, switch to other node."
```

### 6.1.5 Cluster Service

POST /cluster/discovery

### 6.1.6 Telemetry Service

GET /telemetry/\*

WS /telemetry

### 6.1.7 Database Changes Service

WS /changes

### 6.1.8 Status Service

The purpose of the status service is to provide a short overview of the DAPNET network and the microservices.

### GET /status

```
200 OK
{
    "good_health" : true,
    "version" : "1.2.3"
    "microservices\_running" : {
        "database" : true,
        "rubric" : true,
        "transmitter" : true,
        "telemetry" : true,
        "database-changes" : true,
        "statistics" : true,
        "rabbitmq" : true,
        "thirdparty" : true
}
```

### GET /status/<service\_name>

List of valid values for service name:

database-service call-service rubric-service transmitter-service cluster-service telemetry-service database-changes-service statistics-service rabbitmq-service

200 OK

<Status output from service itself>

### 6.1.9 Statistics Service

**GET** /statistics

### 6.1.10 RabbitMQ Service

GET /rabbitmq/\*

## 6.2 RabbitMQ

There are 3 exchanges available on each RabbitMQ instance:

dapnet.calls Messages shared between all nodes

dapnet.local calls Messages coming from the local node instance

dapnet.telemetry Messages containing telemetry from transmitters

### 6.2.1 Transmitters

Valid Messages are:

### dapnet.calls

The messages to transfer data to be transmitted by the transmitter have the following format.

For each transmission, there is a separate RabbitMQ message, as different receivers might need different text encoding. All encoding is already done, when this message is created. The transmitter does no character encoding at all. Both personal pagings and rubric related messages are transmitted with this protocol.

```
"id": "016c25fd-70e0-56fe-9d1a-56e80fa20b82",
"protocol": "pocsag",
"priority": 3,
"expires": "2018-07-03T08:00:52.786458Z",
"message": {
    "ric": 12342,
    "subric": 0 to 3,
    "type": "alphanum", | "numeric"
    "speed": 1200,
    "function": 3,
    "data": "Lorem ipsum dolor sit amet"
}
```

The selection of the transmitter is done by means of the routing key. Besides, the priority is also used in the RabbitMQ queuing to deliver higher priority messages first.

### dapnet.local calls

Same as for the the network originated calls in section 6.2.1.

### 6.2.2 Telemetry

On the telemetry exchange, all transmitters and nodes publish their telemetry messages. The format the same as in section 6.3 and 6.4.

## 6.2.3 MQTT API for third-party consumers

In order to allow third-party instances like, or others to get the emitted calls and rubric contents in a real time event driven way, there is an MQTT API. It is not implemented via a dedicated MQTT broker, but uses the existing RabbitMQ instance (https://www.rabbitmq.com/mqtt.html. There is no distribution of the messages via this MQTT broker; it is local only. So every node publishes the messages locally on its own. Each subscriber has an array of enabled third-party applications. This allow to define the user, if call directed to her/his subscriber shall be also sent to third-party services (see 6.7.4.

with
DL2IC

The currently existing MQTT topics are defined in the CouchDB (see section 6.7.8). This makes it possible to add more third-party services and authorized users during runtime without the need to update the software. The valid users to subscribe to the topic are also listed in the same CouchDB database.

The only permitted access for third-party consumers is read. So the subscribe request from a third-party MQTT-Client must use authentication which is checks against the CouchDB data. If correct, read access is granted. Core software has always write access to publish the calls group messages.

The transmitters who are supposed to send out the personal call or the rubric content are published with callsign, geographic location and type of transmitter (widerange or personal). With this generic concept, every third-party application can decide what to do with the content received.

The encoding of the data is UTF-8.

The format of the data published for **personal paging calls** is

```
{
  "pagingcall" : {
    "srccallsign" : "dl2ic",
"dstcallsign" : "dh3wr",
    "dstric" : 12344,
    "dstsubric" : 0 ... 3,
     "priority" : 3,
    "message" : "DAPNET 2.0 rocks dear YL/OM"
    "transmitted_by" : [
         "callsign" : "db0abc",
         "lat" : 12.123456,
"long" : 32.123456,
         "type" : "PERONAL" | "WIDERANGE"
       Ι.
         "callsign" : "db0def",
         "lat" : 12.123456,
"long" : 32.123456,
          type": "PERONAL" | "WIDERANGE"
     "timestamp" : "2018-07-03T08:00:52.786458Z"
 }
```

The format of the data published for rubric content paging calls is

```
"rubricmessage" : {
    "message" : ""
    "transmitted_by" : [
        {
             "callsign" : "db0abc",
             "lat" : 12.123456,
             "long" : 32.123456,
             "type" : "PERONAL" | "WIDERANGE"
        },
        {
             "callsign" : "db0def",
             "lat" : 12.123456,
             "long" : 32.123456,
             "long" : 32.123456,
             "type" : "PERONAL" | "WIDERANGE"
```

```
}
],
"timestamp" : "2018-07-03T08:00:52.786458Z"
}
```

## 6.3 Telemetry from Transmitters

Telemetry is sent from transmitters to the RabbitMQ exchange **dapnet.telemetry** as defined in section 6.2. It is also used in the same way on the websocket API to inform the website and the app about the telemetry in real-time in section 6.6.1 and 6.6.2.

This is sent every minute in complete. If there are changes, just a subset is sent. The name of the transmitter is used as routing key for the message.

```
"onair": true,
"node": {
  "name": "db0xyz",
  "ip": "44.42.23.8",
  "port": 1234,
  "connected": true,
  "connected_since": "2018-07-03T08:00:52.786458Z"
 }.
"ntp": {
  "synced": true,
  "offset": 124,
  "server": ["134.130.4.1", "12.2.3.2"],
"messages": {
  "queued": [123, 123, 123, 123, 123, 123],
  "sent": [123, 123, 123, 123, 123, 123]
"temperatures": {
  "unit": "C" | "F" | "K",
  "air_inlet": 12.2,
  "air_outlet": 14.2
  "transmitter": 42.2,
  "power_amplifier": 45.2,
  "cpu": 93.2,
  "power_supply": 32.4,
  "custom": [
    {"value": 12.2, "description": "Aircon Inlet"},
{"value": 16.2, "description": "Aircon Outlet"},
{"value": 12.3, "description": "Fridge Next to Programmer"}
 ]
},
"power_supply": {
  "on_battery": false,
  "on_emergency_power": false,
  "dc_input_voltage": 12.4,
  "dc_input_current": 3.23
"rf_output" : {
  "fwd": 12.2,
  "refl" : 12.2,
"vswr" : 1.2
"config": {
  "ip": "123.4.3.2",
  "timeslots" : [true, false,...,
  "software": {
    name: "Unipager" | "MMDVM" | "DAPNET-Proxy",
    version: "v1.2.3", | "20180504" | "v2.3.4",
 },
}
"hardware": {
  "platform": "Raspberry Pi 3B+"
"rf_hardware": {
```

```
"c9000": {
      "name" : "C9000 Compact",
      "<pa_dummy>" : {
         "output_power" : 123,
        "port" : "/dev/ttyUSB0"
      "<rpc>": {
        "version" : "XOS/2.23pre"
    "raspager": {
      "name": Raspager",
      "modulation": 13,
      "power": 63,
      "external_pa": false,
      "version": "V2"
    },
    "audio": {
   "name" = "Audio",
      "transmitter": "GM1200" | "T7F" | "GM340" | "FREITEXT",
      "audio_level": 83,
      "tx_delay": 3
    },
    "rfm69": {
      "name" : "RFM69",
      "port": "/dev/ttyUSBO"
    },
    "mmdvm": {
      "name" : "MMDVM",
      "dapnet_exclusive": true
    }
  },
  "proxy" : {
    "status": "connected" | "connecting" | "disconnected"
}
```

# 6.4 Telemetry from Nodes

Telemetry is sent from nodes to the RabbitMQ exchange **dapnet.telemetry** as defined in section 6.2. It is also used in the same way on the websocket API to inform the website and the app about the telemetry in real-time in section 6.6.3 and 6.6.4.

This is sent every minute in complete. If there are changes, just a subset is sent. The name of the nodes is used as routing key for the message.

```
"good_health" : true,
"microservices" : {
 "database" : {
   "ok" : true,
   "version" : "1.2.3"
  "call" : {
   "ok" : true,
   "version" : "1.2.3"
 "rubric" : {
   "ok" : true,
   "version" : "1.2.3"
  "transmitter" : {
   "ok" : true,
   "version" : "1.2.3"
 "cluster" :
   "ok" : true,
   "version" : "1.2.3"
  "telemetry" : {
```

```
"ok" : true,
      "version" : "1.2.3"
    "database-changes" : {
      "ok" : true,
"version" : "1.2.3"
    "statistics" :
      "ok" : true,
      "version" : "1.2.3"
    "rabbitmq" : {
       "ok" : true,
      "version" : "1.2.3"
    "thirdparty" : {
      "ok": true,
      "version" : "1.2.3"
    },
  "connections" : {
    "transmitters": 123,
"third_party": 3
  "system" : {
    "free_disk_space_mb": 1234
    "cpu_utilization": 0.2
    "is_hamcloud" : false
}
```

# 6.5 Statistic, Status and Telemetry REST API

The statistic and telemetry REST API provides up-to-date information regarding the transmitters and the network via REST. This can be used by e.g. grafana to draw nice graphes or nagios plugins.

### 6.5.1 Statistics

Statistics are given in JSON with number values only to may parsing easier.

GET /stats

No authentication required.

```
Answer: 200 OK
  "users" : 1234,
  "transmitters": {
    "personal": {
      "online": 13
      "total": 34
    },
    "widerage": {
      "online": 53,
      "total": 97
  }
  "nodes": {
    "online": 10,
    "total": 19
  "processed_calls": 1234,
  "processed_rubric_content_changes": 234
```

### **6.5.2** Status

### GET /status

No authentication required.

```
Answer: 200 OK
  "nodes": [
    {
      "host": "node1.ampr.org",
      "port": 4000,
      "reachable": true,
      "last_seen": "2018-07-03T07:43:52.783611Z",
      "response_time": 42
   }
  ],
  "connections": {
    "rabbitmq": true,
    "couchdb": true,
    "hamcloud": true,
  "hamcloud_node": false,
  "general_health": true
```

### 6.5.3 Telemetry from Transmitters

### GET /telemetry/transmitter

No authentication required. Here all stored telemetry from all transmitters is provided.

Answer: 200 OK See 6.3

### GET /telemetry/transmitter/<transmittername>

No authentication required. Here all stored telemetry from the specified transmitter is provided.

Answer: 200 OK

See 6.3

### GET /telemetry/transmitter/<transmittername>/<section\_of\_telemetry>

No authentication required. Here all stored telemetry within the telemetry section from the specified transmitter is provided. Possible sections are 2. Level JSON groups, see 6.3.

Examples: onair, telemetry, transmitter configuration

Answer: 200 OK

See 6.3

### 6.5.4 Telemetry from Nodes

### GET /telemetry/nodes

No authentication required. Here all stored telemetry from all nodes is provided.

Answer: 200 OK See 6.4

### GET /telemetry/nodes/<nodename>

No authentication required. Here all stored telemetry from the specified node is provided.

Answer: 200 OK

### 6.6 Websocket API

The idea is to provide an API for the website and the app to display real-time information without the need of polling. A websocket server is listing to websocket connections. Authentication is done by a custom JOSN handshake. The connection might be encrypted with SSL if using the Internet or plain if using HAMNET.

The data is taken from the **dapnet.telemetry** exchange from the RabbitMQ instance and further other sources if necessary.

There are 4 main endpoints in the websocket interface:

Endpo	$\operatorname{oint}$	Microservice	
WS	/telemetry/transmitters	Summary data of all TX	
WS	/telemetry/transmitters/ <txname></txname>	Details for TX <txname></txname>	
WS	/telemetry/nodes	Summary data of all Nodes	
WS	/telemetry/nodes/ <nodename></nodename>	Details for Node < NodeName >	
WS	/changes	Database changes	

Define if authentication is necessary of some endpoints?

### 6.6.1 Telemetry from Transmitters - Summary of all TX

URL: ws://FQDN/telemetry/transmitters

The data is the same as received from the **dapnet.telemetry** exchange from the RabbitMQ instance. It is defined in section 6.3.

The websocket-Server generates an array of JSON Objects which have the name of the transmitter obtained from the RabbitMQ routing key.

The current time slot is also sent in the summary and updated also by its own every time a time slot change happens.

```
"transmitters": [
 "db0abc" : {
   "onair": true,
   "node": {
      "name": "db0xyz",
     "ip": "44.42.23.8",
     "port": 1234,
      "connected": true,
     "connected_since": "2018-07-03T08:00:52.786458Z"
    },
   "ntp": {
      "synced": true
    "messages": {
      "queued": [123, 123, 123, 123, 123, 123],
      "sent": [123, 123, 123, 123, 123, 123]
   },
    "config": {
     "ip": "123.4.3.2",
      "timeslots" : [true, false,..., false],
    "software": {
     name: "Unipager" | "MMDVM" | "DAPNET-Proxy",
     version: "v1.2.3", | "20180504" | "v2.3.4"
    "proxy" : {
      "status": "connected" | "connecting" | "disconnected"
```

```
}
},
"db0xyz" : {
    "onair": true,
    "node": {
    ....
}
],
"current_timeslot" : 12
```

### 6.6.2 Telemetry from Transmitters - Details of Transmitter

URL: ws://FQDN/telemetry/transmitter/<transmittername>

The data is the same as received from the **dapnet.telemetry** exchange from the RabbitMQ instance. It is defined in section 6.3.

The websocket-Server gives out all the telemetry data from a certain transmitter. The name of the transmitter obtained from the RabbitMQ routing key.

```
"onair": true,
"node": {
"ip": "44.42.23.8",
  "port": 1234,
  "connected": true,
  "connected_since": "2018-07-03T08:00:52.786458Z"
"ntp": {
  "synced": true,
  "offset": 124,
  "server": ["134.130.4.1", "12.2.3.2"],
  "queued": [123, 123, 123, 123, 123, 123],
  "sent": [123, 123, 123 , 123, 123, 123]
"temperatures": {
  "unit": "C" | "F" | "K",
  "air_inlet": 12.2,
  "air_outlet": 14.2,
  "transmitter": 42.2,
  "power_amplifier": 45.2,
  "cpu": 93.2,
  "power_supply": 32.4,
  "custom": [
    {"value": 12.2, "description": "Aircon Inlet"},
{"value": 16.2, "description": "Aircon Outlet"},
{"value": 12.3, "description": "Fridge Next to Programmer"}
  ]
},
"power_supply": {
  "on_battery": false,
  "on_emergency_power": false,
  "dc_input_voltage": 12.4,
  "dc_input_current": 3.23
},
"rf_output" : {
  "fwd": 12.2,
  "refl" : 12.2,
  "vswr" : 1.2
},
"config": {
  "ip": "123.4.3.2",
  "timeslots" : [true, false,...,
                                           falsel.
  "software": {
    name: "Unipager" | "MMDVM" | "DAPNET-Proxy",
    version: "v1.2.3", | "20180504" | "v2.3.4",
  },
```

```
"hardware": {
  "platform": "Raspberry Pi 3B+"
"rf_hardware": {
  "c9000": {
    "name" : "C9000 Compact",
    "<pa_dummy>" : {
      "output_power" : 123,
      "port" : "/dev/ttyUSBO"
    }
    "<rpc>": {
      "version" : "XOS/2.23pre"
  },
  "raspager": {
    "name": Raspager",
    "modulation": 13,
    "power": 63,
    "external_pa": false,
    "version": "V2"
  },
  "audio": {
    "name" = "Audio",
    "transmitter": "GM1200" | "T7F" | "GM340" | "FREITEXT",
    "audio_level": 83,
    "tx_delay": 3
  "rfm69": {
    "name" : "RFM69",
    "port": "/dev/ttyUSB0"
  },
  "mmdvm": {
    "name" : "MMDVM",
    "dapnet_exclusive": true
 }
},
"proxy" : {
  "status": "connected" | "connecting" | "disconnected"
}
```

### 6.6.3 Telemetry from Nodes - Summary of all Nodes

URL: ws://FQDN/telemetry/nodes

}

The websocket-Server generates an array of JSON Objects which have the name of the node obtained from the RabbitMQ routing key.

"nodes" : [
 "db0sda" : {
 "good\_health" : true,
 "connections" : {
 "transmitters" : 123,
 "third\_party" : 3
 },
 "system" : {
 "is\_hamcloud" : false
 }
 },
 "hamcloud1" : {
 "good\_health" : true,
 "connections" : {
 "transmitters" : 658,
 "third\_party" : 25
 },
 "system" : {
 "is\_hamcloud" : true

```
}
},
....
```

### 6.6.4 Telemetry from Transmitters - Details of Node

URL: ws://FQDN/telemetry/node/<nodename>

The data is the same as received from the **dapnet.telemetry** exchange from the RabbitMQ instance. It is defined in section 6.3.

The websocket-Server gives out all the telemetry data from a certain node. The name of the transmitter obtained from the RabbitMQ routing key.

```
"good_health" : true,
  "microservices" : {
     "database" : {
      "ok" : true,
       "version" : "1.2.3"
    },
    "call" : {
       "ok" : true,
       "version": "1.2.3"
     "rubric" : {
       "ok" : true,
       "version" : "1.2.3"
    },
    "transmitter" : {
       "ok" : true,
"version" : "1.2.3"
     "cluster" :
       "ok" : true,
       "version" : "1.2.3"
    },
    "telemetry" : {
       "ok" : true,
"version" : "1.2.3"
     "database-changes" : {
       "ok" : true,
       "version" : "1.2.3"
    "statistics" : {
       "ok" : true,
"version" : "1.2.3"
     "rabbitmq" : {
       "ok" : true,
"version" : "1.2.3"
    "thirdparty" : {
       "ok" : true,
"version" : "1.2.3"
    },
  "connections" : {
    "transmitters": 123, "third_party": 3
  },
  "system" : {
    "free_disk_space_mb": 1234
    "cpu_utilization": 0.2
    "is_hamcloud" : false
  }
}
```

### 6.6.5 Database Changes

URL: ws://FQDN/changes

To inform the website or the app about changes in the CouchDB database, the websocket microservice keeps a connection to the local CouchDB API and receives a stream of updated to the database. As there may be data in the changes that are confidential, the stream is parsed and sent out in a reduced form to the websocket client. Further information: http://docs.couchdb.org/en/2.0.0/api/database/changes.html

The format of the updates is:

 $\frac{\text{define/review}}{\text{format}}$ 

#### Transmitter related

New transmitter added

"type": "transmitter",
"action" : "added",
"name": "db0abc",
"data" : {

```
}
Existing transmitter changed
  "type": "transmitter",
"action" : "changed",
  "name": "dbOabc",
  "data" : {
  (Data from CouchDB Change feed in processed way)
}
Transmitter deleted
  "type": "transmitter",
  "action" : "deleted",
  "name": "db0abc"
User related
New User added
  "type": "user",
"action": "added",
  "name": "db1abc",
  "data" : {
  (Data from CouchDB Change feed in processed way)
Existing user changed
  "type": "user",
  "action" : "changed",
  "name": "db1abc",
  "data" : {
  (Data from CouchDB Change feed in processed way)
}
```

(Data from CouchDB Change feed in processed way)

```
{
  "type": "user",
  "action": "deleted",
  "name": "db1abc"
}

Rubric related

New Rubric added
{
  "type": "rubric",
  "action": "added",
  "id": "...",
  "data": {
  (Data from CouchDB Change feed in processed way)
  }
}

Existing rubric changed
{
  "type": "user",
  "action": "changed",
  "id": "...",
  "data": {
  (Data from CouchDB Change feed in processed way)
  }
}

Rubric deleted
{
  "type": "user",
  "action": "deleted",
  "id": "..."
}
```

### Rubric content related

Rubric content deleted

User deleted

```
New Rubric content added
{
   "type": "rubric_content",
   "action" : "added",
   "id": "...??",
   "data" : {
    (Complete Data dump of all ten rubric messages as stored in CouchDB)
   }
}

Existing rubric changed
{
   "type": "rubric_content",
   "action" : "changed",
   "id": "...",
   "data" : {
    (Complete Data dump of all ten rubric messages as stored in CouchDB)
   }
}
```

Check against

CouchDB structure

```
"type": "rubric_content",
"action": "deleted",
"id": "..."
"data": {
   (Complete Data dump of all ten rubric messages as stored in CouchDB, some may be empty)
}
Node related
New node added
  "type": "node",
"action" : "added",
"name": "db0abc",
  "data" : {
   (Data from CouchDB Change feed in processed way)
}
Existing node changed
  "type": "node",
"action" : "changed",
  "name": "db0abc",
"data" : {
  (Data from CouchDB Change feed in processed way)
}
Node deleted
  "type": "node",
"action": "deleted",
"name": "dblabc"
```

# 6.7 CouchDB Documents and Structure

als Tabelle darstellen

### 6.7.1 Users

Table 6.1: CouchDB: Users

Key	Value-Type	Valid Value Range	Example
_id	string		dl1abc
password	string	bcrypt hash	
email	string		dl1abc@darc.de
admin	boolean		true
enabled	boolean		true
$created\_on$	string	ISO8601	2018-07-08T11:50:02.168325Z
changed_on	string	ISO8601	2018-07-08T11:50:02.168325Z
changed_by	string	valid user name	dh3wr
email_valid	boolean		true
avatar_picture	couchdb_attachment		

```
{
   "_id": "dl1abc",
   "password": "<bcrypt hash>",
   "email": "dl1abc@darc.de",
   "admin": true,
   "enabled": true,
   "created_on": "2018-07-03T08:00:52.786458Z",
   "created_by": "dh3wr",
   "changed_on": "2018-07-03T08:00:52.786458Z",
   "changed_by":"dh3wr",
   "email_valid": true
   "avatar_picture": <couchdb attachment>
}
```

### 6.7.2 Nodes

Wofür
genau
braucht
man
email\_valid?

Table 6.2: CouchDB: Nodes

	14010 (	7.2. Couchibb. Houcs	
Key	Value-Type	Valid Value Range	Example
_id	STRING	N/A	db0abc
coordinates	[number; 2]	[lat, lon]	[34.123456, 6.23144]
hamcloud	boolean	true/false	true
created_on	string	ISO8601	2018-07-08T11:50:02.168325Z
changed_by	string	valid user name	dh3wr
changed_on	string	ISO8601	2018-07-08T11:50:02.168325Z
changed_by	string	valid user name	dh3wr
owners	[string]	N/A	["dl1abc","dh3wr","dl2ic"]
avatar picture	couchdb attachment		

```
"_id": "db0abc",
"auth_key": "super_secret_key",
"coordinates": [34.123456, -23.123456],
"hamcloud": true,
"created_on": "2018-07-03T08:00:52.786458Z",
"created_by":"dh3wr",
"changed_on": "2018-07-03T08:00:52.786458Z",
"changed_by":"dh3wr",
"owners": ["dl1abc","dh3wr","dl2ic"],
"avatar_picture": <couchdb attachment??>}
```

### 6.7.3 Transmitters

```
"_id": "db0abc",
"auth_key": "hdjaskhdlj",
"enabled": true,
"usage": "PERSONAL" | "WIDERANGE",
"coordinates": [34.123456, -23.123456],
"power": 12.3,
"antenna": {
    "agl": 23.4,
    "gain": 2.34,
    "type": "OMNI" | DIRECTIONAL,
    "direction": 123.2,
    "cable_loss": 4.2
}
"owners": ["dl1abc","dh3wr","dl2ic"],
"groups": ["dl-hh", "dl-all"],
"emergency_power": {
    "available": false,
```

Tabelle weiter machen Table 6.3: CouchDB: Transmitters

Key	Value-Type	Valid Value Range	Example
_id	string	N/A	db0abc
auth_key	string	N/A	asd2FD3q3rF
enabled	boolean	true/false	true
usage	string	PERSONAL   WIDERANGE	WIDERANGE
coordinates	[number; 2]	[lat, lon]	[34.123456, 6.23144]
power	number	0.001	12.3
created_on	string	ISO8601	2018-07-08T11:50:02.168325Z
changed_by	string	valid user name	dh3wr
changed_on	string	ISO8601	2018-07-08T11:50:02.168325Z
changed_by	string	valid user name	dh3wr
owners	ARRAY of STRING	N/A	["dl1abc","dh3wr","dl2ic"]
avatar picture	couchdb attachment		

```
"infinite": false,
   "duration": 23*60*60 // seconds
},
"created_on": "2018-07-03T08:00:52.786458Z",
"created_by": "dh3wr",
"changed_on": "2018-07-03T08:00:52.786458Z",
"changed_by": "dh3wr",
"aprs_broadcast": false,
"antenna_pattern" : <couchDB attachment>,
"avatar_picture" : <couchDB attachment>
```

### 6.7.4 Subscribers

```
check if
                                                                                            [] is valid
                                                                                             JSON
  "_id" : "dl1abc",
  "description" : "Peter",
  "pagers" : [
    {
      "ric": 123456,
"subric": 0 .. 3,
      "uuid": "0023-1233-aefe-1234-3423-9812",
      "name": "Peters Alphapoc",
      "type": "UNKNOWN" | "Skyper" | "AlphaPoc" | "QUIX" | "Swissphone" | "SCALL_XT" | "Birdy"
      "enabled" : true
   },
  "third_party_services" : ["APRS", "BM"],
  "owner": ["dh3wr", "dl1abc"]
}
```

### 6.7.5 Subscriber Groups

```
{
  "_id" : "ov-G01",
  "description": "Ortverband Aachen",
  "subscribers": ["dl1abc", "dh3wr"],
  "owner": ["dh3wr", "dl1abc"],
}
```

### 6.7.6 Rubrics List

```
{
    "_id": "wx-dl-hh"
    "number": 14,
```

```
"description": "Wetter DL-HH",
"label": "WX DL-HH",
"transmitter_groups": ["dl-hh","dl-ns"],
"transmitters": ["dbOabc"],
"cyclic_transmit": true,
"cyclic_transmit_interval": 60*60, // seconds
"owner" : ["dh3wr", "dl1abc"]}
```

### 6.7.7 Rubric's content

```
<UUID> of rubric (as defined in 6.7.6)

{
    "_id" : "<UUID>",
    "rubric": "wx-dl-hh",
    "content": [
        "message1",
        ..,
        "message10"
    ],
}
```

### 6.7.8 MQTT services and subscribers