

1. LENGTHS OF CAT-5 UTP AND FIBER OPTIC CABLE ARE TO BE DETERMINED AT INSTALLATION.
2. THE  SYMBOL DEFINES CUSTOMER'S SUPPLIED EQUIPMENT.
 THE  SYMBOL DEFINES THE TURBINE CONTROL PANEL (TCP).
 THE SYMBOL DEFINES THE GENERATOR PROTECTION PANEL (GPP).
3. EACH OPERATOR INTERFACE (HMI AND GenX) COMES WITH A 50 FT PRE-TERMINATED CAT-5 UTP (10 BASE-T) CABLE PER NETWORK INTERFACE CARD PORT. GE ALSO PROVIDES ONE ADDITIOANAL 1000 FT SPOOL OF CAT-5 UTP (10 BASE-T) CABLE AND A BOX OF 50 RJ-45 CONNECTORS FOR THE SITE WHICH SHOULD BE USED TO SATISFY THE AS-INSTALLED CABLE LENGTH NEEDS. HOWEVER IF ADDITIONAL CABLE OR CONNECTORS ARE REQUIRED THE CUSTOMER IS RESPONSIBLE FOR THE ADDITIONAL SUPPLY.
4. IF REQUIRED, THE CUSTOMER IS RESPONSIBLE FOR UPS (UNINTERRUPTIBLE POWER SUPPLY) FOR NETWORK EQUIPMENT. GE SUGGESTS THAT THE CUSTOMER USE SEPARATE CIRCUITS TO POWER THE REDUNDANT EQUIPMENT (I.E. ETHERNET SWITCHES).
- | DEVICE | APPROX. POWER @ 120VAC / 50 HZ |
|--------------------|--------------------------------|
| HMI (WITH MONITOR) | 5 AMPS(EACH) |
| ETHERNET SWITCHES | < 1 AMP (EACH) |
| THIN CLIENT | < 1 AMP (EACH) |
| CONTROL SERVER | < 7 AMP (EACH) |
5. NETWORK HARDWARE THAT IS SUPPLIED BY GE IS SHIPPED LOOSE. THIS HARDWARE IS LOCATED AND INSTALLED BY THE CUSTOMER.
6. ALL OPERATOR INTERFACES INCLUDING THE HMI AND OSM ARE TO BE LOADED WITH HARDWARE AND SOFTWARE AUTHORIZED BY GE ENERGY ONLY THE INSTALLATION OF ANY SOFTWARE OR HARDWARE NOT AUTHORIZED BY GE ENERGY WILL VOID GE WARRANTY AGREEMENTS AND MAY CAUSE NETWORK INTERFACE PROBLEMS.

REVISIONS			
REV	DESCRIPTION	DATE	IssuedBy
D	UPDATED PORT TABLE FOR PDH CONNECTION IN SW7 AS PER MARKUP	2023-05-29	Gowtham

ASSY, REMOTE CONTROL SYS


DESIGN MEMO: F6836G24

GENERATOR: 297788, 298889, 297790, 297791

MODEL LIST: 4108

CUSTOMER: LAWRENCEBURG

THIRD ANGLE PROJECTION



© COPYRIGHT 2012-2023 GENERAL ELECTRIC COMPANY
PROPRIETARY INFORMATION – THIS DOCUMENT CONTAINS
PROPRIETARY INFORMATION OF GENERAL ELECTRIC COMPANY AND
MAY NOT BE USED OR DISCLOSED TO OTHERS, EXCEPT WITH THE
WRITTEN PERMISSION OF THE GENERAL ELECTRIC COMPANY.

GE CLASS II (INTERNAL NON-CRITICAL)					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON 2 PL DECIMALS ± 3 PL DECIMALS ± ANGLES ± FRACTIONS ± ✓	SIGNATURES	DATE	GENERAL ELECTRIC COMPANY		
	DRAWN SUBBU	2011-08-08	 GE Energy ASSY, REMOTE CONTROL SYS FIRST MADE FOR: 4108		
	CHECKED SEE PLM				
	ENGRG SEE PLM				
	ISSUED SEE PLM				
APPLIED PRACTICES			SIZE B	CAGE CODE	DWG NO 154B5246
			SCALE		SHEET 1 of 18
	SIM TO:				



MARK VIe MAX CASE EQUIPMENT LIST



ID #	DESCRIPTION	IDENT.	SUPPLIER
1	TERMINATOR 93	-	-
2	COAXIAL CABLE TEE ADAPTER	-	-
3	COAXIAL CABLE CONNECTOR	-	-
4	ARCNET COAXIAL CABLE (RG-62A/U) MIN LENGTH 1.5m	-	-
5	COAXIAL CABLE TERMINATION INSTRUCTIONS	-	-
6	ARMORED COAXIAL CABLE (RG-62A/U)	-	-
7	FIBER OPTIC CABLE (ARCNET OR ETHERNET)	-	-
8	ARCNET FIBER OPTIC REPEATER/ HUB	-	-
9	TYPE ST ARCNET FIBER OPTIC CONNECTOR	-	-
10	TYPE ST FIBER OPTIC CONN. ASM KIT (ONE PER SITE)	-	-
11	RS-232 MODBUS CABLE	GEH-6195 CHAPTER 10	-
12	RS-232 MODBUS CABLE (FROM HMI TO FIRST LDDS)	GEH-6195 CHAPTER 10	-

ID #	DESCRIPTION	IDENT.	SUPPLIER
13	SET (MODBUS MODEMS)	CHAPTER 10	-
14	DUAL FIBER PORT; VLAN ETHERNET SWITCH	-	BY GE
15	MULTIPLE FIBER PORT; VLAN ETHERNET SWITCH	-	BY GE
16	CAT-5 UTP ETHERNET CABLE (10/100 BASE-T)	-	REUSE
17	CAT-5 UTP ETHERNET CABLE CONNECTOR (RJ-45)	-	REUSE
18	LOCKBOX	-	-
19	NETWORK INTERFACE CARD	-	BY GE
20	TYPE SC ETHERNET FIBER OPTIC CONNECTOR	-	-
21	TYPE SC FIBER OPTIC CONN. ASM KIT (ONE PER SITE	-	-
22	MONITOR SWITCH	-	-
23	DEDICATED ANALOG PHONE LINE #1	-	-
24	DEDICATED ANALOG PHONE LINE #2	-	-
25	CROSSOVER UTP CABLE (3FT PRE TERMINATED LENGTHS)	-	BY GE

ID #	DESCRIPTION	IDENT.	SUPPLIER
26	FIBER OPTIC CABLE (MULTI-MODE)	-	BY CUSTOMER
27	FIBER OPTIC CONNECTOR (TYPE SC)	-	BY CUSTOMER
28	FIBER OPTIC CONN. ASM KIT (TYPE SC; ONE PER SITE)	-	BY CUSTOMER
29	FIREWALL	-	-
30	FIBER OPTIC SWITCH	-	-
31	EDGE SWITCH - 9200L UNSTACKED	-	BY GE
32	ROOT BRIDGE SWITCH 9300	-	BY GE
33	MM Fiber 1M Cable – 1M LC to LC Multi-Mode Duplex	-	BY GE
34	STACKING CABLE FOR ROOT BRIDGE	-	BY GE
35	CONTROL SERVER	-	BY GE
37	THIN CLIENT	-	BY GE
38	NTP	-	REUSE
39	PREFABRICATED 50' CAT- 6 (1000 BASE-T) ETHERNET PATCH CABLE	-	BY GE




© COPYRIGHT 2012-2023 GENERAL ELECTRIC COMPANY
PROPRIETARY INFORMATION – THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF GENERAL ELECTRIC COMPANY AND MAY NOT BE USED OR DISCLOSED TO OTHERS, EXCEPT WITH THE WRITTEN PERMISSION OF THE GENERAL ELECTRIC COMPANY.

GE CLASS II (INTERNAL NON-CRITICAL)					
GE Energy DRAWN SUBBU 2011-08-08 ISSUED See PLM			SIZE B	CAGE CODE	DWG NO 154B5246
			SCALE NONE	SHEET 2 of 18	

DISTR
TO



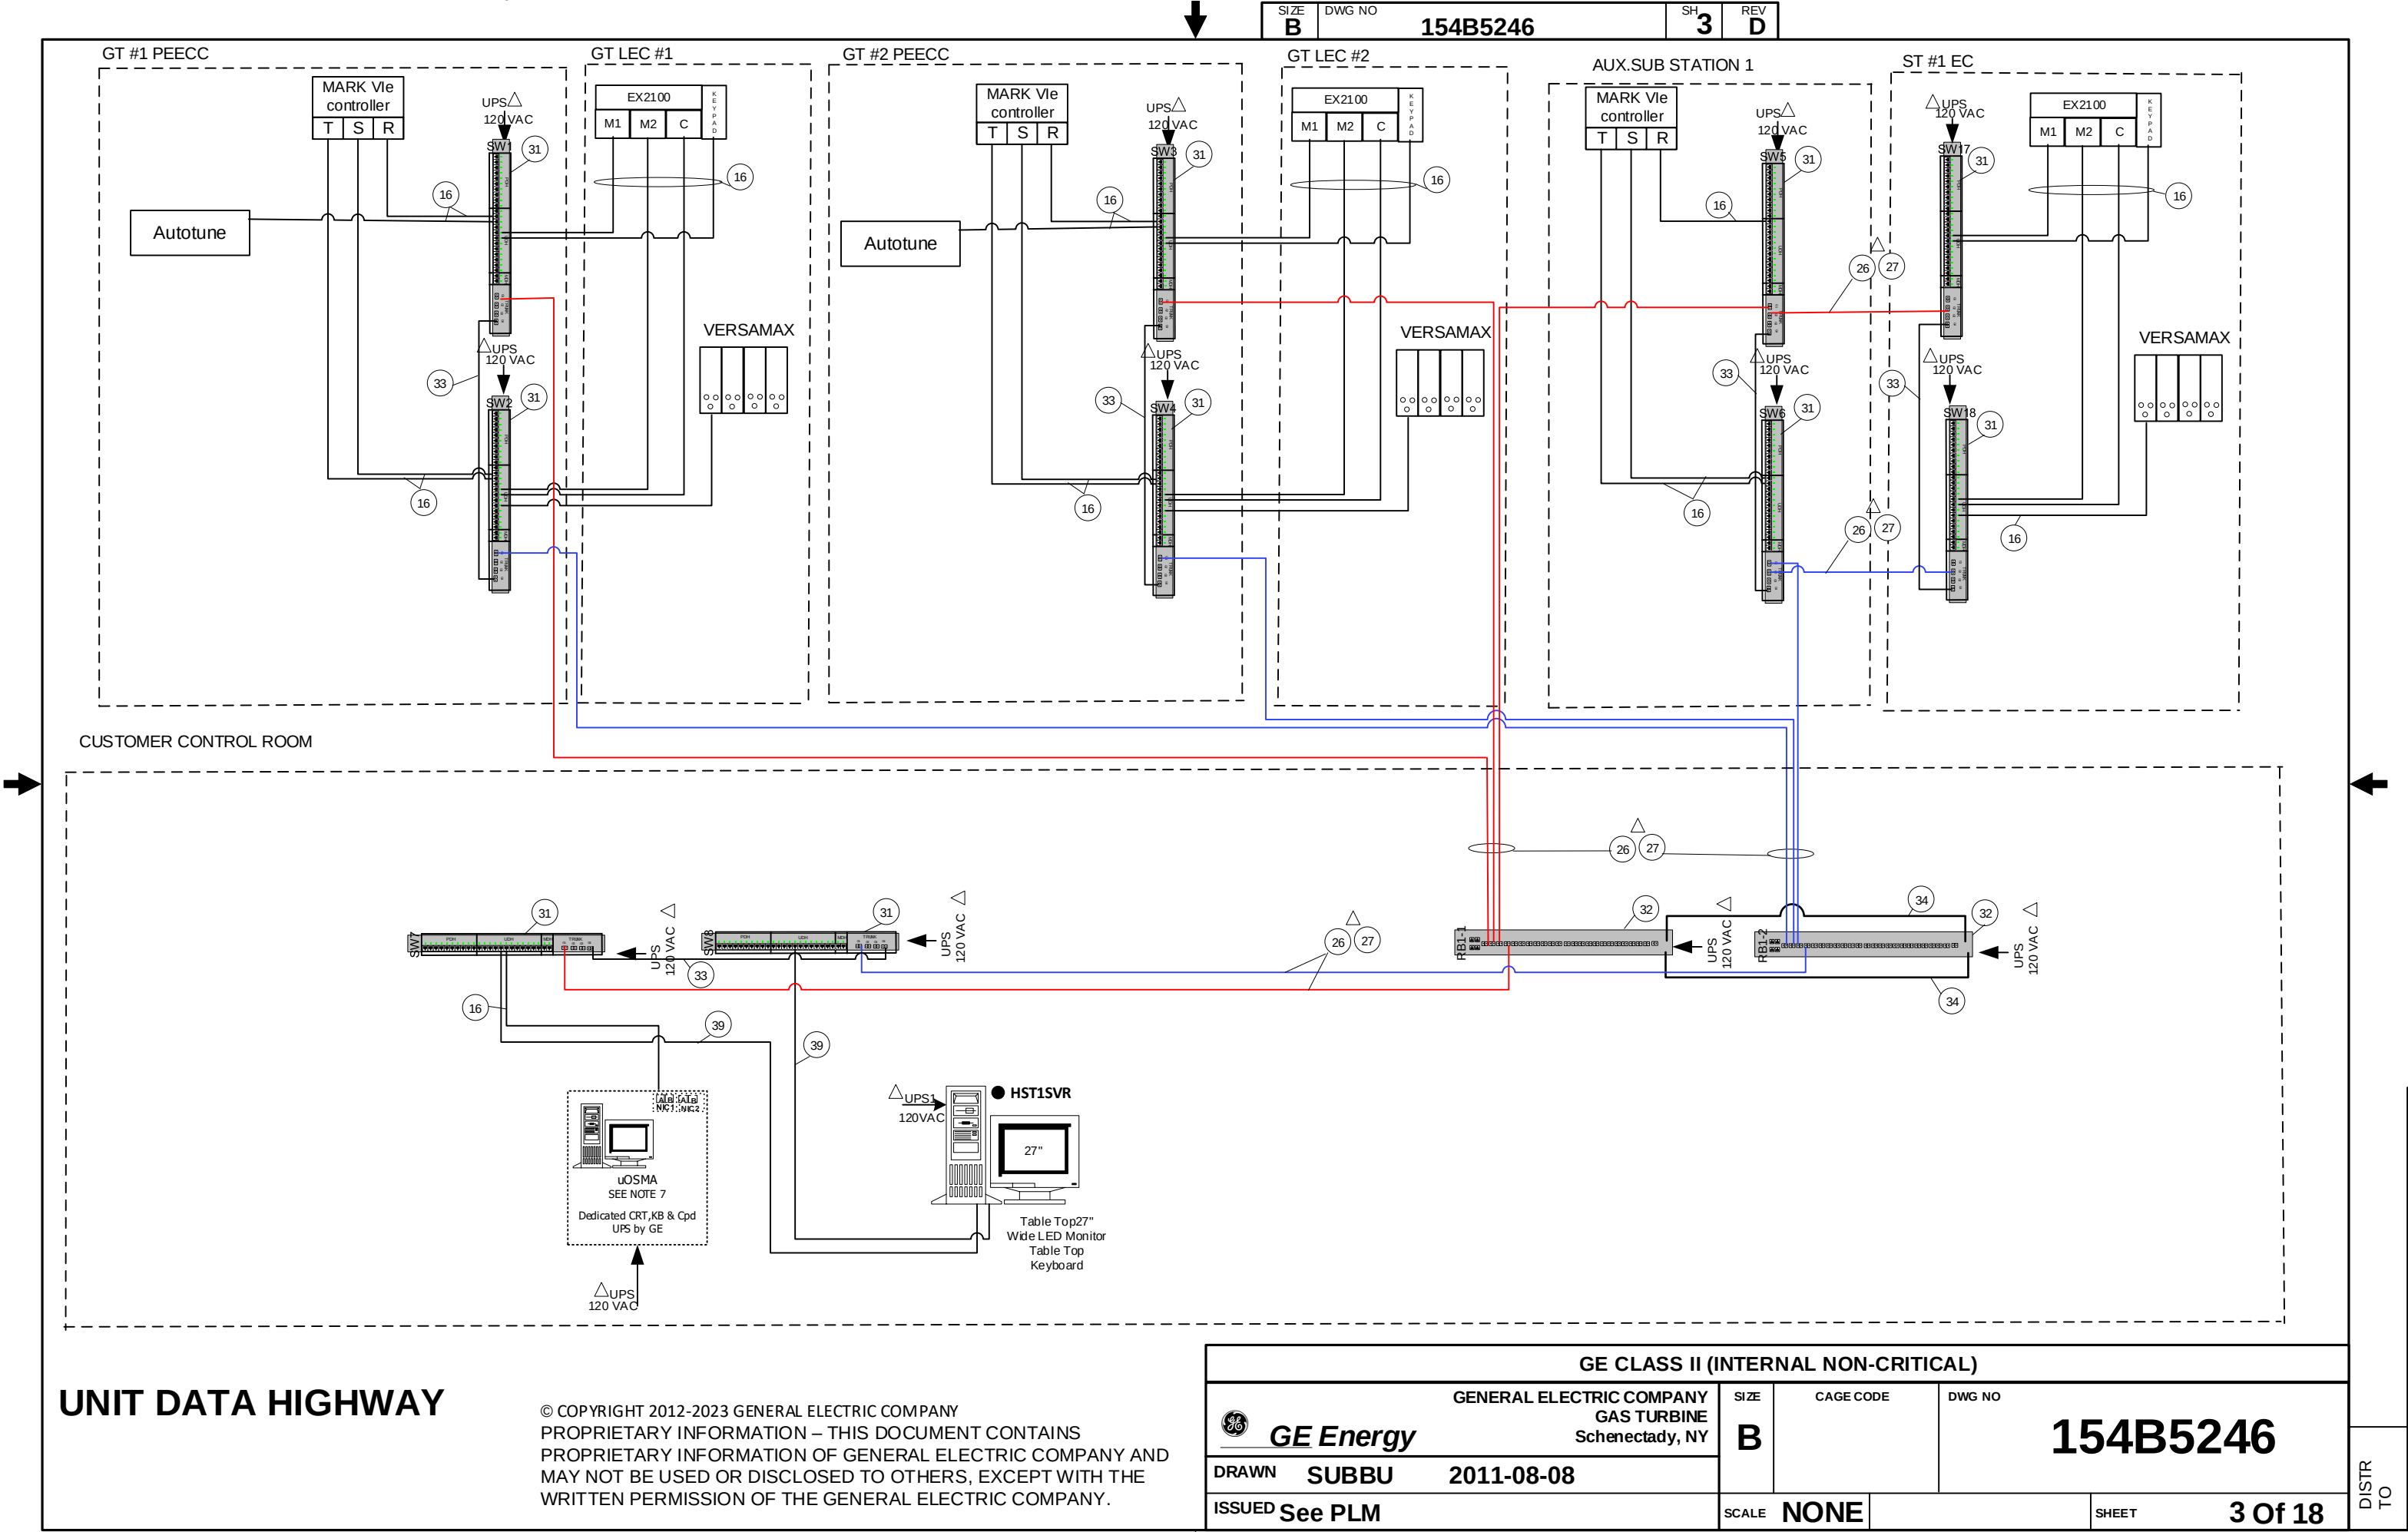

GE CLASS II (INTERNAL NON-CRITICAL)

GE Energy

GENERAL ELECTRIC COMPANY

GAS TURBINE

Schenectady, NY

DRAWN **SUBBU**

2011-08-08

ISSUED **See PLM**

SIZE
B

CAGE CODE


DWG NO
154B5246

SCALE
NONE

SHEET
3 Of 18

DISTR TO

© COPYRIGHT 2012-2023 GENERAL ELECTRIC COMPANY
PROPRIETARY INFORMATION – THIS DOCUMENT CONTAINS
PROPRIETARY INFORMATION OF GENERAL ELECTRIC COMPANY AND
MAY NOT BE USED OR DISCLOSED TO OTHERS, EXCEPT WITH THE
WRITTEN PERMISSION OF THE GENERAL ELECTRIC COMPANY.

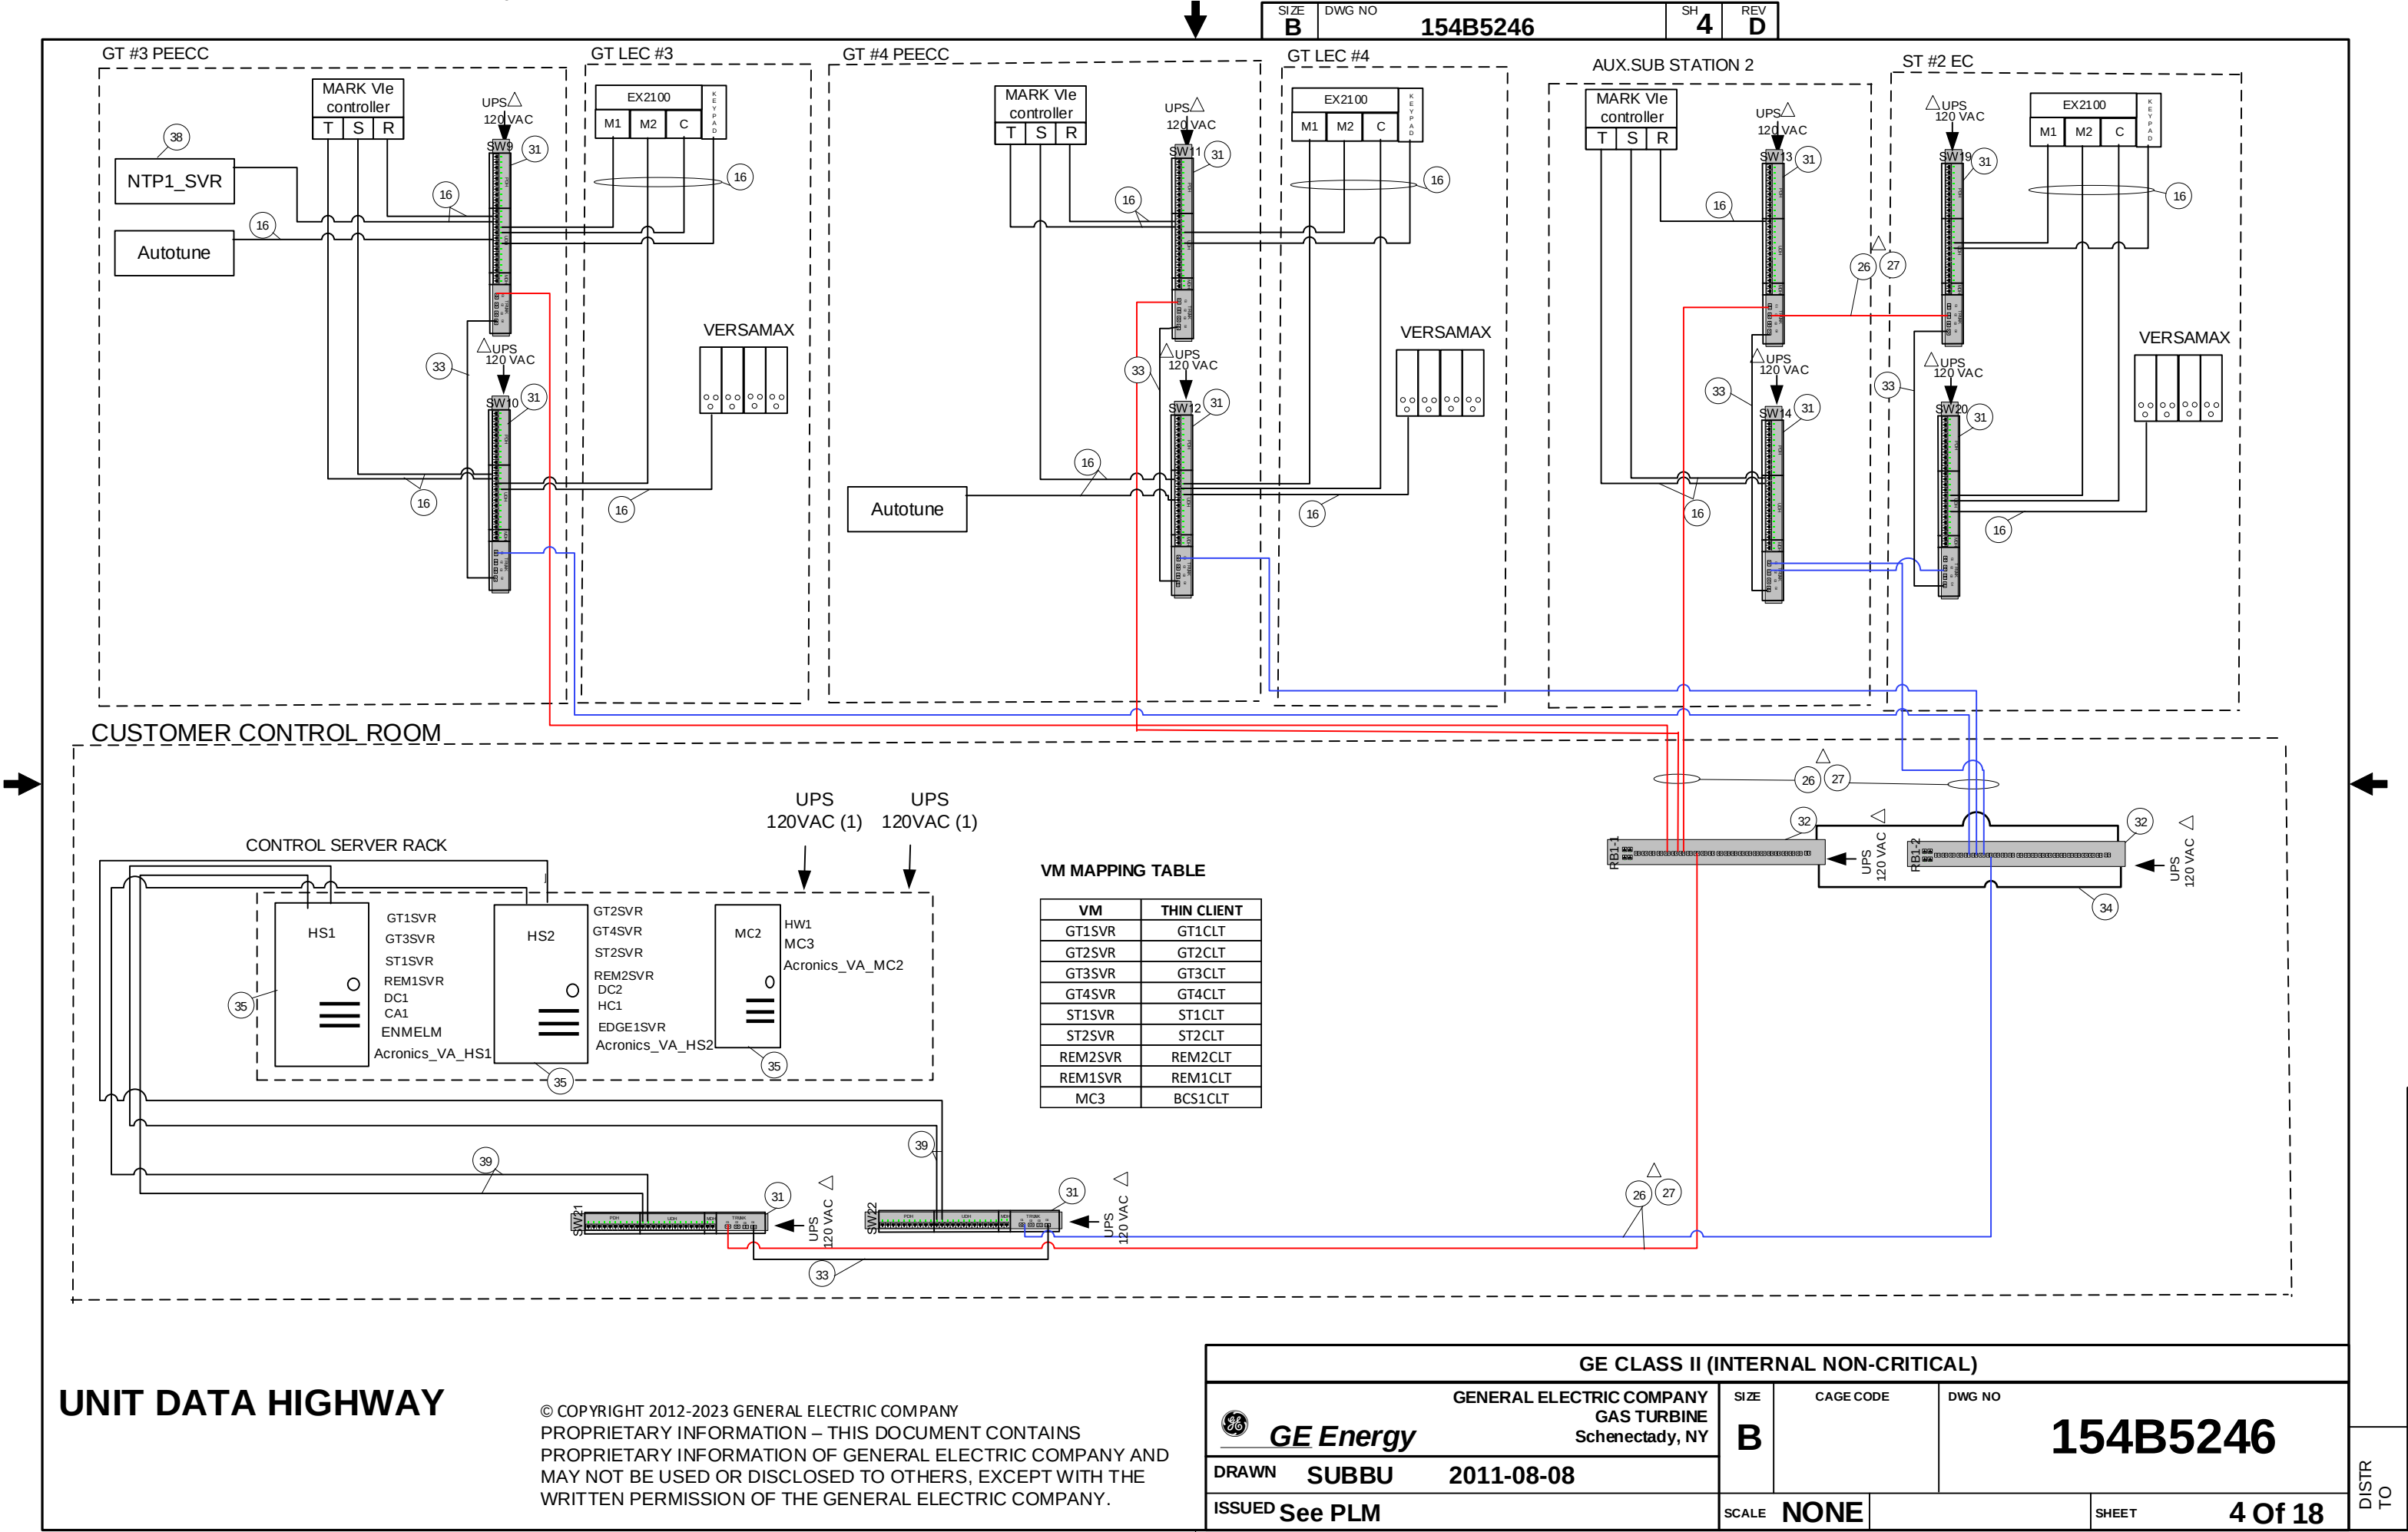

UNIT DATA HIGHWAY

GE CLASS II (INTERNAL NON-CRITICAL)

GENERAL ELECTRIC COMPANY

GAS TURBINE

Schenectady, NY

GE Energy

GE

SIZE

B

CAGE CODE

DWG NO

154B5246

DRAWN

SUBBU

2011-08-08

ISSUED

See PLM


SCALE


NONE


SHEET

4 Of 18

DISTR TO

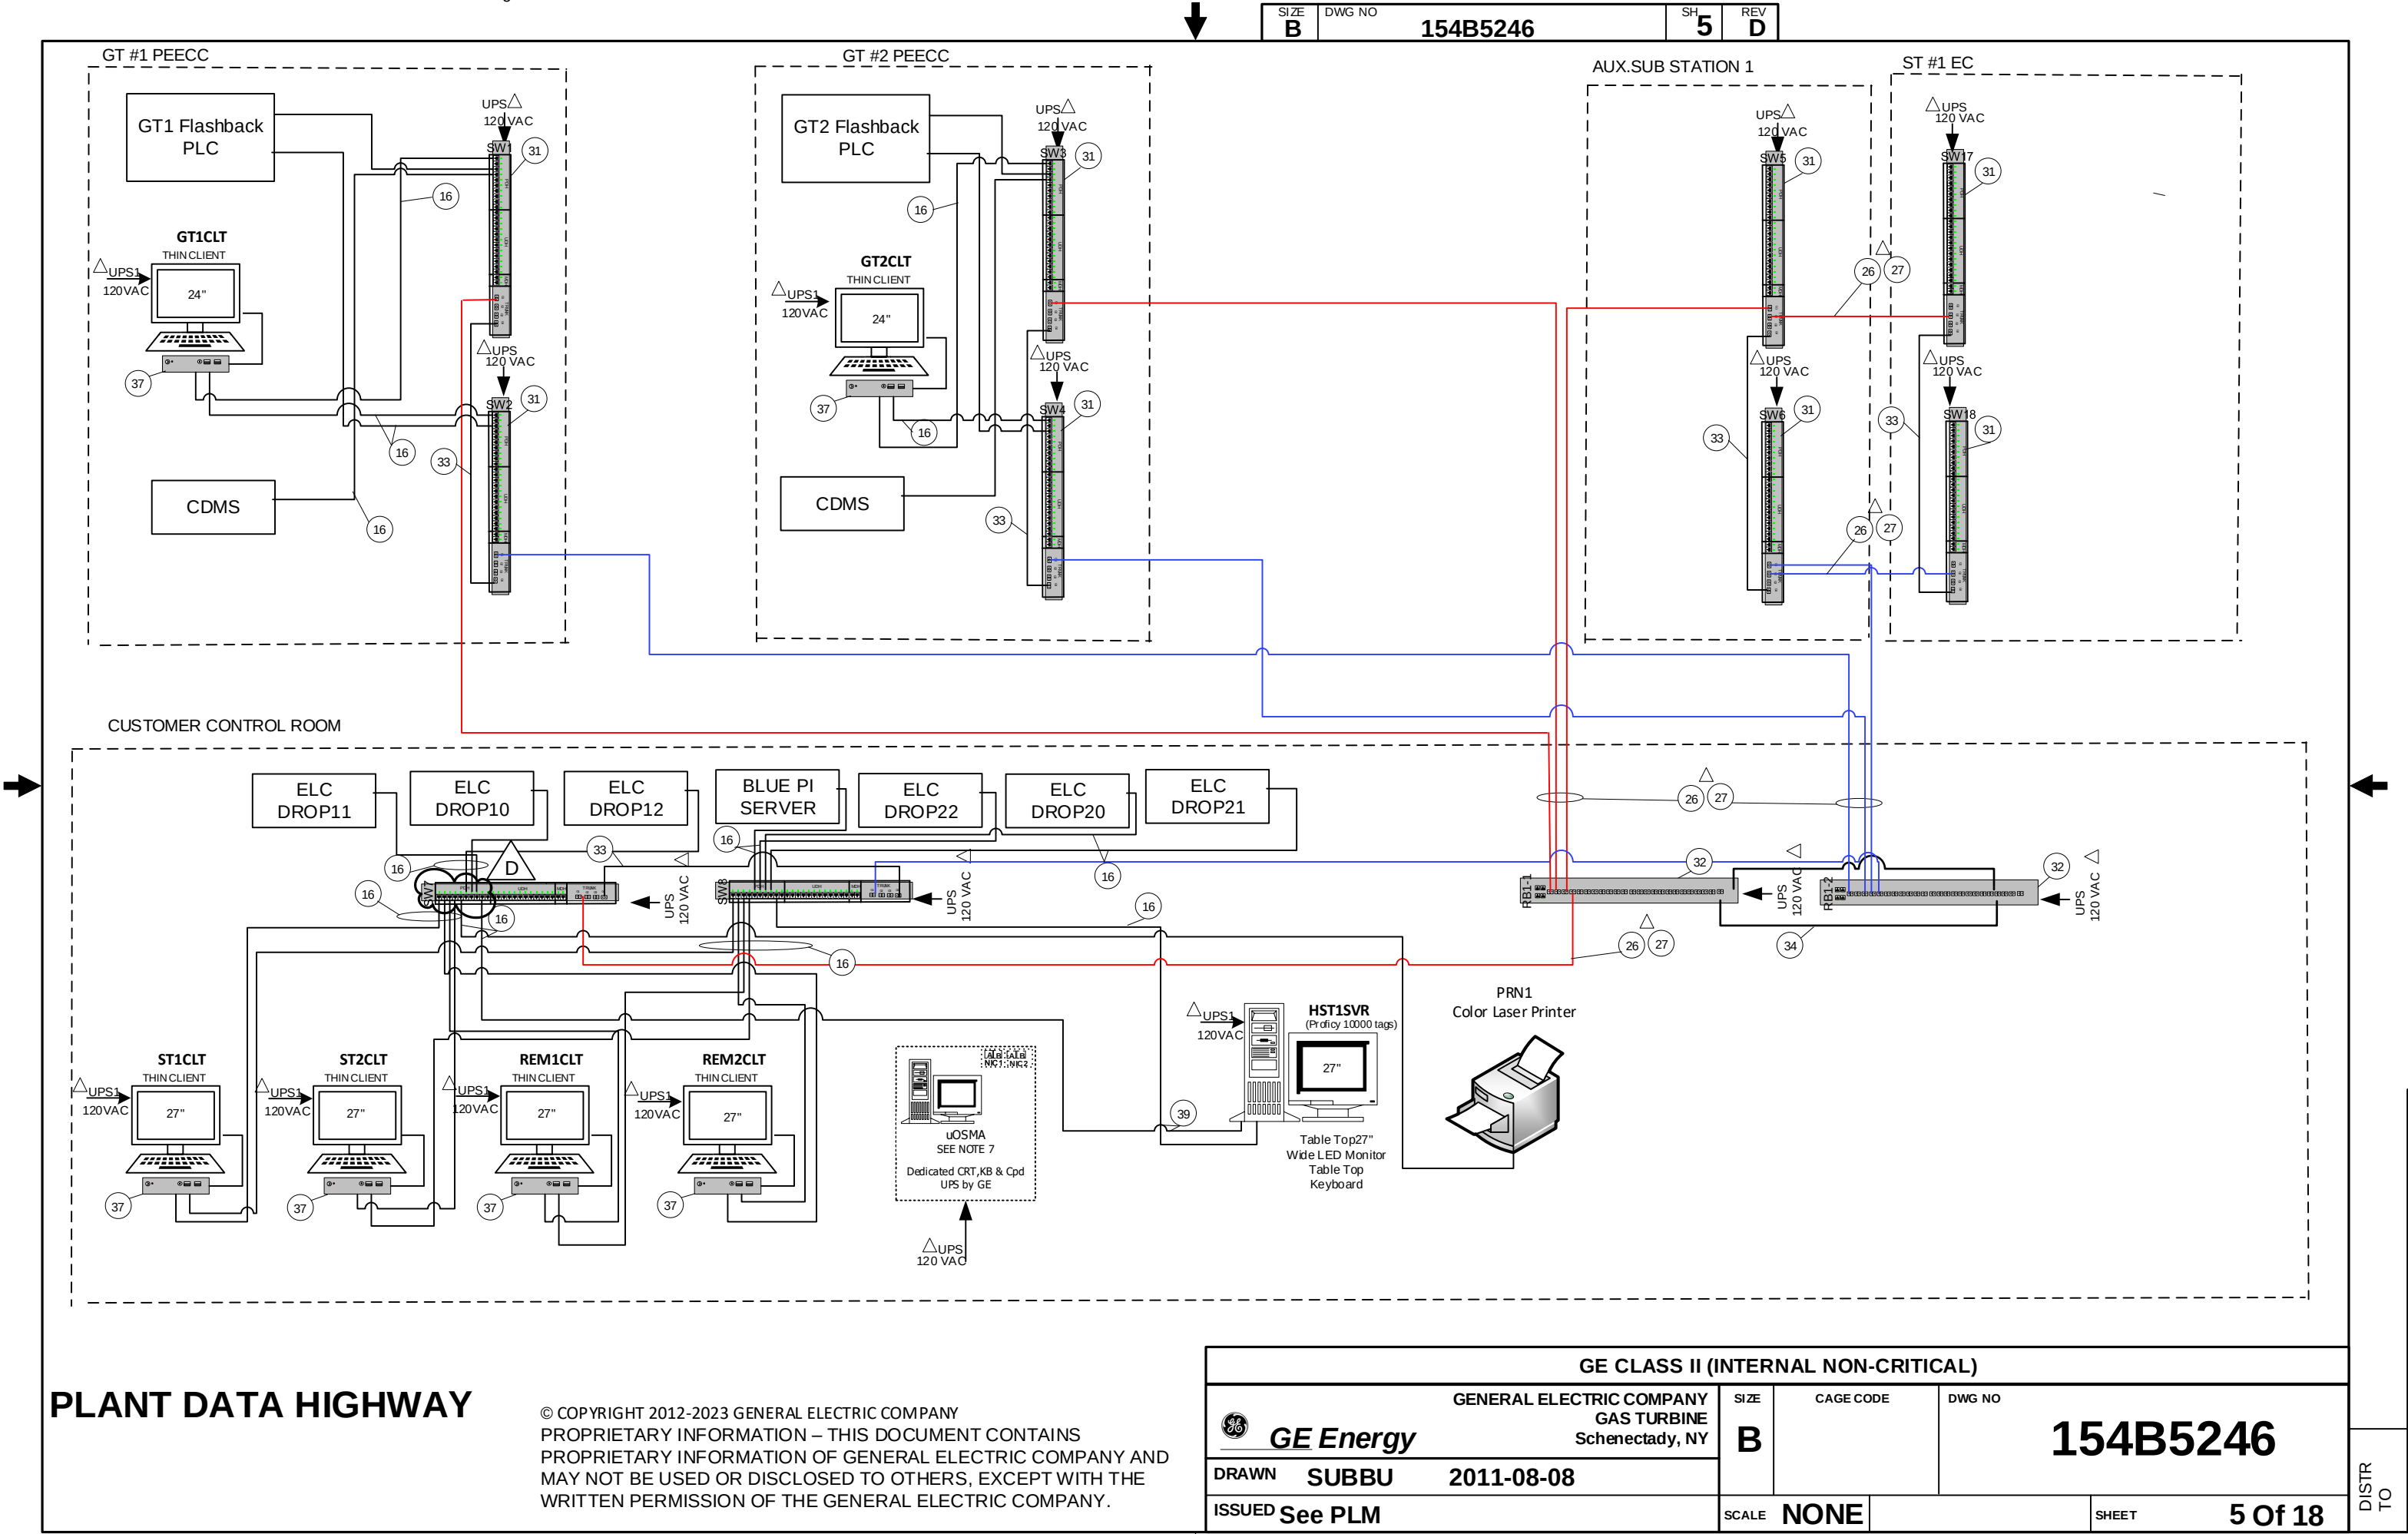

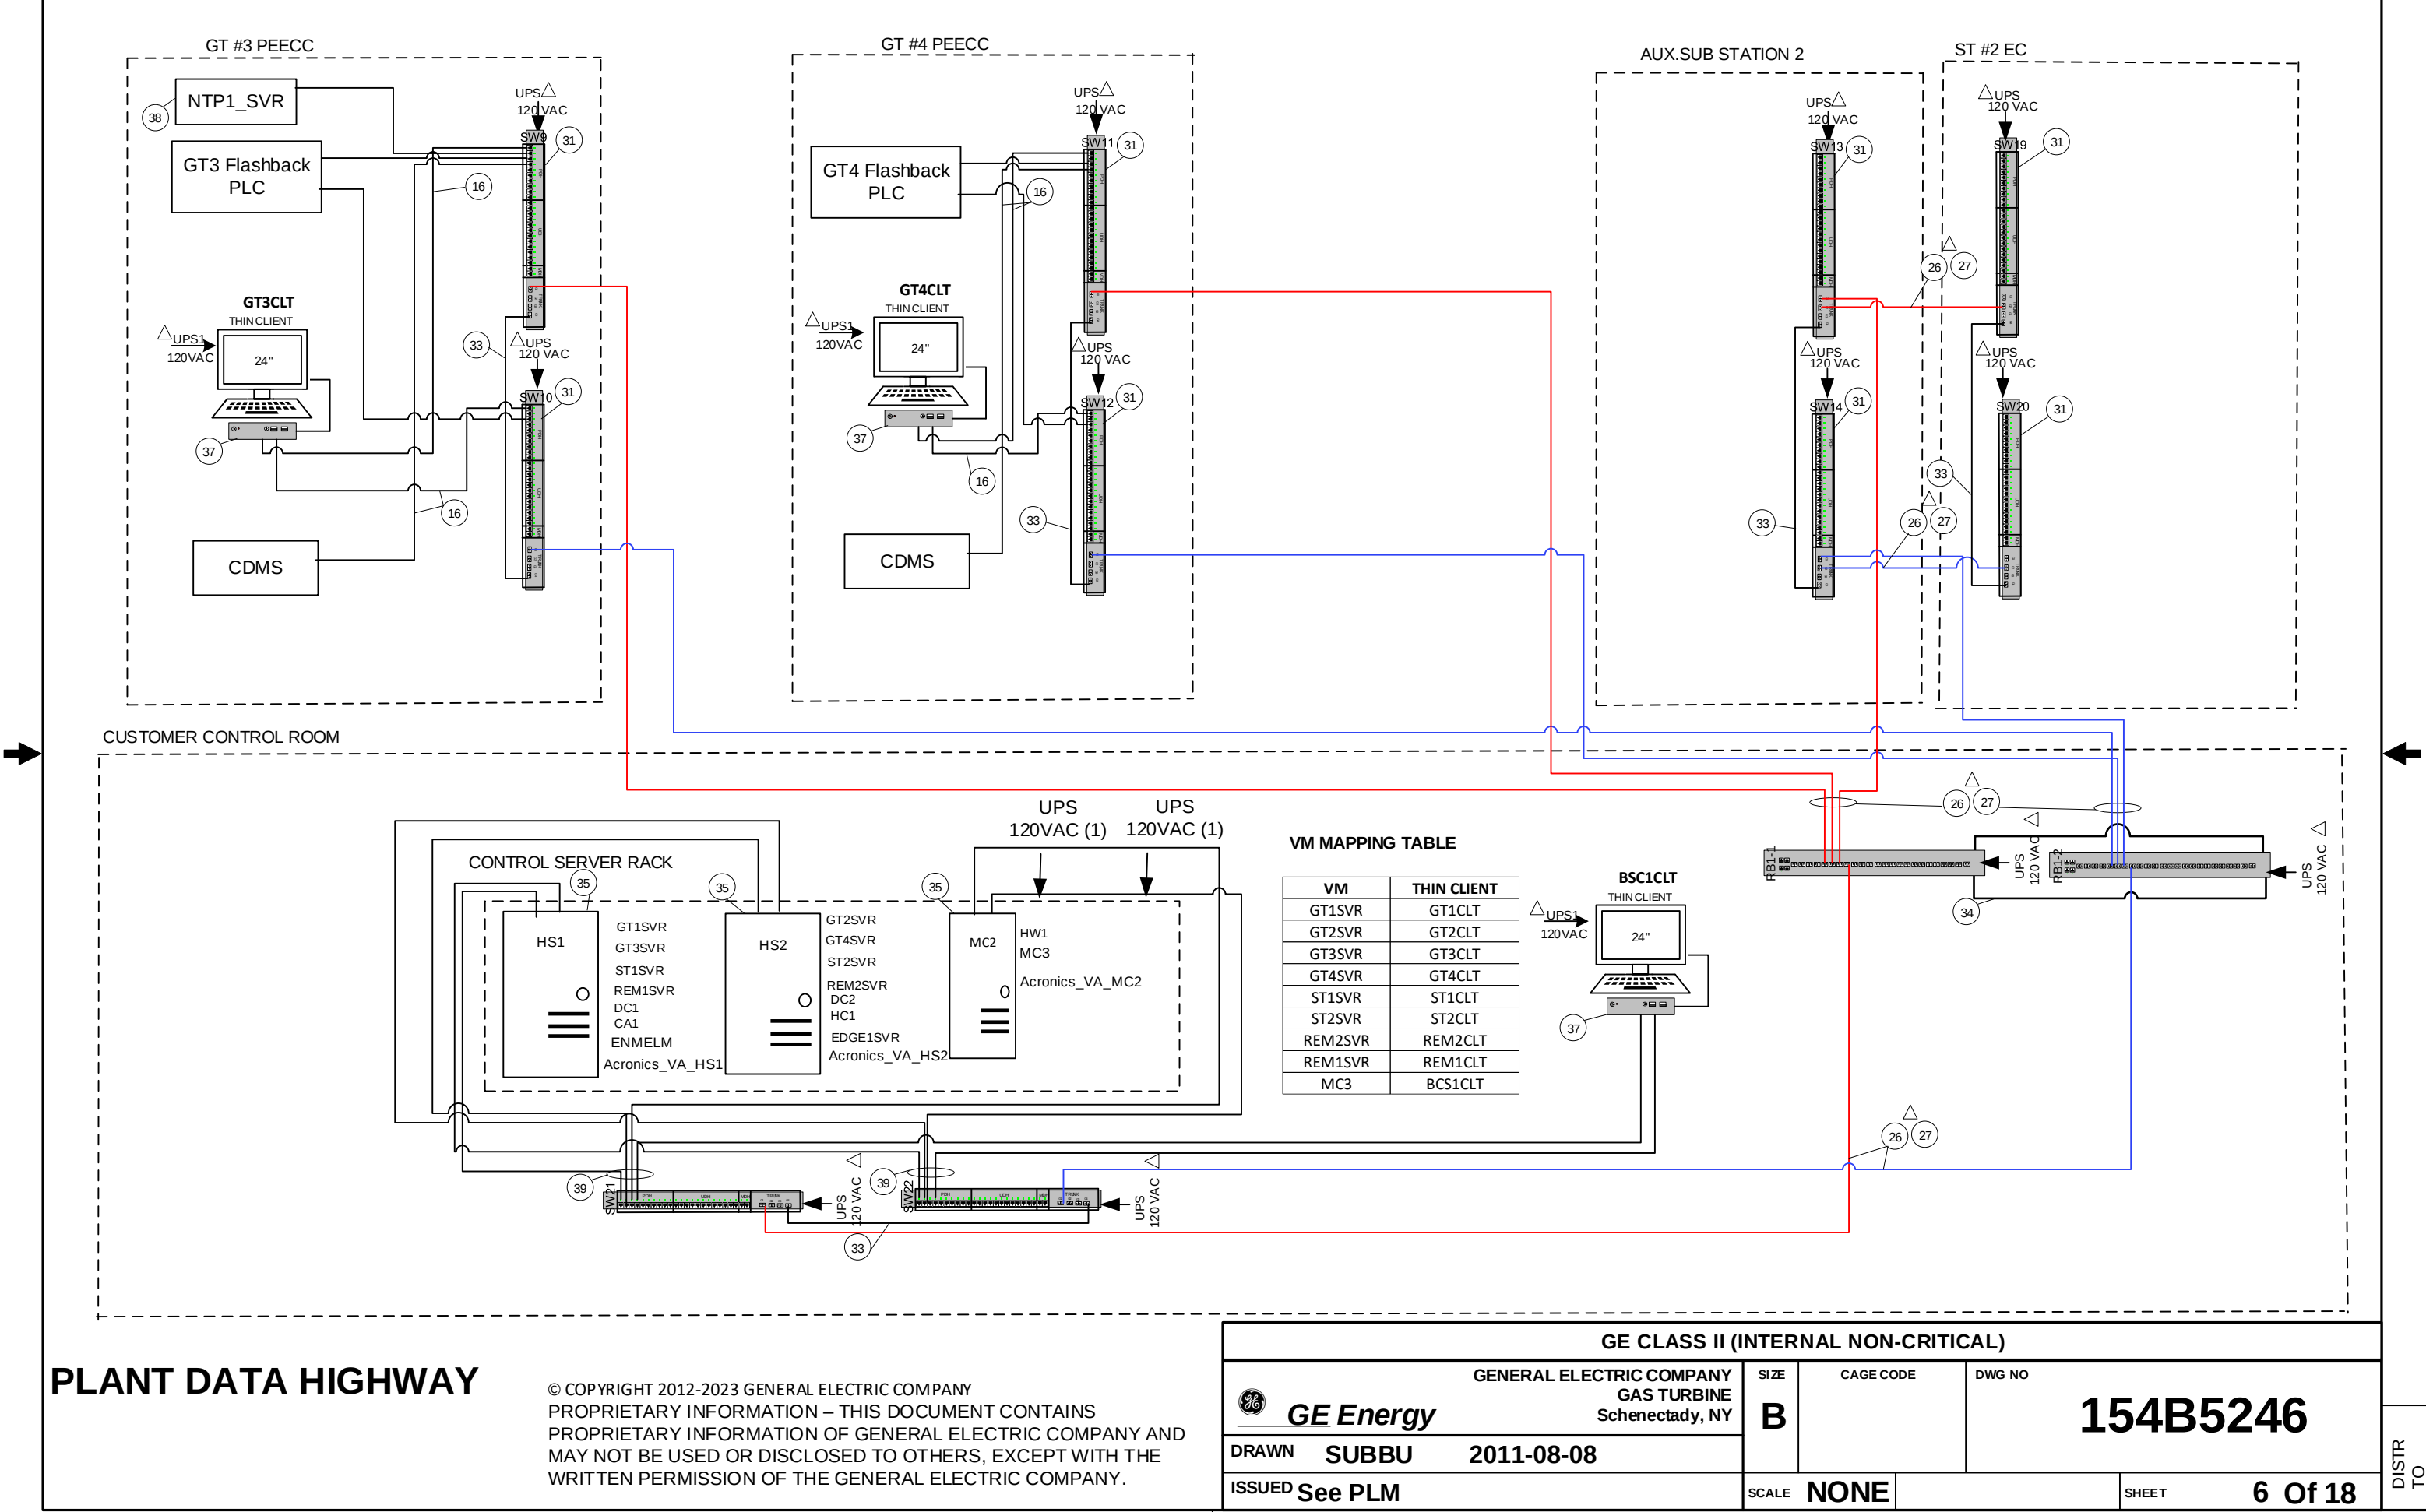

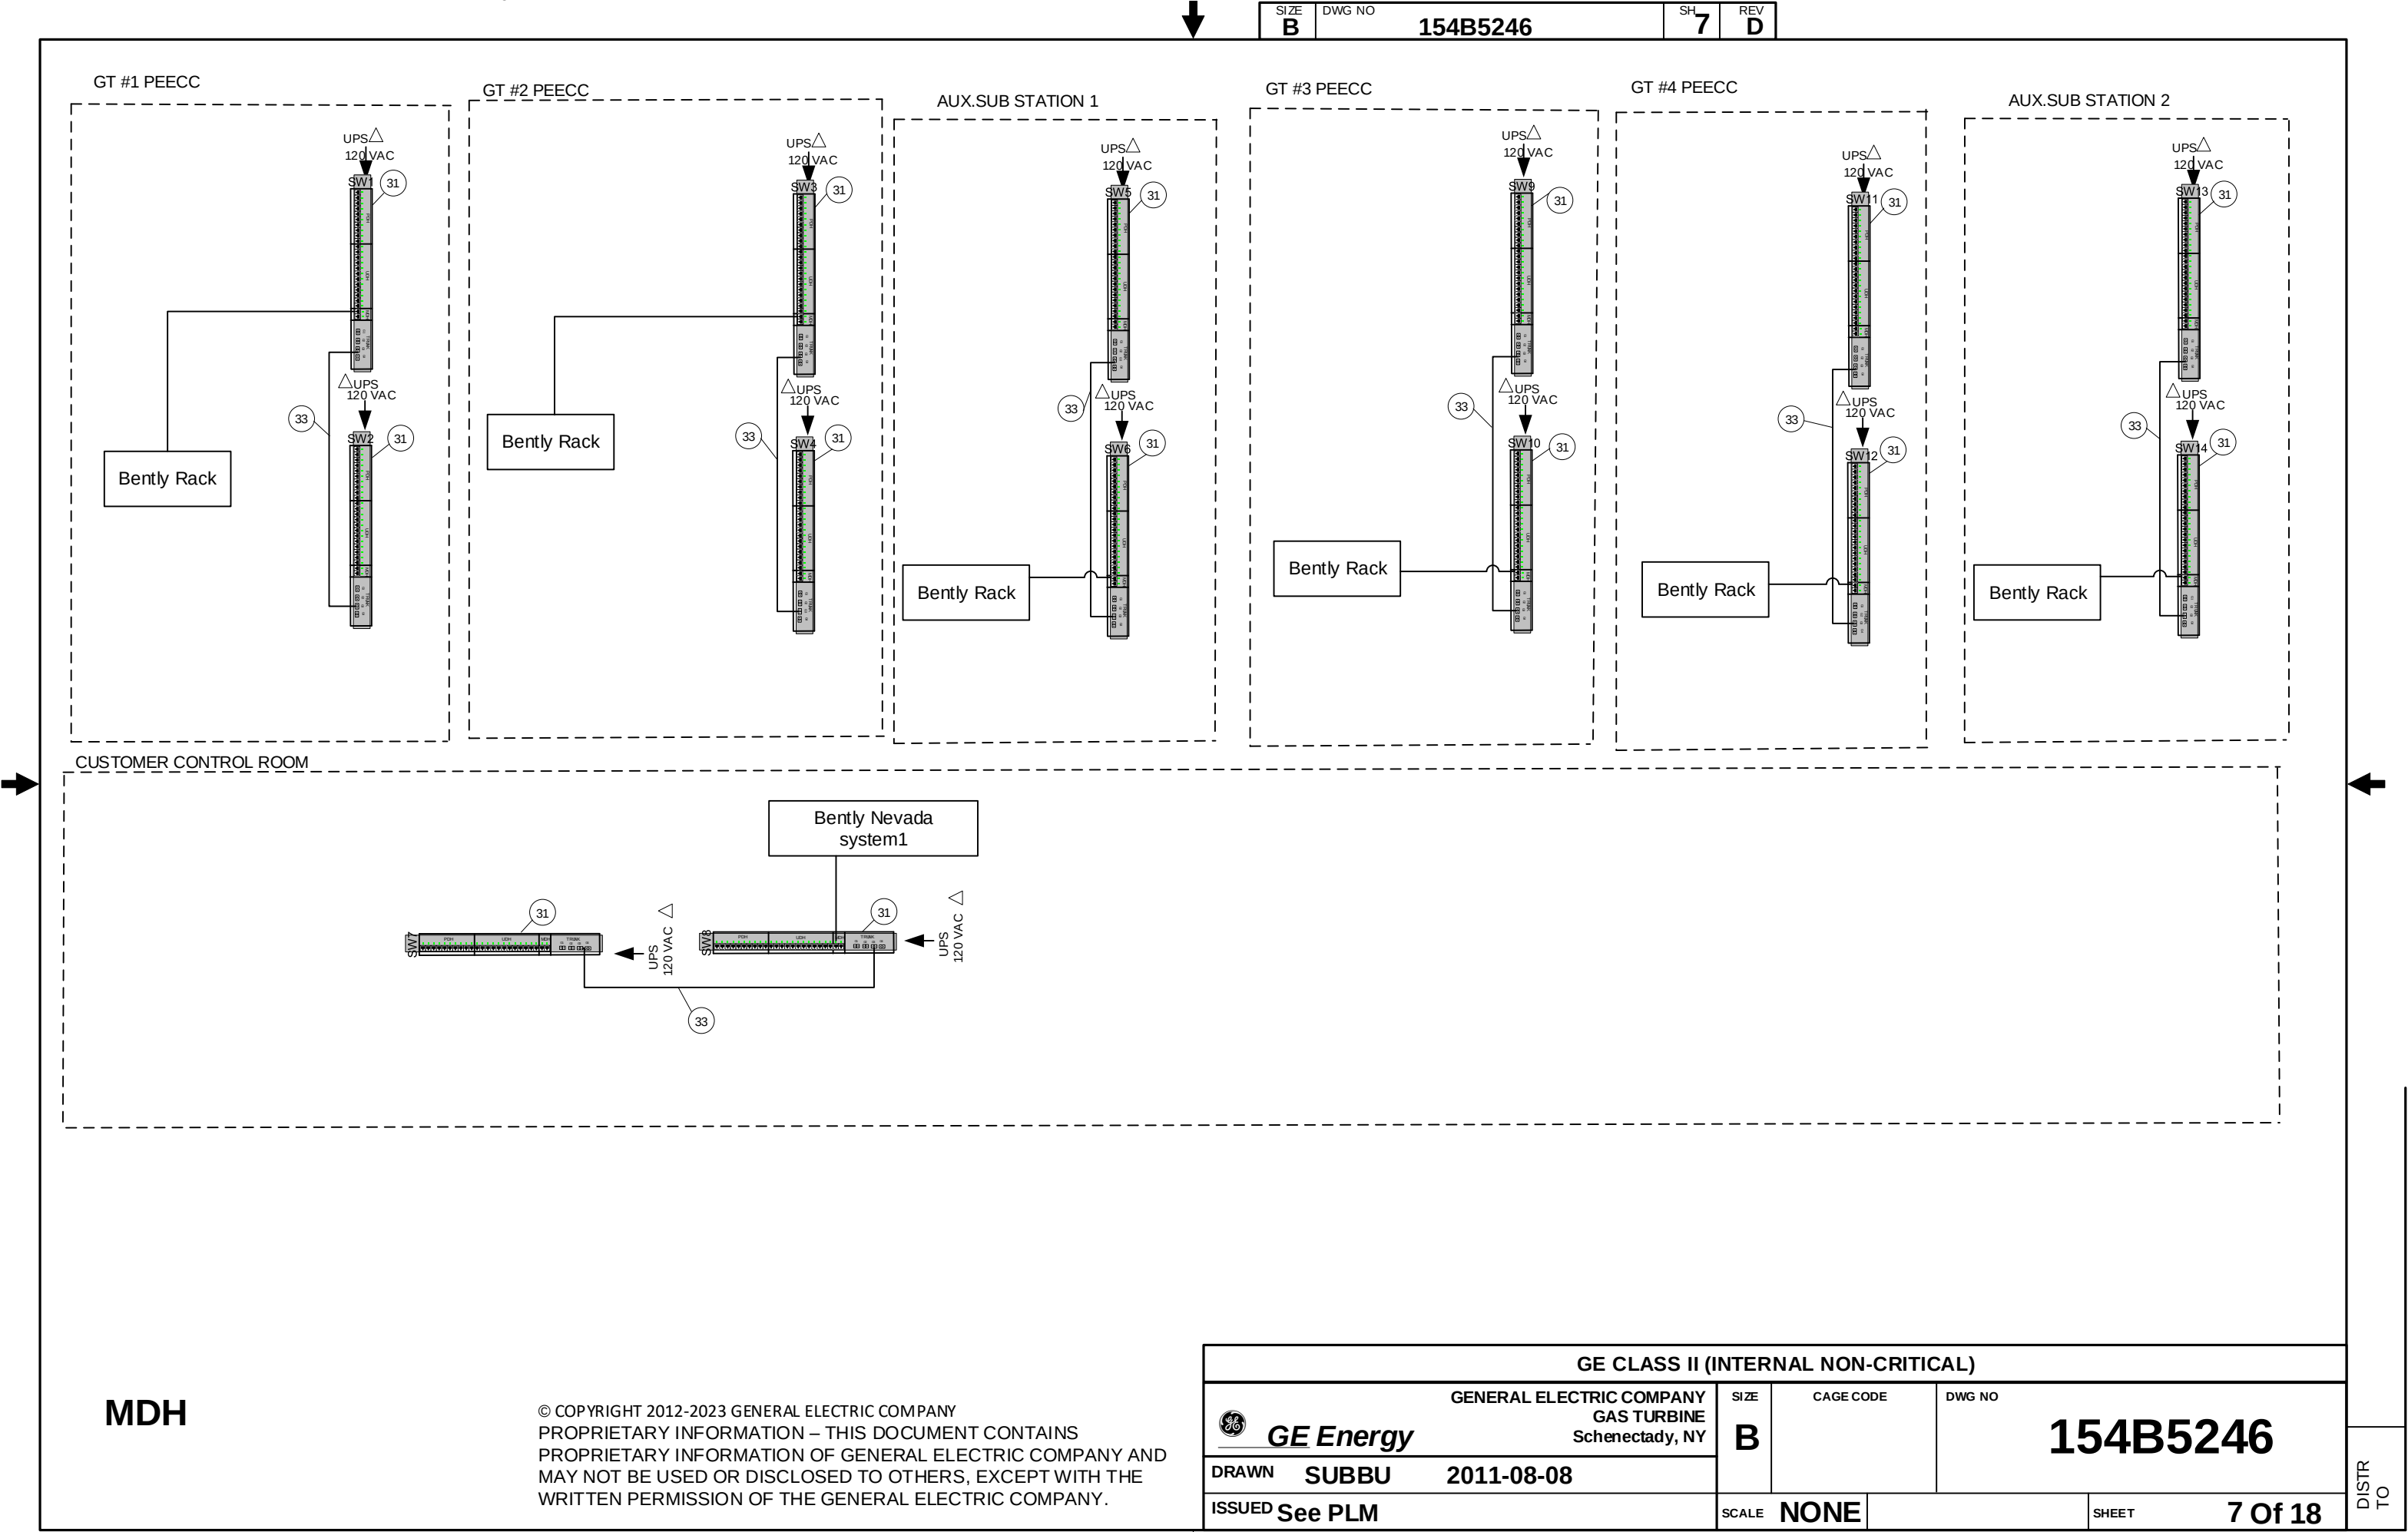



SIZE	DWG NO	SH	REV
B	154B5246	8	D

Switch	SW1		
Location	GT#1 PEECC		
IP Address	192.168.201.244		
Part No.	117T6409P37REAAB		
Type	9200L EDGE SWITCH UNSTACKED PAIR, W/MULTIMODE FIBER		
	Port	Device	Description
PDH	1	GT1CLT	GT1CLT HMI PRIMARY
	2	Spare	
	3	RACK0 Flashback PLC	RACK0 Flashback PLC
	4	CDMS Modbus	CDMS Modbus
	5	Spare	
	6	Spare	
	7	Spare	
	8	Spare	
	9	Spare	
	10	Spare	
UDH	11	Spare	
	12	G1-R	G1 <R> Controller
	13	AUTOTUNE	AUTOTUNE
	14	Spare	
	15	M1	GT1 EX2100 <M1>
	16	Keypad	GT1 EX2100 - Keypad
	17	Spare	
	18	Spare	
	19	Spare	
	20	Spare	
	21	Spare	
	22	Spare	
MDH	23	Bently Rack	Bently Rack
	24	Spare	
Trunk	G1	RB1-1	RB1-1 PORT-1
	G2	Spare	
	G3	Spare	
	G4	SW2	SW2 PORT G4

Switch	SW2		
Location	GT#1 PEECC		
IP Address	192.168.201.243		
Part No.	117T6409P37REAAB		
Type	9200L EDGE SWITCH UNSTACKED PAIR, W/MULTIMODE FIBER		
	Port	Device	Description
PDH	1	GT1CLT	GT1CLT HMI SECONDARY
	2	Spare	
	3	RACK1 Flashback PLC	RACK1 Flashback PLC
	4	Spare	
	5	Spare	
	6	Spare	
	7	Spare	
	8	Spare	
	9	Spare	
	10	Spare	
UDH	11	Spare	
	12	G1<S>	G1 <S> Controller
	13	G1<T>	G1 <T> Controller
	14	Spare	
	15	M2	GT1 EX2100e <M2>
	16	C	GT1 EX2100e <C>
	17	Spare	
	18	VERSAMAX	VERSAMAX
	19	Spare	
	20	Spare	
	21	Spare	
	22	Spare	
MDH	23	Spare	
	24	Spare	
Trunk	G1	RB2-1	RB 2-1 PORT 1
	G2	Spare	
	G3	Spare	
	G4	SW1	SW1 PORT G4

Switch	SW3		
Location	GT#2 PEECC		
IP Address	192.168.201.242		
Part No.	117T6409P37REAAB		
Type	9200L EDGE SWITCH UNSTACKED PAIR, W/MULTIMODE FIBER		
	Port	Device	Description
PDH	1	GT2CLT	GT2CLT HMI PRIMARY
	2	Spare	
	3	RACK0 Flashback PLC	RACK0 Flashback PLC
	4	CDMS Modbus	CDMS Modbus
	5	Spare	
	6	Spare	
	7	Spare	
	8	Spare	
	9	Spare	
	10	Spare	
UDH	11	Spare	
	12	G2-R	G2 <R> Controller
	13	AUTOTUNE	AUTOTUNE
	14	Spare	
	15	M1	GT2 EX2100 <M1>
	16	Keypad	GT2 EX2100 - Keypad
	17	Spare	
	18	Spare	
	19	Spare	
	20	Spare	
	21	Spare	
	22	Spare	
MDH	23	Bently Rack	Bently Rack
	24	Spare	
Trunk	G1	RB1-1	RB1-1 PORT - 2
	G2	Spare	
	G3	Spare	
	G4	SW4	SW4 PORT G4



PORT IDENTIFICATIONS-1

© COPYRIGHT 2012-2023 GENERAL ELECTRIC COMPANY
PROPRIETARY INFORMATION – THIS DOCUMENT CONTAINS
PROPRIETARY INFORMATION OF GENERAL ELECTRIC COMPANY AND
MAY NOT BE USED OR DISCLOSED TO OTHERS, EXCEPT WITH THE
WRITTEN PERMISSION OF THE GENERAL ELECTRIC COMPANY.

GE CLASS II (INTERNAL NON-CRITICAL)					
GE Energy	GENERAL ELECTRIC COMPANY GAS TURBINE Schenectady, NY	SIZE	CAGE CODE	DWG NO	
	DRAWN SUBBU 2011-08-08	B		154B5246	
	ISSUED See PLM	SCALE	NONE	SHEET	8 Of 18

DISTR
TO





SIZE	DWG NO	SH	REV
B	154B5246	9	D

Switch	SW4		
Location	GT#2 PEECC		
IP Address	192.168.201.241		
Part No.	117T6409P37REAAB		
Type	9200L EDGE SWITCH UNSTACKED PAIR, W/MULTIMODE FIBER		
	Port	Device	Description
PDH	1	GT2CLT	GT2CLT Thin client secondary
	2	Spare	
	3	RACK1 Flashback PLC	RACK1 Flashback PLC
	4	Spare	
	5	Spare	
	6	Spare	
	7	Spare	
	8	Spare	
	9	Spare	
	10	Spare	
UDH	11	Spare	
	12	G2<S>	G2 <S> Controller
	13	G2<T>	G2 <T> Controller
	14	Spare	
	15	M2	GT2 EX2100e <M2>
	16	C	EX 2100e <C>
	17	Spare	
	18	VERSAMAX	VERSAMAX
	19	Spare	
	20	Spare	
	21	Spare	
MDH	22	Spare	
	23	Spare	
Trunk	24	Spare	
	G1	RB1-2	RB1-2 PORT 2
	G2	Spare	
	G3	Spare	
	G4	SW3	SW3 PORT G4

Switch	SW5		
Location	AUX. SUB STATION 1		
IP Address	192.168.201.240		
Part No.	117T6409P37REAAB		
Type	9200L EDGE SWITCH UNSTACKED PAIR, W/MULTIMODE FIBER		
	Port	Device	Description
PDH	1	Spare	
	2	Spare	
	3	Spare	
	4	Spare	
	5	Spare	
	6	Spare	
	7	Spare	
	8	Spare	
	9	Spare	
	10	Spare	
UDH	11	S1<R>	S1 <R>
	12	Spare	
	13	Spare	
	14	Spare	
	15	Spare	
	16	Spare	
	17	Spare	
	18	Spare	
	19	Spare	
	20	Spare	
	21	Spare	
	22	Spare	
MDH	23	Spare	
	24	Spare	
Trunk	G1	RB1-1	RB1-1 PORT 3
	G2	SW17	SW17 - PORT G2
	G3	Spare	
	G4	SW6	SW6 PORT G4

Switch	SW6		
Location	AUX. SUB STATION 1		
IP Address	192.168.201.239		
Part No.	117T6409P37REAAB		
Type	9200L EDGE SWITCH UNSTACKED PAIR, W/MULTIMODE FIBER		
	Port	Device	Description
PDH	1	Spare	
	2	Spare	
	3	Spare	
	4	Spare	
	5	Spare	
	6	Spare	
	7	Spare	
	8	Spare	
	9	Spare	
	10	Spare	
UDH	11	S1<S>	S1 <S>
	12	S1<T >	S1 <T >
	13	Spare	
	14	Spare	
	15	Spare	
	16	Spare	
	17	Spare	
	18	Spare	
	19	Spare	
	20	Spare	
	21	Spare	
	22	Spare	
MDH	23	Bently Rack	Bently Rack
	24	Spare	
Trunk	G1	RB1-2	RB1-2 PORT 3
	G2	SW18	SW18 - PORT G2
	G3	Spare	
	G4	SW5	SW5 PORT G4



PORT IDENTIFICATIONS-2

© COPYRIGHT 2012-2023 GENERAL ELECTRIC COMPANY
PROPRIETARY INFORMATION – THIS DOCUMENT CONTAINS
PROPRIETARY INFORMATION OF GENERAL ELECTRIC COMPANY AND
MAY NOT BE USED OR DISCLOSED TO OTHERS, EXCEPT WITH THE
WRITTEN PERMISSION OF THE GENERAL ELECTRIC COMPANY.

GE CLASS II (INTERNAL NON-CRITICAL)						
 GE Energy		GENERAL ELECTRIC COMPANY GAS TURBINE Schenectady, NY		SIZE	CAGE CODE	DWG NO
DRAWN SUBBU 2011-08-08		B		154B5246		
ISSUED See PLM						
SCALE		NONE		SHEET	9 Of 18	

DISTR
TO





SIZE	DWG NO	SH	REV
B	154B5246	10	D

Switch	SW7		
Location	CUSTOMER CONTROL ROOM		
IP Address	192.168.201.238		
Part No.	117T6409P37REAAB		
Type	9200L EDGE SWITCH UNSTACKED PAIR, W/MULTIMODE FIBER		
	Port	Device	Description
PDH	1	ST1CLT	ST1CLT Thin client Primary
	2	REM2CLT	REM2CLT Thin client Primary
	3	REM1CLT	REM1CLT Thin client Primary
	4	ST2CLT	ST2CLT Thin client Primary
	5	PRN1	Color Laserjet Printer 1
	6	ELC DROP 12	ELC DROP 12
	7	ELC DROP 10	ELC DROP 10
	8	ELC DROP 11	ELC DROP 11
	9	HST1SVR	HST1SVR - Historian Primary
	10	Spare	
UDH	11	Spare	
	12	Spare	
	13	Spare	
	14	Spare	
	15	uHST1SVR	HST1SVR - Historian Primary
	16	OSMA	Onsite Monitoring System
	17	Spare	
	18	Spare	
	19	Spare	
	20	Spare	
	21	Spare	
	22	Spare	
MDH	23	Spare	
	24	Spare	
Trunk	G1	RB1-1	RB1-1 PORT 4
	G2	Spare	
	G3	Spare	
	G4	SW8	SW8 PORT G4

Switch	SW8		
Location	CUSTOMER CONTROL ROOM		
IP Address	192.168.201.237		
Part No.	117T6409P37REAAB		
Type	9200L EDGE SWITCH UNSTACKED PAIR, W/MULTIMODE FIBER		
	Port	Device	Description
PDH	1	ST1CLT	ST1CLT Thin client Secondary
	2	REM2CLT	REM2CLT Thin client Secondary
	3	REM1CLT	REM1CLT Thin client Secondary
	4	ST2CLT	ST2CLT Thin client Secondary
	5	BLUE PI SERVER	BLUE PI SERVER
	6	ELC DROP 22	ELC DROP 22
	7	ELC DROP 20	ELC DROP 20
	8	ELC DROP 21	ELC DROP 21
	9	HST1SVR	HST1SVR - Historian Secondary
	10	Spare	
UDH	11	Spare	
	12	Spare	
	13	Spare	
	14	Spare	
	15	uHST1SVR	HST1SVR - Historian Secondary
	16	Spare	
	17	Spare	
	18	Spare	
	19	Spare	
	20	Spare	
	21	Spare	
	22	Spare	
MDH	23	Bently Rack	Bently Rack
	24	Spare	
Trunk	G1	RB1-2	RB1-2 PORT 4
	G2	Spare	
	G3	Spare	
	G4	SW7	SW7 PORT G4

Switch	SW9		
Location	GT#3 PEECC		
IP Address	192.168.201.236		
Part No.	117T6409P37REAAB		
Type	9200L EDGE SWITCH UNSTACKED PAIR, W/MULTIMODE FIBER		
	Port	Device	Description
PDH	1	GT3CLT	GT3CLT Thin client Primary
	2	NTP1_SVR	NTP Primary PDH
	3	RACK0 Flashback PLC	RACK0 Flashback PLC
	4	CDMS Modbus	CDMS Modbus
	5	Spare	
	6	Spare	
	7	Spare	
	8	Spare	
	9	Spare	
	10	Spare	
UDH	11	Spare	
	12	G3<R>	G3 <R> Controller
	13	NTP1_SVR	NTP Primary UDH
	14	M1	GT3 EX2100e <M1>
	15	C	GT3 EX2100e <C>
	16	AUTOTUNE	AUTOTUNE
	17	Keypad	GT3 EX2100e keypad
	18	Spare	
	19	Spare	
	20	Spare	
	21	Spare	
	22	Spare	
MDH	23	Spare	
	24	Spare	
Trunk	G1	RB1-1	RB1-1 PORT 5
	G2	Spare	
	G3	Spare	
	G4	SW10	SW10 PORT G4

PORT IDENTIFICATIONS-3

© COPYRIGHT 2012-2023 GENERAL ELECTRIC COMPANY
PROPRIETARY INFORMATION – THIS DOCUMENT CONTAINS
PROPRIETARY INFORMATION OF GENERAL ELECTRIC COMPANY AND
MAY NOT BE USED OR DISCLOSED TO OTHERS, EXCEPT WITH THE
WRITTEN PERMISSION OF THE GENERAL ELECTRIC COMPANY.

GE CLASS II (INTERNAL NON-CRITICAL)					
GENERAL ELECTRIC COMPANY GAS TURBINE Schenectady, NY			SIZE	CAGE CODE	DWG NO
GE Energy			B		154B5246
DRAWN SUBBU 2011-08-08					
ISSUED See PLM			SCALE	NONE	SHEET 10 Of 18

DISTR
TO



Switch	SW10		
Location	GT#3 PEECC		
IP Address	192.168.201.235		
Part No.	117T6409P37REAAB		
Type	9200L EDGE SWITCH UNSTACKED PAIR, W/MULTIMODE FIBER		
	Port	Device	Description
PDH	1	GT3CLT	GT3CLT Thin client secondary
	2	Spare	
	3	RACK1 FLASHBACK PLC	RACK1 FLASHBACK PLC
	4	Spare	
	5	Spare	
	6	Spare	
	7	Spare	
	8	Spare	
	9	Spare	
	10	Spare	
UDH	11	Spare	
	12	G3<S>	G3 <S> Controller
	13	G3<T>	G3 <T> Controller
	14	M2	GT3 EX2100e <M2>
	15	VERSAMAX	VERSAMAX
	16	Spare	
	17	Spare	
	18	Spare	
	19	Spare	
	20	Spare	
	21	Spare	
	22	Spare	
MDH	23	Bently Rack	Bently Rack
	24	Spare	
Trunk	G1	RB1-2	RB1-2 PORT 5
	G2	Spare	
	G3	Spare	
	G4	SW9	SW9 PORT G4

Switch	SW11		
Location	GT#4 PEECC		
IP Address	192.168.201.234		
Part No.	117T6409P37REAAB		
Type	9200L EDGE SWITCH UNSTACKED PAIR, W/MULTIMODE FIBER		
	Port	Device	Description
PDH	1	GT4CLT	GT4CLT Thin client Primary
	2	Spare	
	3	RACK0 FLASHBACK PLC	RACK0 FLASHBACK PLC
	4	CDMS	CDMS Modbus
	5	Spare	
	6	Spare	
	7	Spare	
	8	Spare	
	9	Spare	
	10	Spare	
UDH	11	Spare	
	12	G4<R>	G4 <R> Controller
	13	G4<T>	G4 <T> Controller
	14	M2	GT4 EX2100e <M2>
	15	Spare	
	16	Keypad	GT4 EX2100e - keypad
	17	Spare	
	18	Spare	
	19	Spare	
	20	Spare	
	21	Spare	
	22	Spare	
MDH	23	Spare	
	24	Spare	
Trunk	G1	RB1-1	RB1-1 PORT 6
	G2	Spare	
	G3	Spare	
	G4	SW12	SW12 PORT G4

Switch	SW12		
Location	GT#4 PEECC		
IP Address	192.168.201.233		
Part No.	117T6409P37REAAB		
Type	9200L EDGE SWITCH UNSTACKED PAIR, W/MULTIMODE FIBER		
	Port	Device	Description
PDH	1	GT4CLT	GT4CLT Thin client secondary
	2	Spare	
	3	RACK1 FLASHBACK PLC	RACK1 FLASHBACK PLC
	4	Spare	
	5	Spare	
	6	Spare	
	7	Spare	
	8	Spare	
	9	Spare	
	10	Spare	
UDH	11	Spare	
	12	G4<S>	G4 <S> Controller
	13	M1	GT4 EX2100e <M1>
	14	C	GT4 EX 2100e <C>
	15	VERSAMAX	VERSAMAX
	16	AUTOTUNE	AUTOTUNE
	17	Spare	
	18	Spare	
	19	Spare	
	20	Spare	
	21	Spare	
	22	Spare	
MDH	23	Bently Rack	Bently Rack
	24	Spare	
Trunk	G1	RB1-2	RB1-2 PORT 6
	G2	Spare	
	G3	Spare	
	G4	SW11	SW11 PORT G4

PORT IDENTIFICATIONS-4

© COPYRIGHT 2012-2023 GENERAL ELECTRIC COMPANY
PROPRIETARY INFORMATION – THIS DOCUMENT CONTAINS
PROPRIETARY INFORMATION OF GENERAL ELECTRIC COMPANY AND
MAY NOT BE USED OR DISCLOSED TO OTHERS, EXCEPT WITH THE
WRITTEN PERMISSION OF THE GENERAL ELECTRIC COMPANY.

GE CLASS II (INTERNAL NON-CRITICAL)				
GE Energy		SIZE	CAGE CODE	DWG NO
DRAWN SUBBU 2011-08-08		B		154B5246
ISSUED See PLM				
SCALE		NONE		SHEET
				11 Of 18

DISTR
TO





SIZE	DWG NO
B	154B5246

SH	REV
12	D

Switch	SW13		
Location	AUX. SUB STATION 2		
IP Address	192.168.201.232		
Part No.	117T6409P37REAAB		
Type	9200L EDGE SWITCH UNSTACKED PAIR, W/MULTIMODE FIBER		
	Port	Device	Description
PDH	1	Spare	
	2	Spare	
	3	Spare	
	4	Spare	
	5	Spare	
	6	Spare	
	7	Spare	
	8	Spare	
	9	Spare	
	10	Spare	
UDH	11	S2<R>	S2 <R> Controller
	12	Spare	
	13	Spare	
	14	Spare	
	15	Spare	
	16	Spare	
	17	Spare	
	18	Spare	
	19	Spare	
	20	Spare	
	21	Spare	
	22	Spare	
MDH	23	Spare	
	24	Spare	
Trunk	G1	RB1-1	RB1-1 PORT 7
	G2	SW19	SW19 - PORT G2
	G3	Spare	
	G4	SW14	SW14 PORT G4

Switch	SW14		
Location	AUX. SUB STATION 2		
IP Address	192.168.201.231		
Part No.	117T6409P37REAAB		
Type	9200L EDGE SWITCH UNUNSTACKED PAIR, W/MULTIMODE FIBER		
	Port	Device	Description
PDH	1	Spare	
	2	Spare	
	3	Spare	
	4	Spare	
	5	Spare	
	6	Spare	
	7	Spare	
	8	Spare	
	9	Spare	
	10	Spare	
UDH	11	S2<S>	S2 <S> Controller
	12	S2<T>	S2 <T> Controller
	13	Spare	
	14	Spare	
	15	Spare	
	16	Spare	
	17	Spare	
	18	Spare	
	19	Spare	
	20	Spare	
	21	Spare	
	22	Spare	
MDH	23	Bently Rack	Bently Rack
	24	Spare	
Trunk	G1	RB1-2	RB1-2 PORT 7
	G2	SW20	SW20 - PORT G2
	G3	Spare	
	G4	SW13	SW13 PORT G4

Switch	SW17		
Location	ST#1 EC		
IP Address	192.168.201.230		
Part No.	117T6409P37REAAB		
Type	9200L EDGE SWITCH UNSTACKED PAIR, W/MULTIMODE FIBER		
	Port	Device	Description
PDH	1	Spare	
	2	Spare	
	3	Spare	
	4	Spare	
	5	Spare	
	6	Spare	
	7	Spare	
	8	Spare	
	9	Spare	
	10	Spare	
UDH	11	Spare	
	12	Spare	
	13	Spare	
	14	Spare	
	15	M1	ST1 EX2100e <M1>
	16	Keypad	ST1 EX2100e - keypad
	17	Spare	
	18	Spare	
	19	Spare	
	20	Spare	
	21	Spare	
	22	Spare	
MDH	23	Spare	
	24	Spare	
Trunk	G1	Spare	
	G2	SW5	SW5 - PORT G2
	G3	Spare	
	G4	SW18	SW18 PORT G4



PORT IDENTIFICATIONS-5

© COPYRIGHT 2012-2023 GENERAL ELECTRIC COMPANY
PROPRIETARY INFORMATION – THIS DOCUMENT CONTAINS
PROPRIETARY INFORMATION OF GENERAL ELECTRIC COMPANY AND
MAY NOT BE USED OR DISCLOSED TO OTHERS, EXCEPT WITH THE
WRITTEN PERMISSION OF THE GENERAL ELECTRIC COMPANY.

GE CLASS II (INTERNAL NON-CRITICAL)				
GE Energy	GENERAL ELECTRIC COMPANY GAS TURBINE Schenectady, NY	SIZE	CAGE CODE	DWG NO
	DRAWN SUBBU 2011-08-08	B		154B5246
	ISSUED See PLM	SCALE NONE		SHEET 12 Of 18

DISTR
TO





Switch	SW18		
Location	ST#1 EC		
IP Address	192.168.201.229		
Part No.	117T6409P37REAAB		
Type	9200L EDGE SWITCH UNSTACKED PAIR, W/MULTIMODE FIBER		
	Port	Device	Description
PDH	1	Spare	
	2	Spare	
	3	Spare	
	4	Spare	
	5	Spare	
	6	Spare	
	7	Spare	
	8	Spare	
	9	Spare	
	10	Spare	
UDH	11	Spare	
	12	Spare	
	13	Spare	
	14	Spare	
	15	M2	ST1 EX2100e <M2>
	16	C	ST1 EX2100e <C>
	17	Spare	
	18	VERSAMAX	VERSAMAX
	19	Spare	
	20	Spare	
	21	Spare	
	22	Spare	
MDH	23	Spare	
	24	Spare	
Trunk	G1	Spare	
	G2	SW6	SW6 - PORT G2
	G3	Spare	
	G4	SW17	SW17 - PORT G4

Switch	SW19		
Location	ST#2 EC		
IP Address	192.168.201.228		
Part No.	117T6409P37REAAB		
Type	9200L EDGE SWITCH UNSTACKED PAIR, W/MULTIMODE FIBER		
	Port	Device	Description
PDH	1	Spare	
	2	Spare	
	3	Spare	
	4	Spare	
	5	Spare	
	6	Spare	
	7	Spare	
	8	Spare	
	9	Spare	
	10	Spare	
UDH	11	Spare	
	12	Spare	
	13	Spare	
	14	Spare	
	15	M1	ST2 EX2100e <M1>
	16	Keypad	ST2 EX2100e - keypad
	17	Spare	
	18	Spare	
	19	Spare	
	20	Spare	
	21	Spare	
	22	Spare	
MDH	23	Spare	
	24	Spare	
Trunk	G1	Spare	
	G2	SW13	SW13 - PORT G2
	G3	Spare	
	G4	SW20	SW20 - PORT G4

Switch	SW20		
Location	ST#2 EC		
IP Address	192.168.201.227		
Part No.	117T6409P37REAAB		
Type	9200L EDGE SWITCH UNSTACKED PAIR, W/MULTIMODE FIBER		
	Port	Device	Description
PDH	1	Spare	
	2	Spare	
	3	Spare	
	4	Spare	
	5	Spare	
	6	Spare	
	7	Spare	
	8	Spare	
	9	Spare	
	10	Spare	
UDH	11	Spare	
	12	Spare	
	13	Spare	
	14	Spare	
	15	M2	ST2 EX2100e <M2>
	16	C	ST2 EX2100e <C>
	17	Spare	
	18	VERSAMAX	VERSAMAX
	19	Spare	
	20	Spare	
	21	Spare	
	22	Spare	
MDH	23	Spare	
	24	Spare	
Trunk	G1	Spare	
	G2	SW14	SW14 - PORT G2
	G3	Spare	
	G4	SW19	SW19 - PORT G4



PORT IDENTIFICATIONS-6

© COPYRIGHT 2012-2023 GENERAL ELECTRIC COMPANY
PROPRIETARY INFORMATION – THIS DOCUMENT CONTAINS
PROPRIETARY INFORMATION OF GENERAL ELECTRIC COMPANY AND
MAY NOT BE USED OR DISCLOSED TO OTHERS, EXCEPT WITH THE
WRITTEN PERMISSION OF THE GENERAL ELECTRIC COMPANY.

GE CLASS II (INTERNAL NON-CRITICAL)				
 GE Energy		SIZE B	CAGE CODE	DWG NO 154B5246
DRAWN SUBBU 2011-08-08				
ISSUED See PLM		SCALE NONE	SHEET 13 Of 18	

DISTR
TO





SIZE	DWG NO	SH	REV
B	154B5246	14	D

Switch	SW21		
Location	CUSTOMER CONTROL ROOM		
IP Address	192.168.201.226		
Part No.	117T6409P37REAAB		
Type	9200L EDGE SWITCH UNSTACKED PAIR, W/MULTIMODE FIBER		
	Port	Device	Description
PDH	1	HS1	Host Server-1 Primary
	2	HS2	Host Server-2 Primary
	3	MC2	Witness Server Primary
	4	BSC1CLT	BSC1CLT Thin client Primary
	5	Spare	
	6	Spare	
	7	Spare	
	8	Spare	
	9	Spare	
	10	Spare	
UDH	11	HS1	Host Server-1 Primary
	12	HS2	Host Server-2 Primary
	13	Spare	
	14	Spare	
	15	Spare	
	16	Spare	
	17	Spare	
	18	Spare	
	19	Spare	
	20	Spare	
	21	Spare	
	22	Spare	
MDH	23	Spare	
	24	Spare	
Trunk	G1	RB1-1	RB1-1 PORT 8
	G2	Spare	
	G3	Spare	
	G4	SW22	SW22 PORT G4

Switch	SW22		
Location	CUSTOMER CONTROL ROOM		
IP Address	192.168.201.225		
Part No.	117T6409P37REAAB		
Type	9200L EDGE SWITCH UNSTACKED PAIR, W/MULTIMODE FIBER		
	Port	Device	Description
PDH	1	HS1	Host Server-1 Secondary
	2	HS2	Host Server-2 Secondary
	3	MC2	Witness Server Secondary
	4	BSC1CLT	BSC1CLT Thin client Secondary
	5	Spare	
	6	Spare	
	7	Spare	
	8	Spare	
	9	Spare	
	10	Spare	
UDH	11	HS1	Host Server-1 Secondary
	12	HS2	Host Server-2 Secondary
	13	Spare	
	14	Spare	
	15	Spare	
	16	Spare	
	17	Spare	
	18	Spare	
	19	Spare	
	20	Spare	
	21	Spare	
	22	Spare	
MDH	23	Spare	
	24	Spare	
Trunk	G1	RB1-2	RB1-2 PORT 8
	G2	Spare	
	G3	Spare	
	G4	SW21	SW21 PORT G4



PORT IDENTIFICATIONS-7

© COPYRIGHT 2012-2023 GENERAL ELECTRIC COMPANY
PROPRIETARY INFORMATION – THIS DOCUMENT CONTAINS
PROPRIETARY INFORMATION OF GENERAL ELECTRIC COMPANY AND
MAY NOT BE USED OR DISCLOSED TO OTHERS, EXCEPT WITH THE
WRITTEN PERMISSION OF THE GENERAL ELECTRIC COMPANY.

GE CLASS II (INTERNAL NON-CRITICAL)					
 GE Energy	GENERAL ELECTRIC COMPANY GAS TURBINE Schenectady, NY		SIZE	CAGE CODE	DWG NO
			B		154B5246
	DRAWN SUBBU 2011-08-08				
ISSUED See PLM			SCALE	NONE	SHEET 14 Of 18

DISTR
TO





Switch	RB1-1		
Location	CUSTOMER CONTROL ROOM		
IP Address	192.168.201.247		
Part No.	117T6409P54REAAA		
Type	9300L Root Bridge Switch		
Trunk	1	SW1	SW 1 PORT G1
	2	SW3	SW 3 PORT G1
	3	SW5	SW 5 PORT G1
	4	SW7	SW 7 PORT G1
	5	SW9	SW 9 PORT G1
	6	SW11	SW 11 PORT G1
	7	SW13	SW 13 PORT G1
	8	SW21	SW 21 PORT G1
	9	Not used	
	10	Not used	
	11	Not used	
	12	Not used	
	13	Not used	
	14	Not used	
	15	Not used	
	16	Not used	
	17	Not used	
	18	Not used	
	19	Not used	
	20	Not used	
	21	Not used	
	22	Not used	
	23	Not used	
	24	Spare - Copper	
Stacking	1	RB1-2	RB1-2 Stacking1
	2	RB1-2	RB1-2 Stacking2

Switch	RB1-2		
Location	CUSTOMER CONTROL ROOM		
IP Address	192.168.201.247		
Part No.	117T6409P54REAAA		
Type	9300L Root Bridge Switch		
Trunk	1	SW2	SW 2 PORT G1
	2	SW4	SW 4 PORT G1
	3	SW6	SW 6 PORT G1
	4	SW8	SW 8 PORT G1
	5	SW10	SW 10 PORT G1
	6	SW12	SW 12 PORT G1
	7	SW14	SW14 PORT G1
	8	SW 22	SW 22 PORT G1
	9	Not used	
	10	Not used	
	11	Not used	
	12	Not used	
	13	Not used	
	14	Not used	
	15	Not used	
	16	Not used	
	17	Not used	
	18	Not used	
	19	Not used	
	20	Not used	
	21	Not used	
	22	Not used	
	23	Not used	
	24	Spare - Copper	
Stacking	1	RB1-1	RB1-1 Stacking1
	2	RB1-1	RB1-1 Stacking2



RB-PORT IDENTIFICATIONS

© COPYRIGHT 2012-2023 GENERAL ELECTRIC COMPANY
PROPRIETARY INFORMATION – THIS DOCUMENT CONTAINS
PROPRIETARY INFORMATION OF GENERAL ELECTRIC COMPANY AND
MAY NOT BE USED OR DISCLOSED TO OTHERS, EXCEPT WITH THE
WRITTEN PERMISSION OF THE GENERAL ELECTRIC COMPANY.

GE CLASS II (INTERNAL NON-CRITICAL)				
 GE Energy	GENERAL ELECTRIC COMPANY GAS TURBINE Schenectady, NY	SIZE B	CAGE CODE	DWG NO 154B5246
	DRAWN SUBBU 2011-08-08			
	ISSUED See PLM	SCALE NONE	SHEET 15	Of 18

DISTR
TO



UDH Addresses for Controllers

IP ADDRESS	NAME	DESCRIPTION	LOCATION
192.168.101.111	G1-R	GT1 <R> Controller	GT#1 PEECC
192.168.101.112	G1-S	GT1 <S> Controller	GT#1 PEECC
192.168.101.113	G1-T	GT1 <T> Controller	GT#1 PEECC
192.168.101.121	G2-R	GT2 <R> Controller	GT#2 PEECC
192.168.101.122	G2-S	GT2 <S> Controller	GT#2 PEECC
192.168.101.123	G2-T	GT2 <T> Controller	GT#2 PEECC
192.168.101.211	S1-R	S1 <R> Controller	AUX. SUB STATION 1
192.168.101.212	S1-S	S1 <S> Controller	AUX. SUB STATION 1
192.168.101.213	S1-T	S1 <T> Controller	AUX. SUB STATION 1
192.168.101.131	G3-R	GT3 <R> Controller	PEECC 3
192.168.101.132	G3-S	GT3 <S> Controller	PEECC 3
192.168.101.133	G3-T	GT3 <T> Controller	PEECC 3
192.168.101.141	G4-R	GT4 <R> Controller	PEECC 4
192.168.101.142	G4-S	GT4 <S> Controller	PEECC 4
192.168.101.143	G4-T	GT4 <T> Controller	PEECC 4
192.168.101.221	S2-R	S2 <R> Controller	AUX. SUB STATION 2
192.168.101.222	S2-S	S2 <S> Controller	AUX . SUB STATION 2
192.168.101.223	S2-T	S2 <T> Controller	AUX . SUB STATION 2

IP Addresses for HMI

IP ADDRESS	NAME	DESCRIPTION	LOCATION
192.168.201.30	GT1CLT	Local HMI for GT1	GT#1 PEECC
192.168.201.31	GT2CLT	Local HMI for GT2	GT#2 PEECC
192.168.201.32	GT3CLT	Local HMI for GT3	GT#3 PEECC
192.168.201.33	GT4CLT	Local HMI for GT4	GT#4 PEECC
192.168.201.34	ST1CLT	Local HMI for ST1	Customer Control Room
192.168.201.35	ST2CLT	Local HMI for GT2	Customer Control Room
192.168.201.36	REM1CLT	Remote HMI 1	Customer Control Room
192.168.201.37	REM2CLT	Remote HMI 2	Customer Control Room
192.168.201.38	HST1SVR	Historian	Customer Control Room
192.168.101.38	uHST1SVR	Historian	Customer Control Room

IP Addresses for Switches

IP ADDRESS	NAME	DESCRIPTION	LOCATION
192.168.201.244	SW1	Network Switch 1	GT#1 PEECC
192.168.201.243	SW2	Network Switch 2	GT#1 PEECC
192.168.201.242	SW3	Network Switch 3	GT#2 PEECC
192.168.201.241	SW4	Network Switch 4	GT#2 PEECC
192.168.201.240	SW5	Network Switch 5	AUX. SUB STATION 1
192.168.201.239	SW6	Network Switch 6	AUX. SUB STATION 1
192.168.201.238	SW7	Network Switch 7	Customer Control Room
192.168.201.237	SW8	Network Switch 8	Customer Control Room
192.168.201.236	SW9	Network Switch 9	GT#3 PEECC
192.168.201.235	SW10	Network Switch 10	GT#3 PEECC
192.168.201.234	SW11	Network Switch 11	GT#4 PEECC
192.168.201.233	SW12	Network Switch 12	GT#4 PEECC
192.168.201.232	SW13	Network Switch 13	AUX. SUB STATION 2
192.168.201.231	SW14	Network Switch 14	AUX. SUB STATION 2
192.168.201.230	SW17	Network Switch 17	ST#1 EC
192.168.201.229	SW18	Network Switch 18	ST#1 EC
192.168.201.228	SW19	Network Switch 19	ST#2 EC
192.168.201.227	SW20	Network Switch 20	ST#2 EC
192.168.201.226	SW21	Network Switch 21	Customer Control Room
192.168.201.225	SW22	Network Switch 22	Customer Control Room
192.168.201.247	RB1-1	Root Bridge Switch	Customer Control Room
192.168.201.247	RB1-2	Root Bridge Switch	Customer Control Room

PDH Addresses for Printer

IP ADDRESS	NAME	DESCRIPTION	LOCATION
192.168.201.40	PRN1	Color Laser Jet Printer 2	Customer Control Room

IP Addresses for NTP1

IP ADDRESS	NAME	DESCRIPTION	LOCATION
192.168.201.250	NTP1_SVR	NTP1	GT#3 PEECC
192.168.101.250	uNTP1_SVR	NTP1	GT#3 PEECC

IP Address 1

© COPYRIGHT 2012-2023 GENERAL ELECTRIC COMPANY
PROPRIETARY INFORMATION – THIS DOCUMENT CONTAINS
PROPRIETARY INFORMATION OF GENERAL ELECTRIC COMPANY AND
MAY NOT BE USED OR DISCLOSED TO OTHERS, EXCEPT WITH THE
WRITTEN PERMISSION OF THE GENERAL ELECTRIC COMPANY.

GE CLASS II (INTERNAL NON-CRITICAL)					
 GE Energy		SIZE B	CAGE CODE	DWG NO 154B5246	
DRAWN SUBBU 2011-08-08					
ISSUED See PLM		SCALE NONE			SHEET 16 Of 18

DISTR
TO

PDH Addresses for ControlServer

IP ADDRESS	NAME	DESCRIPTION	LOCATION
192.168.201.8	HS1	Virtual Host Sever -1	Customer Control Room
192.168.201.9	HS2	Virtual Host Sever -2	Customer Control Room
192.168.201.6	MC2	Witness Host Server	Customer Control Room
192.168.201.10	HW1	Witness /Administrative Console	Customer Control Room
192.168.201.151	CA1	Certificate Authority Server	Customer Control Room
192.168.201.109	DC1	Domain Controller -1	Customer Control Room
192.168.201.110	DC2	Domain Controller -2	Customer Control Room
192.168.201.7	HC1	vCentre Server	Customer Control Room
192.168.201.150	EDGE1SVR	EDGE VM (AvacodOS image)	Customer Control Room
192.168.201.5	MC3	Management Console	Customer Control Room
192.168.201.42	GT1SVR	VM	Customer Control Room
192.168.201.43	GT2SVR	VM	Customer Control Room
192.168.201.44	GT3SVR	VM	Customer Control Room
192.168.201.45	GT4SVR	VM	Customer Control Room
192.168.201.46	ST1SVR	VM	Customer Control Room
192.168.201.47	ST2SVR	VM	Customer Control Room
192.168.201.48	REM1SVR	VM	Customer Control Room
192.168.201.49	REM2SVR	VM	Customer Control Room
192.168.201.154	ENMELM	BSC logging & SIEM Appliance (VM)	Customer Control Room
192.168.201.19	ACRONIS_VA_HS1	Acronis Virtual Appliance for HS1	Customer Control Room
192.168.201.20	ACRONIS_VA_HS2	Acronis Virtual Appliance for HS2	Customer Control Room
192.168.201.21	ACRONIS_VA_MC2	Acronis Virtual Appliance for MC2	Customer Control Room
192.168.201.50	BSC1CLT	BSC Thin client	Customer Control Room

UDH Addresses for ControlServer

192.168.101.151	CA1	Certificate Authority Server	CCR
192.168.101.42	uGT1SVR	VM	Customer Control Room
192.168.101.43	uGT2SVR	VM	Customer Control Room
192.168.101.44	uGT3SVR	VM	Customer Control Room
192.168.101.45	uGT4SVR	VM	Customer Control Room
192.168.101.46	uST1SVR	VM	Customer Control Room
192.168.101.47	uST2SVR	VM	Customer Control Room
192.168.101.48	uREM1SVR	VM	Customer Control Room
192.168.101.49	uREM2SVR	VM	Customer Control Room
192.168.101.150	uEDGE1SVR	EDGE VM (AvacodOS image)	Customer Control Room

UDH Addresses for EX200e

IP ADDRESS	NAME	DESCRIPTION	LOCATION
192.168.101.114	M1	M1 EX2100e Controller	GT LEC #1
192.168.101.115	M2	M2 EX2100e Controller	GT LEC #1
192.168.101.116	C	C EX2100e Controller	GT LEC #1
192.168.101.117	KEYPAD	KEYPAD EX 2100e Controller	GT LEC #1
192.168.101.118	VERSAMAX	VERSAMAX EX2100e Controller	GT LEC #1
192.168.101.124	M1	M1 EX2100e Controller	GT LEC #2
192.168.101.125	M2	M2 EX2100e Controller	GT LEC #2
192.168.101.126	C	C EX2100e Controller	GT LEC #2
192.168.101.127	KEYPAD	KEYPAD EX 2100e Controller	GT LEC #2
192.168.101.128	VERSAMAX	VERSAMAX EX2100e Controller	GT LEC #2
192.168.101.214	M1	M1 EX2100e Controller	ST LEC #1
192.168.101.215	M2	M2 EX2100e Controller	ST LEC #1
192.168.101.216	C	C EX2100e Controller	ST LEC #1
192.168.101.217	KEYPAD	KEYPAD EX 2100e Controller	ST LEC #1
192.168.101.218	VERSAMAX	VERSAMAX EX2100e Controller	ST LEC #1
192.168.101.134	M1	M1 EX2100e Controller	GT LEC #3
192.168.101.135	M2	M2 EX2100e Controller	GT LEC #3
192.168.101.136	C	C EX2100e Controller	GT LEC #3
192.168.101.137	KEYPAD	KEYPAD EX 2100e Controller	GT LEC #3
192.168.101.138	VERSAMAX	VERSAMAX EX2100e Controller	GT LEC #3
192.168.101.144	M1	M1 EX2100e Controller	GT LEC #4
192.168.101.145	M2	M2 EX2100e Controller	GT LEC #4
192.168.101.146	C	C EX2100e Controller	GT LEC #4
192.168.101.147	KEYPAD	KEYPAD EX 2100e Controller	GT LEC #4
192.168.101.148	VERSAMAX	VERSAMAX EX2100e Controller	GT LEC #4
192.168.101.225	M1	M1 EX2100e Controller	ST LEC #2
192.168.101.226	M2	M2 EX2100e Controller	ST LEC #2
192.168.101.227	C	C EX2100e Controller	ST LEC #2
192.168.101.228	KEYPAD	KEYPAD EX 2100e Controller	ST LEC #2
192.168.101.229	VERSAMAX	VERSAMAX EX2100e Controller	ST LEC #2

IP Address 2

© COPYRIGHT 2012-2023 GENERAL ELECTRIC COMPANY
PROPRIETARY INFORMATION – THIS DOCUMENT CONTAINS
PROPRIETARY INFORMATION OF GENERAL ELECTRIC COMPANY AND
MAY NOT BE USED OR DISCLOSED TO OTHERS, EXCEPT WITH THE
WRITTEN PERMISSION OF THE GENERAL ELECTRIC COMPANY.

GE CLASS II (INTERNAL NON-CRITICAL)					
 GE Energy		SIZE B	CAGE CODE	DWG NO 154B5246	
DRAWN SUBBU 2011-08-08					
ISSUED See PLM		SCALE NONE	SHEET 17 Of 18		DISTR TO

PDH Address for PSM devices			
IP ADDRESS	NAME	DESCRIPTION	LOCATION
192.168.201.101	G1-Rack0	GT1Flashback PLC	GT#1 PEECC
192.168.201.23	G1-CDMS	GT1 CDMS Modbus	GT#1 PEECC
192.168.201.102	G1-Rack1	GT1Flashback PLC	GT#1 PEECC
192.168.201.103	G2-Rack0	GT2Flashback PLC	GT#2 PEECC
192.168.201.24	G2-CDMS	GT2 CDMS Modbus	GT#2 PEECC
192.168.201.104	G2-Rack1	GT2Flashback PLC	GT#2 PEECC
192.168.201.105	G3-Rack0	GT3Flashback PLC	GT#3 PEECC
192.168.201.25	G3-CDMS	GT3 CDMS Modbus	GT#3 PEECC
192.168.201.106	G3-Rack1	GT3Flashback PLC	GT#3 PEECC
192.168.201.107	G4-Rack1	GT4Flashback PLC	GT#4 PEECC
192.168.201.26	G4-CDMS	GT4 CDMS Modbus	GT#4 PEECC
192.168.201.108	G4-Rack0	GT4Flashback PLC	GT#4 PEECC

MDH for Bently Nevada			
IP ADDRESS	NAME	DESCRIPTION	LOCATION
172.25.6.81	Bently rack	GT1 Bently Nevada	PEECC 1
172.25.6.82	Bently rack	GT2 Bently Nevada	PEECC 2
172.25.6.84	Bently rack	GT3 Bently Nevada	PEECC 3
172.25.6.85	Bently rack	GT4 Bently Nevada	PEECC 4
172.25.6.80	Bently rack	ST1 Bently Nevada	Aux Sub 1
172.25.6.83	Bently rack	ST2 Bently Nevada	Aux Sub 2
172.25.6.86	System1	Bently Nevada system1	Customer control room

PDH for DCS			
IP ADDRESS	NAME	DESCRIPTION	LOCATION
192.168.201.15	ELC drop 10	DCS to MKVle ELC	Customer control Room
192.168.201.11	ELC drop 11	DCS to MKVle ELC	Customer control Room
192.168.201.12	ELC drop 12	DCS to MKVle ELC	Customer control Room
192.168.201.16	ELC drop 20	DCS to MKVle ELC	Customer control Room
192.168.201.13	ELC drop 21	DCS to MKVle ELC	Customer control Room
192.168.201.14	ELC drop 22	DCS to MKVle ELC	Customer control Room

PDH for PI			
IP ADDRESS	NAME	DESCRIPTION	LOCATION
192.168.201.18	BLUE PI Server	MKVle to PI	Customer control Room

UDH for PSM			
IP ADDRESS	NAME	DESCRIPTION	LOCATION
192.168.101.51	AUTOTUNE	GT1 PSM AUTOTUNE	PEECC 1
192.168.101.52	AUTOTUNE	GT2 PSM AUTOTUNE	PEECC 2
192.168.101.53	AUTOTUNE	GT3 PSM AUTOTUNE	PEECC 3
192.168.101.54	AUTOTUNE	GT4 PSM AUTOTUNE	PEECC 4

IP Address 3

© COPYRIGHT 2012-2023 GENERAL ELECTRIC COMPANY
PROPRIETARY INFORMATION – THIS DOCUMENT CONTAINS
PROPRIETARY INFORMATION OF GENERAL ELECTRIC COMPANY AND
MAY NOT BE USED OR DISCLOSED TO OTHERS, EXCEPT WITH THE
WRITTEN PERMISSION OF THE GENERAL ELECTRIC COMPANY.

GE CLASS II (INTERNAL NON-CRITICAL)					
GE Energy GENERAL ELECTRIC COMPANY GAS TURBINE Schenectady, NY		SIZE B	CAGE CODE	DWG NO 154B5246	
DRAWN SUBBU 2011-08-08					
ISSUED See PLM		SCALE	NONE	SHEET	18 Of 18

DISTR
TO