INSTRUCTIONS

AF3060 INVERTER DRIVES

CHARGE CONTROL - 600A LOW VOLTAGE
900A
1500A

OPERATION – TROUBLE SHOOTING – REPAIR

GEK-62507


ELEMENTARY AND CONNECTION 36B596110BA

These instructions do not purport to cover all details or variations in equipment nor to provide for every possible contingency to be met in connection with installation, operation or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's purposes, the matter should be referred to the General Electric Company.

GENERAL ELECTRIC

HIGH CURRENT 310 V. D.C. CHARGE CONTROL

36B596110BAG01 — 600A DC CURRENT
36B596110BAG02 — 900A DC CURRENT
36B596110BAG03 — 1500A DC CURRENT

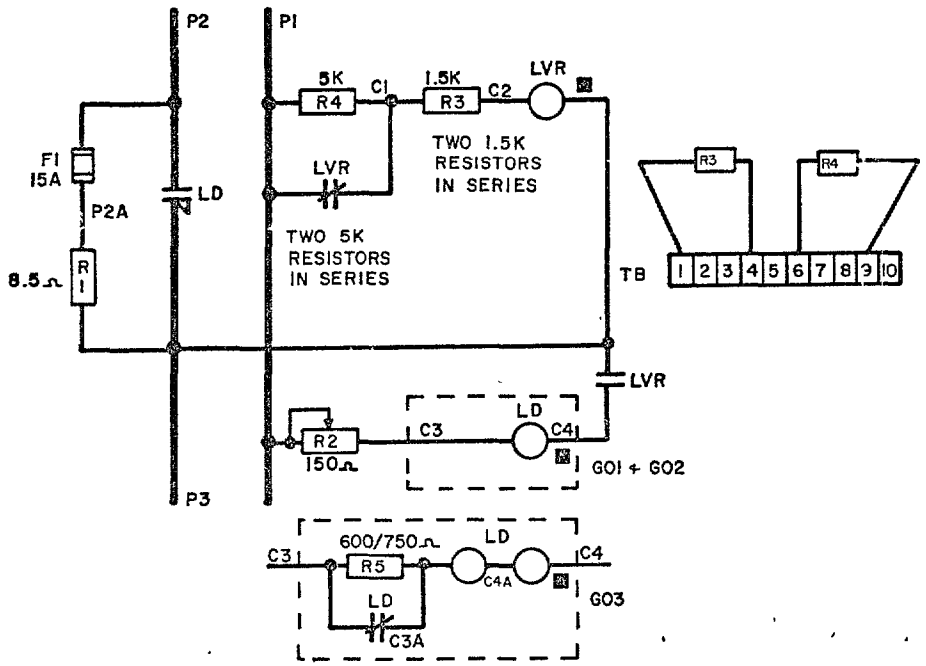

PARTS LISTS

ALL GROUPS

F1	(1)	—	104X109AA011
F1H	(1)	—	104X111AA005
R1	(1)	—	104X135AA021
R2	(1)	—	104X136AB016
R3	(1)	—	104X123DD077
R4	(1)	—	104X123DD090
LVR	(1)	—	104X128ERG01
LVR-RC	(1)	—	942B534ABG01
LD-RC	(1)	—	942B534ABG03
TB	(1)	—	104X154AA009

GROUP 1

LD (1) — 104X106ERG01

GROUP 2

LD (1) — 104X106EXG01

GROUP 3

LD (1) — 104X106AC001
R5 (1) — 104X136AA015

WIRE TABLE

ALL GROUPS

WIRE NO.	#14 BLACK
P1	LVR(3), R2(1), TB(9)
P2	F1(1), LD(Y)
P2A	F2(2), R1(1)
P3	LVR(B), R1(2), LD(X), LVR(2), LVR-RC(—)
C1	TB(6)(1), LVR(4)
C2	TB(4), LVR(A), LVR-RC(+)

GROUP 1 & 2

WIRE NO.	#14 BLACK
C3	R2(2), LD(A), LD-RC(+)
C4	LVR(1), LD(B), LD-RC(—)

GROUP 3

WIRE NO.	#14 BLACK
C3	R2(2), R5(1), LD(3)
C3A	R5(2), LD(A), LD(4), LD-RC(+)
C4	LD(D), LVR(1), LD-RC(—)
C4A	LD(B), LD(C)

HIGH CURRENT 310V CHARGE CONTROL
GENERAL ELECTRIC
36B596110BA FL.
SH NO 1
OCT. 9, 1975
STD.
SV-17318-69