


(4d-1B)

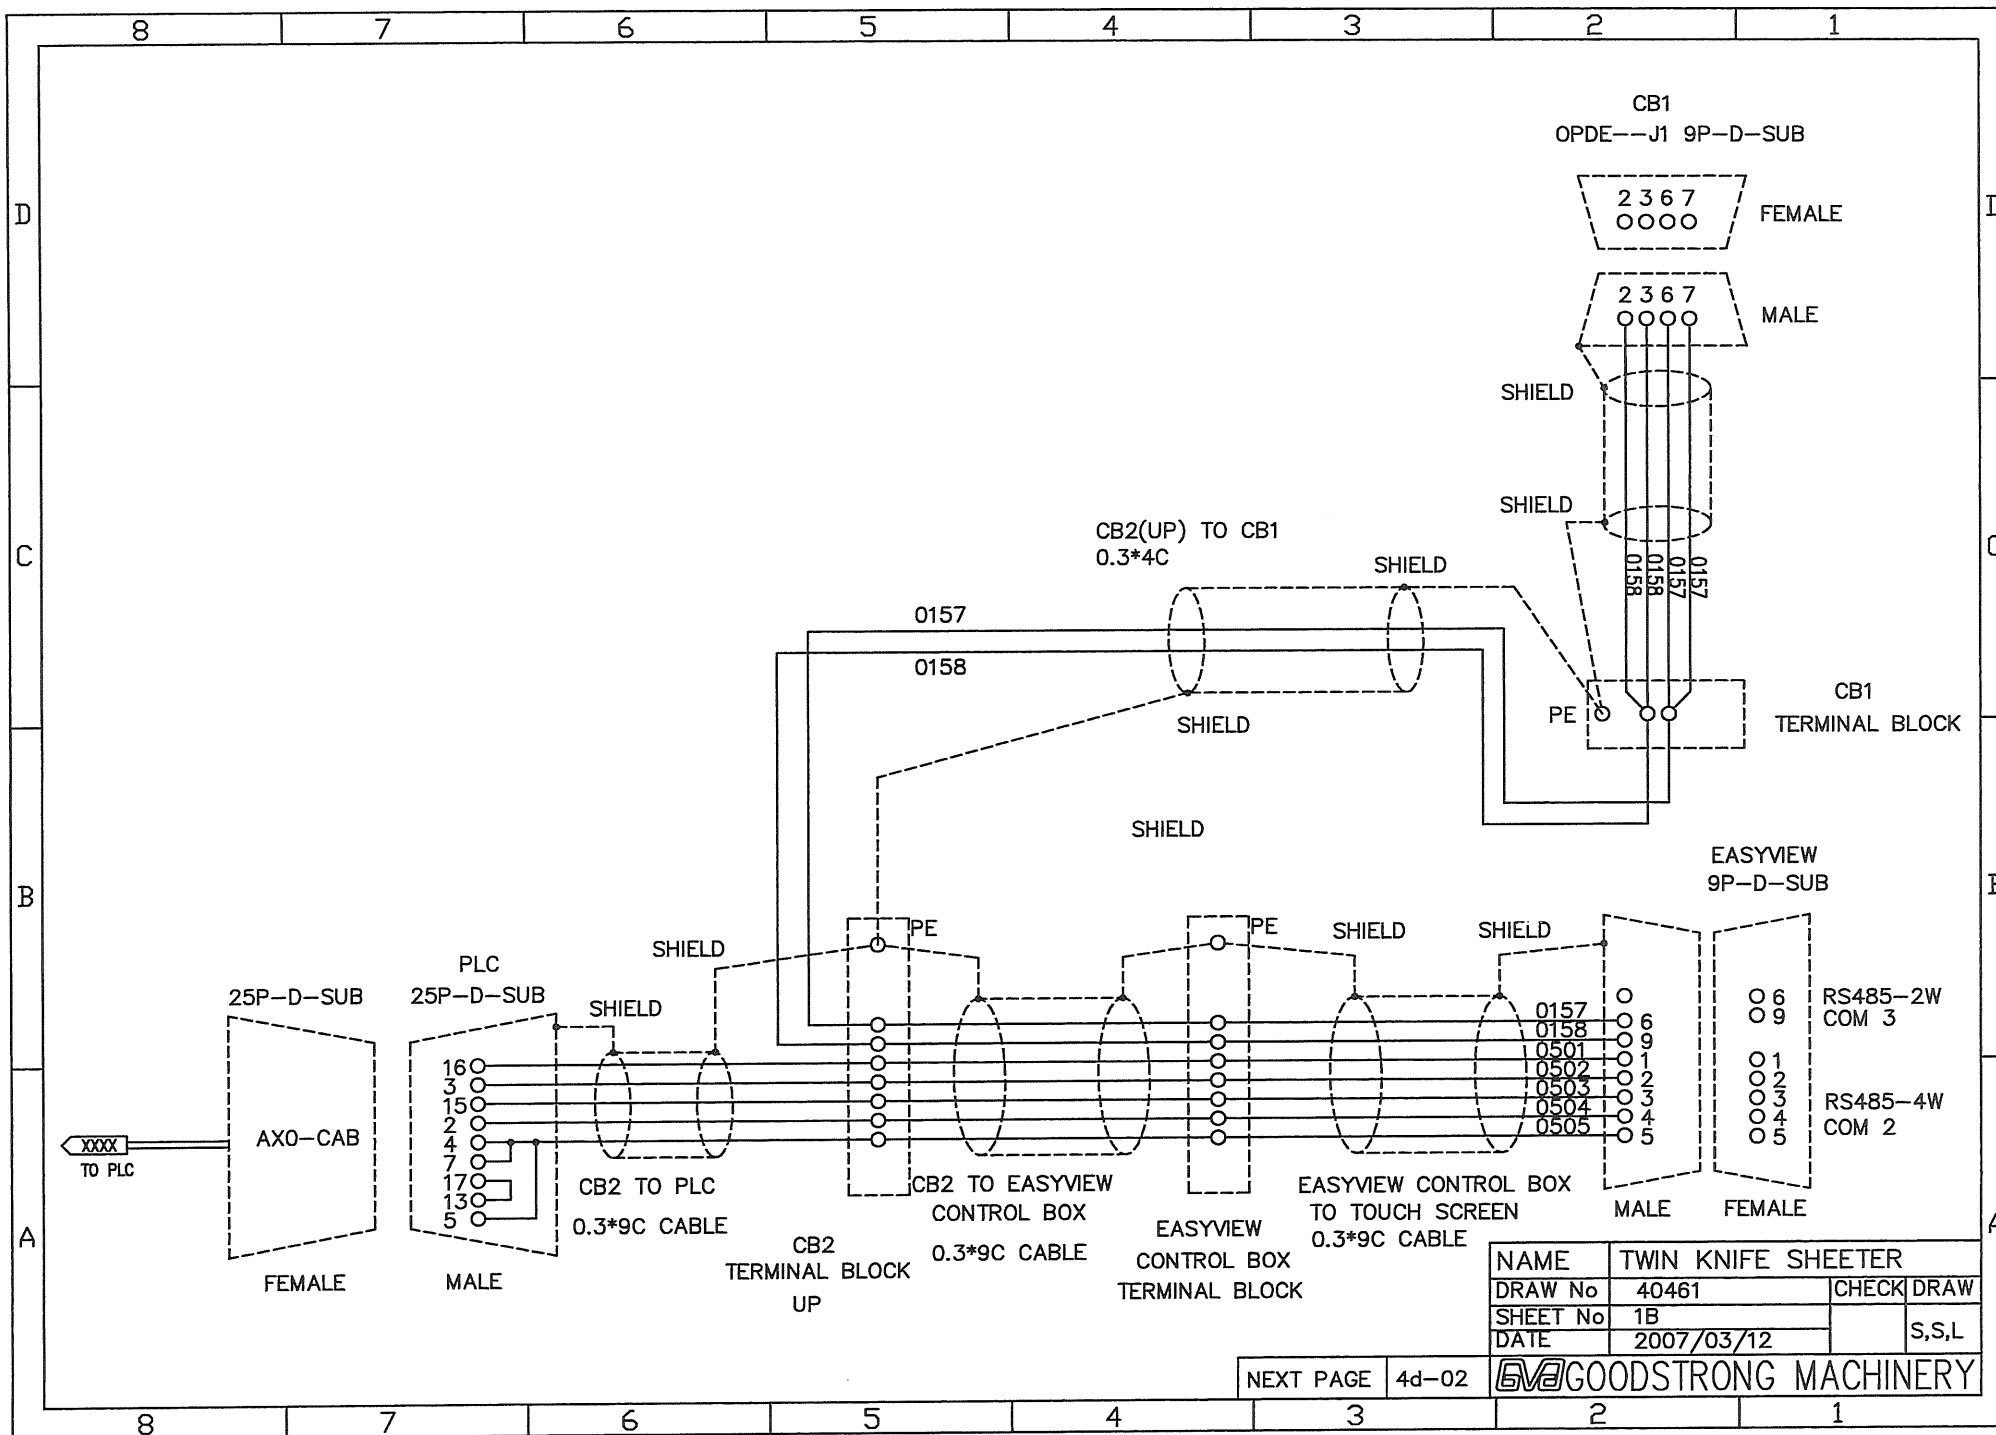


NAME	TWIN KNIFE SHEETER		
DRAW No	40461	CHECK	DRAW
SHEET No	1B		S,S,L
DATE	2007/03/12		

NEXT PAGE 4d-02

GOODSTRONG MACHINERY

(4d-03)

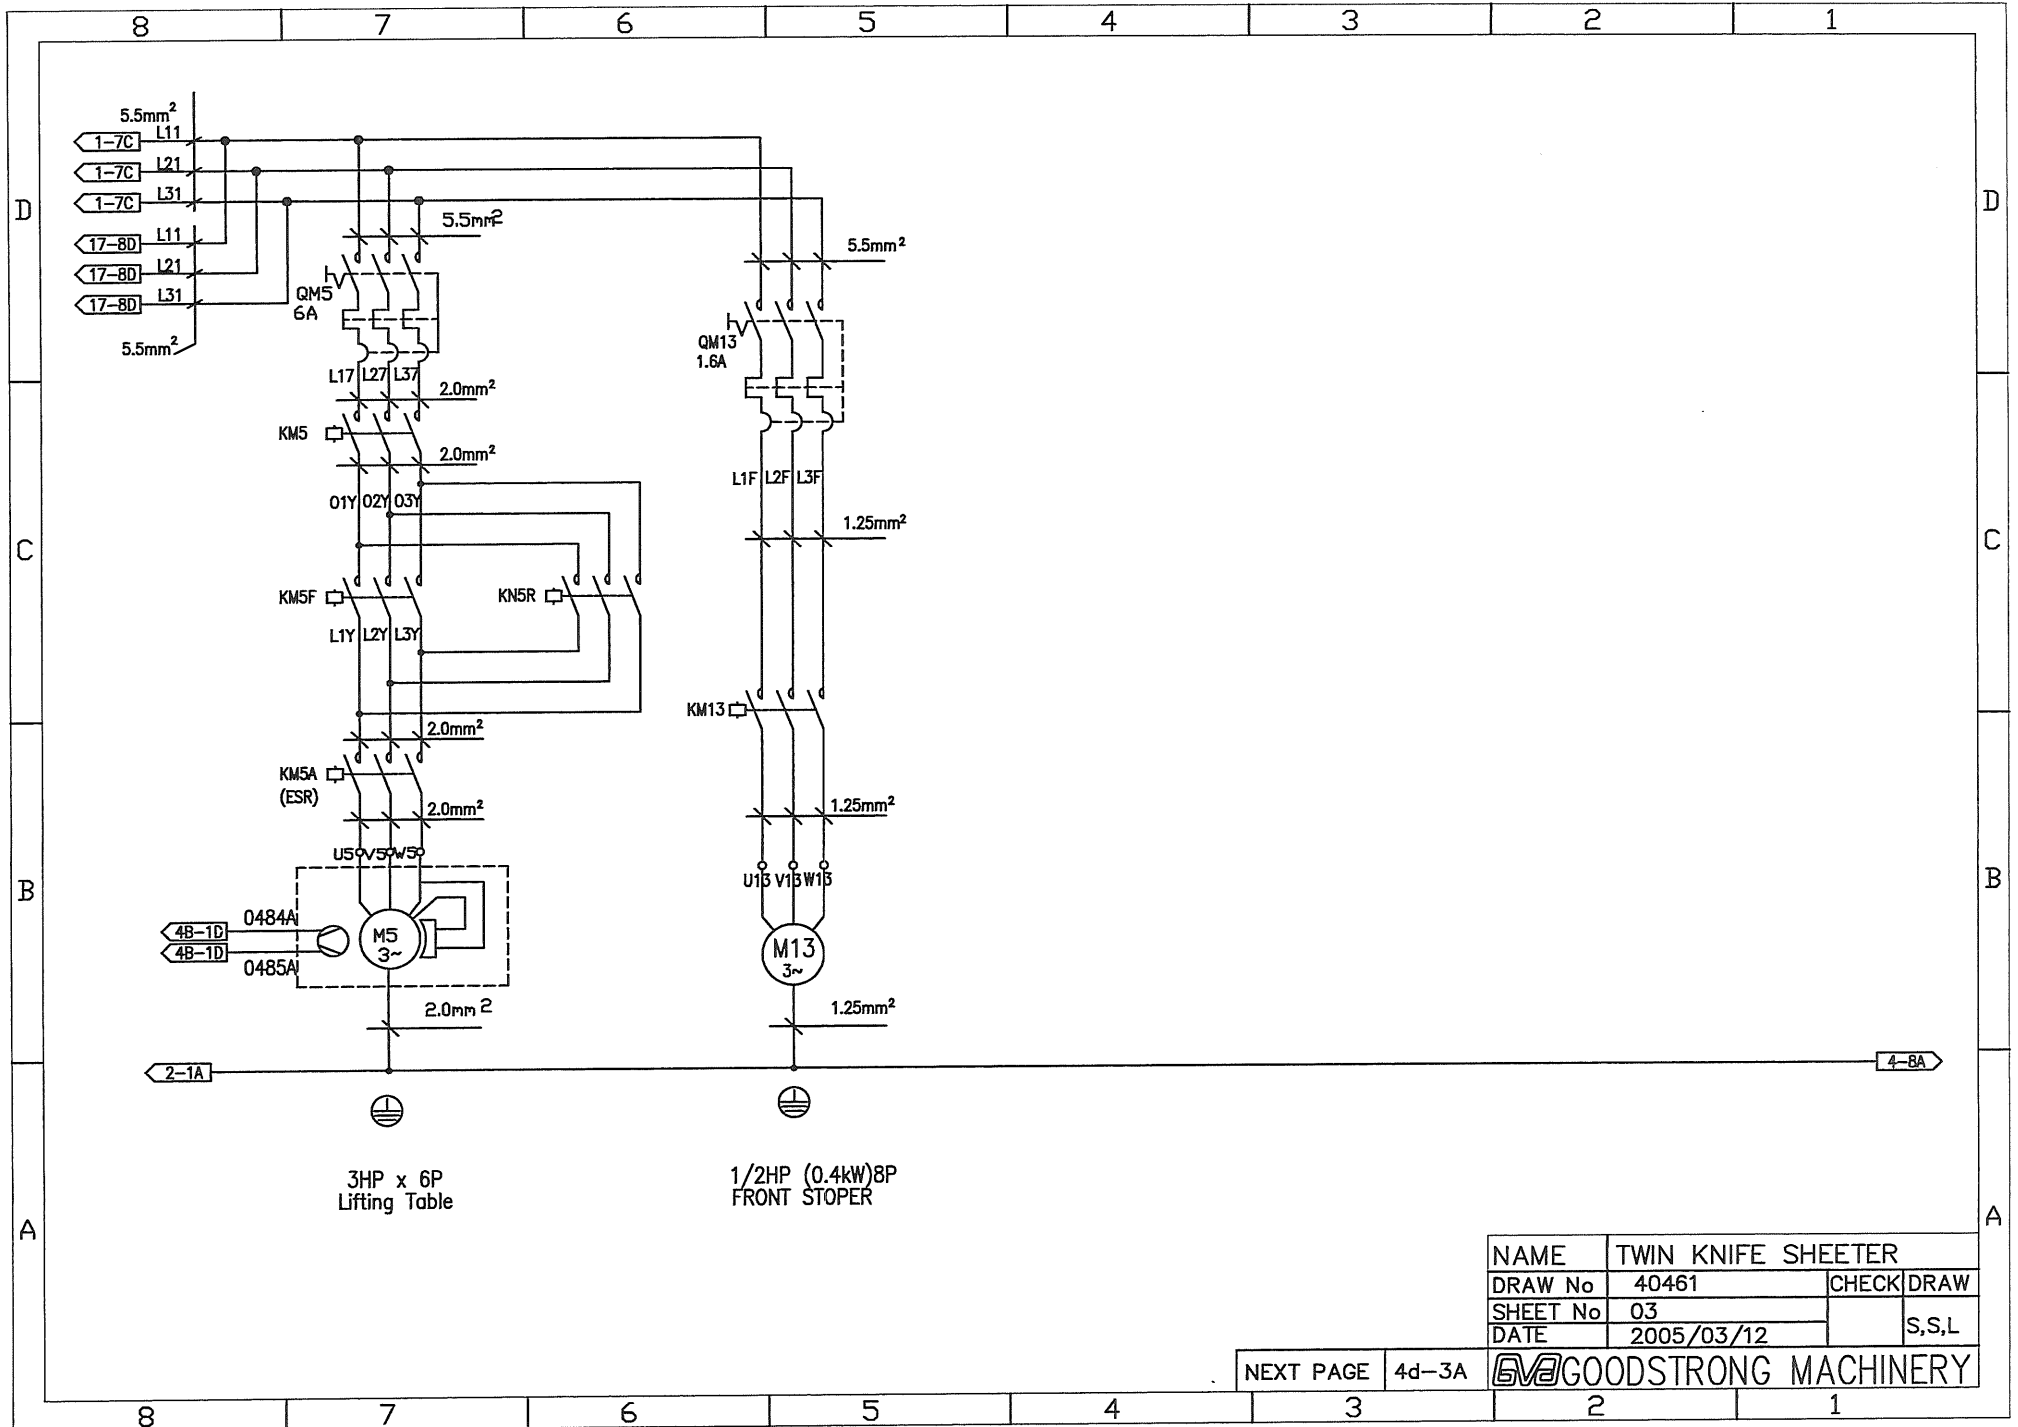


NAME	TWIN KNIFE SHEETER		
DRAW No	40461	CHECK	DRAW
SHEET No	03		S,S,L
DATE	2005/03/12		


NEXT PAGE 4d-3A

GOODSTRONG MACHINERY


(4d-04)

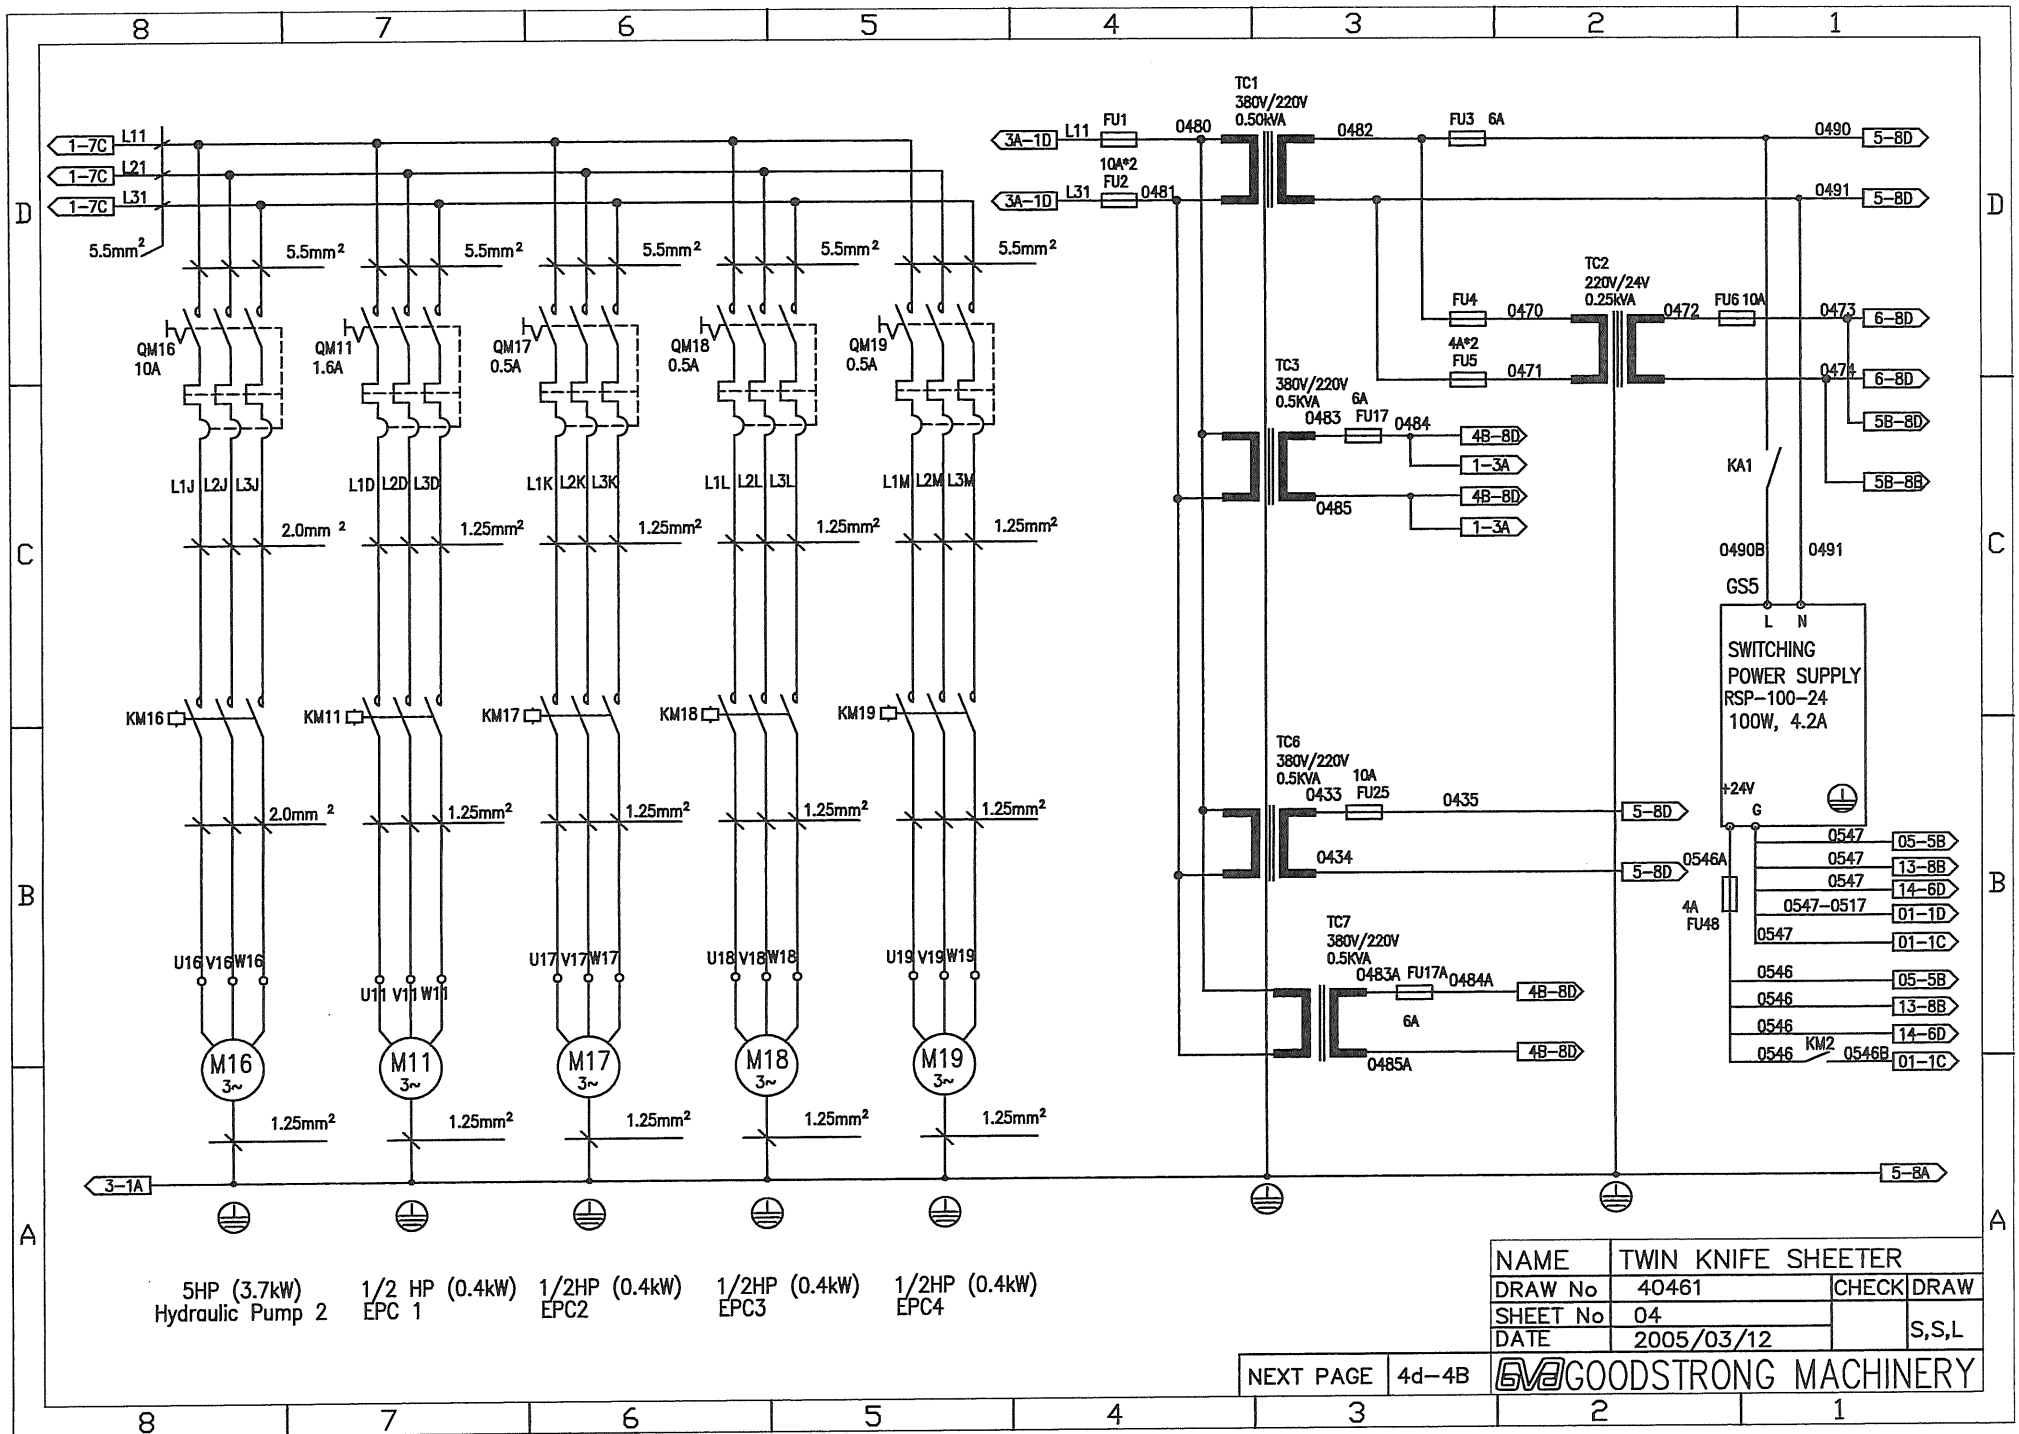

(4d-4C)

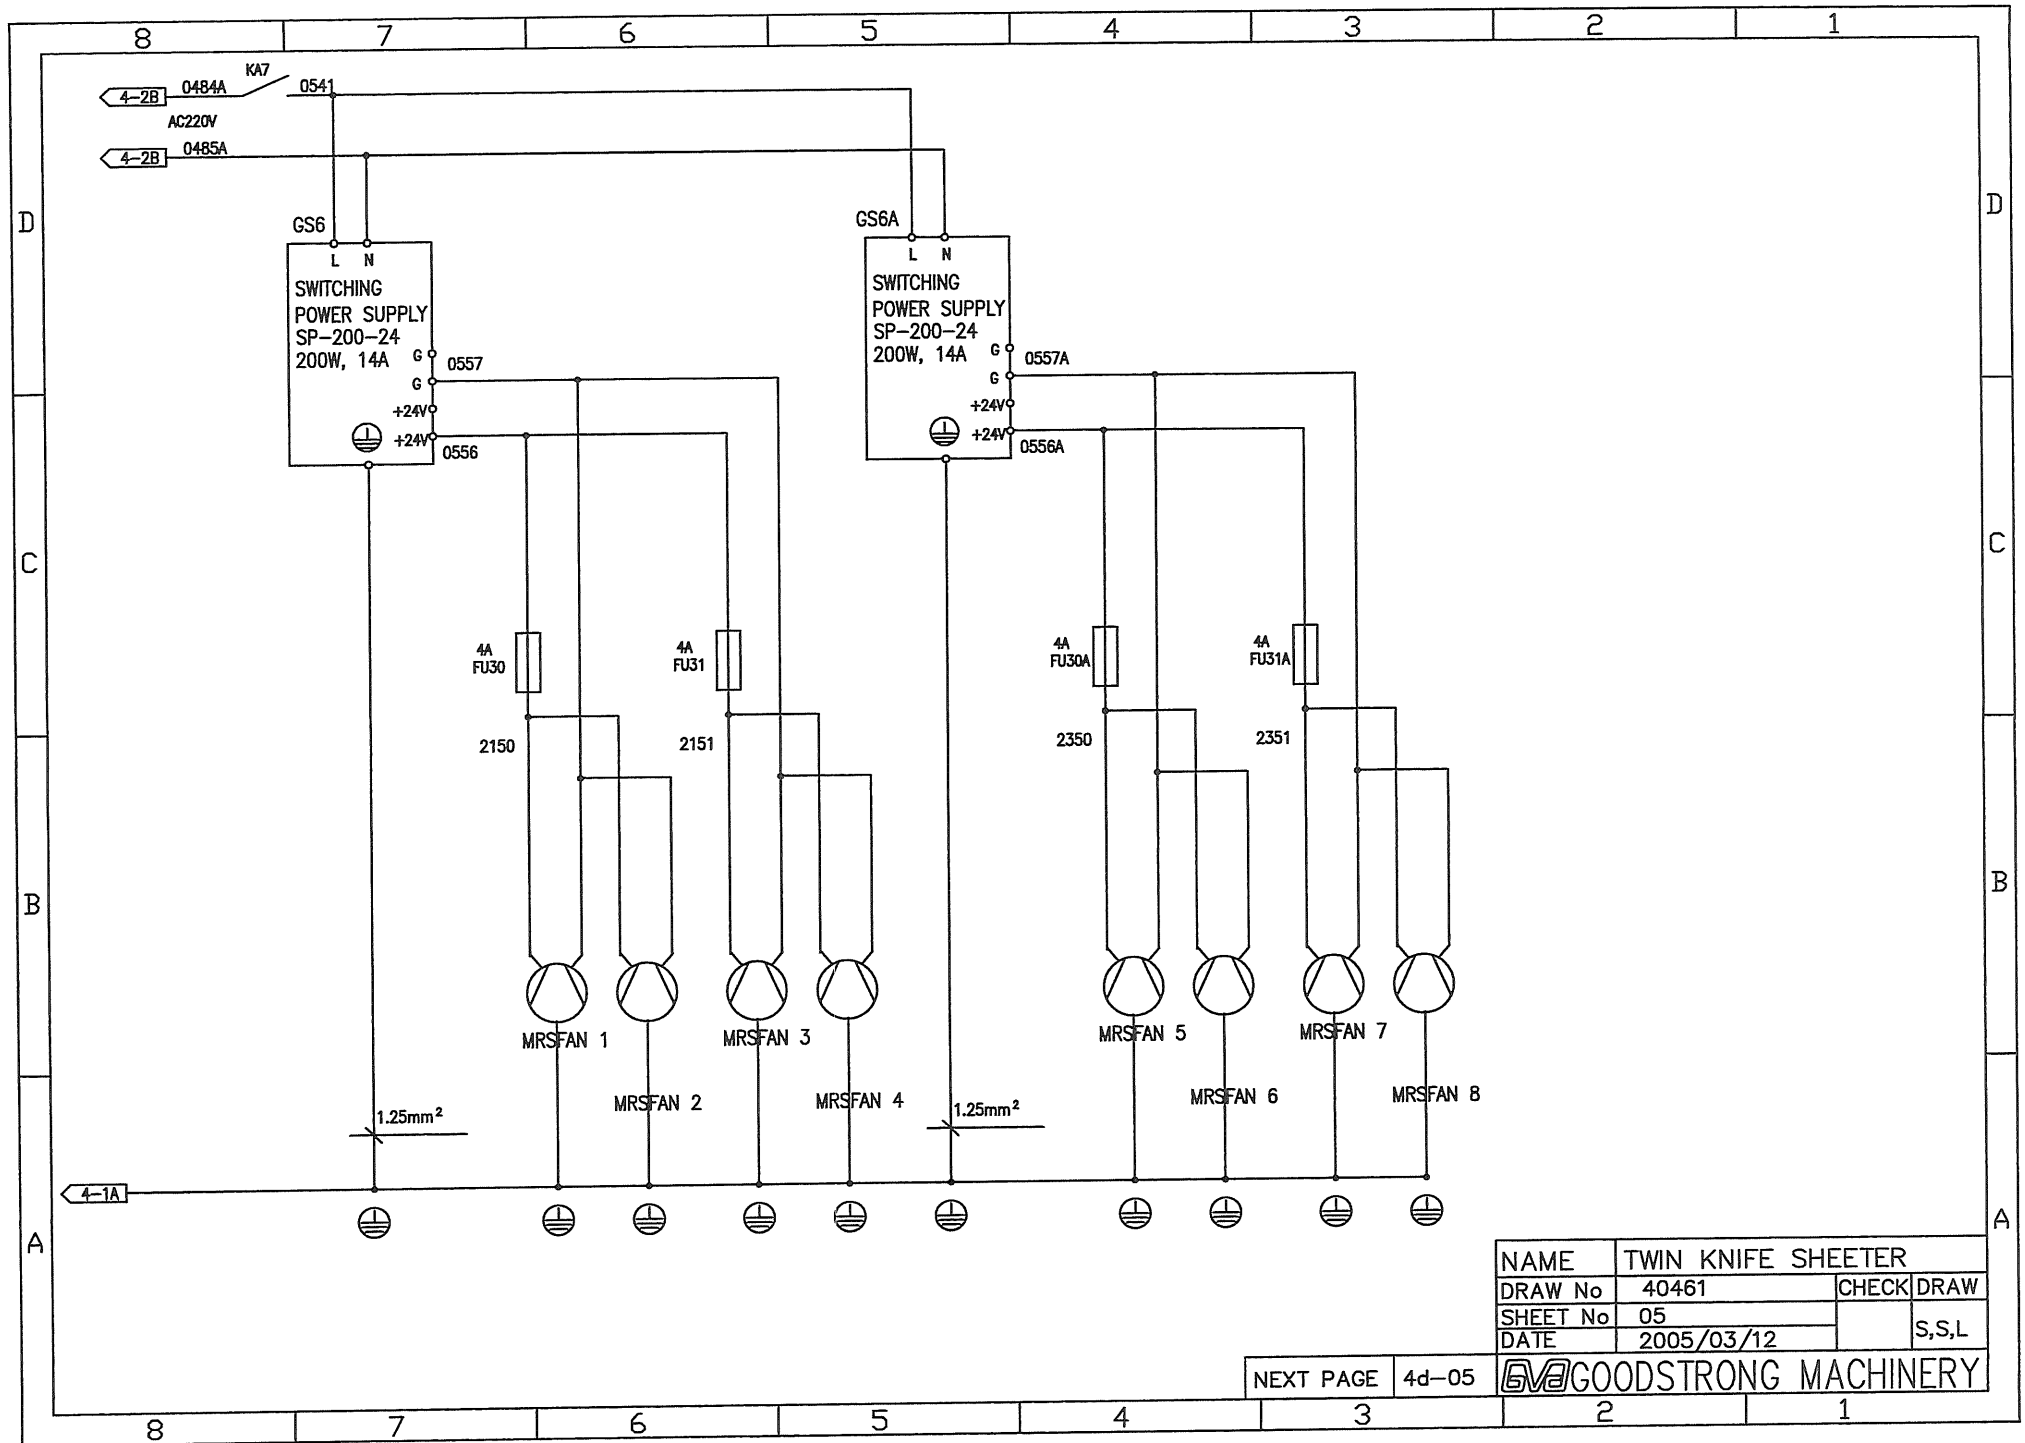


(4d-06)

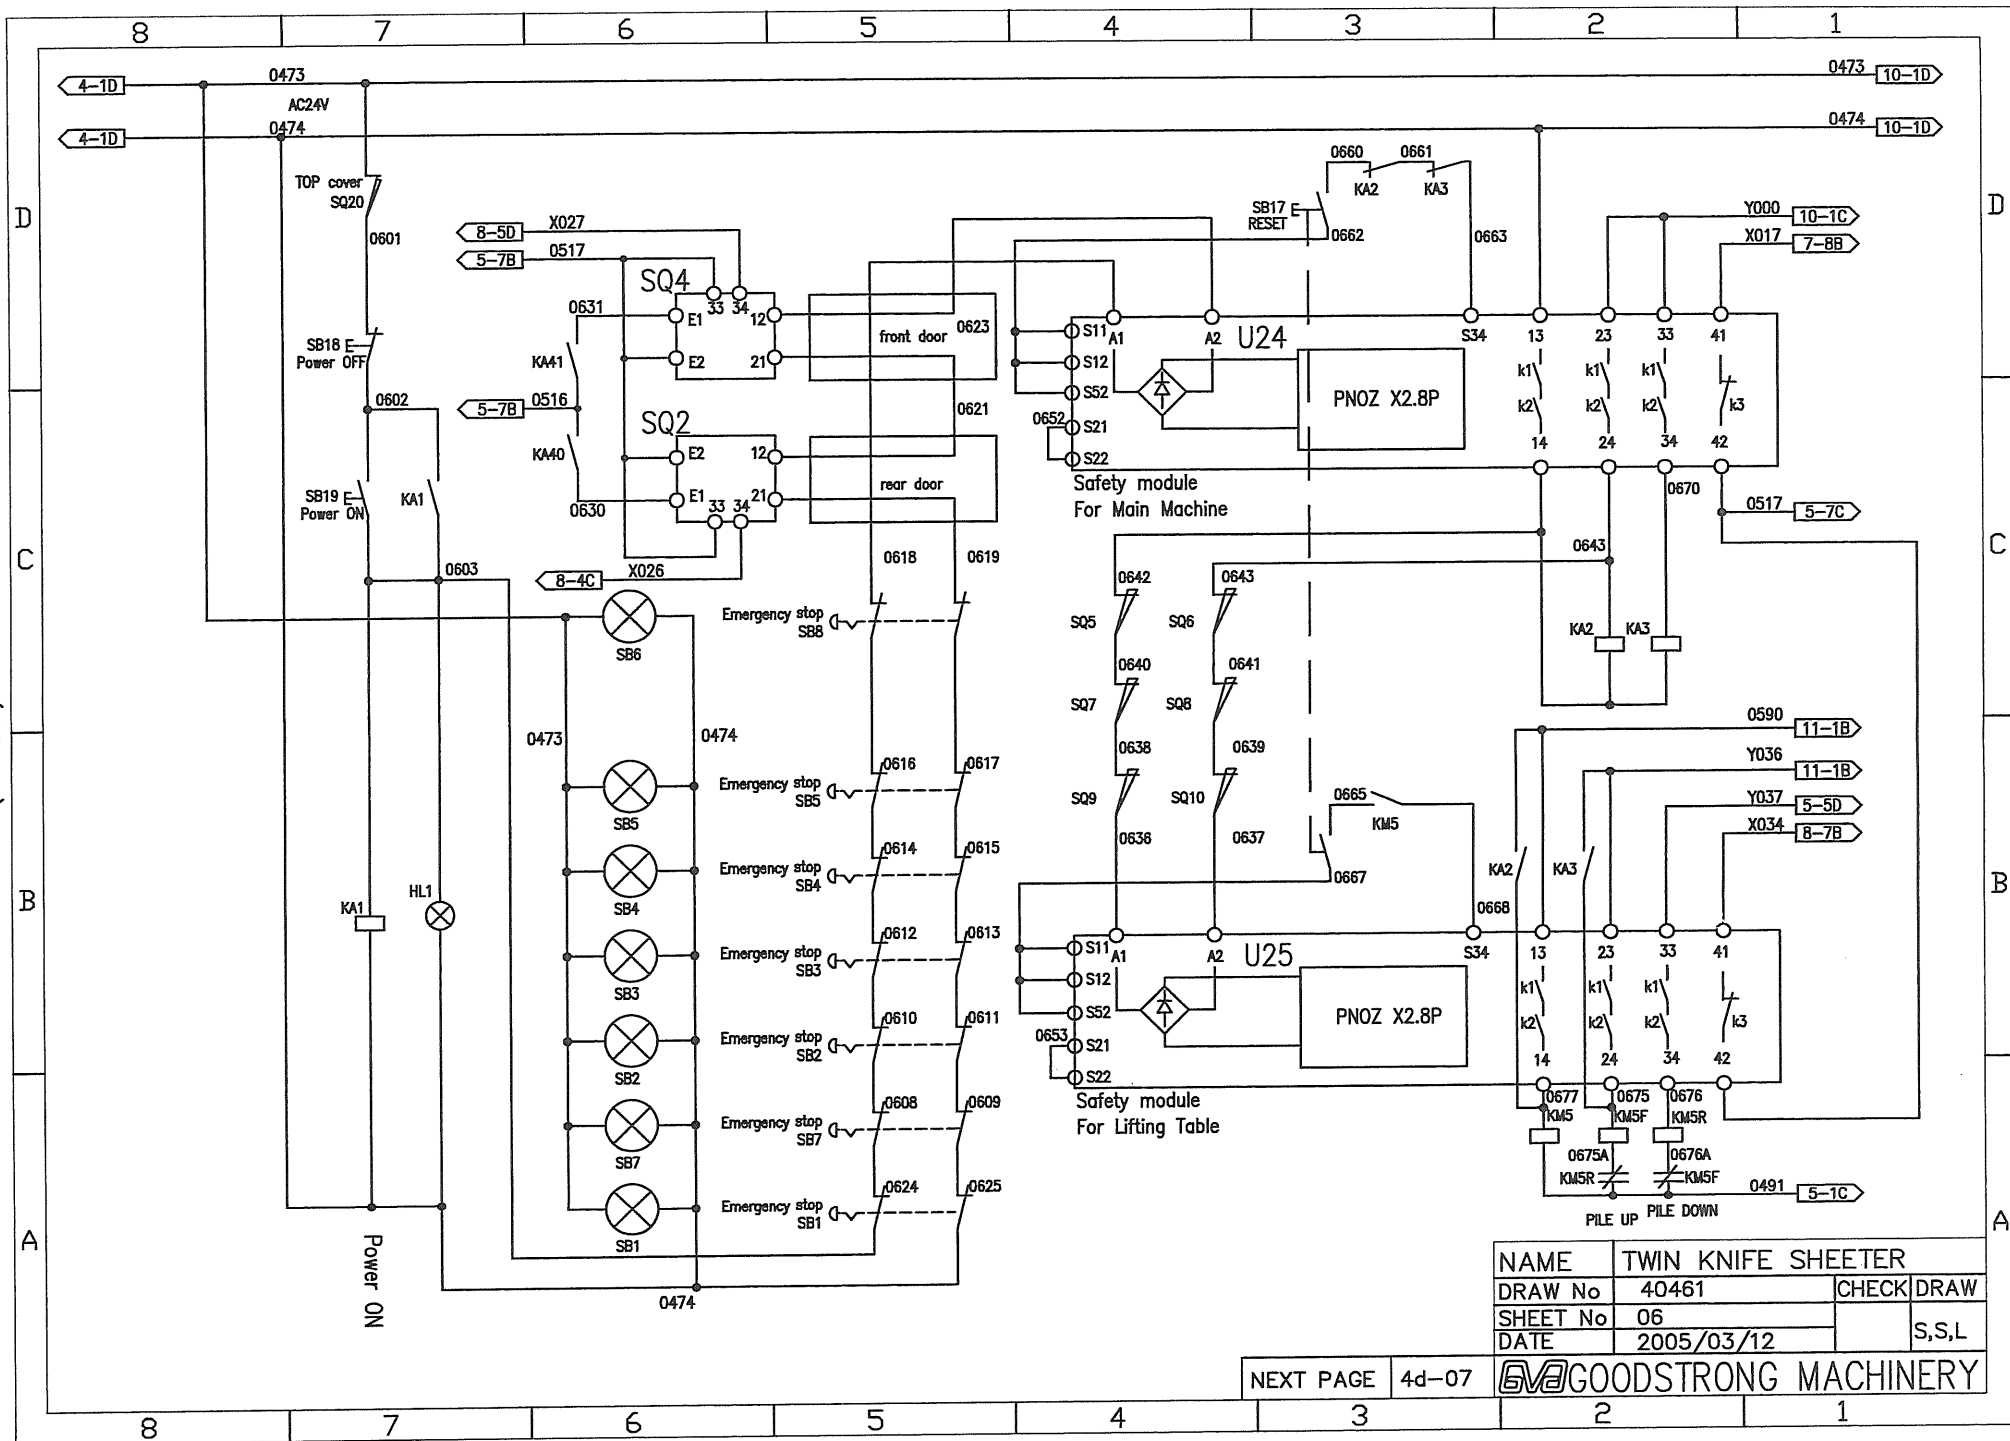


NAME	TWIN KNIFE SHEETER		
DRAW No	40461	CHECK	DRAW
SHEET No	06		S,S,L
DATE	2005/03/12		


NEXT PAGE 4d-07

GOODSTRONG MACHINERY

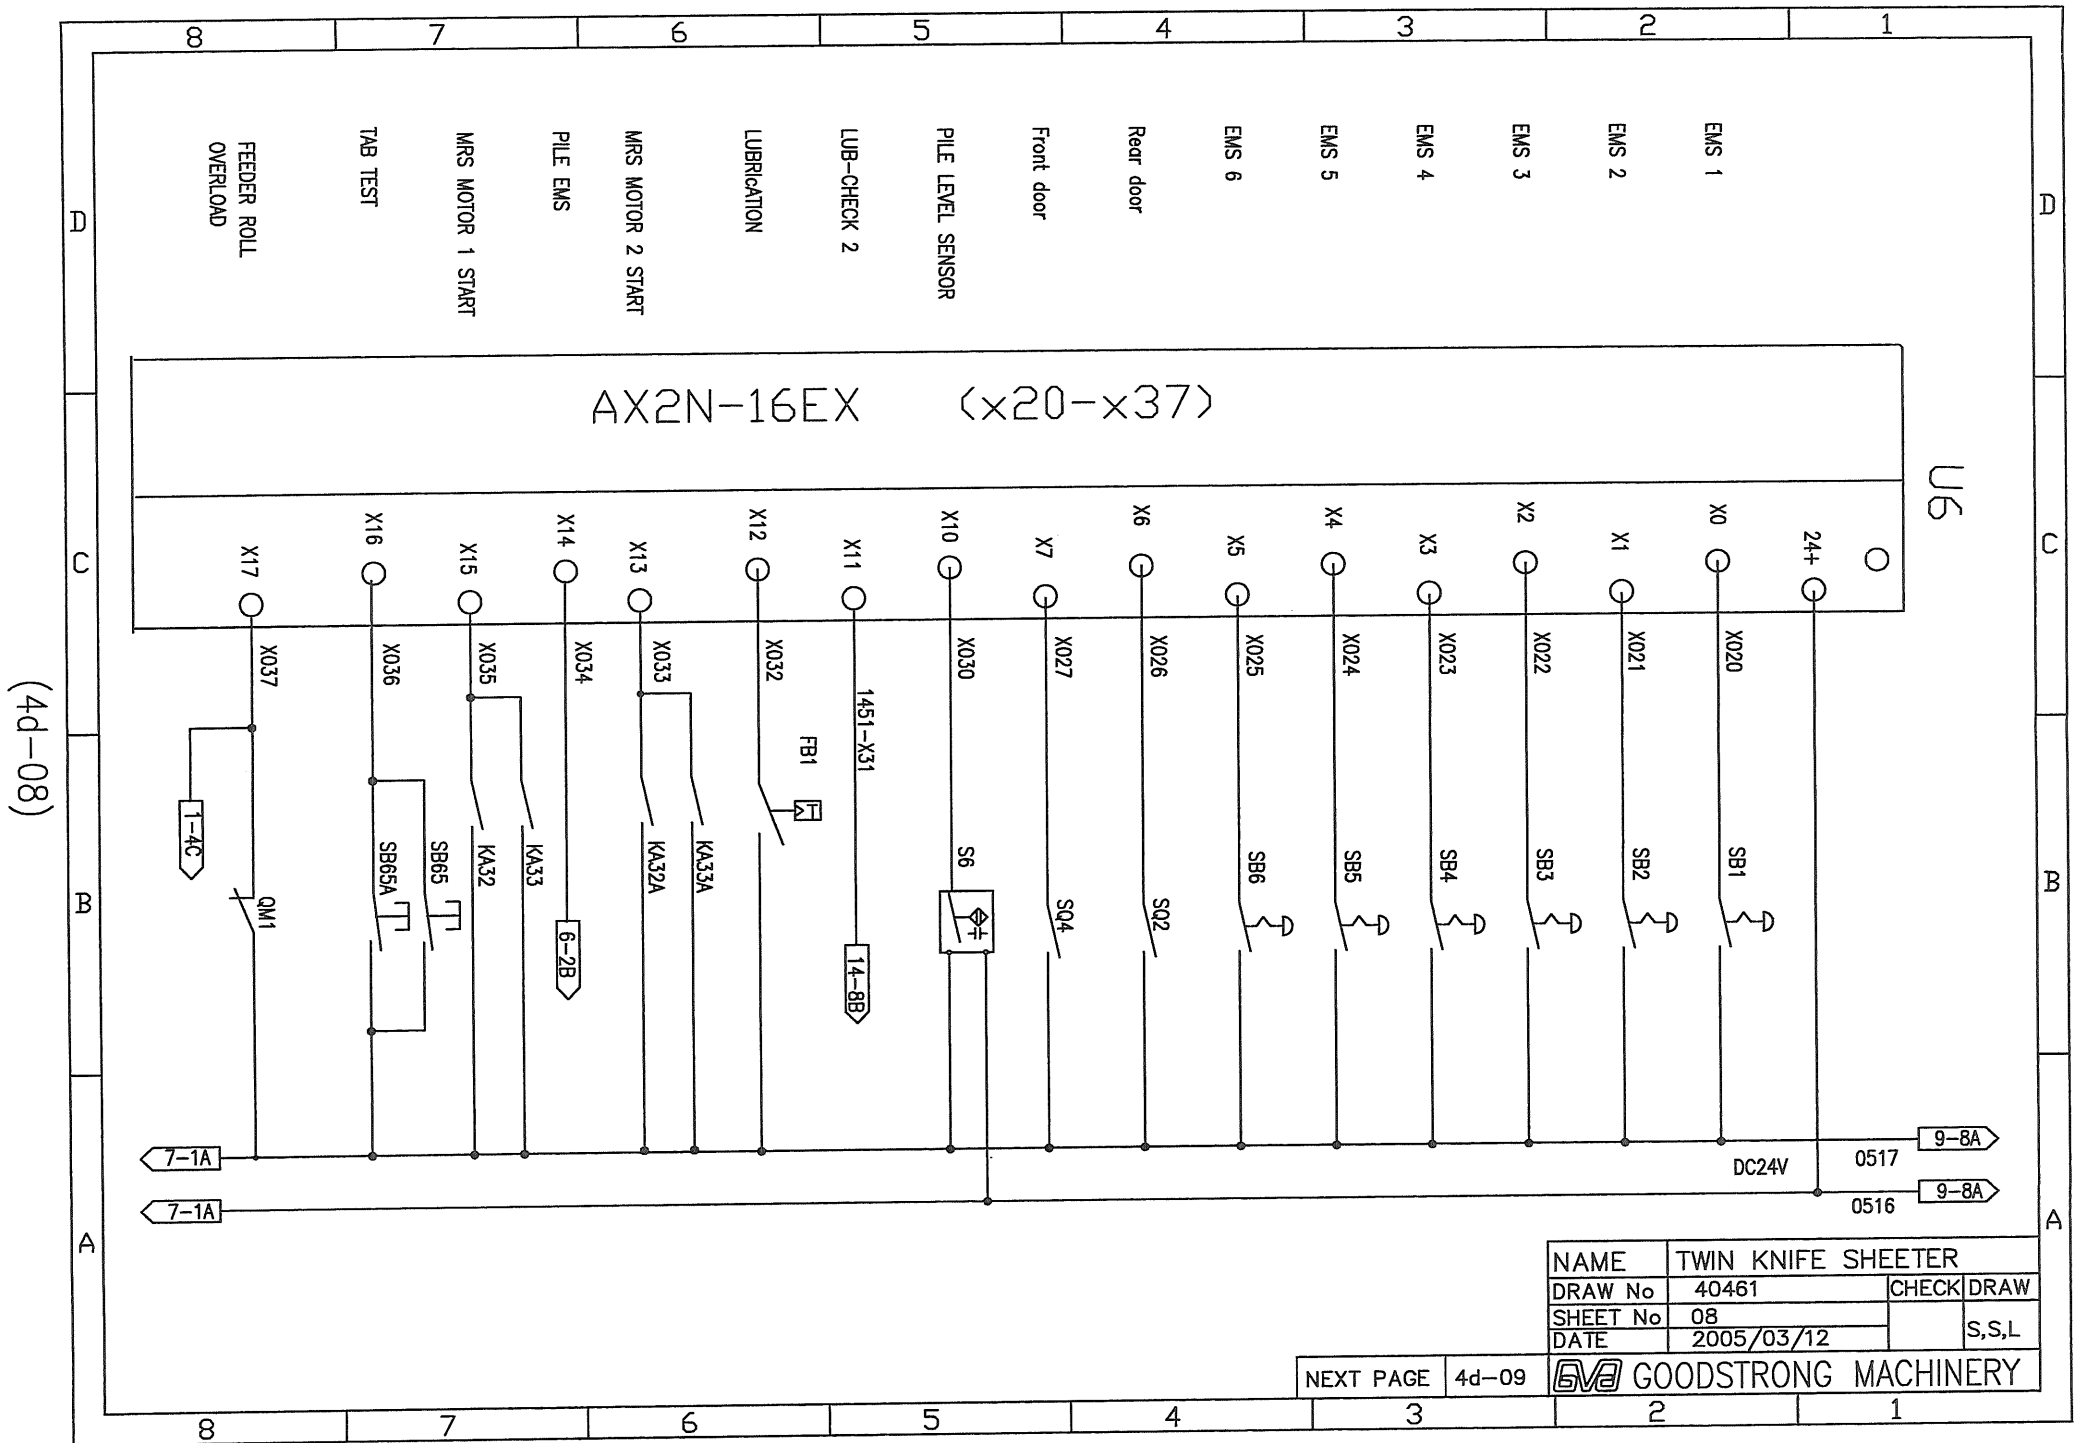

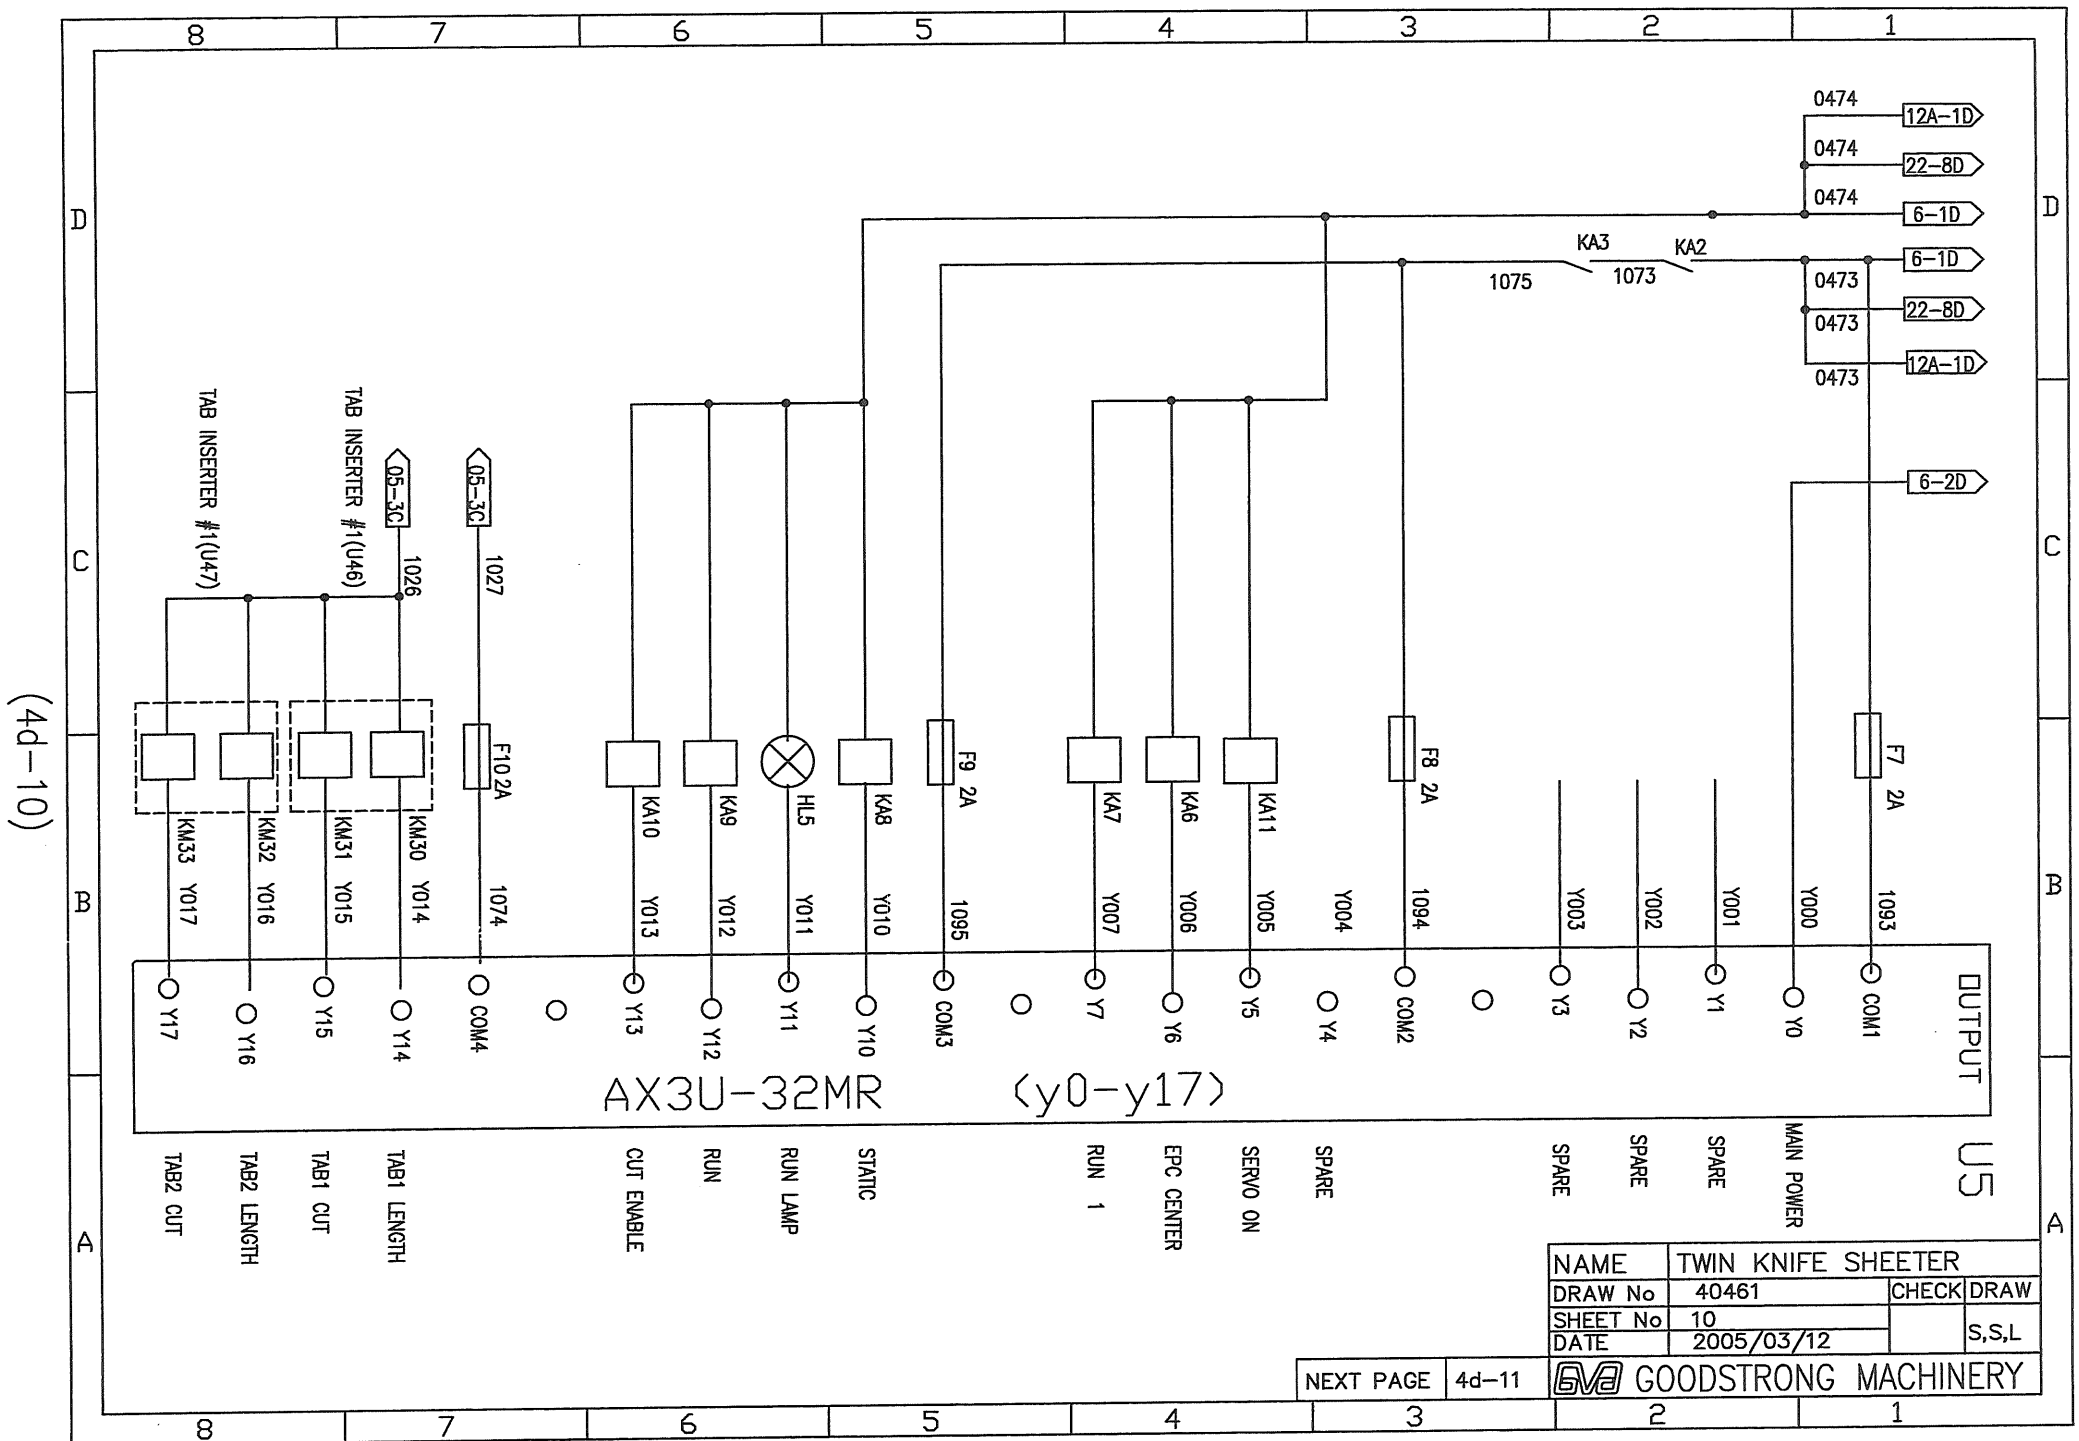

(4d-14)

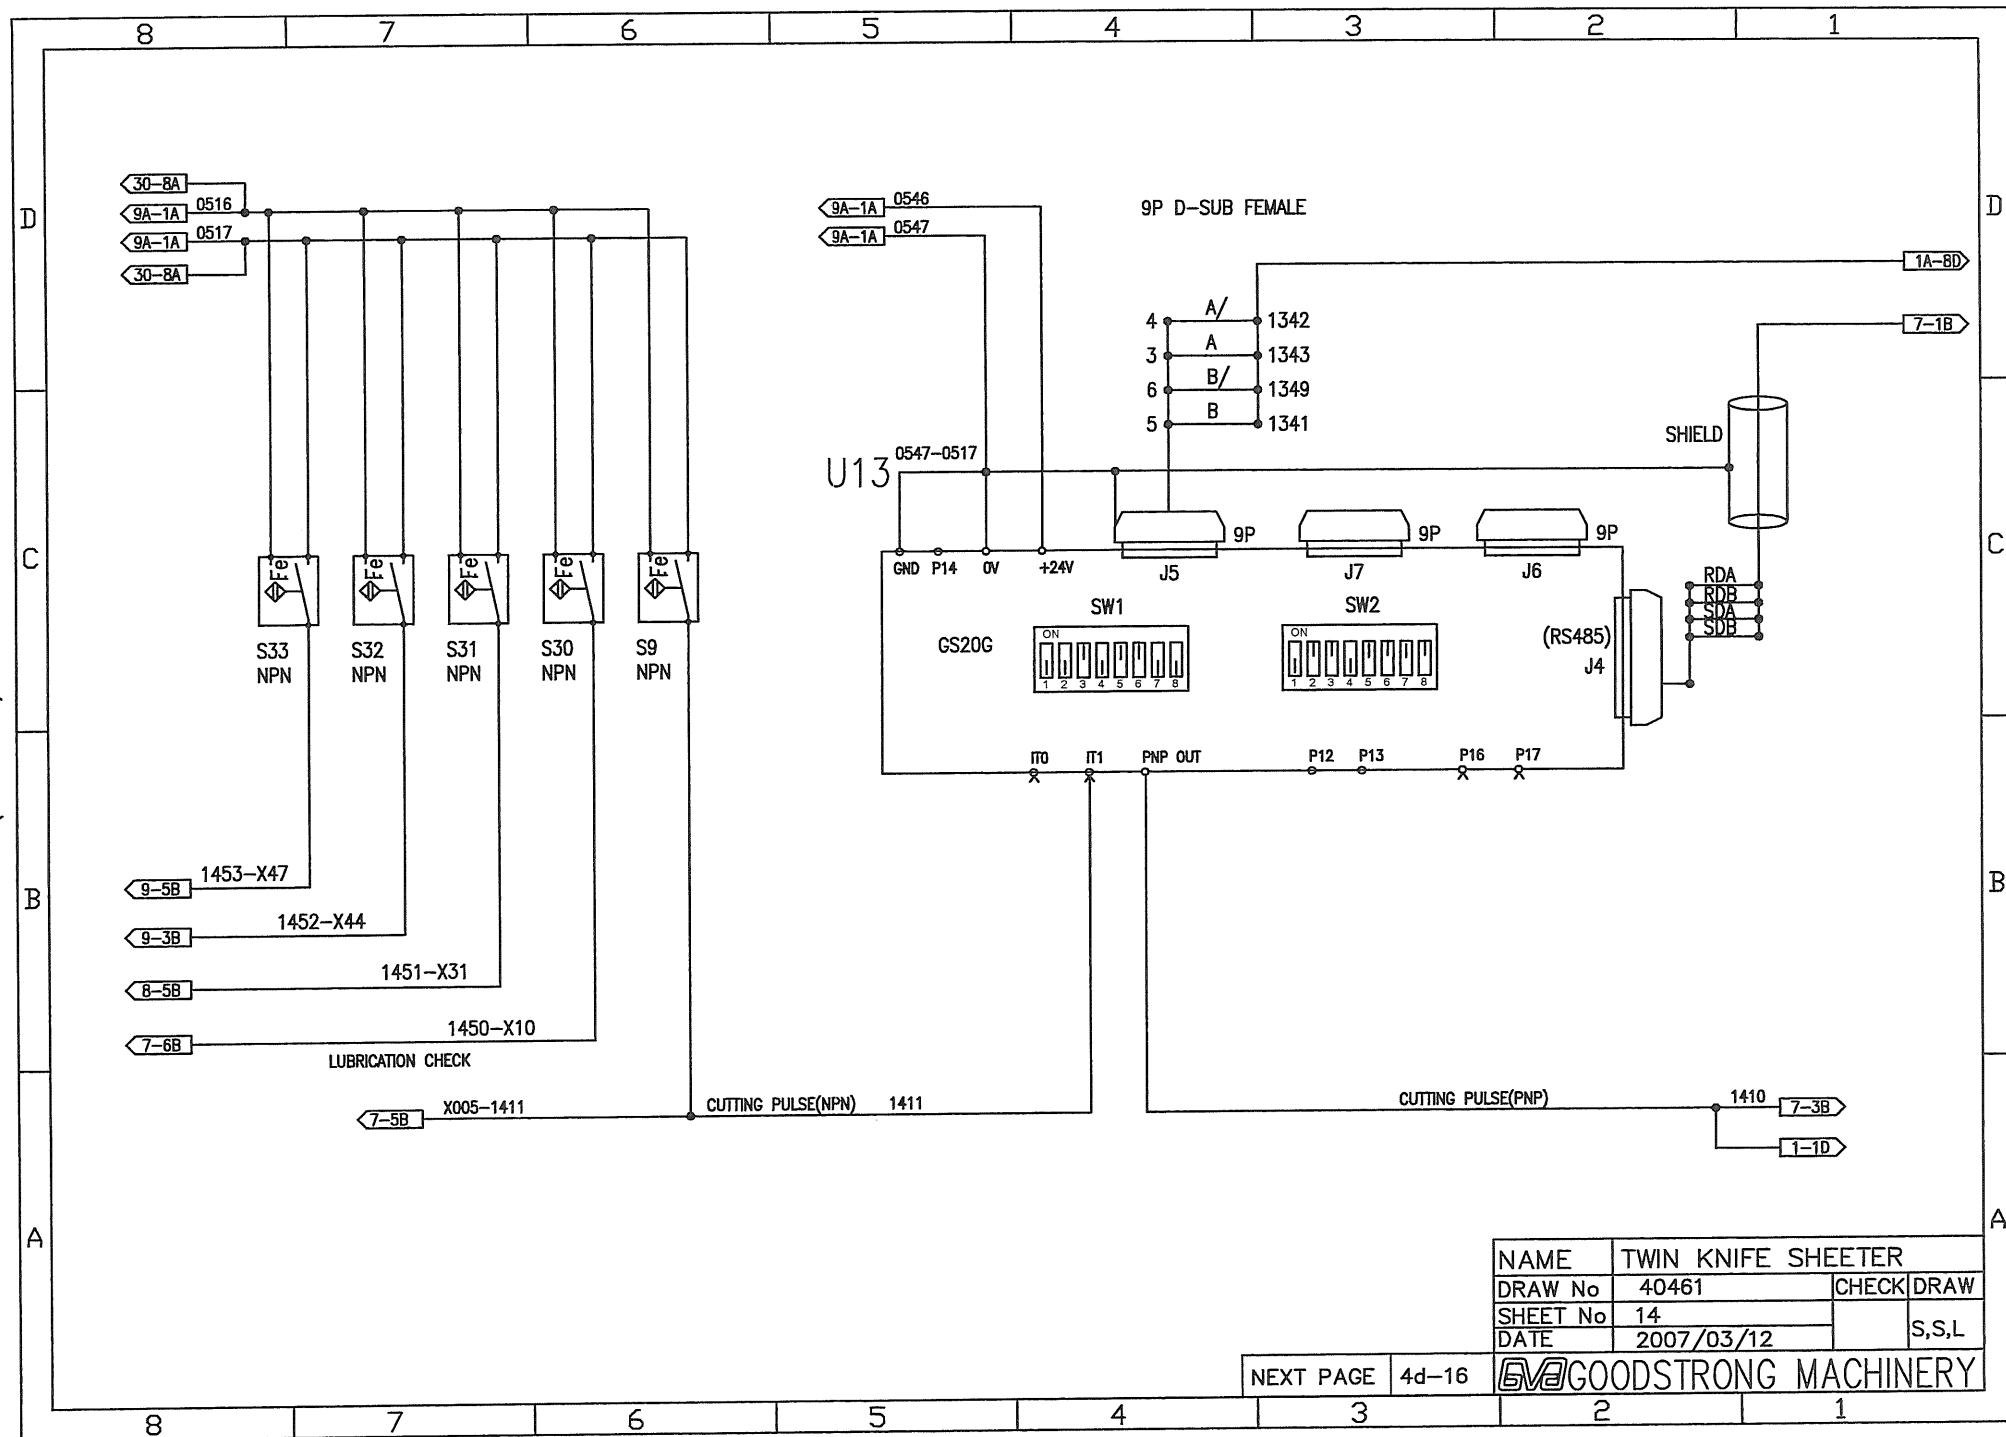


NAME	TWIN KNIFE SHEETER		
DRAW No	40461	CHECK	DRAW
SHEET No	14		S,S,L
DATE	2007/03/12		

NEXT PAGE 4d-16

GOODSTRONG MACHINERY


(4d-17)

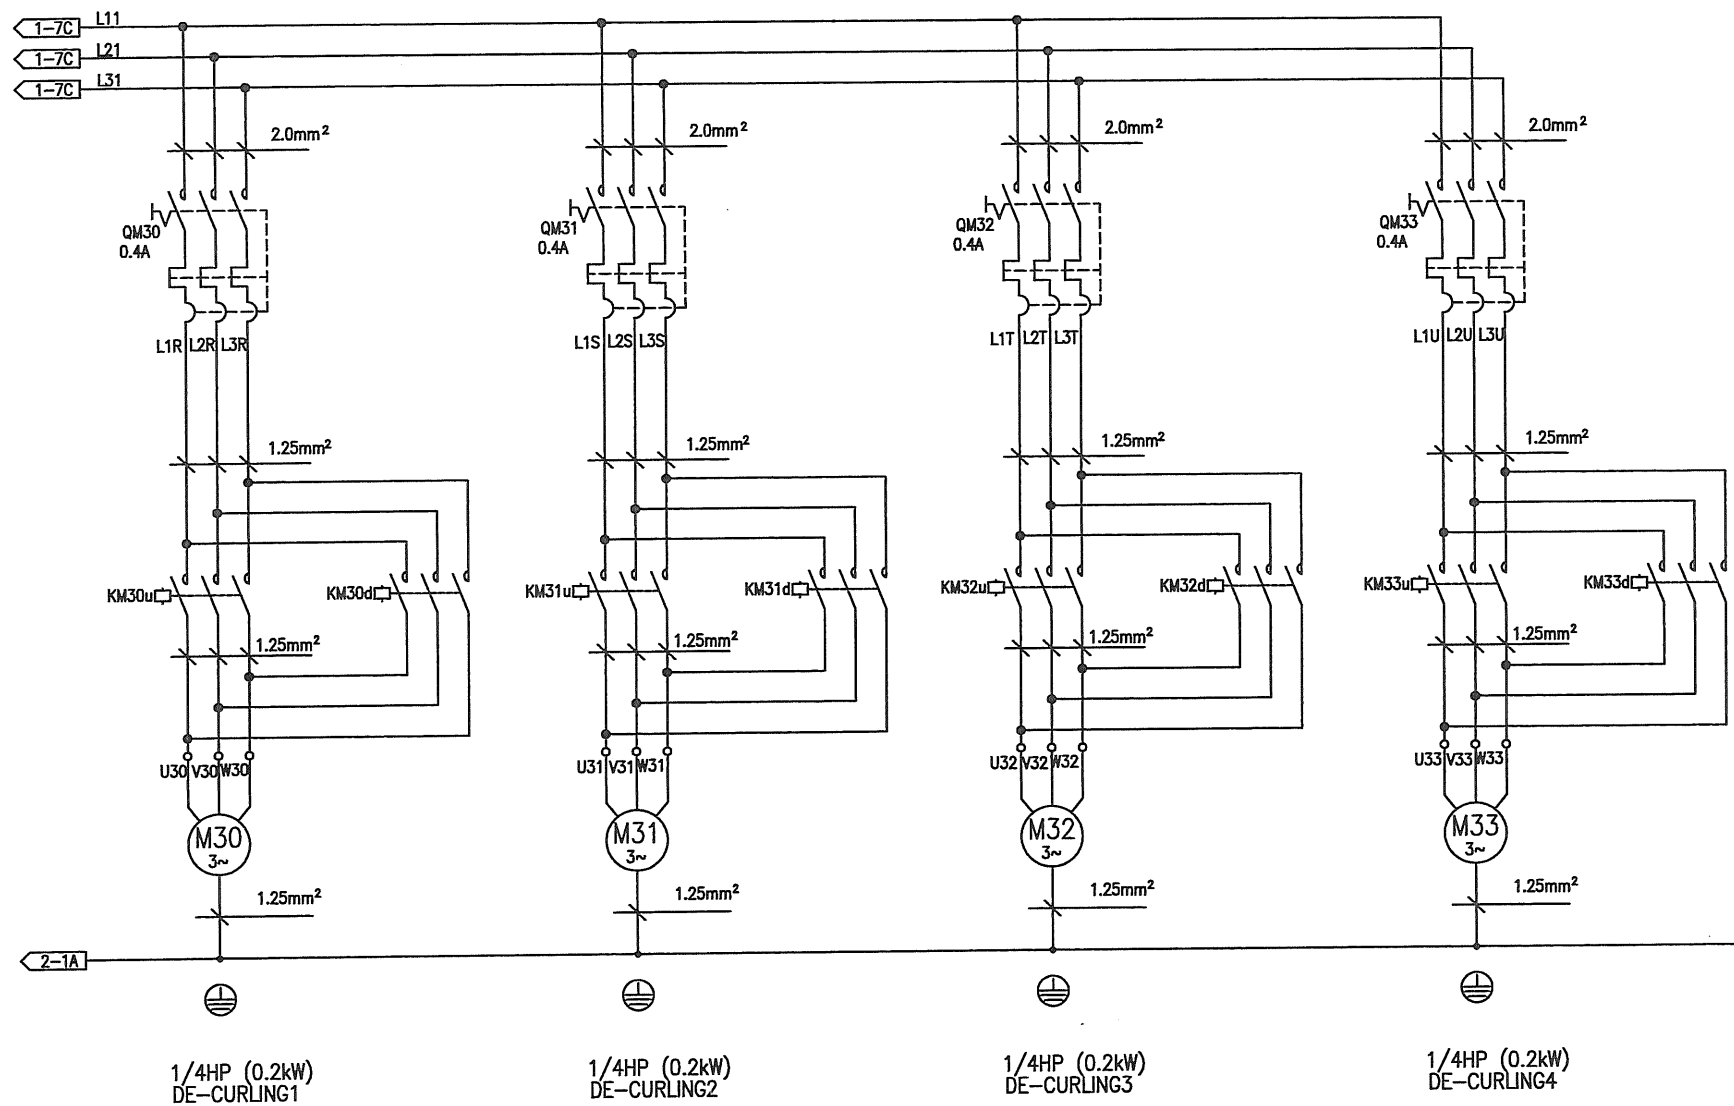

NAME	TWIN KNIFE SHEETER		
DRAW No	40461	CHECK	DRAW
SHEET No	17		S,S,L
DATE	2005/0312		

NEXT PAGE 4d-18 **GOODSTRONG MACHINERY**


(4d-19)

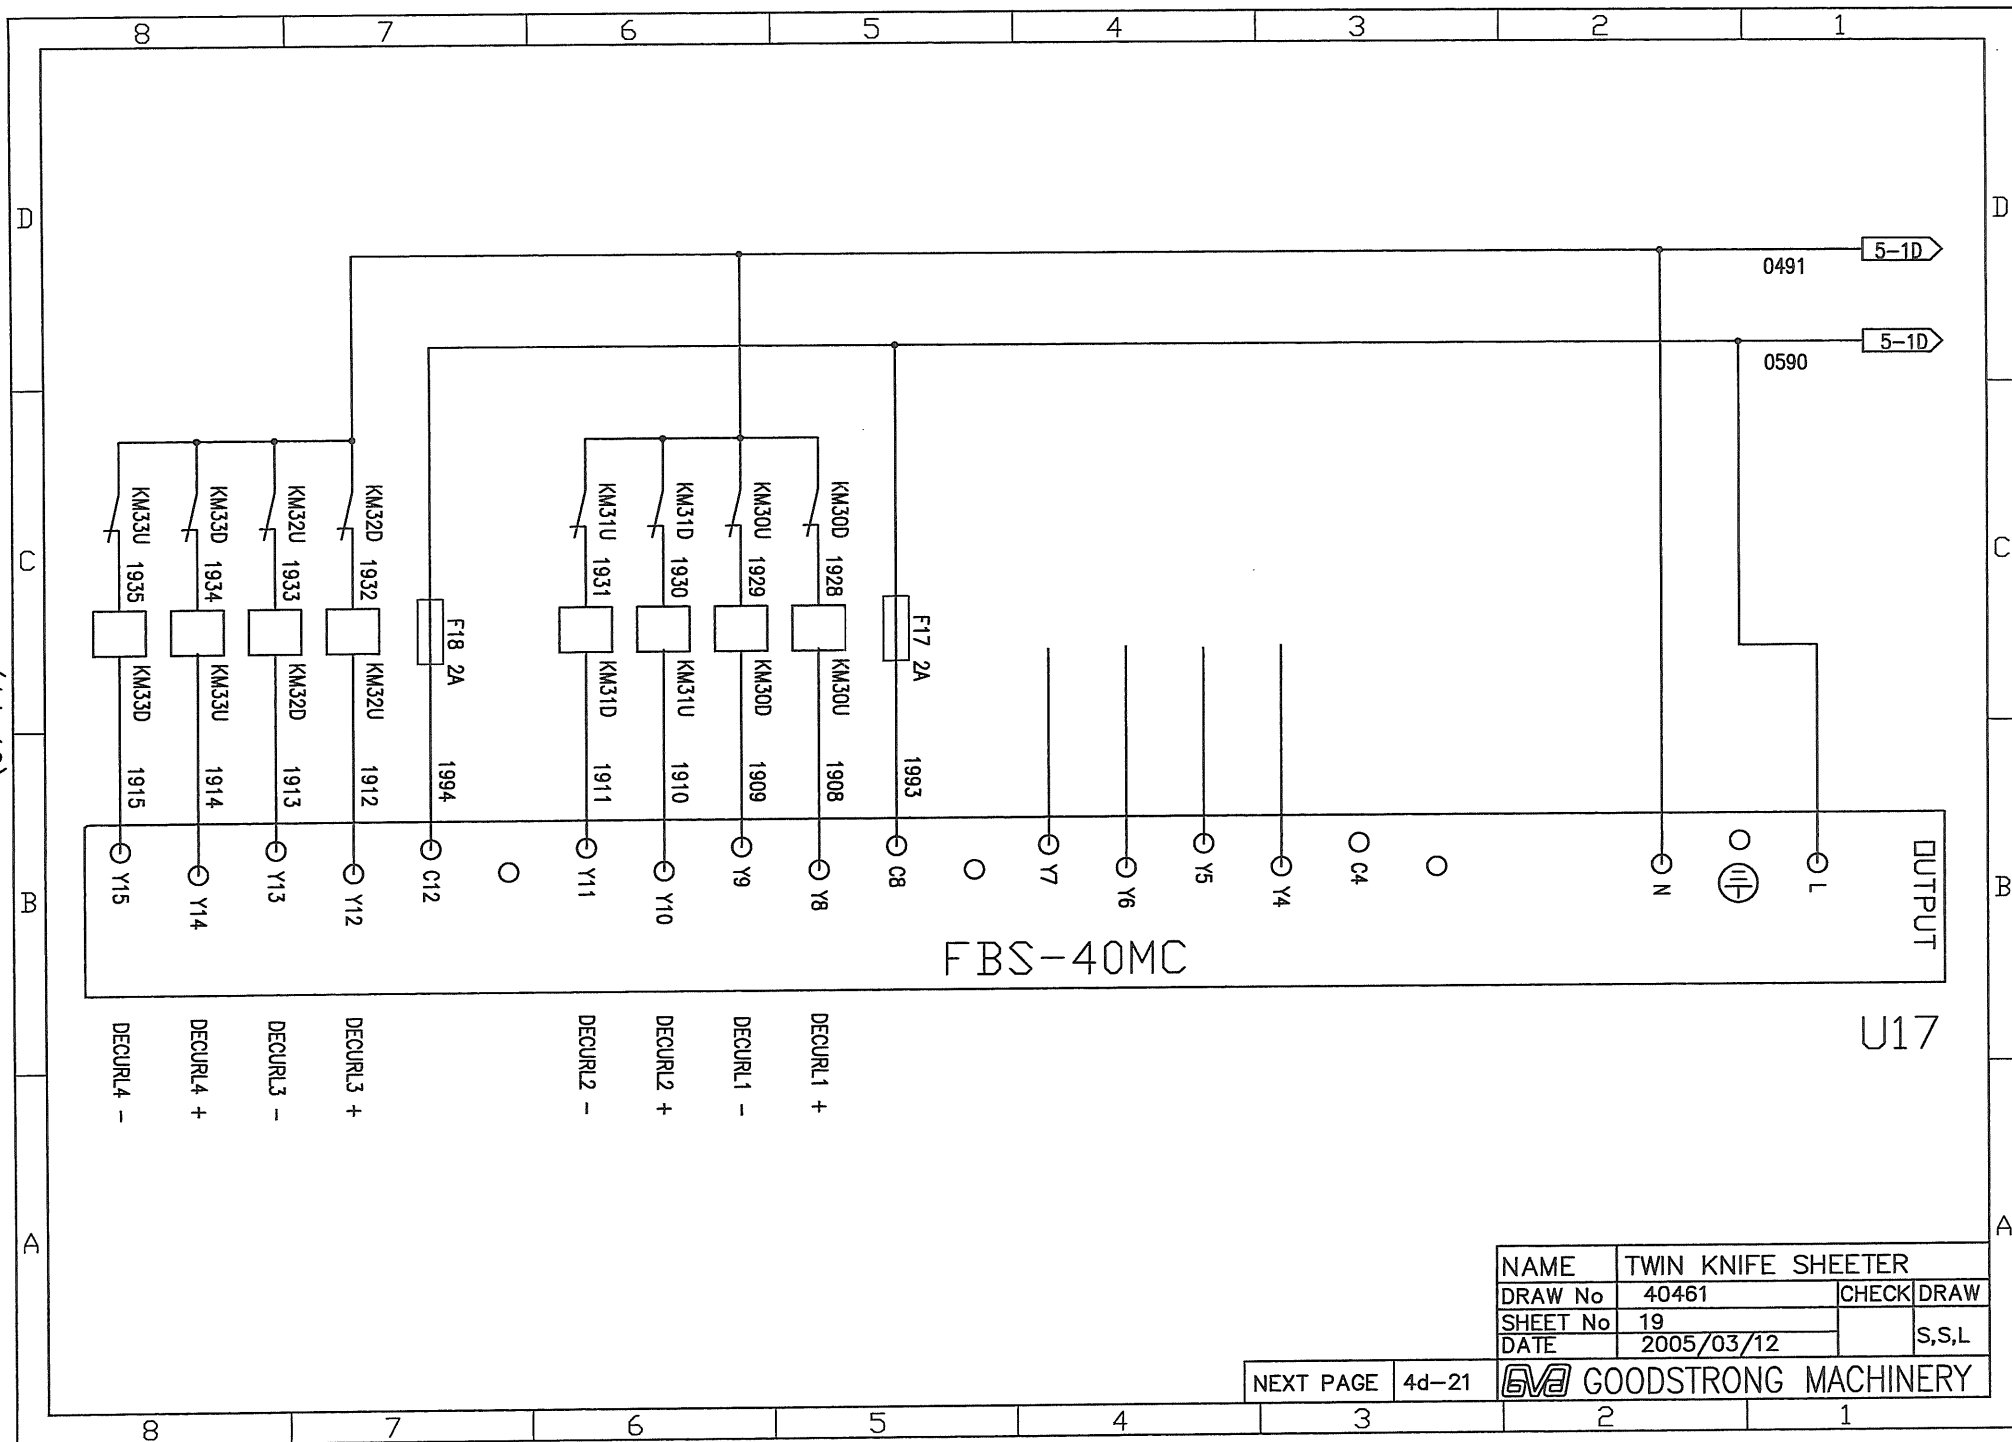


NAME	TWIN KNIFE SHEETER		
DRAW No	40461	CHECK	DRAW
SHEET No	19		S,S,L
DATE	2005/03/12		

NEXT PAGE 4d-21

 GOODSTRONG MACHINERY

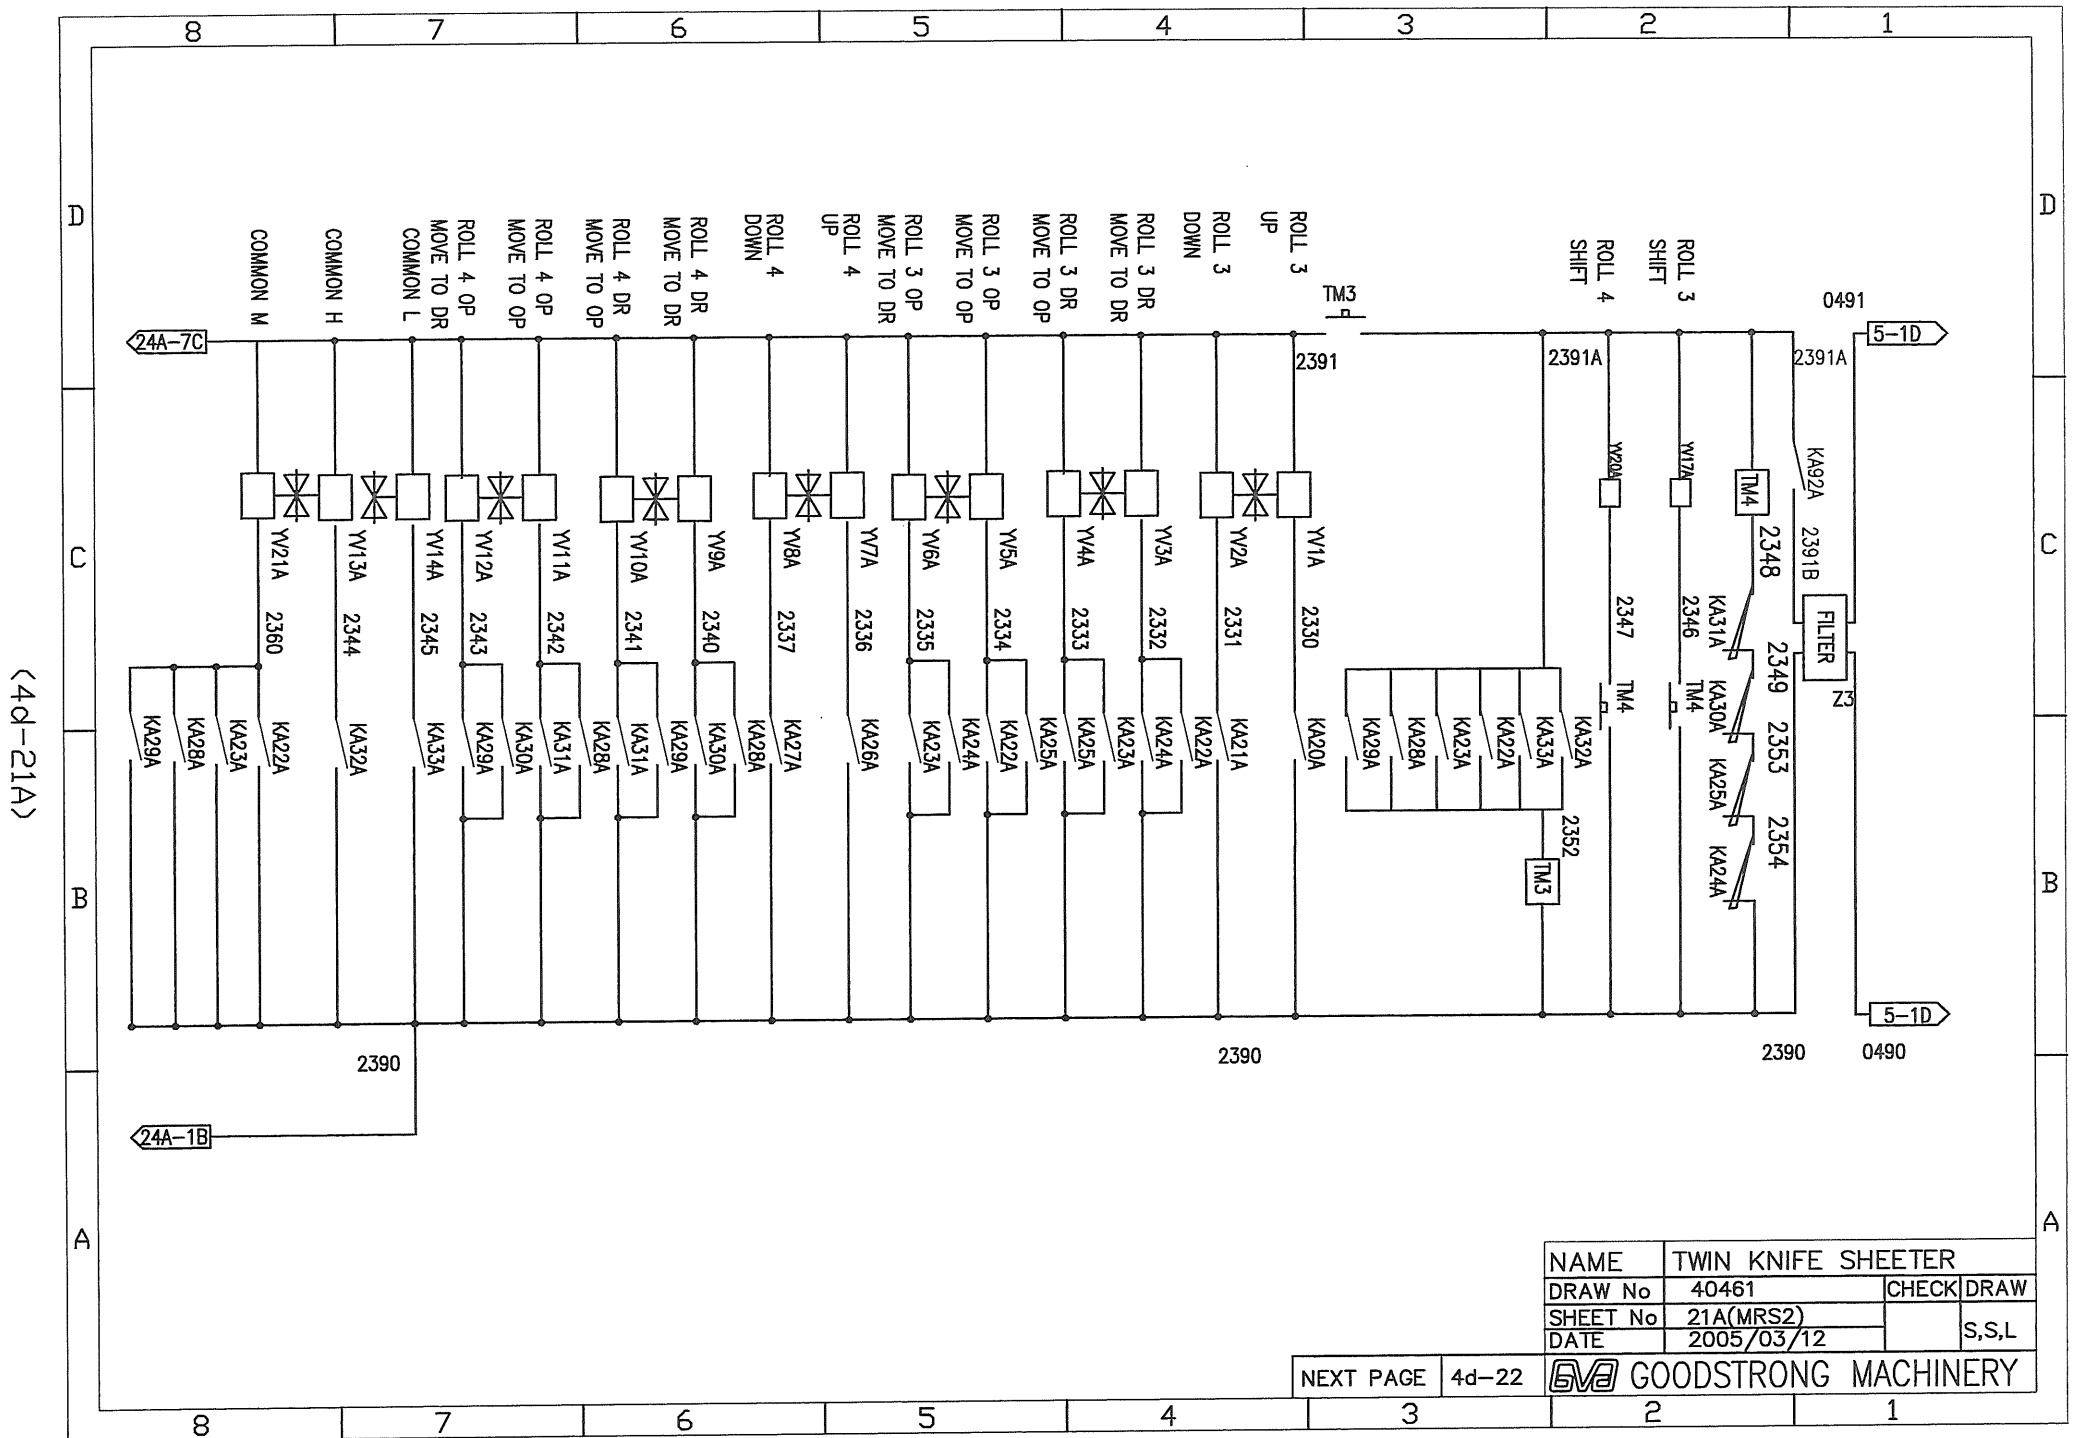

(4d-21A)

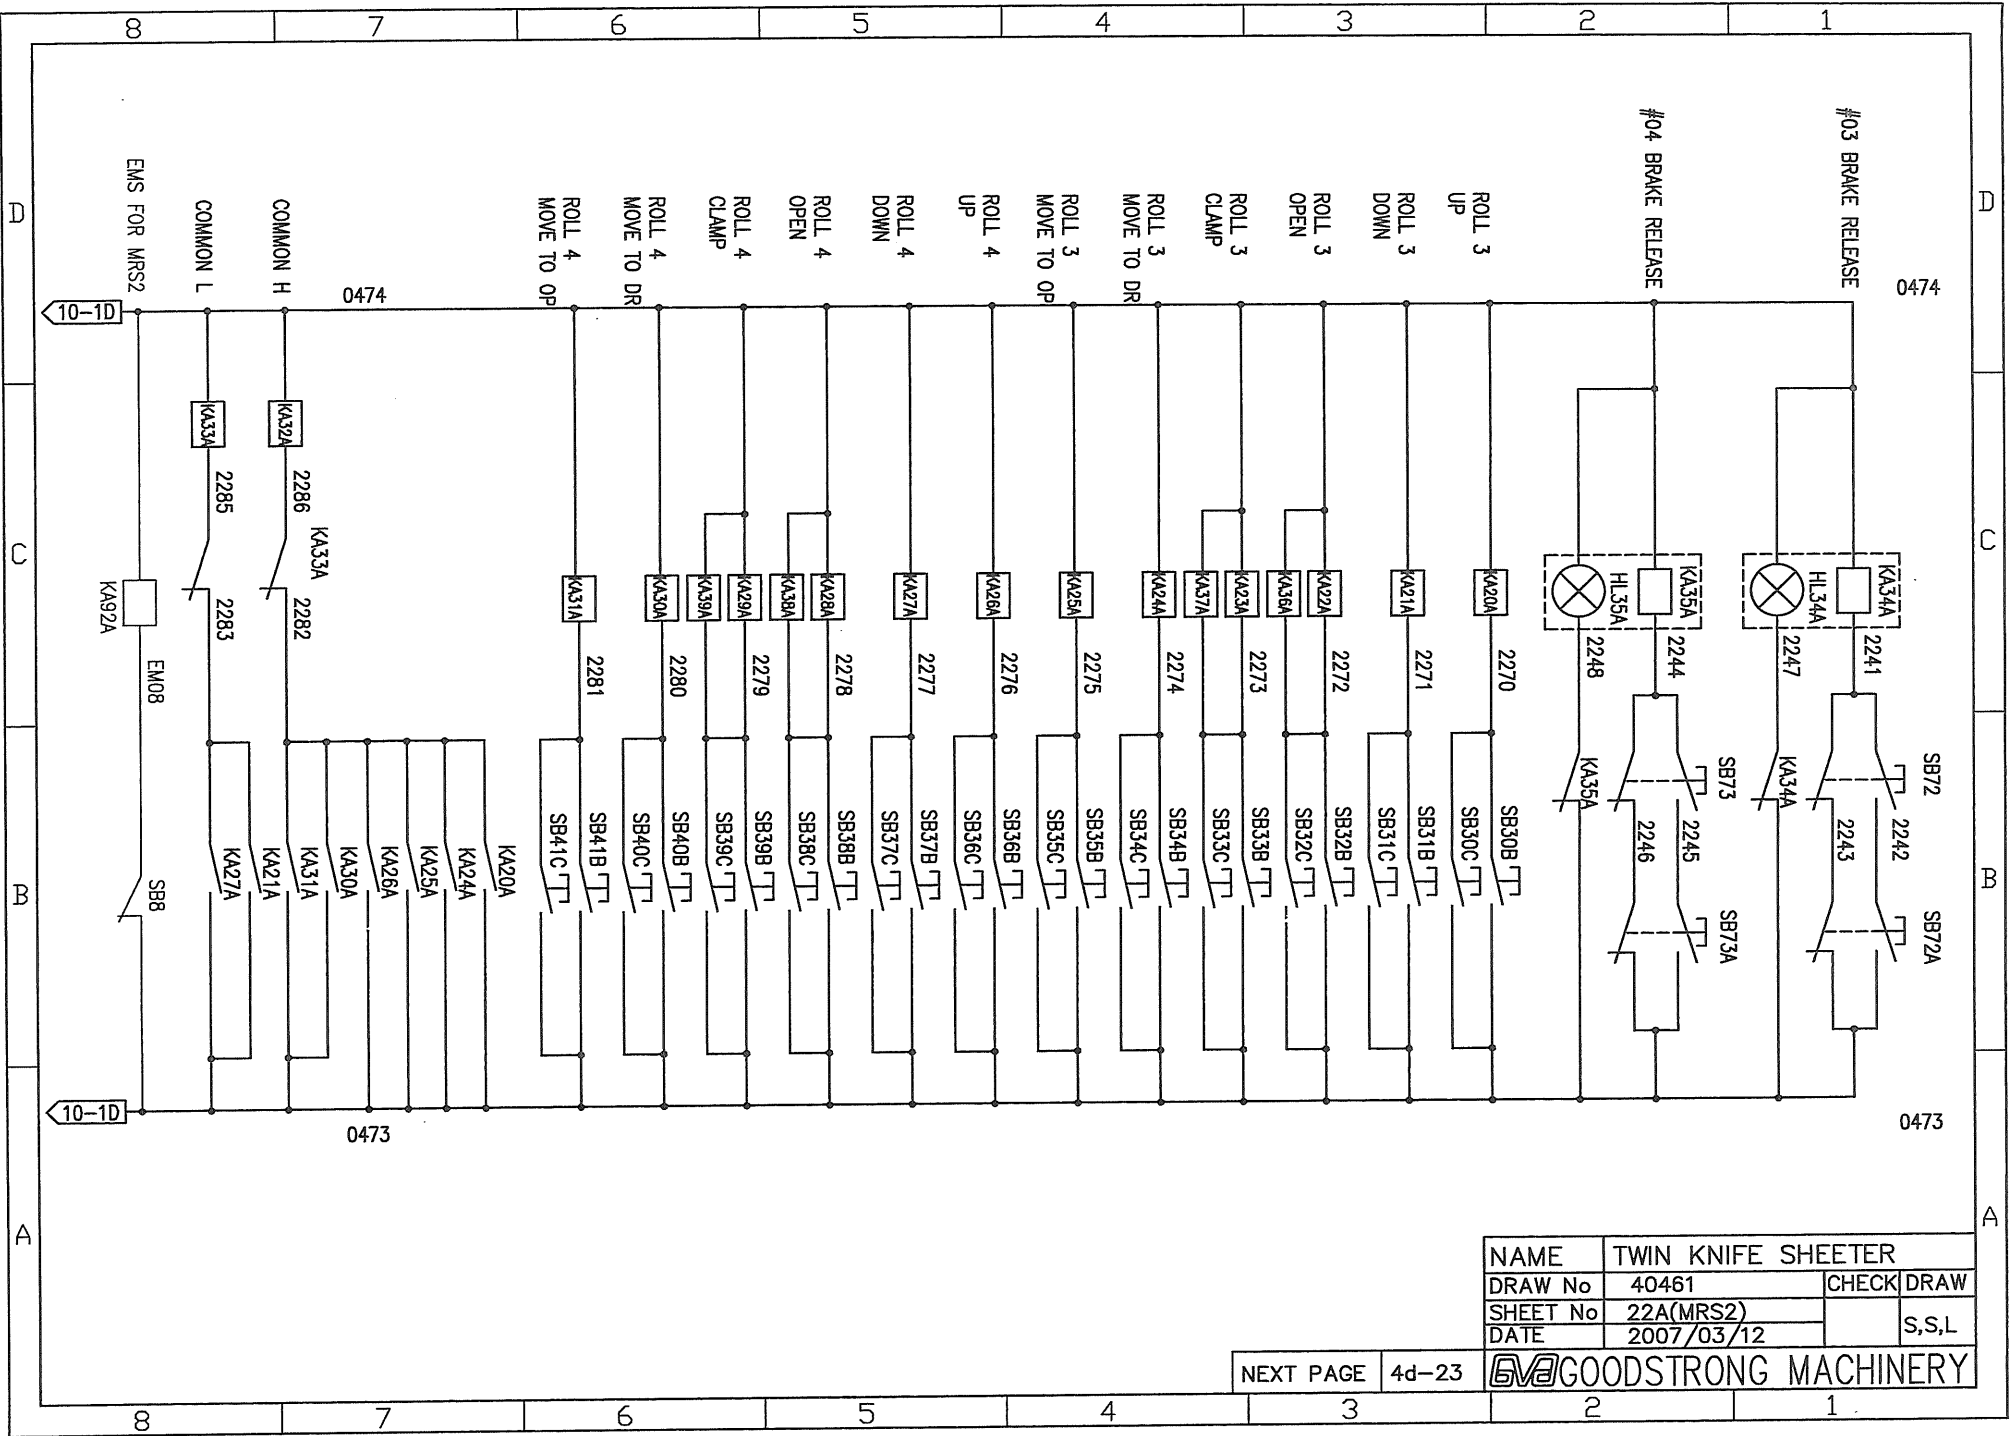

(4d-22A)

NAME	TWIN KNIFE SHEETER		
DRAW No	40461	CHECK	DRAW
SHEET No	22A(MRS2)		S,S,L
DATE	2007/03/12		

NEXT PAGE 4d-23

GOODSTRONG MACHINERY

0491 2391B
0490 2390

Z4

GS6A
(SP-200-24)

24V 0556A
24V 0556A
0V 0557A
0V 0557A
N 0541
L 0485A

0556A 2351
0556A FU30A (4A)
2350

2390	2390	2347	2348
2390	2391	2346	2391A
	X033	2391A	2390
	2372	0517	2352
		2390	
			0474
	2372		2279
		2390	0474
	2370		2278
		2390	0474
			2273
	2370		
		2390	0474
			2272
3104		3104A	0474
3104		3104A	0474
3104		3104A	2244
3103		0473	2248
3103		3103A	0474
3103		3103A	2241
	X033	0517	2279
	2345	2390	0474
	2345	2286	2285
2282	2352	2391A	2277
	X033	2390	0474
2283	2344	2285	2286
	2342	2391A	2273
	2342	2390	0474
	2282	0473	2281
	2343	2348	2349
	2340	2390	0474
	2282	0473	2280
	2343	2349	2353
	2341	2390	0474
	2360	2391A	2279
	2352	2390	0474
	2337	0473	2277
	2283		
	2336	2390	0474
	2282	0473	2276
	2334	2390	0474
	2333	0473	2275
	2282	2353	2354
	2335	2390	0474
	2332	0473	2274
	2282	2354	2390
	2335	2390	0474
	2333	2390	0474
	2360	2390	2273
	2352	2391A	
	2334	2390	0474
	2332	2390	2272
	2360	2391A	
	2352	2390	0474
	2331	0473	2271
	2283		
	2330	2390	0474
	2282	0473	2270

KA20A KA21A KA22A KA23A KA24A KA25A KA26A KA27A KA28A KA29A KA30A KA31A KA32A KA33A KA34A KA35A KA36A KA37A KA38A KA39A TM3 TM4


2347 2346 2391A 2246 2245 2244*2 2243 2242 2241*2 2345 2344 2343 2342 2341 2340 2337 2336 2335 2334 2333 2332 2331 2330 2330 2391 2351*2 2350*2 1485*4 2281*2 2280*2 2279*2 2278*2 2277*2 2276*2 2275*2 2274*2 2273*2 2272*2 2271*2 2270*2 2261 2260 2255 2254 2251 0541 0490 0491 0474*6 0473*5 0618 0619 0626 0627 X033 X025 0517*4 1017*2 1016*2 1016 1016 X004 X003 X046 X045 X013 0516*2 3103 3103A 3130*2 3104 3104 3104A 3140*2

NAME		TWIN KNIFE SHEETER	
DRAW No	40461	CHECK	DRAW
SHEET No	23A(MRS2)		S,S,L
DATE	2007/03/12		

NEXT PAGE 4d-24

GOODSTRONG MACHINERY


(4d-23A)

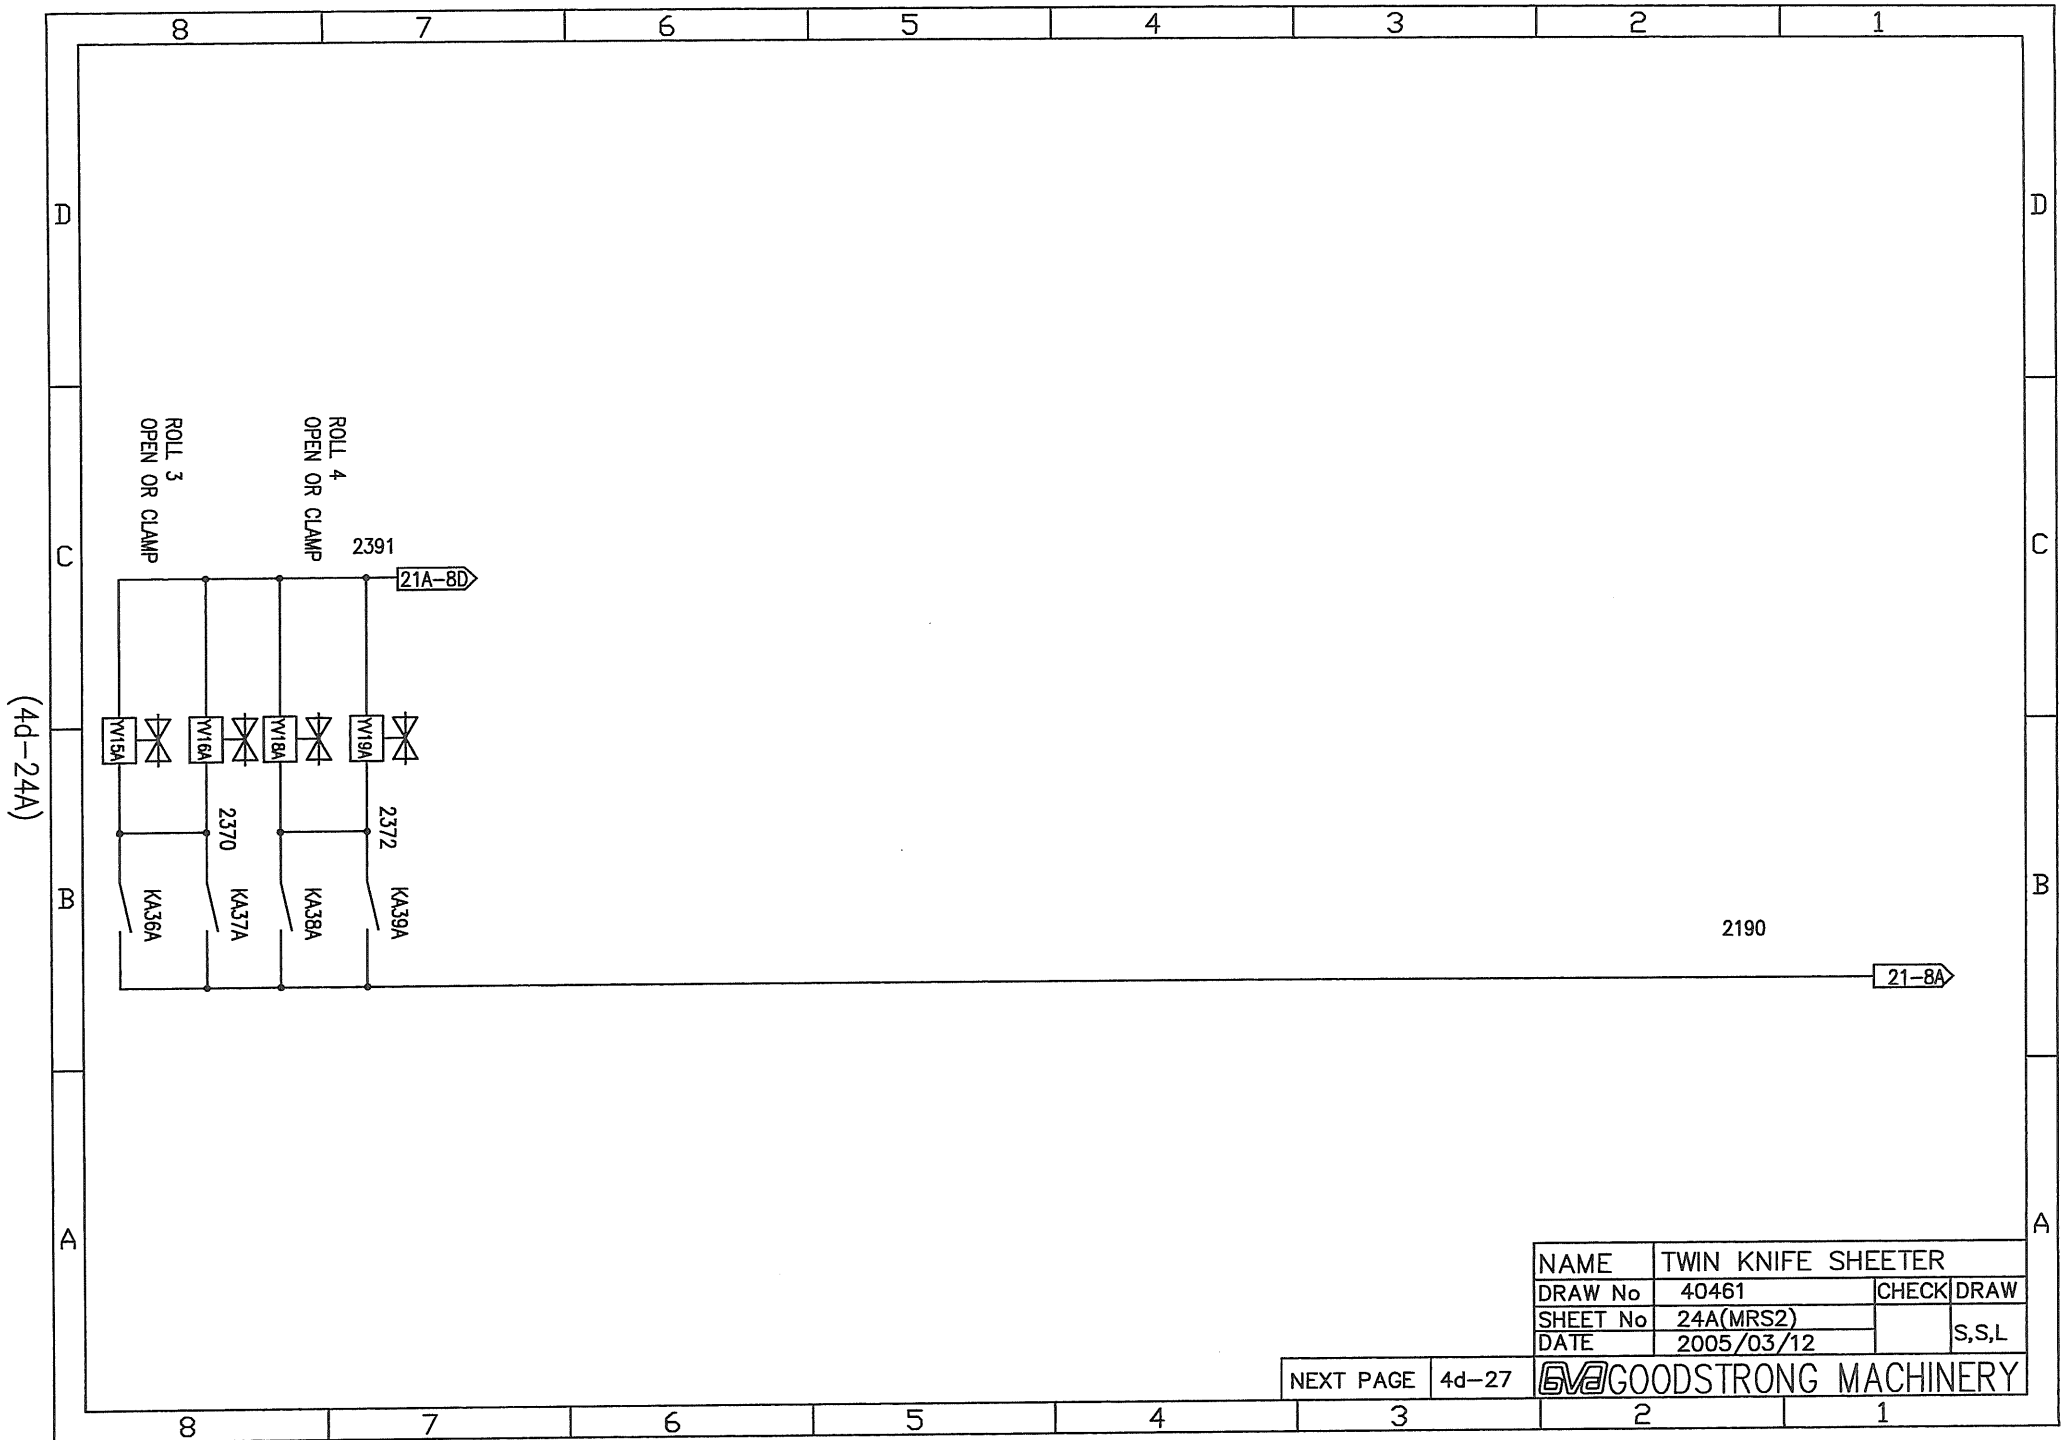

NAME	TWIN KNIFE SHEETER		
DRAW No	40461	CHECK	DRAW
SHEET No	24A(MRS2)		S,S,L
DATE	2005/03/12		

NEXT PAGE 4d-27

GOODSTRONG MACHINERY

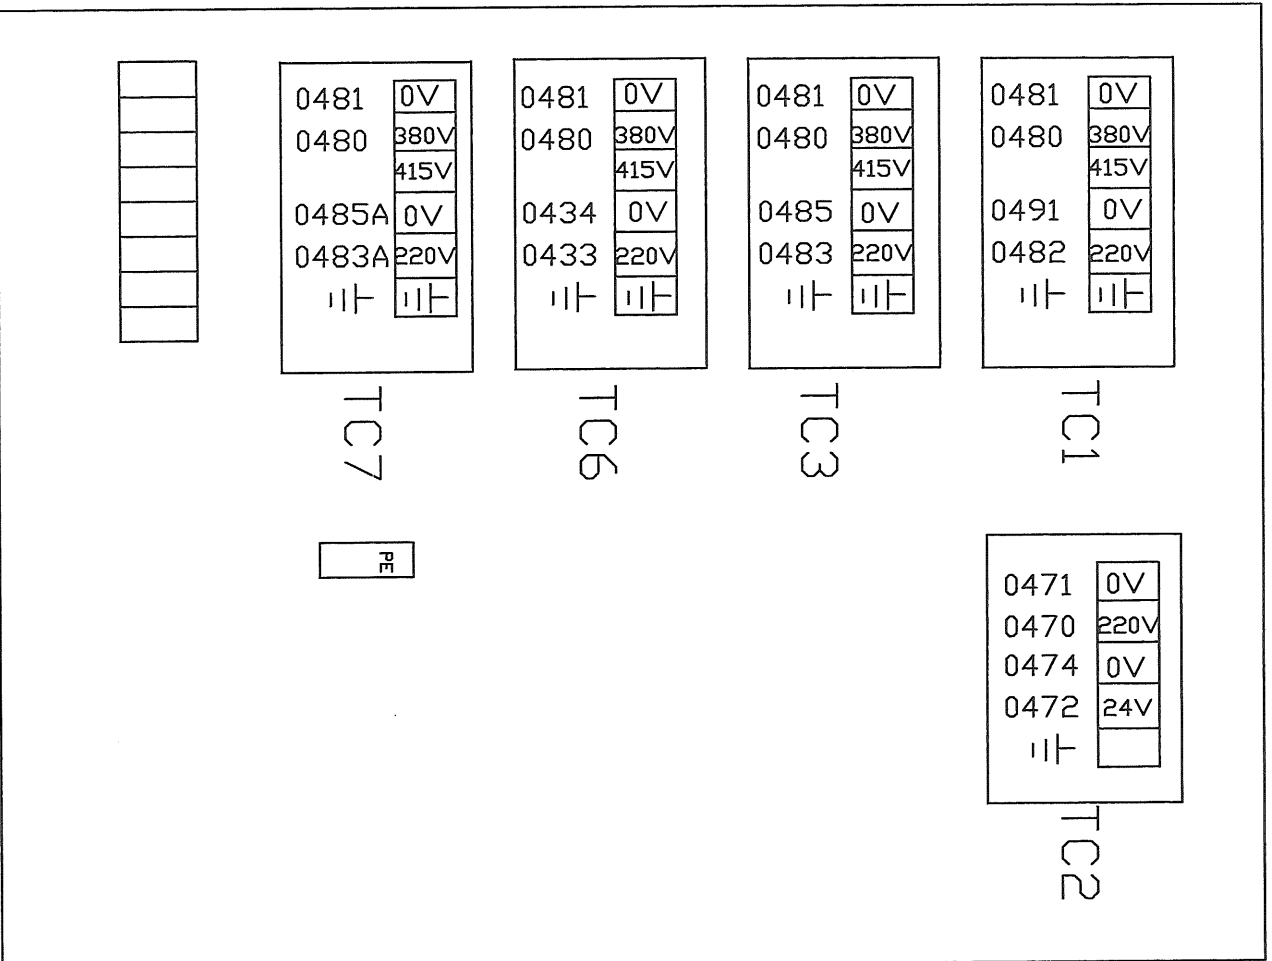

NEXT PAGE 4d-28

NAME	TWIN KNIFE SHEETER		
DRAW No	40461	CHECK	DRAW
SHEET No	27A-CBI-1		
DATE	2005/07/07		S.S.L

GVA GOODSTRONG MACHINERY

(4d-27A)

S/N. 40461 Part list of electrical components

Item designation	Description & function	Manufacture	Type	Technical data	Complies with the following standards	Marking of conformity granted
QF1	Main power switch	TECO	TO-225E	Ui=AC690V Ith=150A, interrup cap. 15kA	EN60947-2	
TC1	Transformer	LUNG CHI	LCP-TBSM-0.5 KVA	AC, 380/220V	EN61558-1 EN61558-2-4 2006/95/EC	
TC2	Transformer	LUNG CHI	LCP-TBSM-0.25 KVA	AC220V/AC24V	EN61558-1 EN61558-2-4 2006/75/EC	
TC3	Transformer	LUNG CHI	LCP-TBSM-0.5 KVA	AC 380/220V	EN61558-1 EN61558-2-4 2006/75/EC	
TC6	Transformer	LUNG CHI	LCP-TBSM-0.5 KVA	AC 380/220V	EN61558-1 EN61558-2-4 2006/75/EC	
TC7	Transformer	LUNG CHI	LCP-TBSM-0.5 KVA	AC 380/220V	EN61558-1 EN61558-2-4 2006/75/EC	
U1	Feeder roller inverter	JPS	PDAN-4110	AC 380V 11KW	93/68/EEC EN50178	
U2	Knife cylinder motor driver	TDE	OPDE-B-110A	55KW	2006/95/EC 2004/108/EC EN60204-1:2006 EN61800-5-1:2007 EN61800-3:2004	
U2-1	CAPACITOR BANK	HPB	CB-25K8V10P	INPUT 557-622VDC STORAGE 25000uf	2006/95/EC 2004/108/EC	
U3	Conveyor inverter	JPS	PDAN-4015	380V 1.5KW	93/68/EEC EN50178	
U4	Outlet roller inverter	JPS	PDAN-4015	380V 1.5KW	93/68/EEC EN50178	
U5	PLC	MITSUBISHI SHIHLIN	FX3U-32MR AX3U-32MR	100-240VAC 50/60HZ	IEC801-1 EN61000-6-4	
U6	PLC(input)	MITSUBISHI SHIHLIN	FX2N-16EX AX2N-16EX	QTY=16 24VDC	IEC801-1 EN61000-6-4	
U7	PLC(input)	MITSUBISHI SHIHLIN	FX2N-16EX AX2N-16EX	QTY=16 24VDC	IEC801-1 EN61000-6-4	

U46	TAB INSERTER1	GMC	410CM019	24V DC	DC24V-----	CE
U47	TAB INSERTER2	GMC	410CM019	24V DC	DC24V-----	CE
U52	PLC(output) FOR TESION	mitsubishi SHIHLIN	FX2N-4DA AX2N-4DA	QTY=4 24VDC	IEC801-1 EN61000-6-4	CE
U63~ U66	E/P	FESTO	VPPM-6L-L-1-G1 8-OL10H-V1N-S1	24VDC	2004/108/EC EN61000-6-2:2005 EN61000-6-4:2007	CE
U85	Static at overlap 1	XIAN XING	SF-F7	220VAC 0.15A OUTPUT:6KV RMS	89/336/EEC	CE
U86	Static at overlap 2 & outlet	SIMCO	D257Q 4000075	230VAC 0.13A OUTPUT:7KV RMS	EN61000-6-1 EN60950	
QM1	Feeder roller motor breaker	SCHNEIDER	GV2-ME22	Ue=690V Setting range=20....25A	EN60947-1 EN60947-4-1	CE
QM2	Knife cylinder motor breaker	FUJI	BW100EAG	3P100A	73/23/EEC 93/68/EEC EN60947-2	CE
QM3	Conveyor motor breaker	SCHNEIDER	GV2-ME10	Ue=690V Setting range=4....6.3A	EN60947-1 EN60947-4-1	CE
QM4	Outlet roller motor breaker	SCHNEIDER	GV2-ME07	Ue=690V Setting range=1.6...2.5A	EN60947-1 EN60947-4-1	CE
QM5	Lifting table motor breaker	SCHNEIDER	GV2-ME14	Ue=690V Setting range=6....10A	EN60947-1 EN60947-4-1	CE
QM8	Blower motor breaker	SCHNEIDER	GV2-ME10	Ue=690V Setting range=4....6.3A	EN60947-1 EN60947-4-1	CE
QM9	Blower motor breaker	SCHNEIDER	GV2-ME10	Ue=690V Setting range=4....6.3A	EN60947-1 EN60947-4-1	CE
QM10	Vacuum motor breaker	SCHNEIDER	GV2-ME08	Ue=690V Setting range=2.5....4A	EN60947-1 EN60947-4-1	CE
QM11	EPC motor breaker	SCHNEIDER	GV2-ME07	Ue=690V Setting range=1.6....2.5A	EN60947-1 EN60947-4-1	CE
QM12	Dust motor breaker	SCHNEIDER	GV2-ME10	Ue=690V Setting range=4....6.3A	EN60947-1 EN60947-4-1	CE

KM10	Magnetic contactor	SCHNEIDER	LC1D09M7	Ue=690V 50/60HZ	EN60947-1 EN60947-4-1	CE
KM11	Magnetic contactor	SCHNEIDER	LC1D09M7	Ue=690V 50/60HZ	EN60947-1 EN60947-4-1	CE
KM12	Magnetic contactor	SCHNEIDER	LC1D09M7	Ue=690V 50/60HZ	EN60947-1 EN60947-4-1	CE
KM13	Magnetic contactor	SCHNEIDER	LC1D09M7	Ue=690V 50/60HZ	EN60947-1 EN60947-4-1	CE
KM14	Magnetic contactor	SCHNEIDER	LC1D09M7	Ue=690V 50/60HZ	EN60947-1 EN60947-4-1	CE
KM14A	Magnetic contactor	SCHNEIDER	LC1D09M7	Ue=690V 50/60HZ	EN60947-1 EN60947-4-1	CE
KM15	Magnetic contactor	SCHNEIDER	LC1D09M7	Ue=690V 50/60HZ	EN60947-1 EN60947-4-1	CE
KM16	Magnetic contactor	SCHNEIDER	LC1D09M7	Ue=690V 50/60HZ	EN60947-1 EN60947-4-1	CE
KM17	Magnetic contactor	SCHNEIDER	LC1D09M7	Ue=690V 50/60HZ	EN60947-1 EN60947-4-1	CE
KM18	Magnetic contactor	SCHNEIDER	LC1D09M7	Ue=690V 50/60HZ	EN60947-1 EN60947-4-1	CE
KM19	Magnetic contactor	SCHNEIDER	LC1D09M7	Ue=690V 50/60HZ	EN60947-1 EN60947-4-1	CE
KM30U~ KM30D	Magnetic contactor	SCHNEIDER	LC1D09M7	Ue=690V 50/60HZ	EN60947-1 EN60947-4-1	CE
KM31U~ KM31D	Magnetic contactor	SCHNEIDER	LC1D09M7	Ue=690V 50/60HZ	EN60947-1 EN60947-4-1	CE
KM32U~ KM32D	Magnetic contactor	SCHNEIDER	LC1D09M7	Ue=690V 50/60HZ	EN60947-1 EN60947-4-1	CE
KM33U~ KM33D	Magnetic contactor	SCHNEIDER	LC1D09M7	Ue=690V 50/60HZ	EN60947-1 EN60947-4-1	CE
SQ2	Safety Door Limit Switch	ELAN	TZFS30/1S/96/M2 0	250VAC 8A	73/23/ECC 89/336/EEC 98/336/EC	CE
SQ4	Safety Door Limit Switch	ELAN	TZFS30/1S/96/M2 0	250VAC 8A	73/23/ECC 89/336/EEC 98/336/EC	CE
SQ5~ SQ10	SAFETY BAR LIMIT SWITCH	TEND	TZ-8104	5A240VAC 5A28VDC	73/23/EEC 93/68/EEC	CE
SQ20	Top cover Limit switch	TEND	TZ-8108	5A240VAC 5A28VDC	73/23/EEC 93/68/EEC	CE
SQ21	Jam limit SENSOR	SICK	IM12-04NNSZW1	10-30VDC	89/336/EC 60947-5-2	CE
SQ22	Cut Unit Door switch	TEND	TZ-8108	5A240VAC 5A28VDC	73/23/EEC 93/68/EEC	CE

KA6	EPC center relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA7	Run 1 relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA8	Static relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA9	Run relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA10	Cut enable relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA11	Servo on relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA20	Roll 1 up relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA21	Roll 1 down relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA22, KA36	Roll 1 open relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA23, KA37	Roll 1 clamp relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA24	Roll 1 shift to DR relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA25	Roll 1 shift to OP relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA26	Roll 2 up relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA27	Roll 2 down relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA28, KA38	Roll 2 open relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE

KA29A, KA39A	MRS 2 Roll 2 clamp relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA30A	MRS 2 Roll 2 shift to DR relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA31A	MRS 2 Roll 2 shift to DR relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA32A	MRS 2 Common H relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA33A	MRS 2 Common L relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA34A~ KA35A	MRS 2 Brake release relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA40	Front door RELAY	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA41	Rear door relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA83	Feeder roll brake relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA87	Cut unit lamp relay	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
KA90~ KA91	ESR RELAY	OMRON	MY4N-GS 24VAC	5A240VAC 5A28VDC	73/23/EEC EN61810-1 :1998	CE
TM1~ TM2	TIMER	OMRON	H3Y-2	5S 220V	89/336/EEC 73/23/EEC	CE
TM3~ TM4	TIMER	OMRON	H3Y-2	5S 220V	89/336/EEC 73/23/EEC	CE
S0	Sheet counter sensor	SICK	WTB9-3N2461	10-30VDC	89/336/EC 60947-5-2	CE
S1-S2	REEL 1-2DIA sensor	FOTEK	PS-05N	10-30VDC	2006/95/EC 2004/108/EC	CE
S3-S4	REEL 3-4DIA sensor	FOTEK	PS-05N	10-30VDC	2006/95/EC 2004/108/EC	CE
S6	PILE LEVEL sensor	FOTEK	CP18-30N	10-30VDC	EN60947-5	CE

SB18	Power off push button	SCHNEIDER	ZB5AA2-BK ZBE102 1B	250V 6A	EN60947-1 EN60947-5-1 89/336/EEC	CE
SB19	Power on push button	SCHNEIDER	ZB5AW37-W ZB5AW061-A BA9SL24W	250V 6A	EN60947-1 EN60947-5-1 89/336/EEC	CE
SB22~ SB22A	SPEED UP push button	SCHNEIDER	ZB5AA1-W ZB5AZ101 1A	250V 6A	EN60947-1 EN60947-5-1 89/336/EEC	CE
SB23~ SB23A	SLOW DOWN push button	SCHNEIDER	ZB5AA2-BK ZB5AZ101 1A	250V 6A	EN60947-1 EN60947-5-1 89/336/EEC	CE
SB30~ SB30A	Roll 1-up push button	SCHNEIDER	ZB5AA1-W ZB5AZ101 1A	250V 6A	EN60947-1 EN60947-5-1 89/336/EEC	CE
SB31~ SB31A	Roll 1-down push button	SCHNEIDER	ZB5AA2-BK ZB5AZ101 1A	250V 6A	EN60947-1 EN60947-5-1 89/336/EEC	CE
SB32~ SB32A	Roll 1-open push button	SCHNEIDER	ZB5AA2-BK ZB5AZ101 1A	250V 6A	EN60947-1 EN60947-5-1 89/336/EEC	CE
SB33~ SB33A	Roll 1-clamp push button	SCHNEIDER	ZB5AA1-W ZB5AZ101 1A	250V 6A	EN60947-1 EN60947-5-1 89/336/EEC	CE
SB34~ SB34A	Roll 1 move to DR push button	SCHNEIDER	ZB5AA1-W ZB5AZ101 1A	250V 6A	EN60947-1 EN60947-5-1 89/336/EEC	CE
SB35~ SB35A	Roll 1 move to OP push button	SCHNEIDER	ZB5AA2-BK ZB5AZ101 1A	250V 6A	EN60947-1 EN60947-5-1 89/336/EEC	CE
SB36~ SB36A	Roll 2 up push button	SCHNEIDER	ZB5AA1-W ZB5AZ101 1A	250V 6A	EN60947-1 EN60947-5-1 89/336/EEC	CE
SB37~ SB37A	Roll 2 down push button	SCHNEIDER	ZB5AA2-BK ZB5AZ101 1A	250V 6A	EN60947-1 EN60947-5-1 89/336/EEC	CE
SB38~ SB38A	Roll 2 open push button	SCHNEIDER	ZB5AA2-BK ZB5AZ101 1A	250V 6A	EN60947-1 EN60947-5-1 89/336/EEC	CE
SB39~ SB39A	Roll 2 clamp push button	SCHNEIDER	ZB5AA1-W ZB5AZ101 1A	250V 6A	EN60947-1 EN60947-5-1 89/336/EEC	CE
SB40~ SB40A	Roll 2 move to DR push button	SCHNEIDER	ZB5AA1-W ZB5AZ101 1A	250V 6A	EN60947-1 EN60947-5-1 89/336/EEC	CE

SB71~ SB71A (HL35)	Brake release push button	FUJI	AR22E5L-11E3Y	250V 6A (HL35 LAMP 30VAC)	73/23/EEC 93/68/EEC EN60947-5-1	CE
SB72~ SB73 (HL34A)	Brake release select button	FUZI	AR22E5L-11E3Y	250V 6A LAMP 30VAC	73/23/EEC 93/68/EEC EN60947-5-1	CE
SB72A~ SB73A (HL35A)	Brake release select button	FUZI	AR22E5L-11E3Y	250V 6A LAMP 30VAC	73/23/EEC 93/68/EEC EN60947-5-1	CE
SB75	Clear tab counter push button	SCHNEIDER	ZB5AA1-W ZB5AZ101 1A	250V 6A	EN60947-1 EN60947-5-1 89/336/EEC	CE
HL2~HL4	ALM R,Y,G	TEND	TPWL-220	Ue:12...230VAC	IEC/EN 60947-5-1	CE
HL6	CUT UNIT LAMP		ME105011001	24VDC	DC24V-----	
GS1	Switch power supply for sensor	MEAN WELL	SP-200-24	200W OUTPUT:+24V 8A	EN60950	CE
GS2	Switch power supply for de-curler	MEAN WELL	RSP-100-24	100W OUTPUT:+24V 4A	EN60950	CE
GS3	Switch power supply for tab insertion	MEAN WELL	RSP-100-24	100W OUTPUT:+24V 4.2A	EN60950	CE
GS4	Switch power supply for feeder roll brake	MEAN WELL	RSP-100-24	100W OUTPUT:+24V 4.2A	EN60950	CE
GS5	Switch power supply for servo driver	MEAN WELL	RSP-100-24	100W OUTPUT:+24V 4.2A	EN60950	CE
GS6~ GS6A	Switch power supply for MRS fan	MEAN WELL	SP-200-24	200W OUTPUT:+24V 8A	EN60950	CE
GS7	Switch power supply for master encoder	MEAN WELL	RQ-50B	50W OUTPUT:+5V 5.0A	EN60950	CE
FU1,FU2 FU6,FU25	Protection loop breaker	SCHNEIDER	IK60N1PC10A	230V 10A	73/23/EEC	CE
FU3,FU17 FU17A	Protection loop breaker	SCHNEIDER	IK60N1PC6A	230V 6A	73/23/EEC	CE
FU4~FU5 FU48	Protection loop breaker	SCHNEIDER	IC60N1PC4A	230V 4A	73/23/EEC	CE
F7~F14 F17~F20	Fuse	CHIAO TEIN	CT-FB101 10*38	690V/32A (Fuse 2A)	EN60269-1 2006/95/EC	CE
FU30~ FU31	Protection loop breaker	SCHNEIDER	IC60N1PC4A	230V 4A	73/23/CEE	CE

YV1	Roll 1 up	CHIA WANG	DSG-02-3C4 Coil : (WE-02G-AC-20)	AC220V	98/37/EEC EN60204	CE
YV2	Roll 1 down	CHIA WANG	DSG-02-3C4 Coil : (WE-02G-AC-20)	AC220V	98/37/EEC EN60204	CE
YV3	Roll 1 DR move to DR	CHIA WANG	DSG-02-3C4 Coil : (WE-02G-AC-20)	AC220V	98/37/EEC EN60204	CE
YV4	Roll 1 DR move to OP	CHIA WANG	DSG-02-3C4 Coil : (WE-02G-AC-20)	AC220V	98/37/EEC EN60204	CE
YV5	Roll 1 OP move to OP	CHIA WANG	DSG-02-3C4 Coil : (WE-02G-AC-20)	AC220V	98/37/EEC EN60204	CE
YV6	Roll 1 OP move to DR	CHIA WANG	DSG-02-3C4 Coil : (WE-02G-AC-20)	AC220V	98/37/EEC EN60204	CE
YV7	Roll 2 up	CHIA WANG	DSG-02-3C4 Coil : (WE-02G-AC-20)	AC220V	98/37/EEC EN60204	CE
YV8	Roll 2 down	CHIA WANG	DSG-02-3C4 Coil : (WE-02G-AC-20)	AC220V	98/37/EEC EN60204	CE
YV9	Roll 2 DR move to DR	CHIA WANG	DSG-02-3C4 Coil : (WE-02G-AC-20)	AC220V	98/37/EEC EN60204	CE
YV10	Roll 2 DR move to OP	CHIA WANG	DSG-02-3C4 Coil : (WE-02G-AC-20)	AC220V	98/37/EEC EN60204	CE
YV11	Roll 2 OP move to OP	CHIA WANG	DSG-02-3C4 Coil : (WE-02G-AC-20)	AC220V	98/37/EEC EN60204	CE
YV12	Roll 2 OP move to DR	CHIA WANG	DSG-02-3C4 Coil : (WE-02G-AC-20)	AC220V	98/37/EEC EN60204	CE
YV13	Common H	CHIA WANG	DSG-02-3C4 Coil : (WE-02G-AC-20)	AC220V	98/37/EEC EN60204	CE
YV14	Common L	CHIA WANG	DSG-02-3C4 Coil : (WE-02G-AC-20)	AC220V	98/37/EEC EN60204	CE
YV15~ YV16	MRS	LUEN	VSV08-28-A2 coil:COD08-A2	220VRAC COIL A04/2	93/68/CEE	CE
YV17	MRS	LUEN	VSV08-28-A2 coil:COD08-A2	220VRAC COIL A04/2	93/68/CEE	CE

YV14A	Common L	CHIA WANG	DSG-02-3C4 Coil : (WE-02G-AC-20)	AC220V	98/37/EEC EN60204	CE
YV15A~ YV16A	MRS 2	LUEN	VSV08-28-A2 coil:COD08-A2	220VRAC COIL A04/2	93/68/CEE	CE
YV17A	MRS 2	LUEN	VSV08-28-A2 coil:COD08-A2	220VRAC COIL A04/2	93/68/CEE	CE
YV18A~ YV19A	MRS 2	LUEN	VSV08-28-A2 coil:COD08-A2	220VRAC COIL A04/2	93/68/CEE	CE
YV20A	MRS 2	LUEN	VSV08-28-A2 coil:COD08-A2	220VRAC COIL A04/2	93/68/CEE	CE
YV21A	Common M	CHIA WANG	DSG-02-3C4 Coil : (WE-02G-AC-20)	AC220V	98/37/EEC EN60204	CE
AV4	Feeder roll brake	MEZ	FBN-20	DC24V	DC24V-----	
AV5	Blower	FESTO	MFH-5-3/8-B	DC24V	98/37/EC	CE
Z1	Filter	YUNPEN	YD05T4	250VAC 50/60HZ	83/264/EEC 2002/95/EC 2005/717/EC	CE
Z2	Spark quencher	CHEMI-CON	XE1202	0.22uf 120Ω		
Z3	Filter	YUNPEN	YD05T4	250VAC 50/60HZ	83/264/EEC 2002/95/EC 2005/717/EC	CE
Z6	RESISTOR		5W 15Ω	5W 15Ω		
Z7	REACTOR	LINENG	E34XS013P124A	3~380V 50/60HZ 124A 0.23MH	EN60335-1 EN60335-2-5	CE
Z8	REACTOR	LINENG	E34XS013P110A	3~380V 50/60HZ 110A 0.053MH	EN60335-1 EN60335-2-5	CE
Z9~Z13	Spark quencher	CHEMI-CON	XE1202	0.22uf 120Ω		
Z14	Spark quencher	FOTEK	SQ3-511W	0.12uF 47Ω 550VAC, 3Φ	89/336/EEC 93/68/EEC	CE
EV1-1~ EV1-3	CB1 FAN	KAKU	KA1238HA2SAT	220V	EN50081-1 IEC801-3 EN60950	CE
EV2	CB2 FAN	KAKU	KA1238HA2SAT	220V	EN50081-1 IEC801-3 EN60950	CE
EV3-1	CB3 FAN	KAKU	KA1238HA2SAT	220V	EN50081-1 IEC801-3 EN60950	CE