


CYBERDECK / 1:1 MECHANICAL FIT TEMPLATE

A4 landscape | TOP VIEW | all dimensions in mm | 2026-10-02

FIT CHECK ONLY

NOT FOR FABRICATION

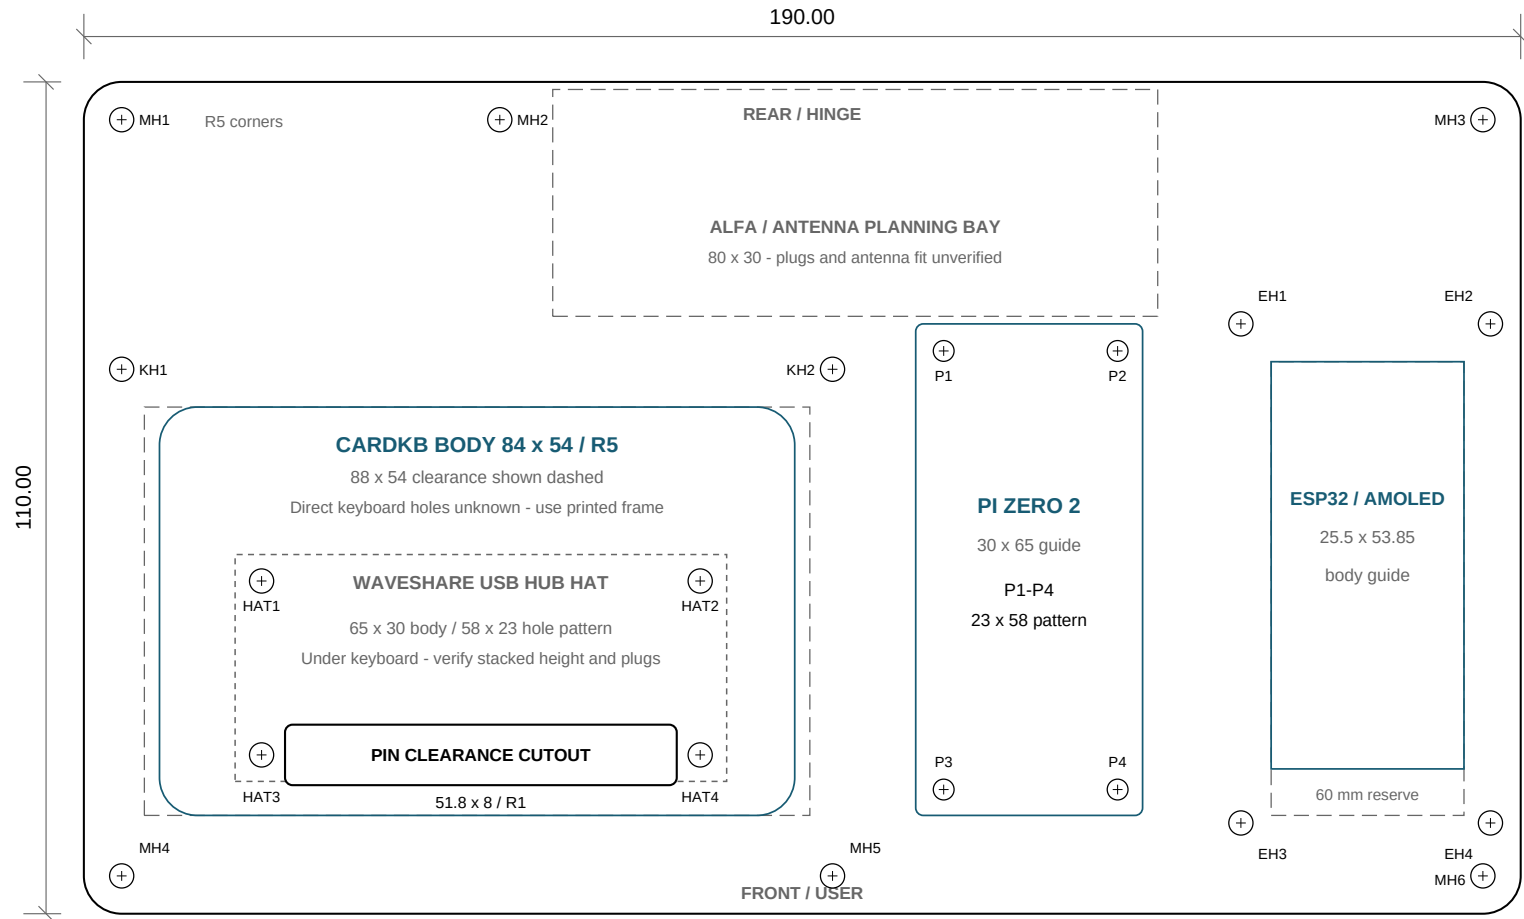

20 CARRIER MOUNT HOLES

Datum: upper-left board extant; X right, Y down.

All NPTH; D = hole diameter. Solder holes omitted.

ID	X	Y	D
MH1	5.000	5.000	3.200
MH2	55.000	5.000	3.200
MH3	185.000	5.000	3.200
MH4	5.000	105.000	3.200
MH5	99.000	105.000	3.200
MH6	185.000	105.000	3.200
KH1	5.000	38.000	3.200
KH2	99.000	38.000	3.200
EH1	153.000	32.000	3.200
EH2	186.000	32.000	3.200
EH3	153.000	98.000	3.200
EH4	186.000	98.000	3.200
HAT1	23.500	66.000	3.200
HAT2	81.500	66.000	3.200
HAT3	23.500	89.000	3.200
HAT4	81.500	89.000	3.200
P1	113.698	35.579	2.750
P2	136.698	35.579	2.750
P3	113.698	93.579	2.750
P4	136.698	93.579	2.750

KH1, KH2, MH4, MH5: keyboard frame.

EH1-EH4: ESP32 frame, not board holes.

P1-P4: Pi mounting pads are NPTH.

No carrier power-module mounting holes.

Use insulating spacers / washers.

HAT3/4 head or spacer OD <=5.5 mm.

External modules mount separately, insulated.

Planning outlines are not fit certification.

Pi guide offset vs holes: ~0.20 / 0.08 mm.


Check native hole centers against your Pi.

CardKB sources conflict: 84 or 88 mm wide.

Measure the keyboard before printing its frame.

PRINT AT ACTUAL SIZE / 100% - disable Fit, Shrink and borderless expansion.

Measure the calibration line before laying actual parts on the paper.



Solid black: board edge / cutout / holes

Blue: component body planning guides

Dashed / dotted: clearance or raised HAT

Keyboard mounting holes are unknown. Four frame mounts are shown; do not drill the CardKB from this template.

Verify standoff heights, USB plugs, cable bends and Chameleon clearance with the real hardware.