




## K107

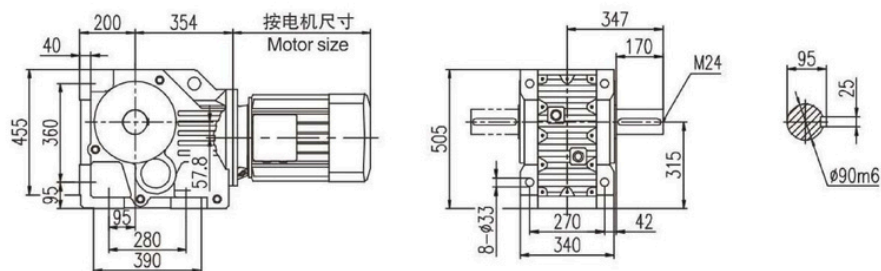


## KF107

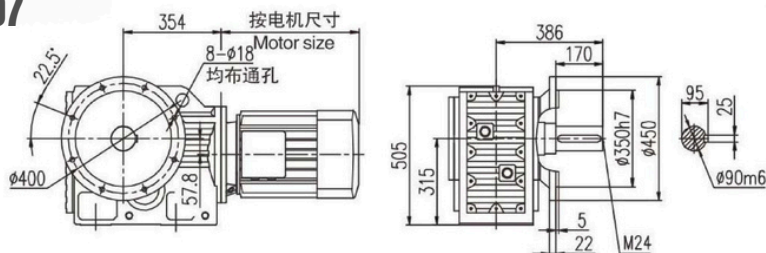


## KAF107

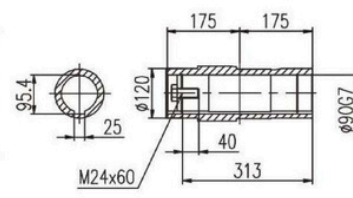


## KA107

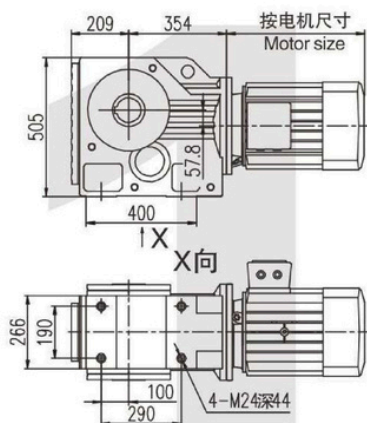

## KAZ107

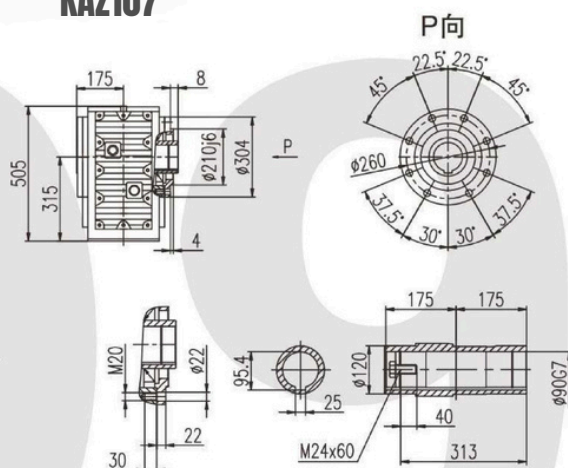

## KAT107




A-A局部

防转臂C面安装


防转臂D面安装

## K.S107

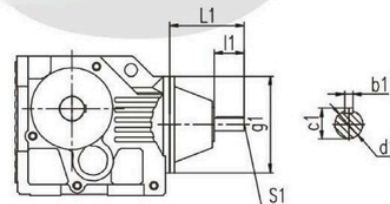


d1	L1	l1	S1	c1	b1	g1
Φ 42k6	270	110	M16	45	12	Φ 350
Φ 48k6	270	110	M16	51.5	14	Φ 350

## KAB107

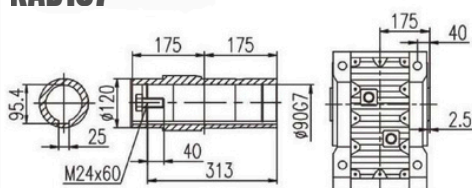


## K..107R77

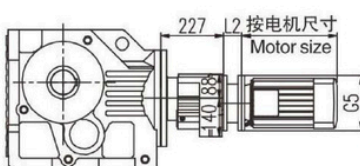

Y2电机座号 Motor size	63		71		80		90		100		112		132	
功率/4P Power/(kw)	0.18	0.25	0.37	0.55	0.75	1.1	1.5	2.2	3.0	4		5.5		
L2	86		86		86		86		86		86		90	
G5	Φ 140		Φ 160		Φ 200		Φ 200		Φ 250		Φ 250		Φ 300	

## K..107

需方自配电机需加连接法兰  
The connected flange is needed when  
the motor supplied by customer

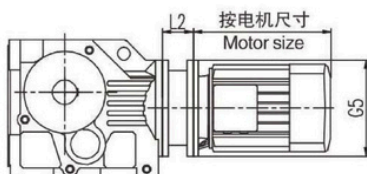

Y2电机座号 Motor size	100		112	132		160		180		200	225	
功率/4P Power/(kw)	2.2	3.0	4	5.5	7.5	11	15	18.5	22	30	37	45
L2	103		103	103		125		125		125	150	
G5	Φ 250		Φ 250	Φ 300		Φ 350		Φ 350		Φ 400	Φ 450	