ROBUS°

COMMERCIAL

SPEEDBEAM PLUS CCT3 SELECTABLE MULTIWATTAGE LED BATTEN





Comparable to:

Total Power (W):

Total Light Output (lm):









OP
220
240
OPERATINO
VOLTAGE





BESA box mounting



PRODUCT INFORMATION DOCUMENT

 Quick connectors allowing adding emergency pack (RHA2WEMSTA-PSU) and microwave

 Unique design of each size allowing selection between 4 different lumen outputs to suit

• Light colour temperature selectable between

• Easy to open screw-less end caps providing

• Two-part construction making wiring and installation much easier and faster

Pressed steel powder coated housing

Polycarbonate diffuser and end capsPrewired with 1m flex and plug

sensor (RLMW) accessories

installation area requirements


3000K, 4000K and 6500K

CONSTRUCTION

FEATURES



1.52

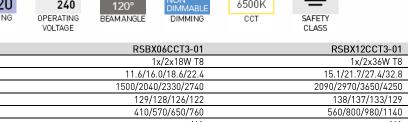


Efficacy (lm/cctW): 560/800/980/1140 Lux at 1m (lux): Emergency Lux at 1m (lux): NA NΑ 3000/4000/6500 3000/4000/6500 CCT (K): CRI: 80 80 IP: 20 20 Operation Temperature (°C) -20 ≤ Ta ≤ +40 ·20 ≤ Ta ≤ +40 Inrush Current: 8A/200us 11A/120us **RG Value:** 0 L70B50 or the variant: >60000 >60000 Dimensions LxWxH 630x66x66 1230x66x66

Weight (kg):

Product is certified to all the relevant standards

Please contact our technical department for market specific compliances.

ACCESSORIES:



375.35cm 64.97,286.81x 750.71cm 2п 28.88,127.51x 1126.06cm 16.24,71.711x 1501.42cm 10.40,45.891x 1876.77cm 5.304,23.411x 2627.48cm 4.061,17.931x 3002.84cm 3.209,14.161x 3378.19cm 10m 2.599,11.4713 3753.55cm

Diagram for RSBX12CCT3-01 in 32W 4000K. Other diagrams available on request

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
N7: TEL: +64 03 668 5285

WEB: WWW.ROBUS.COM WEB: WWW.ROBUS.COM WEB: WWW.ROBUS.COM.AU WEB: WWW.ROBUSLED.CO.NZ